

PRECISION MACHINE
COMPONENTS



Preface

It is our pleasure to announce the publication of a new catalog which contains all NSK linear motion products. We believe this publication is one way to show our deep appreciation of your patronage.

Market demand for more sophisticated and diversified machines and equipment is rapidly escalating. NSK precision products are not only used widely in these machines, but also are crucial elements.

In response to this trend, ball screws, NSK linear guides, and Monocarriers, which are crucial mechanical components of these machines, are required to be highly reliable, maintenance-free, smaller in size and lightweight. They also are expected to heighten efficiency and satisfy uses in special environment.

Publishing a catalog to introduce our entire product line is especially meaningful under such circumstances. This is an improved version of the previous catalog; products are categorized, and each product category has two sections. The first section contains an explanation of products for selection and a technical explanation including results of the latest experiments and research to assist thorough technological discussion. The second half is dimension tables. Last, "Other," whose pages are in color, explains special environments and lubrications such as grease, which are general issues for NSK precision products.

We hope abundant NSK products in the new catalog will be your aide in selecting the most suitable products for your purpose. We solicit your continued patronage.

Contents

A. NSK Linear Rolling Guide

A-1 Characteristics of NSK Linear Rolling Guides

1. Comparison of Rolling Guides and Sliding Guides.....A1
2. Structure and Characteristics of NSK Linear GuidesA2

A-2 Types of NSK Linear Rolling Guides.....A5

A-3 Selection of NSK Linear Rolling Guides

1. Selection Flow Chart.....A13
2. Rating Life and Basic Load Rating.....A15
3. Preload.....A28
4. Accuracy.....A32
5. Maximum Rail Length.....A37
6. Lubrication.....A38
7. Dust Proof.....A52
8. Rust Prevention
(Stainless Steel and Surface Treatment).....A57
9. Special Environment.....A60
10. Arrangement and Mounting of Linear Guide.....A67
11. Drills to Select Linear Guide.....A79
12. Reference.....A90

A-4 NSK Linear Guides

1. Structure of NSK Linear Guides.....A91
2. Characteristics of NSK Linear Guides.....A91
3. Types and Characteristics of NSK Linear Guides.....A93
4. Guide to Technical Services.....A107
5. Linear Guides: Handling Precautions.....A108
6. Design Precautions.....A109

A-5 Technical Description and Dimension Table for NSK Linear Guides

1. General Purpose Series.....A111
2. Miniature Series.....A185
3. High Rigidity Series.....A243
4. High-Accuracy Series.....A299
5. The Comparative Table of Old and New Series.....A321

B. Ball Screws

B-1. Selection Guide to NSK Ball Screw

1. Features of NSK Ball Screws.....B1
2. Structure of a Ball Screw.....B3
3. Ball Screw Series.....B7
4. Procedures to Select Ball Screw.....B17
5. When Placing Orders.....B31

B-2 Technical Description of Ball Screws

1. Accuracy.....B37
2. Static Load Limitation.....B44
3. Permissible Rotational Speed.....B47
4. Supporting Conditions for Calculation of Buckling Load and Critical Speed.....B51
5. Life (Dynamic Load Limitation).....B53
6. Preload and Rigidity.....B56
7. Friction Torque and Drive Torque.....B62
8. Even Load Distribution in Ball Nut (In Case of Ball Screws for High-Load Drive).....B65
9. Lubrication of Ball Screw.....B67
10. Dust Prevention for Ball Screw.....B68
11. Rust Prevention and Surface Treatment of Ball Screws.....B69
12. Ball Screw Specifications for Special Environment.....B70
13. Noise and Vibration.....B71
14. Installation of Ball Screw.....B73
15. Precautions for Designing Ball Screw.....B83
16. Shaft End Machining.....B86
17. Ball Screw Selection Exercise.....B87
18. Reference.....B101
19. Guide to Technical Services.....B102
20. Precautions When Handling Ball Screws.....B103

B-3 Ball Screw Dimension Table

1. Dimension Table and Reference Number of Standard Ball Screws.....B105
2. Dimension Table and Reference Number of Standard Nut Ball Screws.....B451
3. Dimension Table and Reference Number of Application-Oriented Ball Screws.....B511

C. Monocarrier

C-1 Monocarrier

1. Features	C5
2. Classifications and Series	C7
3. Accessories	C9
4. Selection of Monocarrier	C10
5. MCM Series	C25
6. MCH Series	C73

C-2 Toughcarrier

1. Features	C95
2. Classifications and Series	C95
3. Accessories	C97
4. Selection of Toughcarrier	C98
5. TCH Series Dimension Table for Standard Products ..	C111
6. Accessories	C117
7. Motor Bracket Compatibility Table	C130
8. Sensor Rail and Top Cover Unit Combination Table ..	C131
9. Toughcarrier High-Thrust Series	C134

C-3 Technical Guide

1. Sensor Specification	C137
2. Characteristics and Evaluation Method	C139
3. Special Specifications	C140
4. Maintenance	C141
5. NSK Clean Greace LG2 Specifications	C142

D. Other

1. Special Environments	D1
2. Lubrication	D13
3. RoHS Compliant	D24

E. Appendices: Tables

1. Conversion from International System of Units (SI) ...	E1
2. Conversion Table between N and kgf	E3
3. Conversion Table between kg and lb	E4
4. Conversion table of hardness	E5
5. Deviations of shafts used in common fits	E7
6. Deviations of holes used in common fits	E9

NSK Linear Rolling Guide Product

A-1 Characteristics of NSK Linear Rolling Guides

1. Comparison of Rolling Guides and Sliding Guides A1
2. Structure and Characteristics of NSK Linear Guides A2
 1. Structure of NSK Linear Guides A2
 2. Characteristics of NSK Linear Guides A2

A-2 Types of NSK Linear Rolling Guides A5

A-3 Selection of NSK Linear Rolling Guides

1. Selection Flow Chart A13
2. Rating Life and Basic Load Rating A15
 - 2.1 Life and Basic Load Rating A15
 1. Life A15
 2. Rating fatigue life A15
 3. Basic load ratings in compliance with ISO standard A15
 4. Basic dynamic load rating A15
 5. Calculation of rating fatigue life A15
 6. Dynamic equivalent load A16
 7. Basic static load rating A16
 8. Basic static moment load rating A16
 9. Basic load rating by load direction A16
 - 2.2 How to Calculate the Life A17
 1. Setting operating condition of linear guide A17
 2. Calculate load to a slide A17
 3. Calculation of dynamic equivalent load A21
 4. Calculation of mean effective load A23

5. Various coefficients A24
 6. Calculation of rating life A25
 7. Examination of the basic load rating A26
 8. Precautions for the design in examining the life A27
3. Preload A28
 1. Objective of preload A28
 2. Preload and rigidity A28
 3. Selection of preload classification A29
 4. Estimation of the elastic deformation A30
 5. Application examples of preload A30
 6. Load and rating life when the preload is taken into account A31
 7. Calculating friction force by preload A31
 4. Accuracy A32
 1. Accuracy standard A32
 2. Definition of accuracy A32
 3. Application example of accuracy grade and preload A34
 4. Combination of accuracy grade and preload A35
 5. Maximum Rail Length A37
 6. Lubrication A38
 1. NSK linear guides equipped with "NSK K1" lubrication unit A38
 2. Lubrication A42
 7. Dust Proof A52
 1. Standard specification parts A52
 2. Dust-proof parts A53
 8. Rust Prevention (Stainless Steel and Surface Treatment) A57
 1. Stainless steel A57
 2. Surface treatment A57

9. Special Environment	A60
1. Heat-resistant specifications.....	A60
2. Vacuum and clean specifications.....	A60
3. "NSK linear guides for food processing equipment and medical devices" for sanitary environment.....	A61
4. Specifications for special environments	A63
5. Lubrication and materials.....	A64
6. Responsiveness of NSK linear guides for special environments	A66
7. Precautions for handling	A66
10. Arrangement and Mounting of Linear Guides.....	A67
1. Arrangement	A67
2. Mounting accuracy	A69
3. Installation	A72
4. Assembly random-matching type linear guide	A77
5. Butting rail specification	A77
6. Handling preloaded assembly.....	A78
11. Drills to Select Linear Guide.....	A79
1. Single axis material handling system.....	A79
2. Machining center.....	A84
12. Reference.....	A90

A-4 NSK Linear Guides

1. Structure of NSK Linear Guides	A91
2. Characteristics of NSK Linear Guides.....	A91
3. Types and Characteristics of NSK Linear Guides.....	A93
4. Guide to Technical Services.....	A107
5. Linear Guides: Handling Precautions.....	A108
6. Design Precautions.....	A109

A-5 Technical Description and Dimension Table for NSK Linear Guides

1. General Purpose Series	
1.1 NH Series.....	A113
1.2 VH Series.....	A133
1.3 NS Series.....	A153
1.4 LW Series.....	A171
2. Miniature Series	
2.1 PU Series.....	A187
2.2 LU Series.....	A197
2.3 PE Series.....	A209
2.4 LE Series.....	A219
2.5 Miniature LH Series	A233
3. High Rigidity Series	
3.1 RA Series.....	A245
3.2 RB Series.....	A265
3.3 LA Series.....	A281
4. High-Accuracy Series	
4.1 HA Series.....	A301
4.2 HS Series	A315
5. The Comparative Table of Old and New Series	A329


A-1 Characteristics of NSK Linear Rolling Guides

Characteristics of the NSK linear rolling guides are:


- › Designs are simple and economic. This contributes to a highly accurate and low cost guide way system.
- › Low friction coefficient facilitates a compact and low cost driving mechanism.
- › Ultra-high purity of materials and superb processing technology ensure a long-term reliable operation.
- › Prompt delivery thanks to a variety of interchangeable components.
- › Users can select the most suitable guide from a wide variety of the ball guides and roller guides.

A-1-1 Comparison of Rolling Guides and Sliding Guides

The following describes a characteristic comparison between general rolling and sliding guide ways.



Example of rolling guide



Example of sliding guide


Comparative characteristics of rolling and sliding guide ways

Function	Rolling guide	Sliding guide
Friction	<ul style="list-style-type: none"> › Friction coefficient: 0.01 or lower › Difference between static and dynamic friction is small. › The fluctuation of friction force due to varying speed is far less than sliding guides. 	<ul style="list-style-type: none"> › Friction is high. › The difference between static and dynamic friction coefficient is significant.
Positioning accuracy	<ul style="list-style-type: none"> › Lost motion is minimal. › Stick-slip is minimal. › Easy to achieve sub-micron positioning 	<ul style="list-style-type: none"> › Larger lost motion › Stick-slip at low speed › Difficult to achieve sub-micron positioning
Life	<ul style="list-style-type: none"> › Possible to estimate useful life 	<ul style="list-style-type: none"> › Difficult to estimate useful life
Static rigidity	<ul style="list-style-type: none"> › Generally high › No play because of preload › Easy to estimate rigidity 	<ul style="list-style-type: none"> › Rigidity is great against load from a particular direction. › There is mechanical play. › Difficult to estimate rigidity
Speed	<ul style="list-style-type: none"> › Wide range of use from low to high speed 	<ul style="list-style-type: none"> › Unsuitable for extremely low or high speed
Maintenance, reliability	<ul style="list-style-type: none"> › Long life through a simple maintenance 	<ul style="list-style-type: none"> › Precision is lost greatly by a worn out slide way surface.

In response to the demand for a high-speed, high-precision, high-quality, and easy maintenance, rolling guides which have above features are becoming prevalent.

Utilizing the technology we have sharpened in anti-friction rotating bearings, NSK makes various types of rolling linear guides which are highly accurate and reliable.

A-1-2 Structure and Characteristics of NSK Linear Guides



1. Structure of NSK Linear Guides

By avoiding structural complexity, and by reducing the number of components, we not only enhanced the precision of linear guides, but also are able to keep costs low. We have added NSK's patented unique structural feature to the original invention (Fig. 1). This contributes to higher precision and lower prices.

NSK linear guides consist of a rail and a slide (Fig. 2). The balls or rollers roll on the race way surface, and are scooped up by the end caps attached to both ends of the ball or roller slide. Then, the balls or rollers go through a passage made in the slide, and circulate back to the other end.

2. Characteristics of NSK Linear Guides

The use of a unique offset Gothic arch groove (Fig. 3) allows the ball type of NSK linear guides to satisfy groove designs required for specific purposes.

This unique ball groove design facilitates precise measurement of the ball groove, thus enabling the stable and highly accurate production of the rails and ball slides for random matching. (Fig. 4)

On top of that, we have developed and marketed the NSK Roller Guides, representing the culmination of NSK's analysis technology and tribology.

Such technologies ensure the features of NSK linear guides outlined below.

(1) High precision and quality

- › High precision and quality come from our superb production and measuring technologies, strengthened by extensive experience in antifriction rotary bearings and ball screw production. Our quality assurance extends to the smallest components.

(2) High reliability and durability

- › Logical simplicity in shape, along with stable processing, maintains high precision and reliability.
- › Super-clean materials, our advanced heat treatment and processing technologies increase product durability.

(3) Abundant in type for any purpose

- › Various series are available, and their slide models and size categories are standardized to satisfy any requirement. Our technology, polished by abundant experience in the use of special materials and surface treatments, meets the customer's most demanding expectations.

(4) Development of random-matching parts for short delivery time

- › The adoption of the Gothic arch groove which makes measuring easy, and a new reliable quality control method has made random-matching of the rails and the ball slides possible. The parts are stocked as standard products, thereby reducing delivery time.

(5) Patented static load carrying capacity (impact-resistance)


- › When a super-high load (impact) is applied, our Gothic arch groove spreads the load to surfaces which usually do not come into contact in the ball type NSK linear guides. This increases impact load resistance (Fig. 5).

(6) Lineup of extremely high-load capacity series

- › The LA series provides a top class high-load capacity for the ball linear guides through a unique load carrying configuration with three ball recirculation circuits on the one side.

By installing rollers that are the largest possible diameter and length, the NSK roller linear guides have realized the world's highest load capacity, far superior to the roller linear guides of other companies.

A-1-2 Structure and Characteristics of NSK Linear Guides

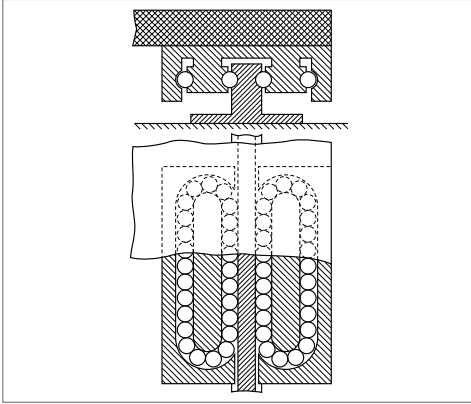

> Fig. 1 French Patent in 1932.
> Inventor: Gretsch (German)

NSK added its patented technology to the invention in **Fig. 1**, and improved the linear guide structure, thus realizing low cost design.

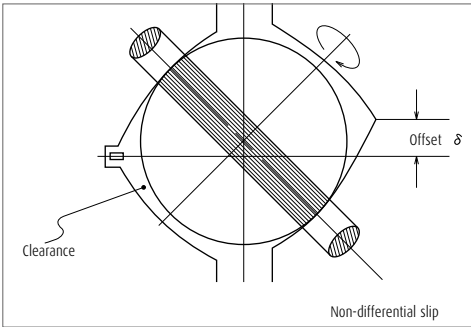


Fig. 3 Two contact point at offset Gothic arch groove

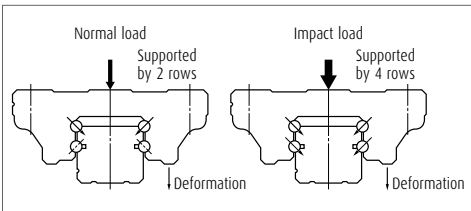


Fig. 5 Shock-resistance

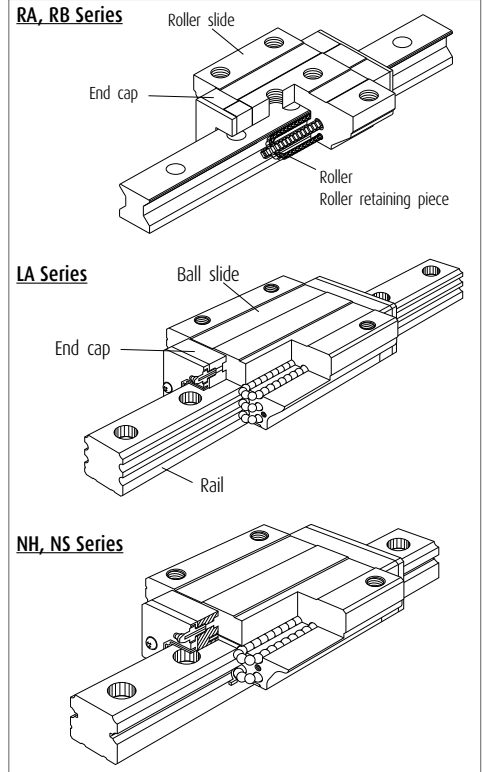


Fig. 2 Structure of NSK linear guides

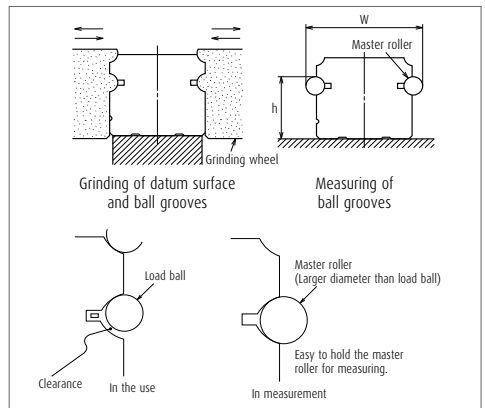








Fig. 4 Processing and measuring grooves

Measuring grooves is easy: you can obtain highly accurate results for all types of NSK series. This is why you can purchase rails and slides separately for random matching.



A-2 Types of NSK Linear Rolling Guides

Product	Appearance	Shape	Rolling element	Load carrying characteristics
NSK Linear Guides			Ball	High vertical load carrying capacity 
			Ball	High vertical load carrying capacity 

Note For customers who have used the former LH or SH series, NH series is recommended as a substitute. Please confirm the correlation between NH series and former ones on the comparative table at A329.

Rigidity	Friction characteristic	Assembly workability	Major applications	Page
◎	◎	◎	<ul style="list-style-type: none"> > Industrial robots > Materials handling equipment > Semiconductor manufacturing equipment > Laser cutting machines > Electric discharge machines > Packaging/packing machines 	A113
◎	◎	◎	<ul style="list-style-type: none"> > Industrial robots > Materials handling equipment > Woodworking machines > Laser cutting machines > Electric discharge machines > Packaging/packing machines 	A133

Rigidity ☆ : Extremely high ◎ : High ○ : Medium ○ : Low

Friction characteristic ◎ : Low ○ : Normal

Assembly workability ◎ : Good ○ : Fair

A-2 Types of NSK Linear Rolling Guides

Product	Appearance	Shape	Rolling element	Load carrying characteristics
NSK Linear Guides	NS Series		Ball	High vertical load carrying capacity
	LW Series		Ball	High vertical load carrying capacity
	PU Series		Ball	Four-way equal load carrying capacity
	LU Series		Ball	Four-way equal load carrying capacity
	PE Series		Ball	Four-way equal load carrying capacity

Note For customers who have used the former LS or SS series, NS series is recommended as a substitute. Please confirm the correlation between NS series and former ones on the comparative table at A329.
















Rigidity	Friction characteristic	Assembly workability	Major applications	Page
			<ul style="list-style-type: none"> > Industrial robots > Materials handling equipment > Electric discharge machines > Woodworking machines > Semiconductor manufacturing equipment > Packaging/packing machines > Pneumatic equipment 	A153
			<ul style="list-style-type: none"> > Industrial robots > Materials handling equipment > Electric discharge machines > Woodworking machines > Semiconductor manufacturing equipment > Packaging/packing machines > Pneumatic equipment 	A171
			<ul style="list-style-type: none"> > Semiconductor manufacturing equipment > LCD manufacturing equipment > Medical equipment > Optical stages > Microscope XY stages > Miniature robots > Pneumatic equipment > Computer peripherals 	A187
			<ul style="list-style-type: none"> > Semiconductor manufacturing equipment > LCD manufacturing equipment > Medical equipment > Optical stages > XY stage of microscope > Miniature robots > Pneumatic equipment > Computer peripherals 	A197
			<ul style="list-style-type: none"> > Semiconductor manufacturing equipment > LCD manufacturing equipment > Medical equipment > Optical stages > Microscope XY stages > Miniature robots > Pneumatic equipment > Computer peripherals 	A209









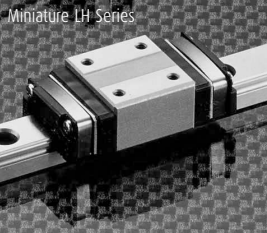






Rigidity ☆ : Extremely high : High : Medium : Low

Friction characteristic : Low : Normal

Assembly workability : Good : Fair

A-2 Types of NSK Linear Rolling Guides







Product	Appearance	Shape	Rolling element	Load carrying characteristics
NSK Linear Guides	<p>LE Series</p> 		Ball	<p>Four-way equal load carrying capacity</p> 
	<p>Miniature LH Series</p> 		Ball	<p>High vertical load carrying capacity</p> 
	<p>RA Series</p> 		Roller	<p>Four-way equal load carrying capacity</p> 
	<p>RB Series</p> 		Roller	<p>Four-way equal load carrying capacity</p> 
	<p>LA Series</p> 		Ball	<p>Four-way equal load carrying capacity</p> 







Rigidity	Friction characteristic	Assembly workability	Major applications	Page
			<ul style="list-style-type: none"> › Semiconductor manufacturing equipment › LCD manufacturing equipment › Medical equipment › Optical stages › XY stages of microscope › Miniature robots › Pneumatic equipment › Computer peripherals 	A219
			<ul style="list-style-type: none"> › Semiconductor manufacturing equipment › LCD manufacturing equipment › Medical equipment › Optical stages › Microscope XY stages › Miniature robots › Pneumatic equipment › Computer peripherals 	A233
			<ul style="list-style-type: none"> › Machining centers › NC lathes › Heavy cutting machine tools › Various types of NC grinders › Gear-cutting machines › Press machines › Electric discharge machines 	A245
			<ul style="list-style-type: none"> › Machining centers › NC lathes › Heavy cutting machine tools › Various types of NC grinders › Gear-cutting machines › Press machines › Electric discharge machines 	A265
			<ul style="list-style-type: none"> › Machining centers › NC lathes › Heavy cutting machine tools › Various types of NC grinders › Gear-cutting machines › Press machines › Electric discharge machines 	A281

Rigidity ☆ : Extremely high ◎ : High ◉ : Medium ○ : Low

Friction characteristic ◎ : Low ○ : Normal **Assembly workability** ◎ : Good ○ : Fair

A-2 Types of NSK Linear Rolling Guides

Product	Appearance	Shape	Rolling element	Load carrying characteristics
NSK Linear Guides	HA Series 		Ball	Four-way equal load carrying capacity 
	HS Series 		Ball	High vertical load carrying capacity 

Rigidity	Friction characteristic	Assembly workability	Major applications	Page
			<ul style="list-style-type: none"> > Machining centers > Precision lathes > Various types of NC grinders > Electric discharge machines > Optical stages > LCD manufacturing equipment > Die molding machines > High-precision measuring equipment 	A301
			<ul style="list-style-type: none"> > Machining centers > Precision lathes > Various types of grinders > Electric discharge machines > Optical stages > LCD manufacturing equipment > High-precision measuring equipment 	A315


Rigidity ☆ : Extremely high ◎ : High ◉ : Medium ○ : Low

Friction characteristic ◉ : Low ○ : Normal **Assembly workability** ◎ : Good ○ : Fair

A-3 Selection of NSK Linear Rolling Guides

A-3-1 Selection Flow Chart

The flow chart below shows the basic steps for the selection.

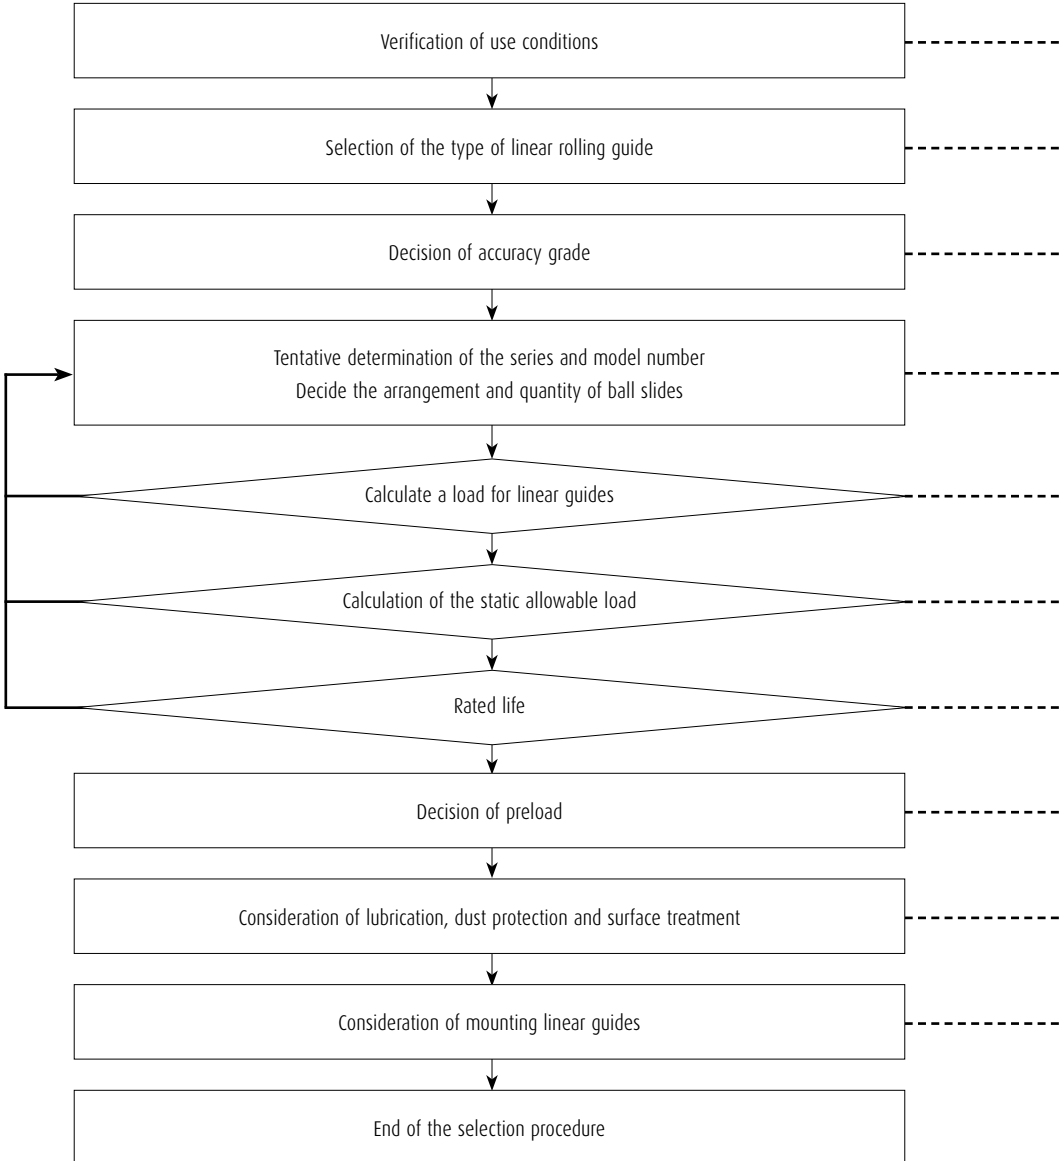

<ul style="list-style-type: none"> › Machine structure, installation space and position of the linear guides › Functional requirements (required life, rigidity and accuracy) and use environment 	<ul style="list-style-type: none"> A15 Description of the rated life A28 Description of the preload A32 Description of the accuracy A57 Description of rust prevention and surface treatment A67 Description of arrangement and mounting A111 Technical description and dimension table for NSK Linear Guides
<ul style="list-style-type: none"> › Consider the load, rigidity, friction and installation position, and select the model and size of linear guide most suitable to the condition requirements. 	<ul style="list-style-type: none"> A32 Description of the accuracy
<ul style="list-style-type: none"> › Decide by the required running accuracy of the machine. 	<ul style="list-style-type: none"> A15 Description of the rated life A111 Technical description and dimension table for NSK Linear Guides
<ul style="list-style-type: none"> › Select a model based on the installation space. › Select a model temporarily based on the mutual balance between the machine, its ancillaries and the size of ball screws, making use of your experience and actual results. 	<ul style="list-style-type: none"> A15 Description of the rated life
<ul style="list-style-type: none"> › Calculate loads in the direction of up/down and right/left, and moment loads of the linear guide. › Consider loads caused by acceleration/deceleration and the fluctuation of load. 	<ul style="list-style-type: none"> A16 Description of the static load rating
<ul style="list-style-type: none"> › Calculate the static allowable load, and confirm that the total static load is within the permissible range. › Confirm the strength of fastening parts of linear guides such as bolts and their material. 	<ul style="list-style-type: none"> A15 Description of the rated life
<ul style="list-style-type: none"> › Estimate the life and confirm it is within the scope of the use conditions. 	<ul style="list-style-type: none"> A28 Description of the preload
<ul style="list-style-type: none"> › Select a preload and clearance most suitable to the requirements. 	<ul style="list-style-type: none"> A38 Description of lubrication A52 Description of dust protection
<ul style="list-style-type: none"> › Select lubricant, grease or oil, and the lubrication method according to the use conditions. › Select suitable dust protection means (seals, bellows or surface treatment) for the use environment. 	<ul style="list-style-type: none"> A67 Description of arrangement and mounting CAT.No.E9008 Description of the mounting of linear guides
<ul style="list-style-type: none"> › Decision of an installation position, the shoulder height and corner radius R of mounting surface of a machine base. › Confirm installation procedures. 	

A-3-2 Rating Life and Basic Load Rating

A-3-2.1 Life and Basic Load Rating

1. Life

Although used in appropriate conditions, the linear guide deteriorates after a certain period of operation, and eventually becomes unusable. In broad definition, the period until the linear guide becomes unusable is called "life." There are "fatigue life" caused by flaking, and "accuracy life" which the result of wear components.

2. Rating fatigue life

When the linear guide runs under loads, the rolling elements and the rolling contact surface of the grooves are exposed to repetitive stress. This brings about fatigue to the material, and generates flaking. Flaking is scale-like damage to the surface of the rolling contact surface.

Total running distance until first appearance of flaking is called "fatigue life." This is "life" in the narrow sense. The fatigue life varies significantly even in linear guides produced in the same lot, and even when they are operated under the same conditions. This is attributable to the inherent variation of the fatigue of the material itself.

"Rating fatigue life" is the total running distance which allows 90% of the group of linear guides of the same reference number to run without causing flaking when they are independently run under the same conditions. The rating fatigue life is sometimes indicated by total operating hours when the linear guides run at a certain speed.

3. Basic load ratings in compliance with ISO standard

NSK defines the basic load rating in compliance with the ISO standard.

The basic load rating listed in "A-5 Technical Description and Dimension Table for NSK Linear Guides." comply with the ISO standard.

ISO: International Organization for Standardization

[Basic dynamic load rating]

ISO 14728-1; Rolling bearings — Linear motion rolling bearings

Part 1: Dynamic load ratings and rating life

[Basic static load rating]

ISO 14728-2; Rolling bearings — Linear motion rolling bearings

Part 2: Static load ratings

4. Basic dynamic load rating

- ISO international standard, the basic dynamic load rating, which indicates load carrying capacity of the linear guide, is a load whose direction and volume do not change, and which furnishes 100 km of rating fatigue life.
- In case of the linear guides, it is a constant load applied to downward direction to the center of the slide.
- For balls as rolling element, some linear guide manufacturers in Japan and Asian countries define the load for the basic fatigue life of 50 km as the basic dynamic load ratings.
- The following formula may be used to convert the basic dynamic load rating for 50 km (C_{50}) into the dynamic load rating for 100 km (C_{100}) rated fatigue life.
- For balls as rolling element $C_{100} = \frac{C_{50}}{1.26}$
- For rollers as rolling element $C_{100} = \frac{C_{50}}{1.23}$

5. Calculation of rating fatigue life

- In general, the rating fatigue life "L" can be calculated from the basic dynamic load rating "C" and the load "F" to a slide using the following formula.

[For balls as rolling element] The third power of the index.

For the basic dynamic load rating for 100 km

$$L = 100 \times \left(\frac{C_{100}}{F} \right)^3$$

For the basic dynamic load rating for 50 km

$$L = 50 \times \left(\frac{C_{50}}{F} \right)^3$$

[For rollers as rolling element] The ten third power of the index.

For the basic dynamic load rating for 100 km

$$L = 100 \times \left(\frac{C_{100}}{F} \right)^{\frac{10}{3}}$$

For the basic dynamic load rating for 50 km

$$L = 50 \times \left(\frac{C_{50}}{F} \right)^{\frac{10}{3}}$$

L ; Rating fatigue life (km)

C_{100} ; Basic dynamic load rating for 100 km rated fatigue life (N)

C_{50} ; Basic dynamic load rating for 50 km rated fatigue life (N)

F ; Load to a slide (dynamic equivalent load) (N)

6. Dynamic equivalent load

- › Loads applied to the linear guide (slide load) comes from various directions up/down and right/left directions and/or as moment loads. Sometimes more than one type of load is applied simultaneously. Sometimes the volume and direction of the load may change.
- › Various loads cannot be used as they are to calculate the life of the linear guide. Therefore, it is necessary to use a hypothetical load on the slide with a constant volume, which would generate a value equivalent to an actual fatigue life. This is called "dynamic equivalent load." For actual calculation, refer to "A-3-2.2 3. Calculation of dynamic equivalent load".

7. Basic static load rating

- › When an excessive load or a momentary large impact is applied to the linear guide, local permanent deformation takes place on the rolling elements and on the rolling contact surfaces. After exceeding a certain level, the deformation hampers smooth linear guide operation.
- › Basic static load rating is a static load when: [Permanent deformation of the rolling elements] + [permanent deformation of the rolling contact surfaces] becomes approximately 0.0001 times of the rolling element diameter.
- › In the case of the linear guides, it is a load which is applied in downward direction to the center of the slide.
- › Values of the basic static load rating C_0 are shown in "A-5 Technical Description and Dimension Table for NSK Linear Guides".

8. Basic static moment load rating

- › Generally, NSK linear guides use a set of two rails and four slides for the guide way of one axis. Under some operating condition, static moment load should be taken into account.
- › " M_0 ," which is the limit of static moment load, and calculated from permanent deformation in such use is shown in "A-5 Technical Description and Dimension Table for NSK Linear Guides".

9. Basic load rating by load direction

- › The basic load rating is considered to be a downward load to the slide and is indicated in the dimension tables as the dynamic load rating C and the static load rating C_0 respectively. However, the load may be applied to a slide in upward or lateral directions in actual use. In such a case the basic load rating shall be compensated as shown in **Table 2.1**. The basic dynamic load rating of the RA and LA Series is the same in C and C_0 for all load directions, up, down and lateral, while the NH Series, for an example, has different basic load ratings by the load direction as shown in the table.

Table 2.1 Basic load ratings by load direction

Load rating Load direction Series	Basic dynamic load rating			Basic static load rating		
	Downward	Upward	Lateral	Downward	Upward	Lateral
NH, VH, NS, LW, LH, HS	C	C	0.84C	C_0	0.78 C_0	0.65 C_0
PU, LU, PE, LE, RA, RB, LA, HA	C	C	C	C_0	C_0	C_0

A-3-2 Rating Life and Basic Load Rating

A-3-2.2 How to Calculate the Life

1. Setting operating condition of linear guide

- > First, set operating conditions to determine whether the temporarily selected model satisfies the required life.
- > Major operating conditions are as follows. Set all values to calculate applied loads to each slide. (Refer to **Table 2.2**.)

Axis set up	: Horizontal or vertical
Rail combination	: Single rail or multiple rail
Applying loads	: F_x , F_y and F_z (N)
Slide span	: l (mm)
Rail span	: L (mm)
Position of load action point	: X , Y , Z (mm)
Center of driving mechanism	: X_b , Y_b , Z_b (mm)
Operating speed	: V (mm/sec)
Time in acceleration	: t (sec)
Operating frequency (duty cycle)	

2. Calculating load to a slide

- > **Table 2.2** shows a formula to calculate loads that are going to be applied to each assembled slide into a machine.

The Table shows six typical patterns of linear guide installing structure.

- > In the Tables, directions indicated by arrows denote "plus" for the applied loads (F_x , F_y , F_z) and the loads which are applied to the slides. (F_r , F_s , M_r , M_p , M_y)
- > Codes in the Tables are as follows:

F_r : Vertical loads to the slide (N)

F_s : Lateral loads to the slide (N)

M_r : Rolling moment to the slide (N · mm)

M_p : Pitching moment to the slide (N · mm)

M_y : Yawing moment to the slide (N · mm)

Suffixes (1, 2, ...) to the above $F_r - M_y$: Slide number

F_{xi} : Load applied in X direction ($i = 1$ to n ; n is the number of loads applied in X direction) (N)

F_{yj} : Load applied in Y direction ($j = 1$ to n ; n is the number of loads applied in Y direction) (N)

F_{zk} : Load applied in Z direction ($k = 1$ to n ; n is the number of loads applied in Z direction) (N)

Coordinates (X_{xi} , Y_{xi} , Z_{xi}): Point where load F_{xi} (mm) is applied.

Coordinates (X_{yj} , Y_{yj} , Z_{yj}): Point where load F_{yj} (mm) is applied.

Coordinates (X_{zk} , Y_{zk} , Z_{zk}): Point where load F_{zk} (mm) is applied.

l : Slide span (mm)

L : Rail span (mm)

Coordinates (X_b , Y_b , Z_b): Center of driving mechanism

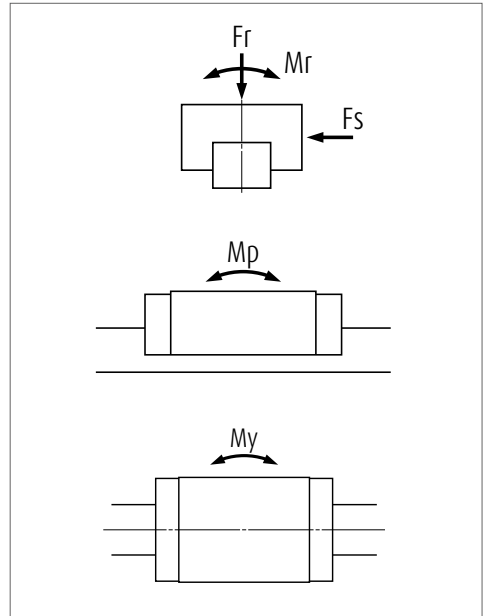




Fig. 2.1

Table 2.2 Loads applied to the slides

Pattern	Arrangement of slides	Load to slide and deformation at Point A
1		$Fr_1 = \sum_{k=1}^n Fz_k, \quad Fs_1 = \sum_{j=1}^n Fy_j$ $Mr_1 = \sum_{j=1}^n (Fy_j \cdot Zy_j) + \sum_{k=1}^n (Fz_k \cdot Zz_k)$ $Mp_1 = \sum_{i=1}^n \{Fxi \cdot (Zxi - Zb)\} + \sum_{k=1}^n (Fz_k \cdot Xz_k)$ $My_1 = -\sum_{i=1}^n \{Fxi \cdot (Yxi - Yb)\} + \sum_{j=1}^n (Fyj \cdot Xyj)$
2		$Fr_1 = \frac{\sum_{k=1}^n Fz_k}{2} + \frac{M2}{L}, \quad Fr_2 = \frac{\sum_{k=1}^n Fz_k}{2} - \frac{M2}{L}$ $Fs_1 = \frac{\sum_{j=1}^n Fy_j}{2} + \frac{M3}{L}, \quad Fs_2 = \frac{\sum_{j=1}^n Fy_j}{2} - \frac{M3}{L}$ $Mr_1 = \frac{M1}{2}, \quad Mr_2 = \frac{M1}{2}$ $M1 = \sum_{j=1}^n (Fy_j \cdot Zy_j) + \sum_{k=1}^n (Fz_k \cdot Zz_k)$ $M2 = \sum_{i=1}^n \{Fxi \cdot (Zxi - Zb)\} + \sum_{k=1}^n (Fz_k \cdot Xz_k)$ $M3 = -\sum_{i=1}^n \{Fxi \cdot (Yxi - Yb)\} + \sum_{j=1}^n (Fyj \cdot Xyj)$
3		$Fr_1 = \frac{\sum_{k=1}^n Fz_k}{2} + \frac{M1}{L}, \quad Fr_2 = \frac{\sum_{k=1}^n Fz_k}{2} - \frac{M1}{L}$ $Fs_1 = Fs_2 = \frac{\sum_{j=1}^n Fy_j}{2}$ $Mp_1 = Mp_2 = \frac{M2}{2}, \quad My_1 = My_2 = \frac{M3}{2}$ $M1 = \sum_{j=1}^n (Fy_j \cdot Zy_j) + \sum_{k=1}^n (Fz_k \cdot Zz_k)$ $M2 = \sum_{i=1}^n \{Fxi \cdot (Zxi - Zb)\} + \sum_{k=1}^n (Fz_k \cdot Xz_k)$ $M3 = -\sum_{i=1}^n \{Fxi \cdot (Yxi - Yb)\} + \sum_{j=1}^n (Fyj \cdot Xyj)$

A-3-2 Rating Life and Basic Load Rating

Pattern	Arrangement of slides	Load to slide and deformation at Point A
4	<p>Center of driving mechanism (X_b, Y_b, Z_b)</p> <p>Center line of driving mechanism</p>	$Fr_1 = \frac{\sum_{k=1}^n Fz_k}{4} + \frac{M1}{2L} + \frac{M2}{2L}, \quad Fr_2 = \frac{\sum_{k=1}^n Fz_k}{4} + \frac{M1}{2L} - \frac{M2}{2L}$ $Fr_3 = \frac{\sum_{k=1}^n Fz_k}{4} - \frac{M1}{2L} + \frac{M2}{2L}, \quad Fr_4 = \frac{\sum_{k=1}^n Fz_k}{4} - \frac{M1}{2L} - \frac{M2}{2L}$ $Fs_1 = Fs_3 = \frac{\sum_{j=1}^n Fy_j}{4} + \frac{M3}{2L}, \quad Fs_2 = Fs_4 = \frac{\sum_{j=1}^n Fy_j}{4} - \frac{M3}{2L}$ $M1 = \sum_{j=1}^n (Fy_j \cdot Z_j) + \sum_{k=1}^n (Fz_k \cdot Yz_k)$ $M2 = \sum_{i=1}^n \{ Fx_i \cdot (Zx_i - Zb) \} + \sum_{k=1}^n (Fz_k \cdot Xz_k)$ $M3 = - \sum_{i=1}^n \{ Fx_i \cdot (Yx_i - Yb) \} + \sum_{j=1}^n (Fy_j \cdot Xy_j)$ $\delta x = Y_d \cdot \frac{Fs_2 - Fs_1}{L \cdot Ks} + Z_d \cdot \frac{Fr_1 - Fr_2}{L \cdot Kr}$ $\delta y = \frac{\sum_{j=1}^n Fy_j}{4 \cdot Ks} + X_d \cdot \frac{Fs_1 - Fs_2}{L \cdot Ks} + Z_d \cdot \frac{Fr_1 - Fr_3}{L \cdot Kr}$ $\delta z = \frac{\sum_{k=1}^n Fz_k}{4 \cdot Kr} + X_d \cdot \frac{Fr_1 - Fr_2}{L \cdot Kr} + Y_d \cdot \frac{Fr_1 - Fr_3}{L \cdot Kr}$
5	<p>Center of driving mechanism (X_b, Y_b, Z_b)</p> <p>Center line of driving mechanism</p>	$Fr_1 = \frac{\sum_{k=1}^n Fz_k}{6} + \frac{M1}{3L} + \frac{M2}{2L}, \quad Fr_2 = \frac{\sum_{k=1}^n Fz_k}{6} + \frac{M1}{3L}$ $Fr_3 = \frac{\sum_{k=1}^n Fz_k}{6} + \frac{M1}{3L} - \frac{M2}{2L}, \quad Fr_4 = \frac{\sum_{k=1}^n Fz_k}{6} - \frac{M1}{3L} + \frac{M2}{2L}$ $Fr_5 = \frac{\sum_{k=1}^n Fz_k}{6} - \frac{M1}{3L}, \quad Fr_6 = \frac{\sum_{k=1}^n Fz_k}{6} - \frac{M1}{3L} - \frac{M2}{2L}$ $Fs_1 = Fs_4 = \frac{\sum_{j=1}^n Fy_j}{6} + \frac{M3}{2L}, \quad Fs_2 = Fs_5 = \frac{\sum_{j=1}^n Fy_j}{6}$ $Fs_3 = Fs_6 = \frac{\sum_{j=1}^n Fy_j}{6} - \frac{M3}{2L}$ $M1 = \sum_{j=1}^n (Fy_j \cdot Z_j) + \sum_{k=1}^n (Fz_k \cdot Yz_k)$ $M2 = \sum_{i=1}^n \{ Fx_i \cdot (Zx_i - Zb) \} + \sum_{k=1}^n (Fz_k \cdot Xz_k)$ $M3 = - \sum_{i=1}^n \{ Fx_i \cdot (Yx_i - Yb) \} + \sum_{j=1}^n (Fy_j \cdot Xy_j)$ $\delta x = Y_d \cdot \frac{Fs_3 - Fs_1}{L \cdot Ks} + Z_d \cdot \frac{Fr_1 - Fr_3}{L \cdot Kr}$ $\delta y = \frac{\sum_{j=1}^n Fy_j}{6 \cdot Ks} + X_d \cdot \frac{Fs_1 - Fs_3}{L \cdot Ks} + Z_d \cdot \frac{Fr_1 - Fr_4}{L \cdot Kr}$ $\delta z = \frac{\sum_{k=1}^n Fz_k}{6 \cdot Kr} + X_d \cdot \frac{Fr_1 - Fr_3}{L \cdot Kr} + Y_d \cdot \frac{Fr_1 - Fr_4}{L \cdot Kr}$

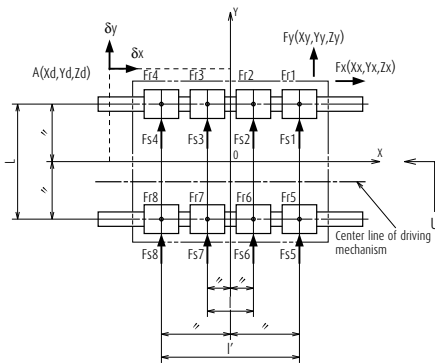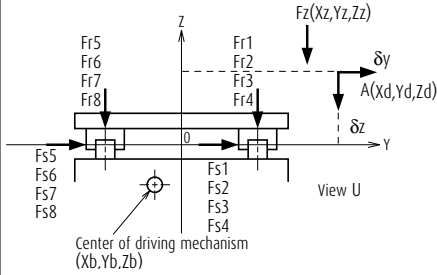

$$Fr_1 = \frac{\sum_{k=1}^n Fz_k}{8} + \frac{M1}{4L} + \frac{M2 \cdot l'}{2 \cdot (l^2 + l'^2)}$$

$$Fr_2 = \frac{\sum_{k=1}^n Fz_k}{8} + \frac{M1}{4L} + \frac{M2 \cdot l}{2 \cdot (l^2 + l'^2)}$$

$$Fr_3 = \frac{\sum_{k=1}^n Fz_k}{8} + \frac{M1}{4L} - \frac{M2 \cdot l}{2 \cdot (l^2 + l'^2)}$$

$$Fr_4 = \frac{\sum_{k=1}^n Fz_k}{8} + \frac{M1}{4L} - \frac{M2 \cdot l'}{2 \cdot (l^2 + l'^2)}$$

$$Fr_5 = \frac{\sum_{k=1}^n Fz_k}{8} - \frac{M1}{4L} + \frac{M2 \cdot l'}{2 \cdot (l^2 + l'^2)}$$

$$Fr_6 = \frac{\sum_{k=1}^n Fz_k}{8} - \frac{M1}{4L} + \frac{M2 \cdot l}{2 \cdot (l^2 + l'^2)}$$

$$Fr_7 = \frac{\sum_{k=1}^n Fz_k}{8} - \frac{M1}{4L} - \frac{M2 \cdot l}{2 \cdot (l^2 + l'^2)}$$

$$Fr_8 = \frac{\sum_{k=1}^n Fz_k}{8} - \frac{M1}{4L} - \frac{M2 \cdot l'}{2 \cdot (l^2 + l'^2)}$$

$$Fs_1 = Fs_5 = \frac{\sum_{j=1}^n Fy_j}{8} + \frac{M3 \cdot l'}{2 \cdot (l^2 + l'^2)}$$

$$Fs_2 = Fs_6 = \frac{\sum_{j=1}^n Fy_j}{8} + \frac{M3 \cdot l}{2 \cdot (l^2 + l'^2)}$$

$$Fs_3 = Fs_7 = \frac{\sum_{j=1}^n Fy_j}{8} - \frac{M3 \cdot l}{2 \cdot (l^2 + l'^2)}$$

$$Fs_4 = Fs_8 = \frac{\sum_{j=1}^n Fy_j}{8} - \frac{M3 \cdot l'}{2 \cdot (l^2 + l'^2)}$$

$$M1 = \sum_{j=1}^n (Fy_j \cdot Zy_j) + \sum_{k=1}^n (Fz_k \cdot Yz_k)$$

$$M2 = \sum_{i=1}^n \{ Fx_i \cdot (Zx_i - Zb) \} + \sum_{k=1}^n (Fz_k \cdot Xz_k)$$

$$M3 = - \sum_{i=1}^n \{ Fx_i \cdot (Yx_i - Yb) \} + \sum_{j=1}^n (Fy_j \cdot Xy_j)$$

$$\delta X = Y_0 \cdot \frac{Fs_4 - Fs_1}{l_2 \cdot Ks} + Z_d \cdot \frac{Fr_1 - Fr_4}{l_2 \cdot Kf}$$

$$\delta Y = \frac{\sum_{j=1}^n Fy_j}{8 \cdot Ks} + X_d \cdot \frac{Fs_1 - Fs_4}{l_2 \cdot Ks} + Z_d \cdot \frac{Fr_1 - Fr_5}{L \cdot Kf}$$

$$\delta Z = \frac{\sum_{k=1}^n Fz_k}{8 \cdot Kf} + X_d \cdot \frac{Fr_1 - Fr_4}{l_2 \cdot Kf} + Y_d \cdot \frac{Fr_1 - Fr_5}{L \cdot Kf}$$

A-3-2 Rating Life and Basic Load Rating

3. Calculation of dynamic equivalent load

➤ For the calculation of dynamic equivalent load, use the load in **Table 2.3** which matches the intended use of the linear guide.

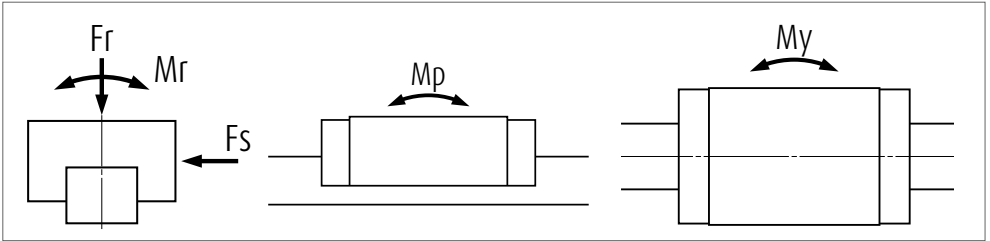


Fig. 2.2

Table 2.3 Loads in the arrangement of linear guides

Pattern	Arrangement of linear guide	Loads necessary to calculate dynamic equivalent load					Dynamic equivalent load
		Load		Moment load			
		Up/down (vertical)	Right/left (lateral)	Rolling	Pitching	Yawing	
1		F_r	F_s	M_r	M_p	M_y	$F_r = F_r$ $F_{se} = F_s \cdot \tan\alpha$ $F_{re} = \epsilon_r \cdot M_r$ $F_{pe} = \epsilon_p \cdot M_p$ $F_{ye} = \epsilon_y \cdot M_y$ α : Contact angle NH, VH, NS, LW, LH, HS Series $\alpha = 50^\circ$ PU, LU, PE, LE, RA, RB, LA, HA Series $\alpha = 45^\circ$
2		F_r	F_s	M_r			
3		F_r	F_s		M_p	M_y	
4		F_r	F_s				

► Use the dynamic equivalent coefficient ϵ in the table below for an easy conversion of moment loads to the dynamic equivalent load.

► Coefficient of each moment direction is as follows.
 ϵ_r : Rolling direction
 ϵ_p : Pitching direction
 ϵ_y : Yawing direction

Table 2.4 Dynamic equivalent coefficients

Unit: 1/m

Model No.	ϵ_r	ϵ_p	ϵ_y	Model No.	ϵ_r	ϵ_p	ϵ_y	Model No.	ϵ_r	ϵ_p	ϵ_y
NH15	188	111	132	PU05	377	431	431	RA20L	79	55	55
NH15L	188	72	86	PU07	267	349	349	RA25	71	64	64
NH20	142	81	97	PU09	215	222	222	RA25L	71	50	50
NH20L	142	57	68	PU09L	215	136	136	RA30	56	58	58
NH25	123	68	81	PU12	163	204	204	RA30L	56	44	44
NH25L	123	51	61	PU12L	163	125	125	RA35	46	52	52
NH30A	98	70	83	PU15	133	174	174	RA35L	46	39	39
NH30EF	98	58	69	PU15L	133	102	102	RA45	37	40	40
NH30L	98	44	52					RA45L	37	30	30
NH35	78	51	61	LU05	385	359	359	RA55	32	33	33
NH35L	78	36	43	LU07	286	305	305	RA55L	32	24	24
NH45	60	38	45	LU09	217	242	242	RA65	26	28	28
NH45L	60	30	36	LU09L	217	138	138	RA65L	26	19	19
NH55	51	31	37	LU09R	217	203	203				
NH55L	51	25	30	LU12	167	204	204	RB30	56	58	58
NH65	43	27	32	LU12L	167	116	116	RB30L	56	44	44
NH65L	43	20	24	LU15	133	174	174	RB35	46	52	52
				LU15L	133	94	94	RB35L	46	39	39
VH15	188	111	132					RB45	37	40	40
VH15L	188	72	86	PE05	194	277	277	RB45L	37	30	30
VH20	142	81	97	PE07	141	203	203	RB55	32	33	33
VH20L	142	57	68	PE09	123	161	161	RB55L	32	24	24
VH25	123	68	81	PE09L	123	108	108	RB65	26	28	28
VH25L	123	51	61	PE12	90	136	136	RB65L	26	19	19
VH30A	98	70	83	PE12L	90	90	90				
VH30EF	98	58	69	PE15	50	111	111	LA25	122	76	76
VH30L	98	44	52	PE15L	50	72	72	LA25L	122	47	47
VH35	78	51	61					LA30	105	63	63
VH35L	78	36	43	LE05	196	248	248	LA30L	105	43	43
VH45	60	38	45	LE05S	196	323	323	LA35	84	54	54
VH45L	60	30	36	LE07	141	188	188	LA35L	84	37	37
VH55	51	31	37	LE07S	141	349	349	LA45	60	41	41
VH55L	51	25	30	LE07L	141	122	122	LA45L	60	31	31
				LE09	123	149	149	LA55	51	33	33
NS15	177	116	138	LE09S	123	277	277	LA55L	51	26	26
NS15S	177	174	208	LE09L	123	102	102	LA65	43	29	29
NS20	127	94	112	LE12	90	125	125	LA65L	43	20	20
NS20S	127	136	162	LE12S	90	233	233				
NS25	111	70	83	LE12L	90	86	86	HA25	122	33	33
NS25S	111	108	129	LE15	50	102	102	HA30	105	27	27
NS30	94	63	75	LE15S	50	174	174	HA35	84	23	23
NS30S	94	102	121	LE15L	50	68	68	HA45	60	20	20
NS35	76	54	64					HA55	51	16	16
NS35S	76	87	104	LH08	316	269	321				
				LH10	253	203	242	HS15	177	45	54
LW17	66	125	149	LH12	223	136	162	HS20	127	39	47
LW21	59	108	129					HS25	111	33	39
LW27	53	76	91	RA15	105	95	95	HS30	94	27	32
LW35	32	51	61	RA15L	105	70	70	HS35	76	23	28
LW50	25	38	46	RA20	79	74	74				

Definitions of codes appearing at the end of the model number in **Table 2.4**:

- | | | |
|---------|--|-------------------------------|
| L | : Super-high-load type | ; NH45L |
| S | : Medium load type | ; NS25S |
| No code | : High-load type | ; NH45_ |
| A | : Ball slide shape is square | ; NH30A (only LH30 and SH30) |
| EF | : Ball slide shape is flanged type (EL, FL type) | ; NH30EF (only LH30 and SH30) |
| R | : Miniature Series with ball retainer | ; LU09R (only LU and LE) |

A-3-2 Rating Life and Basic Load Rating

- > The formula is determined by the relationship of loads in terms of volume. A full dynamic equivalent load can be easily obtained by using each coefficient.

After obtaining the dynamic equivalent load of the necessary load directions from Table 2.4, use the formulas below to calculate full dynamic equivalent loads.

- > When **Fr** is the largest load : $F_e = Fr + 0.5F_{se} + 0.5F_{re} + 0.5F_{pe} + 0.5F_{ye}$
- > When **Fse** is the largest load : $F_e = 0.5Fr + F_{se} + 0.5F_{re} + 0.5F_{pe} + 0.5F_{ye}$
- > When **Fre** is the largest load : $F_e = 0.5Fr + 0.5F_{se} + F_{re} + 0.5F_{pe} + 0.5F_{ye}$
- > When **Fpe** is the largest load : $F_e = 0.5Fr + 0.5F_{se} + 0.5F_{re} + F_{pe} + 0.5F_{ye}$
- > When **Fye** is the largest load : $F_e = 0.5Fr + 0.5F_{se} + 0.5F_{re} + 0.5F_{pe} + F_{ye}$

For the values of each dynamic equivalent load in the formulas above, disregard load directions and take the absolute value.

- > It is necessary to include the amount of preload for the calculation of rating life when selecting "Z3 medium preload" or "Z4 heavy preload" as a preload. For the calculation of full dynamic equivalent loads that consider preload, see "A-3-3 6" on page A31.

4. Calculation of mean effective load

When the load to the slide deviates, obtain a mean effective load which becomes equal to the life of slide under variable load conditions. If the load does not vary, use the dynamic equivalent load as it is.

(1) When load and running distance vary stepwise (Fig. 2.3)

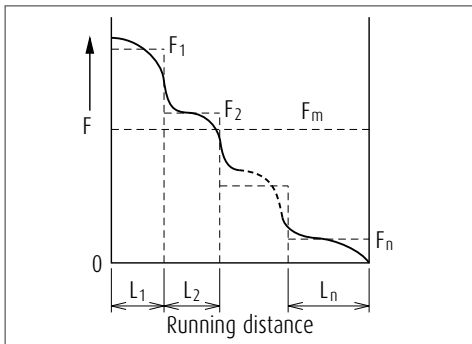


Fig. 2.3 Stepwise load change

Running distance while dynamic equivalent load F_1 is applied: L_1

Running distance while dynamic equivalent load F_2 is applied: L_2

Running distance while dynamic equivalent load F_3 is applied: L_3

.....

Running distance while dynamic equivalent load F_n is applied: L_n

From the above, mean effective load F_m can be obtained by the following formula.

In case of ball

$$F_m = \sqrt[3]{\frac{1}{L} (F_1^3 L_1 + F_2^3 L_2 + \dots + F_n^3 L_n)}$$

F_m : Mean effective load of the deviating load (N)

L : Running distance (ΣL_n)

In case of roller

$$F_m = \sqrt[10]{\frac{1}{L} (F_1^{10} L_1 + F_2^{10} L_2 + \dots + F_n^{10} L_n)}$$

(2) When load changes almost linearly (Fig. 2.4)

Approximate mean effective load F_m can be obtained by the following formula.

$$F_m \approx \frac{1}{3} (F_{min} + 2F_{max})$$

F_{min} : Minimum value of dynamic equivalent load (N))

F_{max} : Maximum value of dynamic equivalent load (N)

(3) When load changes in sinusoidal pattern (Fig. 2.5)

At time of (a): $F_m = 0.65 F_{max}$

At time of (b): $F_m = 0.75 F_{max}$

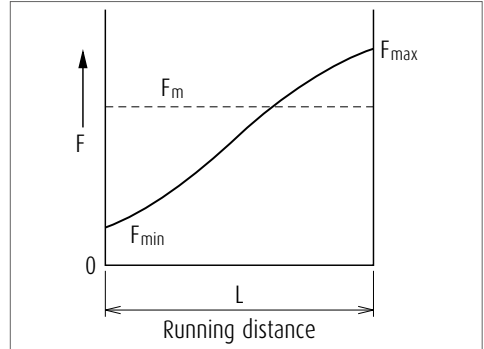


Fig. 2.4 Linear load change

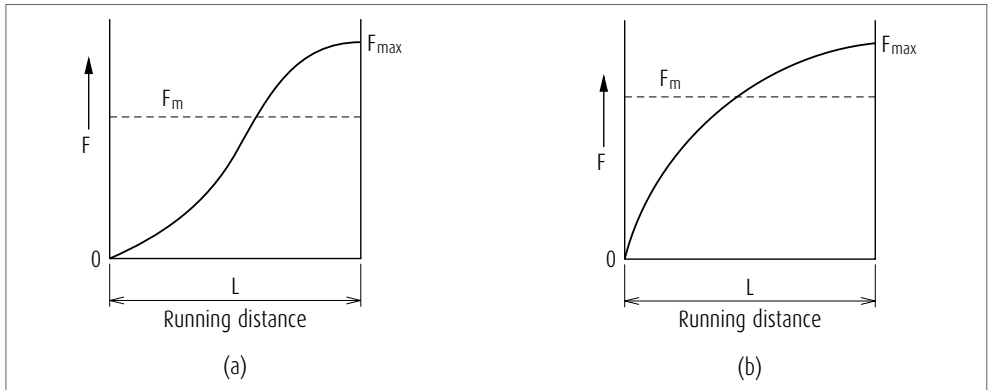


Fig. 2.5 Load that changes in sinusoidal pattern

5. Various coefficients

(1) Load factors

- > Although a load applied to the slide can be calculated, the actual load becomes larger than the calculated value due to the machine's vibration and impact.
- > Therefore, calculation of load on the slide should take into consideration the load factors in **Table 2.5**.

Table 2.5 Load factor f_w

Impact/Vibration	Load factor
No external impact/vibration	1.0 - 1.5
There is impact/vibration from outside.	1.5 - 2.0
There is significant impact/vibration.	2.0 - 3.0

A-3-2 Rating Life and Basic Load Rating

(2) Hardness coefficient

- For linear guides, in order to function optimally, both the rolling elements and the rolling contact surface must have a hardness of HRC58 to 62 to an appropriate depth.
- The hardness of NSK linear guide fully satisfies HRC58 to 62. Therefore, in most cases it is not necessary to consider hardness. If the linear guide is made of a special material by a customer's request, as the material hardness is lower than HRC58, use the following formula for adjustment.

$$C_H = f_H \cdot C$$

$$C_{0H} = f_H' \cdot C_0$$

C_H : Basic dynamic load rating adjusted by hardness coefficient

f_H : Hardness coefficient (Refer to Fig. 2.6)

C_{0H} : Basic static load rating adjusted by hardness coefficient

f_H' : Static hardness coefficient (Refer to Fig. 2.6)

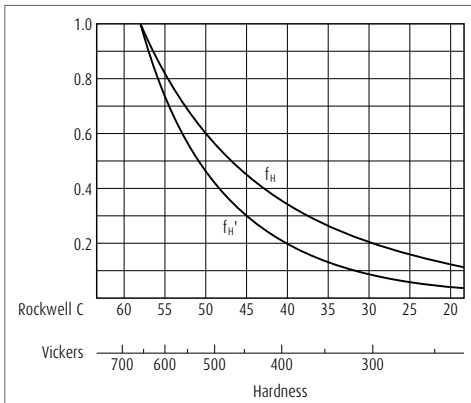


Fig. 2.6 Hardness coefficient

(3) Reliability coefficient

- In general, a reliability of 90% is customary. In this case, reliability coefficient is 1. Therefore, the reliability coefficient does not have to be included in calculation.

6. Calculation of rating life

(1) Life Calculating Formula

The life calculating formula in the stroke movement with normal lubrication, the following relationships exist between the slide mean effective load F_m (N), the basic dynamic load rating to load application direction C (N), and the rating fatigue life L (km).

[For balls as rolling element]

For the basic dynamic load rating for 100 km

$$L = 100 \times \left(\frac{f_H \cdot C_{100}}{f_w \cdot F_m} \right)^3$$

For the basic dynamic load rating for 50 km

$$L = 50 \times \left(\frac{f_H \cdot C_{50}}{f_w \cdot F_m} \right)^3$$

[For rollers as rolling element]

For the basic dynamic load rating for 100 km

$$L = 100 \times \left(\frac{f_H \cdot C_{100}}{f_w \cdot F_m} \right)^{\frac{10}{3}}$$

For the basic dynamic load rating for 50 km

$$L = 50 \times \left(\frac{f_H \cdot C_{50}}{f_w \cdot F_m} \right)^{\frac{10}{3}}$$

L : Rating fatigue life (km)

C_{100} : Basic dynamic load rating for 100 km rated fatigue life (N)

C_{50} : Basic dynamic load rating for 50 km rated fatigue life (N)

f_H : Hardness coefficient

f_w : Load factor

F_m : Mean effective load

Note: Do not use the basic static load rating C_0 and the basic static moment rating M_{R0} , M_{P0} or M_{Y0} for a calculation of the life.

(2) Life as an entire guide way system

In those cases when several slides comprise a single guide way system (such as a single-axis table), the life of the slide to which the most strenuous condition is applied is considered to be the life of the entire system.

For example, in Fig. 2.7, if "slide A" is the slide which receives the largest mean effective load, or if "slide A" is the one which has the shortest life, the life of the system is considered to be the life of "slide A."




Fig. 2.7 Life of a system

7. Examination of the basic static load rating

(1) Examine from the basic static load rating

- > Examine the static equivalent load P_0 , which is applied to the slide, from the basic static load rating C_0 and the static permissible load factor f_s .

$$f_s = \frac{C_0}{P_0}$$

When the static equivalent load P_0 is a combination of vertical loads F_r and lateral load F_s , calculate it using formulas below. When the static equivalent load P_0 is a combination of vertical loads F_r and lateral load F_s , calculate it using formulas below.

For NH, VH, NS, LW, LH and HS Series:

If compressed load and lateral load are combined

$$P_0 = Fr + 1.54Fs$$

If tensile load and lateral load are combined

$$P_0 = 1.28Fr + 1.54Fs$$

For PU, LU, PE, LE, LL, RA, RB, LA and HA Series:

$$P_0 = Fr + Fs$$

- > The table below shows guidelines of f_s for general industrial use.

Table 2.6

Use conditions	f_s
Under normal operating conditions	1 - 2
Operating under vibration/impact	1.5 - 3

- > Basic static load rating is not a destructive force to the balls, rollers, rails, or slides. The balls can withstand a load more than seven times larger than the basic static load rating. It is sufficient as a safety factor to the destruction load designed for general machines.
- > However, when a heavy load applied to the rail and slide in tension direction, the strength of the bolts which secures the rail and the ball slide affects the strength of the entire system. Strength of the bolt and its material should be considered.

(2) Examining from static moment load rating

- > Also examine static permissible moment load M_0 from basic static moment load M_{p0} and static permissible load factor f_s .

$$f_s = \frac{M_{p0}}{M_0}$$

If more than one moment load in any direction is combined, please consult NSK.

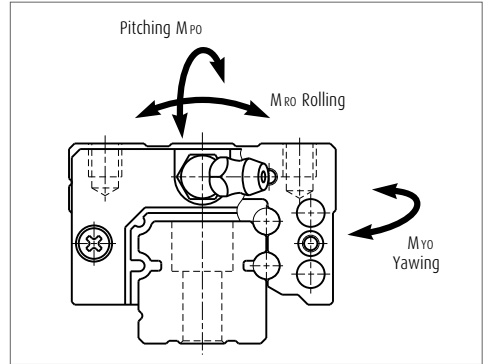


Fig. 2.8 Moment load directions

A-3-2 Rating Life and Basic Load Rating

8. Precautions for the design in examining the life

The following points must be heeded in examining the life.



In case of oscillating motion

- > If the rolling elements do not rotate all the way, but only halfway, and if this minute stroke is repeated, lubricant disappears from the contact surface of rolling elements and raceways. This generates "fretting," a premature wear. Fretting cannot be entirely prevented, but it can be mitigated.
- > A grease which prevents fretting is recommended for oscillating stroke operations. When a standard grease is used, the life can be markedly prolonged by adding a normal stroke travel (about the slide length) once every several thousand cycles.



When applying pitching or yawing moment

- > The load applied to the rolling element rows inside the slide is inconsistent if a pitching or yawing moment load is applied. Loads are heavy on the rolling elements on each end of the row.
- > In such case, a heavy load lubricant grease or oil are recommended. Another countermeasure is using one size larger model of linear guide to reduce the load per rolling element.
- > The moment load to a ball slide is insignificant for 2-rail, 4-slide combination which is commonly used.



When an extraordinary high load is applied during stroke

- > If an extraordinary large load is applied at certain position of the stroke, calculate not only the life based on the mean effective load, but also the life based on the load in this range.
- > When an extraordinary heavy load is applied and thus the application of high tensile stress to fixing bolts of the rails and slides is foreseen, the strength of the bolts should be considered.



When the calculated life is extraordinarily short (Less than 3 000 km in calculated life)

- > In such case, the contact pressure to the rolling elements and the rolling contact surface is extraordinarily high.
- > If the linear guides are operated under such state continually, the life is significantly affected by the loss of lubrication and the presence of dust, and thus the actual life becomes shorter than calculated.
- > It is necessary to reconsider the arrangement of linear guides, the number of slide, and the type of model in order to reduce the load to the slides.
- > It is necessary to consider preload for calculation of rating life when selecting Z3 (medium preload) or Z4 (heavy preload) as a preload. For the calculation of full dynamic equivalent loads that consider preload, see "A-3-3 6" on page A31.



Application at high speed

- > The standard maximum allowable speed of a linear guide under normal conditions is 100 m/min. However, the maximum allowable speed can be affected by accuracy of installation, operating temperature, external loading etc.
- > The end cap with high speed specification must be used when the operating speed exceeds the permissible speed. In such a case, please consult NSK.

A-3-3 Preload

1. Objective of preload

- > An elimination of clearance between the raceways and rolling elements vanishes the mechanical play of the linear guide system.
- > When a preload is applied, the deformation of linear guides by external vertical load is further improved thus increasing the system stiffness.
- > Preloading method
The preload is applied by inserting rolling elements slightly bigger than the space of two raceways as shown in **Fig. 3.1**.

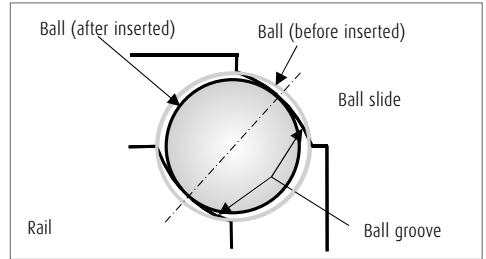


Fig. 3.1 Preloading method

2. Preload and rigidity

- > In NSK linear guides, slight size changes of rolling elements, which are going to be inserted in the slide, control the clearance and amount of preload.
- > In NSK linear guides, the rigidity is further increased and the elastic deformation is reduced by applying preload.
- > In general, the load range of ball guide system in which the preload is effective, is about 2.8 times of the preload (**Fig.3.2**). For roller guide system, it becomes about 2.2 times of the preload.
- > **Fig. 3.3** shows the relationship between the ball slide deformation and the external vertical load under a specified preload. NH35 is used as an example.
- > The following show the definition of linear guide rigidity.
 - 1) Radial rigidity: Rigidity of vertical and lateral directions, up/down and right/left (**Fig. 3.4**).
 - 2) Moment rigidity: Three moment directions, pitching, rolling, and yawing (**Fig. 3.5**).

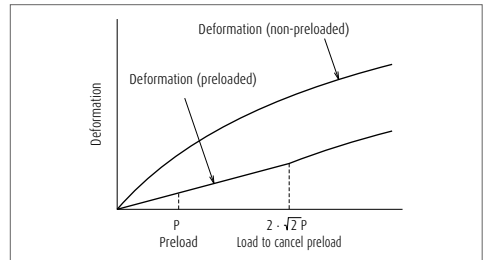


Fig. 3.2 Elastic deformation

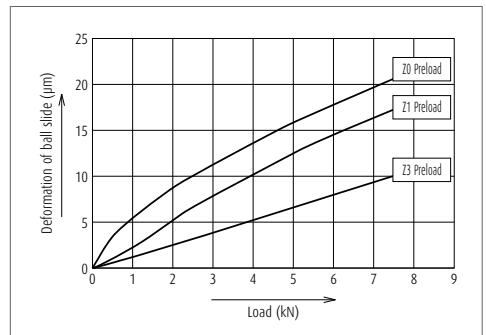


Fig. 3.3 Rigidity of NH35, downward direction load (example)

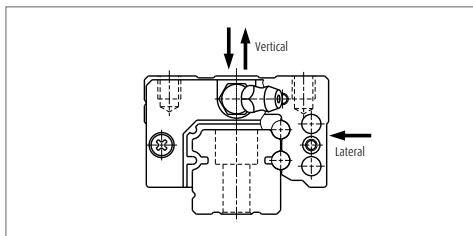


Fig. 3.4 Radial rigidity

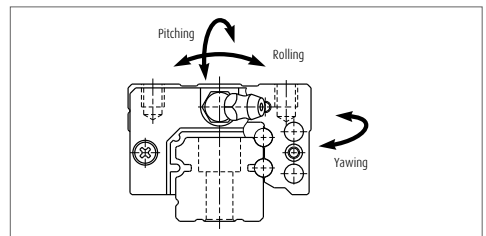


Fig. 3.5 Moment rigidity

A-3-3 Preload

- ▶ Since two rails and four slides are used in general as a pair, consideration only for the radial rigidity is sufficient.
- ▶ However, in cases as shown in **Fig. 3.6**, **Fig. 3.7** and **Fig. 3.8**, it is necessary to take into account the moment rigidity in addition to the radial rigidity.

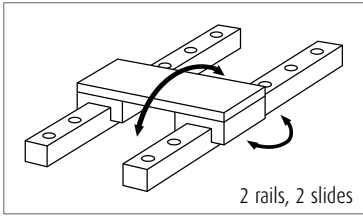


Fig. 3.6 Pitching and yawing direction




Fig. 3.7 Rolling direction




Fig. 3.8 All directions

3. Selection of preload types

- ▶ Several types of preload that match the characteristic of each series are set for NSK linear guides.
- ▶ Types of preload classification for each series are shown in **Table 3.1**. **Table 3.2** shows the selection criterion of the preload classification.

Table 3.1 Classification of preload in each series

Preload Series	Preloaded assembly (not random matching)				Random-matching assembly		
	Heavy preload Z4	Medium preload Z3	Slight preload Z1	Fine clearance Z0	Medium preload ZH	Slight preload ZZ	Fine clearance ZT
Ball guide	NH, NS	○	○	○		○	○
	VH		○	○		○	○
	LW		(○)	○		○	○
	PU			○			○
	LU			○			○
	PE			○			○
	LE			○			○
	Miniature LH			○			○
	LA	○	○				
Roller guide	HA		○				
	HS		○				
	RA		○		○		
	RB		○				

Table 3.2 Selection criterion of the preload

Classification of preload	Use condition	Applications
Z0 and ZT (Fine clearance)	<ul style="list-style-type: none"> ▶ An application in which a set of two parallel linear guides (four ball slides/two rails) is used to sustain a unidirectional load with low vibration and impact. ▶ An application in which the accuracy is not very necessary but a friction force must be minimized. 	Welding machines, Glass processing machines, Packaging/packing machines, Materials handling equipment
Z1 and ZZ (Slight preload)	<ul style="list-style-type: none"> ▶ Moment loads are applied. ▶ Application for a highly accurate operation. 	Industrial robots, Inspection/measuring equipment, Laser cutting machine, Electric discharge machines, PCB drillers, Chip mounters
Z3, ZH, and Z4 (Medium preload, Heavy preload)	<ul style="list-style-type: none"> ▶ Application in which extremely high stiffness is essential. ▶ Application in which vibration and impact load will be applied. 	Machining centers, Lathes, Milling machines, Boring machines, Grinders

4. Estimation of the elastic deformation

The followings are the relation between load and deformation.

- > Without the preload
 - When the rolling element is ball
The deformation is proportional to the 2/3 power of the load.
 - When the rolling element is roller
The deformation is proportional to the 9/10 power of the load.
- > With the preload
The deformation is directly proportional to the load.

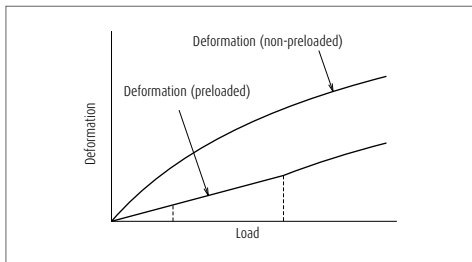


Fig. 3.9 Elastic deformation

A preloaded linear guide deforms proportionally to the load as shown in **Fig. 3.9**; the calculation of system deformation can be done using the deformation curve. The factors required for an estimation of the system deformation are listed below. The stiffness of slide is shown on the relevant explanation of each linear guide series.

< Required conditions to calculate deformation >

- > Volume of load
- > Direction of load
- > Point of load application
- > Position of deformation calculation
- > Arrangement of rails and ball slides
- > Position of a driving mechanism

Please refer to the calculation formula of deformation for typical table structures on the pages A18 to A20.

5. Application examples of preload

Table 3.3 shows typical application for each preload types of the NSK linear guides.

Refer to this table when selecting the preload type for your application.

Table 3.3 Examples of preload for specific purpose

Type of machine	Application	Preload			
		Heavy preload Z4	Medium preload Z3	Slight preload Z1, Z2	Fine clearance Z0, ZT
Machine tools	> Machining centers	○	○		
	> Grinders	○	○		
	> Lathes	○	○		
	> Milling machines	○	○		
	> Drilling machines	○	○		
	> Boring machines		○		
	> Gear cutters	○	○		
	> Diesinking machines		○	○	
	> Laser cutting machines		○	○	
	> Electric discharge machines		○		
Industrial machines and equipment	> Punch presses		○	○	
	> Press machines			○	○
	> Welding machines		○	○	○
	> Painting machines			○	○
	> Textile machines			○	○
	> Coil winders		○	○	
	> Woodworking machines		○	○	○
	> Glass processing machines			○	○
	> Stone cutting machines			○	○
	> Tire forming machines			○	○
	> ATC			○	○
	> Industrial robots		○	○	○
	> Materials handling equipment			○	○
	> Packing machines			○	○
> Construction machines				○	
Semiconductor facilities	> Probers		○		
	> Wire bonders		○	○	
	> PCB drillers		○	○	
	> Wafer slicers		○		
	> Wafer dicers		○		
	> Chip mounters		○	○	
	> IC handlers			○	
	> Scanners			○	
> Lithographic machines		○	○		
Others	> Measuring/inspection equipment			○	
	> Three-dimensional measuring equipment		○	○	
	> Medical equipment			○	○
	> OA equipment			○	○
	> Railway cars			○	○
	> Stage systems				○
> Pneumatic equipment			○	○	

A-3-3 Preload

6. Load and rating life when the preload is taken into account

- > It is necessary to include the amount of preload for the calculation of rating life when the Z3 (medium preload) or the Z4 (heavy preload) preload type is specified.
- > Full dynamic equivalent load when the preload is taken into account can be obtained by the following formulas.

For balls as rolling element

$$F_{eP} = P \left(1 + \frac{F_e}{2.83 \times P} \right)^{\frac{3}{2}}$$

P : Preload (N)

However, when the full dynamic equivalent load taking account of preload is larger than the load at which preload is removed, $F_{eP} = F_e$.

For this case, preload is lost at $F_{P0} = 2^{\frac{2}{3}}P$

For rollers as rolling element

$$F_{eP} = P \left(1 + \frac{F_e}{2.16 \times P} \right)^{\frac{10}{9}}$$

P : Preload (N)

However, when the full dynamic equivalent load taking preload into account is larger than the load at which preload is removed, $F_{eP} = F_e$.

For this case, preload is lost at $F_{P0} = 2^{\frac{9}{10}}P$

7. Calculating friction force by preload

- > Dynamic friction force per one slide of the ball guide can be calculated from a preload value.
- > The following is a simple calculation to obtain the criterion of dynamic friction force.

For the slight preload ZZ of a preloaded random-matching type linear guide, use the preload volume of slight preload Z1 type assembly.

$$F = iP$$

F : Dynamic friction force (N)

P : Preload (N)

i : Contact coefficient

Use the following contact coefficient values (i) for each series of linear guides.

NH, VH, NS, LW, LH and HS Series : 0.004

LA and HA Series : 0.010

PU, LU, PE and LE Series : 0.026

- > The starting friction force when the slide begins to move depends on lubrication condition. Roughly estimate it at 1.5 to 2 times of the dynamic friction obtained by the above method.

Calculation example

In case of NH35AN - Z3

$$i = 0.004$$

$$P = 2350 \text{ (N) (refer to LH series preload)}$$

$$F = iP$$

$$= 0.004 \times 2350 = 9.4 \text{ (N)}$$

Therefore, the criteria of the dynamic friction force of NH35AN - Z3 is 9.4 N.

For seal friction, refer to seal friction of each Series.

A-3-4 Accuracy

1. Accuracy standard

The accuracy characteristics of linear guide are specified to each series in the variations of assembled height, assembled width, and running parallelism. We also specify the mutual variation of a pair of linear guides in the assembled height and assembled width. The accuracy of the table equipped with a set of linear guides is depending on other accuracies and many factors besides the accuracy of linear guides. Those are the accuracy of the mounting surface of the machine, the mounting span between two linear guides, the span of ball slides, the number of ball slides, and the location of the point at where the accuracy is really required. The NSK linear guides can deal with these factors and provide the best suited model for your specific application.

2. Definition of Accuracy

> **Table 4.1, Figure 4.1** and **Figure 4.2** show accuracy characteristics.

Table 4.1 Definition of accuracy

Characteristics	Definition (Figures 4.1 and 4.2)
Mounting height H	Distance from A (rail bottom datum surface) to C (slide top surface)
Variation of H	Variation of H in slides assembled to the rails of a set of linear guides
Mounting width W_2 or W_3	Distance from B (rail side datum surface) to D (slide side datum surface). Applicable only to the reference linear guide.
Variation of W_2 or W_3	Difference of the width (W_2 or W_3) between the assembled slides which are installed in the same rail. Applicable only to the reference linear guide.
Running parallelism of slide, surface C to surface A	Variation of C (slide top surface) to A (rail bottom datum surface) when slide is moving.
Running parallelism of slide, surface D to surface B	Variation of D (slide side datum surface) to B (rail side datum surface) when a slide is moving.

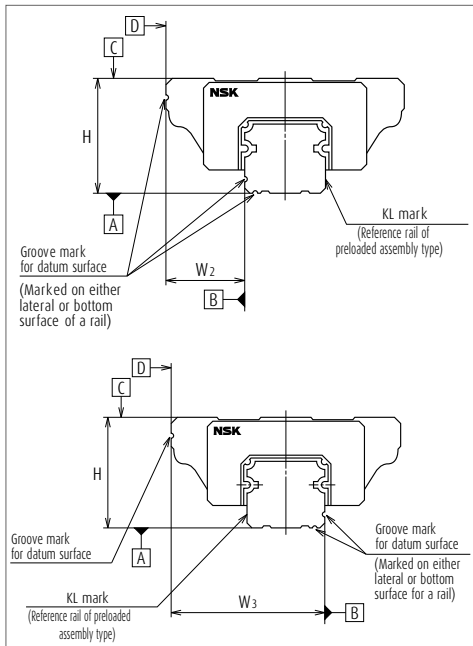


Fig. 4.1 Assembled dimensions

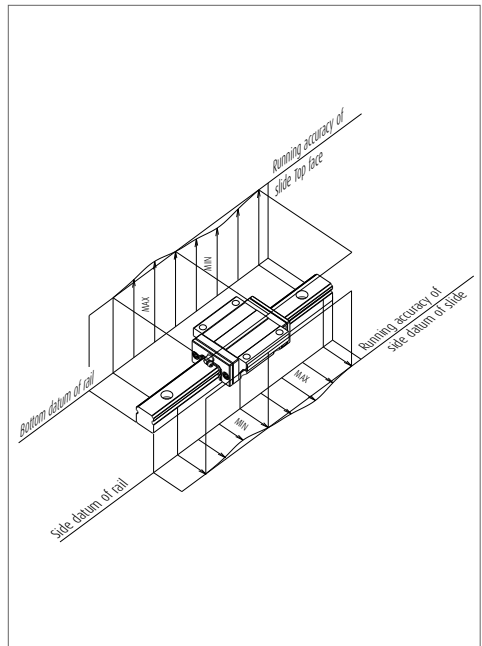


Fig. 4.2 Running parallelism of slide

A-3-4 Accuracy

Mounting width: W_2 and W_3

- Mounting width differs depending on the arrangement of the datum surfaces of the rail and slide on the reference linear guide (indicated as KL on the rail). (Fig. 4.3 and Fig. 4.4)

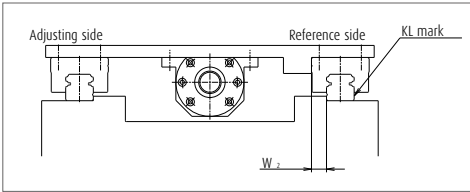


Fig. 4.3 Mounting width W_2

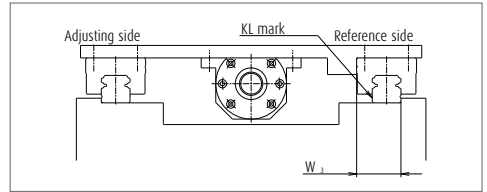


Fig. 4.4 Mounting width W_3

Running Parallelism of Ball Slide

- Running parallelism of slide is common in all series. Specifications of all accuracy grades are shown in Table 4.2. However, applicable accuracy grades differ by series. Please refer to "Table 4.4 Accuracy grade and applicable series" on page A35.

Table 4.2 Running parallelism of slide

Unit: μm

Accuracy grade Rail length (mm)		Preloaded assembly (not random matching)					Random- matching type	
		Ultra precision P3	Super precision P4	High precision P5	Precision grade P6	Normal grade PN	Normal grade PH	Normal grade PC
over	or less							
-	50	2	2	2	4.5	6	2	6
50	- 80	2	2	3	5	6	3	6
80	- 125	2	2	3.5	5.5	6.5	3.5	6.5
125	- 200	2	2	4	6	7	4	7
200	- 250	2	2.5	5	7	8	5	8
250	- 315	2	2.5	5	8	9	5	9
315	- 400	2	3	6	9	11	6	11
400	- 500	2	3	6	10	12	6	12
500	- 630	2	3.5	7	12	14	7	14
630	- 800	2	4.5 (4)	8	14	16	8	16
800	- 1000	2.5	5 (4.5)	9	16	18	9	18
1 000	- 1 250	3	6 (5)	10	17	20	10	20
1 250	- 1 600	4	7 (6)	11	19	23	11	23
1 600	- 2 000	4.5	8 (7)	13	21	26	13	26
2 000	- 2 500	5	10 (8)	15	22	29	15	29
2 500	- 3 150	6	11 (9.5)	17	25	32	17	32
3 150	- 4 000	9	16	23	30	34	23	34

Note Value of () is the running parallelism of RA and RB Series.

3. Application examples of accuracy grade and preload

Table 4.3 shows examples of accuracy grade and preload of NSK linear guides for specific purposes.

Refer to this table when selecting accuracy grade and preload type for your application.

Table 4.3 Application examples of accuracy grade and preload

Type of machine	Application	Accuracy grade					Preload			
		Ultra precision P3	Super precision P4	High precision P5, PH	Precision grade P6	Normal grade PN, PC	Heavy preload Z4	Medium preload Z3, ZH	Slight preload Z1, ZZ	Fine clearance Z0, ZT
Machine tools	> Machining centers		○	○	○		○	○		
	> Grinders	○	○	○			○	○		
	> Lathes		○	○	○		○	○		
	> Milling machines		○	○	○		○	○		
	> Drilling machines			○	○		○	○		
	> Boring machines		○	○	○		○	○		
	> Gear cutters		○	○	○		○			
	> Diesinking machines		○	○	○			○	○	
	> Laser cutting machines		○	○	○			○	○	
	> Electric discharge machines	○	○	○			○	○		
Industrial machines and equipment	> Punch presses			○	○			○	○	
	> Press machines				○	○			○	○
	> Welding machines				○	○		○	○	○
	> Painting machines				○	○			○	○
	> Textile machine				○	○			○	○
	> Coil winders				○	○		○	○	
	> Woodworking machines			○	○	○		○	○	○
	> Glass processing machines				○	○			○	○
	> Stone cutting machines				○	○			○	○
	> Tire forming machines					○			○	○
	> ATC				○	○			○	○
	> Industrial robots			○	○	○		○	○	○
	> Materials handling equipment				○	○			○	○
	> Packing machines				○	○			○	○
> Construction machines					○				○	
Semiconductor facilities	> Probers	○						○	○	
	> Wire bonders		○	○				○	○	
	> PCB drillers			○	○			○	○	
	> Wafer slicers	○	○					○		
	> Wafer dicers	○	○					○		
	> Chip mounters			○	○			○	○	
	> IC handlers			○	○				○	
	> Scanners			○	○				○	
	> Lithographic machines	○	○				○	○		
Others	> Measuring/inspection equipment	○	○	○	○			○	○	
	> Three-dimensional measuring equipment	○	○	○	○			○	○	
	> Medical equipment		○	○						○
	> OA equipment				○	○			○	○
	> Railway cars					○			○	○
	> Stage systems					○				○
	> Pneumatic equipment				○	○		○	○	

Note Only Z1 and Z0 are available for PN grade.

For random-matching type, preload "ZH" and "ZZ" are available for PH grade. For PC grade, "ZH", "ZZ" and "ZT" are available.

A-3-4 Accuracy

4. Combination of accuracy grade and preload

(1) Accuracy grades

- > The accuracy grade which matches the characteristic of each series is set for the NSK linear guides.
- > **Table 4.4** shows the accuracy grades available for each series.
- > Refer to "**3. Application examples of accuracy grade**" which shows cases of appropriate accuracy grade for specific purpose.

Table 4.4 Accuracy grades and applicable series

Series	Preloaded assembly (not random matching)					Random-matching type	
	Ultra precision	Super precision	High precision	Precision grade	Normal grade	Precision grade	Normal grade
	P3	P4	P5	P6	PN	PH	PC
NH, NS	○	○	○	○	○	○	○
VH	○	○	○	○	○		○
LA	○	○	○	○			
LW			○	○	○		○
PE, LE		○	○	○	○		○
PU, LU		○	○	○	○		○
Miniature LH		○	○	○	○		
HA	○	○	○				
HS	○	○	○				
RA	○	○	○	○		○*)	
RB	○	○	○	○			

*) Only RA25 to RA65 are available in random matching.

(2) Preload

- › Several classifications of preload that match the characteristic of each series are set for the NSK linear guides.
- › The classification of preload for each series are shown in **Table 4.5**.
- › Refer to the specifications of each series for details of radial clearance, preload, and rigidity.
- › "**3. Application examples of accuracy grade**" shows the cases of appropriate preload classifications and accuracy grades for specific purposes.

Table 4.5 Classification of preload

Series	Preloaded assembly (not random matching)				Random-matching type		
	Heavy preload	Medium preload	Slight preload	Fine clearance	Medium preload	Slight preload	Fine clearance
	Z4	Z3	Z1	Z0	ZH	ZZ	ZT
NH, NS		○	○	○	○	○	○
VH		○	○	○		○	○
LA	○	○					
LW		(○)	○	○		○	○
PE, LE			○	○			○
PU, LU			○	○			○
Miniature LH			○	○			
HA		○	○				
HS		○	○				
RA		○	○		○	○	
RB		○					

- Notes**
- 1) Z3 preload classification is only applicable to LW35 and LW50 for LW Series.
 - 2) Only RA25 to RA65 are available in random matching.
 - 3) The preload code of "Z" is omitted from the specification number. Only the number of preload classification code is specified on the last code of the reference number. (Refer to the reference number of each series.)

(3) Combinations of accuracy grade and preload

- › Combinations of accuracy grade and preload are shown in **Table 4.6**.

Table 4.6 Combinations of accuracy grade and preload type

	Accuracy grade	Preload
Preloaded assembly	P3 - P6	Z4 - Z0
	PN	Z1, Z0
Random-matching type	PC, PH*1), *2)	ZH, ZZ, ZT

- Notes**
- *1) The random-matching type is available for the models of RA25 to RA65. PH grade is set for the accuracy.
 - *2) ZH and ZZ preload are available for the PH accuracy grade.

A-3-5 Maximum Rail Length

General Industrial Use

Unit: mm

Series	Size		15	20	25	30	35	45	55	65
	Material									
NH	Special high carbon steel		2 980	3 960	3 960	4 000	4 000	3 990	3 960	3 900
	Stainless steel		1 800	3 500	3 500	3 500				
VH	Special high carbon steel		2 000	3 960	3 960	4 000	4 000	3 990	3 960	
	Stainless steel		1 800	3 500	3 500	3 500				
NS	Special high carbon steel		2 920	3 960	3 960	4 000	4 000			
	Stainless steel		1 700	3 500	3 500	3 500	3 500			

Unit: mm

Series	Size		17	21	27	35	50
	Material						
LW	Special high carbon steel		1 000	1 600	2 000	2 000	2 000

Miniature Series

Unit: mm

Series	Size		05	07	08	09	10	12	15
	Material								
PU	Stainless steel		210	375		600		800	1 000
LU	Special high carbon steel					1 200		1 800	2 000
	Stainless steel		210	375		600		800	1 000
PE	Stainless steel		150	600		800		1 000	1 200
LE	Stainless steel		150	600		800		1 000	1 200
LH	Stainless steel				375		600	800	

High Rigidity Series

Unit: mm

Series	Size		15	20	25	30	35	45	55	65
	Material									
RA	Special high carbon steel		2 000	3 000	3 900	3 900	3 900	3 650	3 600	3 600
RB						3 900	3 900	3 650	3 600	3 600
LA	Special high carbon steel				3 960	4 000	4 000	3 990	3 960	3 900


High-Accuracy Series

Unit: mm

Series	Size		15	20	25	30	35	45	55
	Material								
HA	Special high carbon steel				3 960	4 000	4 000	3 990	3 960
HS	Special high carbon steel		2 000	3 960	3 960	4 000	4 000		
	Stainless steel		1 300	3 500	3 500	3 500	3 500		

A-3-6 Lubrication

1. NSK linear guides equipped with "NSK K1" lubrication unit

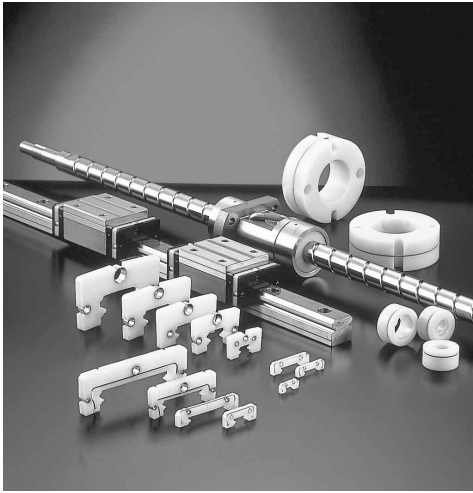


NSK K1 lowers machine operation cost, and reduces impact on the environment.

What is "long-term, maintenance-free" operation?

Ball screws and linear guides which are equipped with NSK K1 do not require maintenance for five years or up to 10 000 km operational distance.

What is NSK K1 lubrication unit?

NSK K1 is a lubrication device which combines oil and resin in a single unit. The porous resin contains a large amount of lubrication oil. Touching its surface to the raceway of a rail close to the ball contact point NSK K1 constantly supplies fresh oil which seeps from the resin.



Polyolefin

Unlike vinyl chloride products, polyolefin does not produce dioxin. Polyolefin is also being used increasingly at supermarkets for food wrapping.

Lubrication oil

It is mineral oil-based lubricant. The oil has a viscosity of 100 cSt.

Enlarged surface of "NSK K1" Lubrication Unit 100µm

Remarkable capacity with new material: NSK K1 lubrication unit information

- > NSK K1 lubrication unit (referred to as NSK K1 hereafter) equipped with an NSK linear guide is an outstanding new lubrication material.
- > A Newly developed porous synthetic resin contains large volume of lubricant oil that seeps out and enhances lubricating function.
- > Simply install NSK K1 inside a standard end seal (rubber).
- > We also provide NSK K1 lubrication unit for sanitary environments suited for food processing machinery, medical equipment and their ancillaries for the environment where hygiene control is essential. For details, refer to "A-3-9 3. NSK Linear Guides for Food Processing Equipment and Medical Devices for Sanitary Environment".

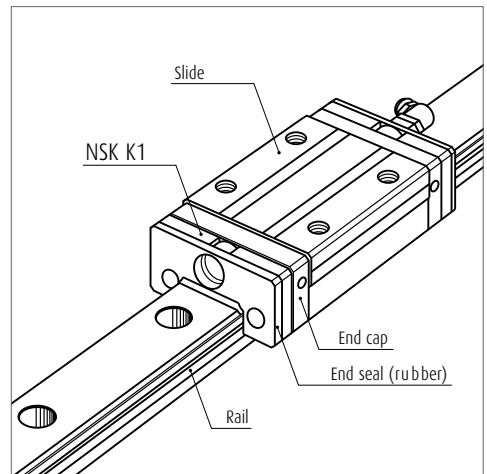


Fig. 6.1

A-3-6 Lubrication

(1) Features

NSK K1 comprises a part of the compact and efficient lubrication unit.

1) Maintenance is required only infrequently

Used with grease, the lubrication function lasts for a long time. Ideal for systems/environments in which replenishing is difficult.



For automotive component processing lines, etc.

2) Does not pollute the environment

A very small volume of grease combined with NSK K1 can provide sufficient lubrication in the environment where grease is undesirable as well as in the environment where high cleanliness is required.



Food processing/medical equipment, liquid crystal displays/semiconductor manufacturing equipment, etc.

We also provide NSK K1 lubrication unit for sanitary environment suited for food processing machinery, medical equipment and their ancillaries for the environment where hygiene control is essential. For details, refer to "A-3-9 3. NSK Linear Guides for Food Processing Equipment and Medical Devices for Sanitary Environment".

3) Good for applications where lubricant is washed away

Used with grease, life of the machine is prolonged even when the machine is washed entirely by water, or in an environments where the machine is exposed to rain or wind.



Food processing equipment, housing/construction machines, etc.

4) Maintains efficiency in dusty environments

In environments where oil- and grease-absorbing dust is produced, long-term efficiency in lubrication and prevention from foreign inclusions is maintained by using NSK K1 in combination with grease.



Woodworking machines, etc.

* Stainless steel linear guides are available for use in corrosive environments or other environments where rusting is a potential problem.

(2) Functions

NSK K1 has various superb functions. NSK's ample test data and field performances confirm NSK K1 abilities.

1) Durability test at high speed, with no other lubrication

Fig. 6.2 shows test results under these conditions.

The linear guide operated with no lubricant is unable to travel after a short period because breakage occurs. Equipped with NSK K1, the linear guide easily travels 25 000 km.

Conditions: Sample ; LH30AN (preload Z1)
Travel speed ; 200 m/min
Stroke ; 1 800 mm

No lubricant: Completely degreased, no lubrication

NSK K1: Completely degreased, no lubrication + NSK K1

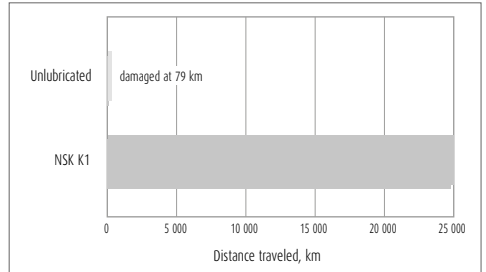


Fig. 6.2 Durability test at high speed, with no lubrication (lubricated by NSK K1 only)

2) Immersion test

Fig. 6.3 shows the test results after a linear guide is immersed in water once per week for 24 hours at a time, then traveled for 2 700 km. Without NSK K1, the ball groove surface wore out at an early stage and broke. With NSK K1, the wear was reduced to about 1/3 (Table 6.1). This test proves the effect of NSK K1.

Conditions: Sample ; LS30 Stainless steel (preload Z1)
 Travel speed ; 24 m/min
 Stroke ; 400 mm
 Load ; 4 700 N/Slide
 Lubricant ; Fully packed with grease
 (*) exclusive use for food processing machines

Immersing condition:

Immersed and traveled once per week for 24 hours at a time.

* Grease made in U.S.A.

Characteristic

Consistency: 280

Base oil viscosity: 580 (cSt)

Table 6.1 Comparison in wear of grooves and steel balls (2 700 km) Unit: μm

Lubricating condition	Ball slide groove	Rail groove	Steel balls
With NSK K1	16 – 18	2 – 3	6 – 8
Without NSK K1	30 – 45	9 – 11	17 – 25

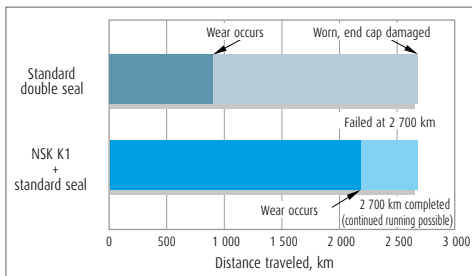


Fig. 6.3 Durability test immersed in water

3) Durability test with wood chips

Wood chips absorb lubricant. Maintaining lubrication in such environment is extremely difficult. Fig. 6.4 shows that the life when NSK K1 is added to a standard seal is two times longer than the life when two seals are combined (standard double seal).

Conditions: Sample ; LH30AN (preload Z1)
 Travel speed ; 24 m/min
 Stroke ; 400 mm
 Load ; 490 N/Slide

Seal specifications/lubricant:

Standard double Seal ; Standard double Seal + AS2 Grease

NSK K1 ; NSK K1 + Standard seal + AS2 Grease

Wood chip conditions: 1 Volume of wood chips: Large
 2 Volume of wood chips: Medium

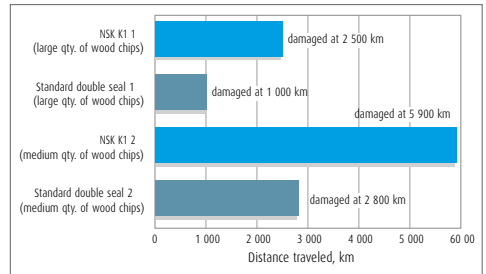


Fig. 6.4 Durability test with wood chips

4) Dust generation

Fig. 6.5 is a comparison of dust generation of NSK K1. The combination of NSK K1 and NSK Clean Grease LG2 (low dust generation grease) generates as little dust as fluorine grease (vacuum grease).

Conditions: Sample ; LS20
 Travel speed ; 36 m/min

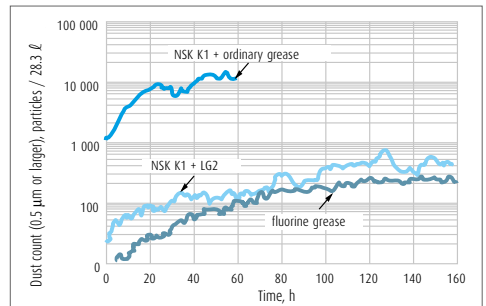


Fig. 6.5 Comparison of dust emission

A-3-6 Lubrication

(3) Specifications

1) Applicable series and sizes

- a) Can be installed in NH, NS, LW, PU, LU, PE, LE, LH, RA, RB, LA, HA and HS series. It is standard equipment for the VH Series.
- b) Can be used with stainless steel materials and surface-treated items.

2) Standard specifications

- a) NSK K1 is installed between the end seal and end cap.
For the TS series, it is installed in the end cap. (Double-seal specification, and specification with protector are also available upon request.)
- b) NSK standard grease is packed inside the slide.
(You may specify the type of grease and its volume if required.)
- c) Accuracy and preload classifications are the same as standard items. (Dynamic friction increases slightly due to NSK K1.)

3) Number of installed NSK K1

Normally, one NSK K1 should be installed on both ends of slides. (two K1s for one slide)

However, more NSK K1 may be required under more stringent operating conditions and environment. Please consult NSK for details in such a case.

Precautions for handling

To maintain high functionality of the NSK K1, observe the following precautions.

1. Temperature range for use:
Maximum temperature in use: 50°C
Momentary maximum temperature in use: 80°C
2. Chemicals that should not come into contact with NSK K1:
Do not leave the NSK K1 in an organic solvent, such as hexane and thinner that remove oil, or rust preventive oil that contains white kerosene.

Note: Water-type cutting oil, oil-type cutting oil, mineral-oil type grease and ester-type grease do not damage NSK K1.

2. Lubrication

Mainly there are two ways of lubrication, grease and oil, for linear guides.

Use a lubricant agent and method most suitable to condition requirements and the purpose to optimize functions of linear guides.

In general, lubricants with low base oil kinematic viscosity are used for high-speed operation, in which thermal expansion has a large impact, and in low temperatures.

Lubrication with high base oil kinematic viscosity is used for oscillating operations, operations in low speeds and in high temperatures.

The following are lubrication methods by grease and by oil.

(1) Grease Lubrication

Grease lubrication is widely used because it does not require a special oil supply system or piping. Grease lubrication accessories available from NSK are:

- › Various types of grease in bellows tube which can be instantly attached to the hand grease pump;
- › NSK Grease Unit that consists of a hand grease pump and various nozzles. These are compact and easy to use.

1) NSK grease lubricants

Table 6.2 shows the marketed general grease widely used for linear guides. In addition to these grease, NSK provides special grease for specific conditions and purposes.

Table 6.2 Grease lubricant for linear guides

Type	Thickener	Base oil	Base oil kinematic viscosity mm ² /s (40°C)	Range of use temperature (°C)	Purpose
AS2* ¹⁾	Lithium type	Mineral oil	130	-10 - 110	For general use at high load
PS2* ²⁾	Lithium type	Synthetic oil + synthetic hydrocarbon oil	15.9	-50 - 110	For low temperature and high frequency operation
LG2	Lithium type	Mineral oil + synthetic hydrocarbon oil	32	-20 - 70	For clean environment
LGU	Diurea	Synthetic hydrocarbon oil	95.8	-30 - 120	For clean environment
NF2	Urea composite type	Synthetic hydrocarbon oil	26	-40 - 100	For fretting resistant

Note *¹⁾ Standard grease of NH, VH, NS, LW, LH, RA, RB, LA, HA and HS Series.

*²⁾ Standard grease of PU, LU, PE and LE Series.

A-3-6 Lubrication

[1] NSK Grease AS2

> Features

It is environmentally friendly and widely used grease for high-load applications. It is mineral oil based grease containing lithium thickener and several additives. It is superb in load resistance as well as stability in oxidization. It not only maintains good lubrication over a long period of time, but also demonstrates superb capability in retaining water. Even containing a large amount of water, it does not lose grease when it is softened.

> Application

It is a standard grease for general NSK linear guides. It is prevalently used in many applications because of its high base oil viscosity, high load resistance, and stability in oxidization.

> Nature

Thickener	Lithium soap base
Base oil	Mineral oil
Consistency	275
Dropping point	181°C
Volume of evaporation	0.24% (99°C, 22 hr)
Copper corrosion test	Satisfactory (Method B, 100°C, 24 hr)
Oil separation	2.8% (100°C, 24 hr)
Base oil kinematic viscosity	130 mm ² /s (40°C)

[2] NSK Grease PS2

> Features

The major base oil component is synthetic oil with mineral oil. It is an excellent lubrication especially for low-temperature operation. It is for a high-speed and light-load application.

> Application

It is standard grease for NSK miniature linear guides. It is especially superb for low-temperature operation, but also functions well in normal temperatures, making it ideal for small equipment with light load.

> Nature

Thickener	Lithium soap base
Base oil	Synthetic oil + Synthetic hydrocarbon oil
Consistency	275
Dropping point	190°C
Volume of evaporation	0.60% (99°C, 22 hr)
Copper corrosion test	Satisfactory (Method B, 100°C, 24 hr)
Oil separation	3.6% (100°C, 24 hr)
Base oil kinematic viscosity	15.9 mm ² /s (40°C)

[3] NSK Grease LG2

> Features

This grease was developed by NSK to be exclusively used for linear guides in clean room. Compared to the fluorine grease which is commonly used in clean room, LG2 has several advantages such as:

- > Higher in lubrication function
- > Longer lubrication life
- > More stable torque (resistant to wear)
- > Higher rust prevention.

In dust generation, LG2 is more than equal to the fluorine grease in keeping dust volume low. Since the base oil is not special oil but mineral oil, LG2 can be handled in the same manner as general grease.

> Application

LG2 is the lubrication grease for linear guides for semiconductor and liquid crystal display (LCD) processing equipment which require a highly clean environment. Because LG2 is exclusively for a clean environment at normal temperatures, however, it cannot be used in a vacuum environment.

Refer to "Special environment" in page A60 for the detailed data on superb characteristics of NSK Grease LG2.

> Nature

Thickener	Lithium soap base
Base oil	Mineral oil + Synthetic hydrocarbon oil
Consistency	199
Dropping point	201°C
Volume of evaporation	1.40% (99°C, 22 hr)
Copper corrosion test	Satisfactory (Method B, 100°C, 24 hr)
Oil separation	0.8% (100°C, 24 hr)
Base oil kinematic viscosity	32 mm ² /s (40°C)

[4] NSK Grease LGU

> Features

This is a proprietary urea base grease of NSK featuring low dust emission exclusively for linear guides which are used in clean room.

In comparison with the fluorine base grease, which has been used commonly in clean room, LGU has better lubricating property, longer duration of lubricant, better torque variation, much better anti-rust property, and equivalent or better dust generation. In addition, this grease can be handled in the same way as the other common grease because high-grade synthetic oil is used as the base oil.

LGU grease contains much less metallic elements compared to LG2 grease. It can be used in high temperature environment.

> Application

This is exclusive lubrication grease for linear guides that are installed in equipment that requires cleanliness, as same as LG2 grease, and it can be used in high temperature range of -30°C to 180°C.

This grease cannot be used in vacuum.

> Nature

Thickener	Diurea
Base oil	Synthetic hydrocarbon oil
Consistency	201
Dropping point	260°C
Volume of evaporation	0.09% (99°C, 22 hr)
Copper corrosion test	Satisfactory (Method B, 100°C, 24 hr)
Oil separation	0.6% (100°C, 24 hr)
Base oil kinematic viscosity	95.8 mm ² /s (40°C)

[5] NSK Grease NF2

> Features

It uses high-grade synthetic oil as the base oil and urea base organic compound as the thickener. It has remarkable anti-fretting corrosion property. It can be used in wide temperature range, from low to high, and has superior lubrication life.

> Application

This grease suits for linear guides whose application includes oscillating operations. Allowable temperature range is -40°C to 100°C.

> Nature

Thickener	Diurea
Base oil	Synthetic hydrocarbon oil
Consistency	288
Dropping point	260°C
Volume of evaporation	0.22% (99°C, 22 hr)
Copper corrosion test	Satisfactory (Method B, 100°C, 24 hr)
Oil separation	0.5% (100°C, 24 hr)
Base oil kinematic viscosity	26 mm ² /s (40°C)

> Precautions for handling

- > Wash the linear guides to remove oil prior to applying Clean Grease LG2 or LGU, so the grease functions are fully utilized.
- > Clean grease is exclusively used for clean environments at normal pressure.

A-3-6 Lubrication

2) How to replenish grease

Use the grease fitting of a slide if an exclusive grease supply system is not used. Supply the required amount of grease by a grease pump.

Wipe off old grease and accumulated dust before supplying new grease. If the grease fitting is not used due to the size limitation, apply grease directly to the rail. Remove the seal if possible, and move the slide few strokes so the grease permeates it. A hand grease pump, an exclusive and easy lubricating device for linear guides, is available at NSK.

3) Volume of grease to be replenished

Once grease is replenished, another supply is not required for a long time. But under some operational conditions, it is necessary to periodically replenish grease. The following are replenishing methods.

- › When there is an exclusive grease supply system and the volume from the spout can be controlled, the criterion is: All at once, replenish the amount that fills about 50% of the internal space of the slide. This method eliminates waste of grease, and is efficient.

Page A46 shows the internal spaces of slide of each series for your reference.

- › When replenishing grease using a grease pump:

Use a grease pump and fill the inside of slide with grease. Supply grease until it comes out from the slide area. Move the slide by hand while filling them with grease, so the grease permeates all areas. Do not operate the machine immediately after replenishing. Always try to run-in the system a few times to spread the grease throughout the system and to remove excess grease from inside.

Running-in operation is necessary because the sliding force of the linear guide greatly increases immediately after the replenishment (full-pack state) and may cause problems. Grease's stirring resistance is accountable for this phenomenon. Wipe off excess grease that accumulates at the end of the rail after trial runs, so the grease does not scatter to other areas.

4) Intervals of checks and replenishments

Although the grease is of high quality, it gradually deteriorates and its lubrication function diminishes. Also, the grease in the slide is gradually removed by stroke movement. In some environments, the grease becomes dirty, and foreign objects may enter a slide. New grease should be replenished depending on the frequency of use. The following is a guide of intervals of grease replenishments to linear guides.

Table 6.3 Intervals of checks and replenishments for grease lubrication

Intervals of checks	Items to be checked	Intervals of replenishments
3-6 months	Dirt, foreign matters such as cutting chip	Usually once per year is sufficient. Every 3 000 km for a system such as material handling equipment that travels more than 3 000 km per year. Replenish if checking results warrant it necessary.

- Notes**
- 1) As a general rule, do not mix greases of different brands. Grease structure may be destroyed if greases of different thickeners are mixed. Even when greases have the same thickener, different additives in them may have an adverse effect on each other.
 - 2) Grease viscosity varies by temperature. Viscosity is particular high in winter due to low temperature. Pay attention to increase in linear guide's sliding resistance in such occasion.

Table 6.4 Inside space of the slide

NH Series

Unit: cm³

Series Model No.	NH	
	High-load type	Ultra-high-load type
15	3	4
20	6	8
25	9	13
30	13	20
35	22	30
45	47	59
55	80	100
65	139	186

LW Series

Unit: cm³

Series Model No.	LW
17	3
21	3
27	7
35	24
50	52

VH Series

Unit: cm³

Series Model No.	VH	
	High-load type	Ultra-high-load type
15	3	4
20	6	8
25	9	13
30	13	20
35	22	30
45	47	59
55	80	100

PU, LU Series

Unit: cm³

Series Model No.	PU		LU	
	Standard type	High-load type	Standard type	High-load type
05	0.1	-	0.1	-
07	0.1	-	0.1	-
09	0.2	0.3	0.2	0.3
12	0.3	0.4	0.3	0.4
15	0.8	1.1	0.8	1.1

NS Series

Unit: cm³

Series Model No.	NS	
	Medium-load type	High-load type
15	2	3
20	3	4
25	5	8
30	8	12
35	12	19

PE, LE Series

Unit: cm³

Series Model No.	PE		LE		
	Standard type	High-load type	Medium-load type	Standard type	High-load type
05	0.1	-	0.1	0.1	-
07	0.2	-	0.1	0.2	0.3
09	0.4	0.5	0.2	0.4	0.5
12	0.5	0.7	0.3	0.5	0.7
15	1.2	1.6	0.8	1.2	1.6

RA Series

Unit: cm³

Series Model No.	RA	
	High-load type	Ultra-high-load type
15	1	1.5
20	2	2.5
25	3	3.5
30	5	6
35	6	8
45	10	13
55	15	20
65	33	42

Miniature LH Series

Unit: cm³

Series Model No.	LH
08	0.2
10	0.4
12	1.2

RB Series

Unit: cm³

Series Model No.	RB	
	High-load type	Super-high-load type
30	5	6
35	6	8
45	10	13
55	15	20
65	33	42

LA Series

Unit: cm³

Series Model No.	LA	
	High-load type	Ultra-high-load type
25	8	12
30	14	18
35	21	29
45	38	48
55	68	86
65	130	177

HA, HS Series

Unit: cm³

Series Model No.	HA	HS
	15	-
20	-	9
25	16	16
30	27	25
35	42	40
45	67	-
55	122	-


A-3-6 Lubrication

5) NSK Grease Unit

A hand grease pump and lubrication grease contained in a bellows tube (80 g of grease) which can be loaded to the grease pump.



Grease in a bellows tube

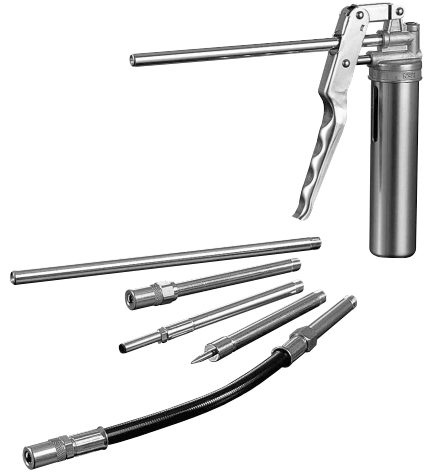

[1] Composition of NSK grease unit

Components and grease types are shown below.

	Name	(Tube color)	Reference number
NSK Grease Unit			
NSK Grease (80 g in a bellows tube)	NSK Grease AS2	(Ocher)	NSK GRS AS2
	NSK Grease PS2	(Orange)	NSK GRS PS2
	NSK Grease LG2	(Blue)	NSK GRS LG2
	NSK Grease LGU	(Yellow)	NSK GRS LGU
	NSK Grease NF2	(Gray)	NSK GRS NF2
NSK Hand Grease Pump Unit			
	NSK Hand Grease Pump (Straight nozzle NSK HGP NZ1 -- One nozzle is provided with the hand pump.)		NSK HGP
	Grease nozzle (used with a hand grease pump)		
	NSK straight nozzle		NSK HGP NZ1
	NSK chuck nozzle		NSK HGP NZ2
	NSK drive fitting nozzle		NSK HGP NZ3
	NSK point nozzle		NSK HGP NZ4
	NSK flexible nozzle		NSK HGP NZ5
	NSK flexible extension pipe		NSK HGP NZ6
	NSK straight extension pipe		NSK HGP NZ7

[2] NSK greases (80 g in a bellows tube)

Refer to pages A43 and D14 for their natures and details.

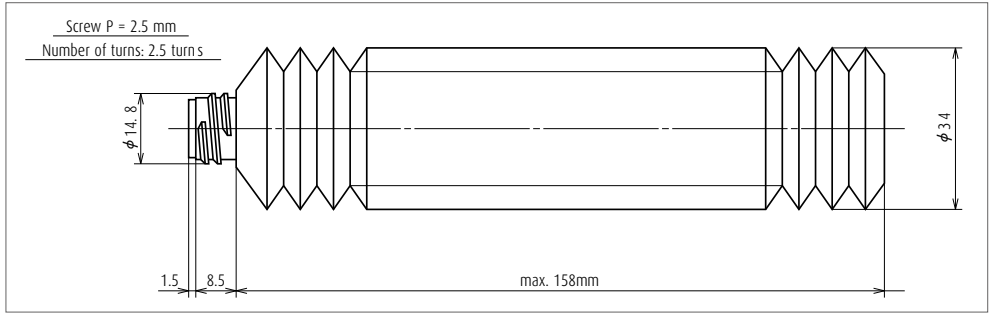


Fig. 6.6 Bellows tube

[3] NSK hand grease pump unit

a) NSK Hand Grease Pump (Reference number: NSK HGP)

> Features

- > Light-weight Can be operated by one hand, yet there is no worry to make a mistake.
- > Inserting by high pressure Insert at 15 Mpa.
- > No leaking Does not leak when held upside down.
- > Easy to change grease Simply attach grease in bellows tube.
- > Remaining grease Can be confirmed through slit on tube.
- > Several nozzles Five types of nozzles to choose from.

> Specifications

- > Discharge rate 15 MPa
- > Spout volume 0.35 cc/shot
- > Mass of main body Without nozzle 240 g
Provided nozzle 90 g
- > Outer diameter of bellows grease tube ϕ 38.1
- > Accessories Several nozzles for a unique application can be attached

* Air is contained in the unopened bellows tube. Try the system tens of times when to use the hand grease pump. The tube will be use after deflated from the tube.

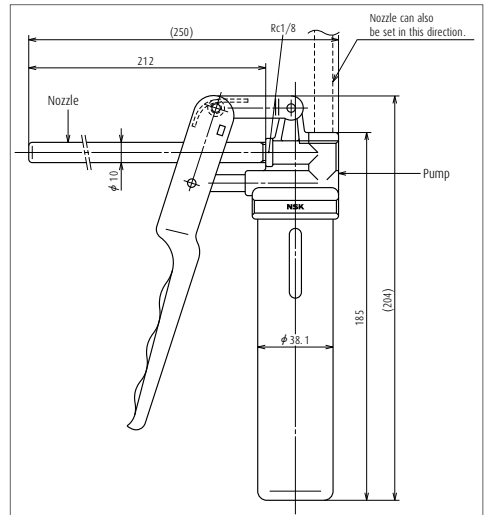


Fig. 6.7 NSK Hand Grease Pump with NSK straight nozzle

A-3-6 Lubrication

b) Nozzles

Table 6.5 Nozzles that can be attached to NSK Hand Grease Pump

Name	Designation code	Use	Dimensions
NSK straight nozzle	NSK HGP NZ1	Can be used with grease fitting A, B, and C under JIS B1575 standard.	
NSK chuck nozzle	NSK HGP NZ2	Same as above. However, there is no need to press the hand pump because the grease fitting and the nozzle come into contact due to the chucking mechanism at the tip.	
NSK fitting nozzle	NSK HGP NZ3	Dedicated for the $\phi 3$ drive-in grease fitting.	
NSK point nozzle	NSK HGP NZ4	Used for linear guides that do not have grease fitting. Supplies grease directly to the ball grooves, or through the opening of slide or slide to inside.	
NSK flexible nozzle	NSK HGP NZ5	The tip of the flexible nozzle is a chuck nozzle. The straight nozzle is not available for use.	
NSK flexible extension pipe	NSK HGP NZ6	Flexible extension pipe connects the grease pump and the nozzle	
NSK straight extension pipe	NSK HGP NZ7	Straight extension pipe connects the grease pump and the nozzle.	

Table 6.6 Grease fittings used for NSK linear guide

Series	Model No.	Tap hole for grease fitting	Standard grease fitting	Straight nozzle NZ1	Chuck nozzle NZ2	Drive-in fitting nozzle NZ3	Point nozzle NZ4	Flexible nozzle NZ5
NH Series	NH15	φ 3	Drive-in type			○		
	NH20, 25, 30, 35*	M6×0.75	B type	○	○			○
	NH45, 55, 65	Rc1/8	B type	○	○			○
VH Series	VH15	φ 3	Drive-in type			○		
	VH20, 25, 30, 35*	M6×0.75	B type	○	○			○
	VH45, 55	Rc1/8	B type	○	○			○
NS Series	NS15	φ 3	Drive-in type			○		
	NS20, 25, 30, 35*	M6×0.75	B type	○	○			○
LW Series	LW17	φ 3	Drive-in type			○		
	LW21, 27, 35*	M6×0.75	B type	○	○			○
	LW50	Rc1/8	B type	○	○			○
PU Series	PU05, 07, 09, 12	-	-				○	
	PU15	φ 3	Drive-in type			○		
LU Series	LU05, 07, 09, 12, 15	-	-				○	
PE Series	PE05, 07, 09, 12	-	-				○	
	PE15	φ 3	Drive-in type			○		
LE Series	LE05, 07, 09, 12, 15	-	-				○	
Miniature LH Series	LH08, LH10	-	-				○	
	LH12	φ 3	Drive-in type			○		
RA Series	RA15, 20	φ 3	Drive-in type			○		
	RA25, 30, 35*	M6×0.75	B type	○	○			○
	RA45, 55, 65	Rc1/8	B type	○	○			○
RB Series	RB30	φ 3	Drive-in type			○		
	RB35, 45	M6×0.75	B type	○	○			○
	RB55, 65	Rc1/8	B type	○	○			○
LA Series	LA25, 30, 35*	M6×0.75	B type	○	○			○
	LA45, 55, 65	Rc1/8	B type	○	○			○
HA Series	HA25, 30, 35*	M6×0.75	B type	○	○			○
	HA45, 55	Rc1/8	B type	○	○			○
HS Series	HS15	φ 3	Drive-in type			○		
	HS20, 25, 30, 35*	M6×0.75	B type	○	○			○

*) When using a chuck nozzle, make sure that it does not interfere with the table on linear guides.

Note PU, PE, LU, and LE Series: Apply grease directly to ball groove, etc. using a point nozzle.

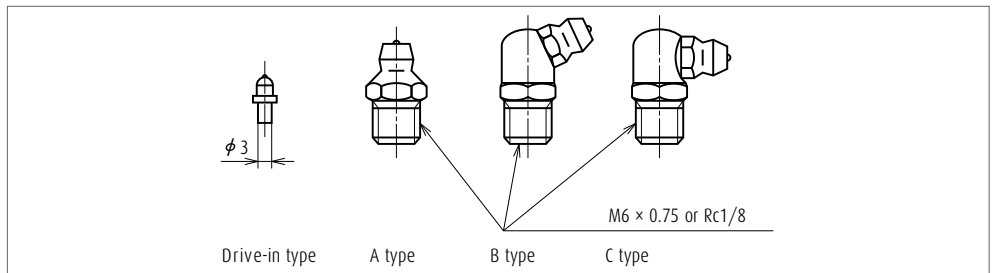


Fig. 6.8 Grease fittings

A long threaded grease fitting is required because of dust-proof parts. Please refer to the sections pertaining to the lubrication and dust-proof parts of each series.

A-3-6 Lubrication

(2) Oil lubrication

Required amount of new oil is regularly supplied by:

- > Manual or automatic intermittent supply system;
- > Oil mist lubricating system via piping.

Equipment for oil lubrication is more costly than one for grease lubrication. However, oil mist lubricating system supplies air as well as oil, thus raising the inner pressure of the slide. This prevents foreign matters from entering, and the air cools the system. Use an oil of high atomizing rate such as ISO VG 32-68 for the oil mist lubrication system.

ISO VG 68-220 are recommended for common intermittent replenishment system. Approximate volume of oil Q for a slide of linear guide per hour can be obtained by the following formula.

In case of ball type linear guide except for LA series

$$Q \geq n/150 \text{ (cm}^3\text{/hr)}$$

In case of LA, RA and RB series

$$Q \geq n/100 \text{ (cm}^3\text{/hr)}$$

n: Linear guide code

e.g. When NH45 is used,

$$n = 45,$$

Therefore,

$$Q = 45/150 = 0.3 \text{ cm}^3\text{/hr}$$

For the oil lubrication by gravity drip, the oil supply position and installation position of the slide are crucial. In case of linear guide, unless it is installed to a horizontal position, the oil flows only on the down side, and does not spread to all raceway surface. This may cause insufficient lubrication. Please consult NSK to correct such situations prior to use. NSK has the internal design which allows oil lubricant to flow throughout the system.

Table 6.7 shows the criterion of intervals of oil checks and replenishments.

Table 6.7 Intervals of checks and replenishments

Method	Intervals of checks	Items to check	Replenishment or intervals of changes
Automatic intermittent supply	Weekly	Volume of oil, dirt, etc.	Replenish at each check. Suitable volume for tank capacity.
Oil bath	Daily before operation	Oil surface	Make a suitable criterion based on consumption

- Notes**
- 1) As with grease lubrication, do not mix oil lubricant with different types.
 - 2) Some components of the linear guide are made of plastic. Avoid using an oil that adversely affects synthetic resin.
 - 3) When using oil mist lubricating system, please confirm an oil supply amount at the each outlet port.

A-3-7 Dust Proof

1. Standard specification parts

- > To keep foreign matters from entering inside the slide, NSK linear guides have end seals on both ends, bottom seals at the bottom surfaces, and an inner seal in the inside of slide.
- > The seals for standard specification for each series are shown in **Table 7.1**.
- > Seal friction per a standard slide is shown in the technical description of the dust-proof parts of each series.

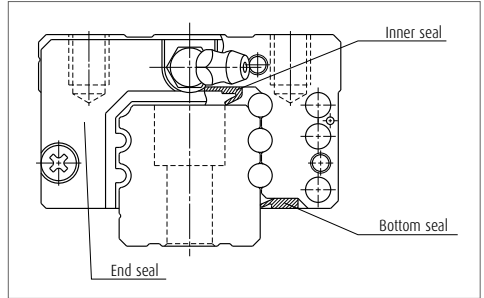


Fig. 7.1

Table 7.1 Standard seals

		End seal	Bottom seal	Inner seal
NH Series	NH15	○	○	-
	NH20, NH25, NH30, NH35, NH45, NH55, NH65	○	○	△
VH Series	VH15	○	○	-
	VH20, VH25, VH30, VH35, VH45, VH55	○	○	△
NS Series	NS15	○	○	-
	NS20, NS25, NS30, NS35	○	○	△
LW Series	LW17, LW21, LW27, LW35, LW50	○	○	-
PU Series	PU05, PU07, PU09, PU12, PU15	○	-	-
LU Series	LU05, LU07, LU09	△	-	-
	LU12, LU15	○	-	-
PE Series	PE05, PE07, PE09, PE12, PE15	○	-	-
LE Series	LE05, LE07, LE09, LE12, LE15	○	-	-
Miniature LH Series	LH08, LH10	○	-	-
	LH12	○	○	-
RA Series	RA15, RA20	○	○	△
	RA25, RA30, RA35, RA45, RA55, RA65	○	○	○
RB Series	RB30, RB35, RB45, RB55, RB65	○	○	○
LA Series	LA25, LA30, LA35, LA45, LA55, LA65	○	○	△
HA Series	HA25, HA30, HA35, HA45, HA55	○	○	○
HS Series	HS15, HS20, HS25, HS30, HS35	○	△	-

○ : Equipped as a standard feature

△ : Available upon request

A-3-7 Dust Proof

2. Dust-proof parts

› NSK has the following items for the dust-proof parts. Select a suitable type for the operating environment.

Table 7.2 Optional dust-proof parts

Name	Purpose	Reference page
NSK K1 lubrication unit	Made of oil impregnated resin. Enhances lubricating functions.	A38 – A41
Double seal	It combines two end seals for enhancing sealing function.	A53
Protector	Protect the end seal from hot and hard contaminants.	A54
Rail cap	Prevents foreign matters, such as swarf generated in cutting operation from clogging the rail-mounting holes.	A54
Inner seal	Installed inside a slide, and prevents foreign matters from entering the rolling contact surface.	A55
Bellows	Covers the linear guide.	A55
Rail cover *)	Covers the rail top surface, and prevents foreign matters, such as cutting dust, from collecting in the rail mounting holes.	A252

*) Rail cover is applicable to RA25 to 65 of RA series.

(1) Double seal

- › It is a combination of two end seals to enhance seal function.
- › When the double seal is installed, the end seal section becomes thicker than the standard item. Please pay attention to the increase in a slide length when designing the mounting dimension of slide and the table stroke. Please refer to the section of dust-proof components for the dimensional increase in the length direction of each series due to fitting of double seal.
- › Double-seal set: Can be installed to a completed standard ball slide assembly later upon request. It comprises two end seals, two collars, and two machine screws for installation (**Fig. 7.2**). The product reference numbers of each series are described on the section of dust-proof parts.
- › When attaching a grease fitting to the end cap after the double seal is equipped, you require a connector shown in **Fig. 7.2**. Please specify the connector set when ordering the linear guides.
- › For VH, RA, RB, LA, HA and HS Series, the double-seal set can be only installed before shipping from the factory.

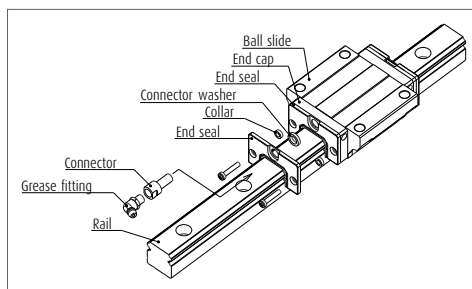


Fig. 7.2 Double seal

(2) Protector

- > A protector is usually installed outside the end seal to prevent high-temperature fine particles such as welding spatter and other hard foreign matters from entering the slide.
- > Same as the case with the double seal, when the protector is installed, the slide becomes longer. Take this thickness of slide into consideration for determining the relevant dimensions such as the system stroke and the ball slide installation envelope. An increase in the length of the ball slide due to the installation of protector is shown in the technical description of the dust-proof parts of each series.
- > The protectors are available from the stock and we can install them to a completed standard slide assembly upon request. The model numbers of the protectors for ordering are shown in the technical explanation of the dust -proof parts of each series.
- > When attaching a grease fitting to the end cap after the protector is equipped, you require the connector shown in **Fig. 7.3**. Please specify the connector set when ordering the linear guides.
- > For VH, RA, RB, LA, HA and HS Series, the protector can only be installed only before shipping from the factory.

(3) Bolt-hole cap to plug the bolt holes for rail mounting

- > After the rail is mounted to the machine base, a bolt-hole cap is used to plug the bolt hole to prevent foreign matters from clogging up the hole and from entering into the slide (**Fig. 7.4**).
- > The bolt-hole cap is made of synthetic resin which has superb in its resistance to oil and abrasion.
- > Sizes of the bolt for the each linear guide model as well as the reference number of the bolt-hole cap are shown in the technical description of the dust-proof parts of each series.
- > To insert the cap into the rail bolt hole, use a flat dolly block (**Fig. 7.5**). Pound the cap gradually until its height becomes flush with the rail top surface.
- > You can reorder extra bolt hole caps. Sizes of the bolts and each model number of bolt-hole caps are shown in the technical description of the dust-proof parts of each series.
- > Caps which are made of metal is also available upon request.

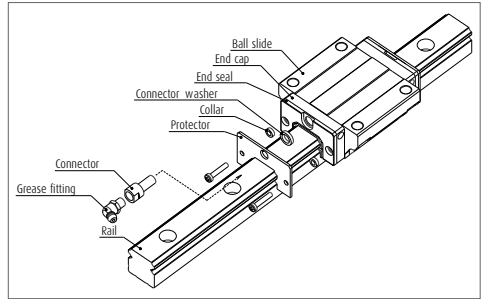


Fig. 7.3 Protector

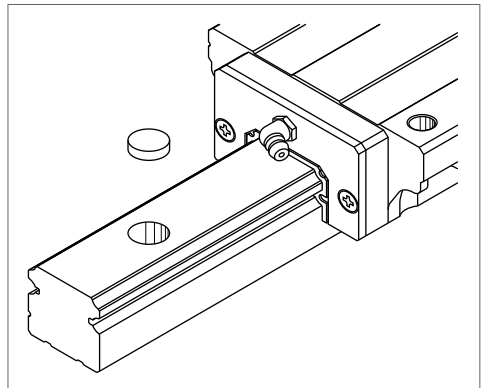


Fig. 7.4

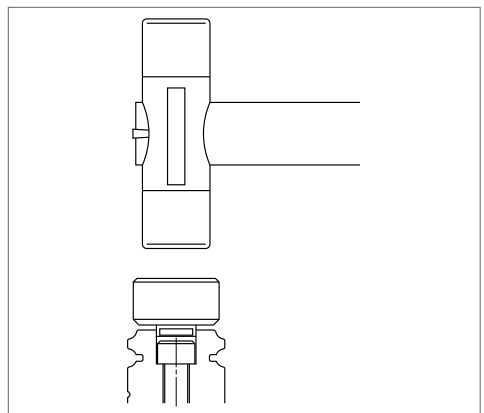


Fig. 7.5

(4) Inner seal

- ▶ The end seal installed on both ends of a slide cannot arrest entire contaminant, though the missed amount is negligible. An inner seal protects the rolling contact surface from such contaminant which entered inside the slide (**Fig. 7.6**).
- ▶ The inner seal is installed inside the slide. Therefore, the appearance in size and the shape are the same as the standard slide. (The inner seal is already installed before shipping.)
- ▶ It is strongly recommended to use the bellows and the double seal along with the inner seal to maintain the precision of the linear guide.
- ▶ Refer to **Table 7.1** for availability of inner seal.

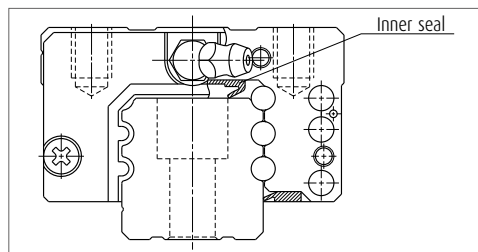


Fig. 7.6 Inner seal when installed

[1] Installation of bellows NH and NS Series

* Fixing to the ball slide (**Fig. 7.7**)

- ▶ Remove two machine screws (M_2) which secure the end seals to the end of the slide (**Fig. 7.7**). For NS15, hold the end cap by hand. Otherwise, the end cap is detached from the ball slide, and the balls inside may spill out.
- ▶ Then insert a spacer to the hole for securing the end seal. Fasten the mounting plate at the end of the bellows to the slide with a slightly longer machine screw (provided with the bellows).

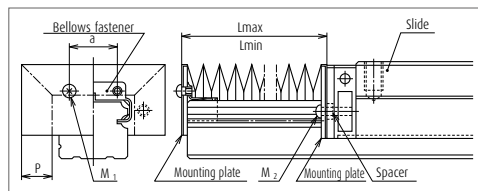


Fig. 7.7

(5) Bellows

- ▶ A bellows covers entire linear guide. It has been used widely as a way of protection in an environment where foreign matters are prevalent.
- ▶ NSK has bellows exclusively for NH, NS, LW, RA and LA Series. They have a middle bellows and a bellows at both ends. For NH Series, there are low and high type bellows which are in compliance with their slide types.
- ▶ The high type is used for AN and BN types. The low type is used for EM, GM, AL and BL types. The top of the high type bellows is slightly lower than the top surface of the slide.
- ▶ When a high type bellows is installed to the slide with the height code L (such as AL), the top of the bellows becomes higher than the slide. However, it is advantageous for stroke because the pitch of the bellows becomes larger than the low type.
- ▶ Special bellows are required when installing the linear guide vertically, or hanging it from a ceiling. Please consult NSK in such a case.
- ▶ When a bellows is used, please be advised that we cannot put a grease fitting on the end of slide to which the bellows is attached. If you require the grease fitting, it shall be put on the side of end cap or slide body. Consult NSK for details.
- ▶ For the dimension of bellows, please refer to the section of dust proof parts of each series.

* Fixing to the rail

- ▶ To install bellows for NH and NS Series, lightly knock a fastener exclusively for bellows to the end of the rail (**Fig. 7.7**). Then secure the mounting plate to the end of the bellows through the tap hole of the fastener.
- ▶ As described above, a bellows can be easily fixed to the end of the rail without adding a tap hole on the end of the rail.
- ▶ Bellows fastener is available only for the horizontal mounting positions. For other mounting positions, sliding plate is required (see **Fig. 7.10** on page A56.)

For fixing to the rail, make tap holes to the rail end surface. Fix the bellows mounting plate to the rail end surface through these tap holes by using a machine screw. NSK processes a tap hole to the rail end face when ordered with a linear guide.

[2] LW and LA Series

* Fixing to the ball slide (Fig. 7.8 and Fig. 7.9)

- > Remove two machine screws which secure the end seal. (For LW17 and LW21, hold the end cap by hand while removing the machine screw. Otherwise, the end cap is detached from the slide, and the balls inside may spill over and fall.)
- > Insert a spacer to the securing hole of the end seal, fasten the mounting plate on the end of the bellows using a slightly longer machine screw (provided with the bellows).

* Fixing to the rail

- > Make two tap holes to the rail end surface. Fix the bellows mounting plate with machine screws to the rail end surface through these tap holes. NSK processes the tap holes to the rail end surface when ordered with a linear guide.

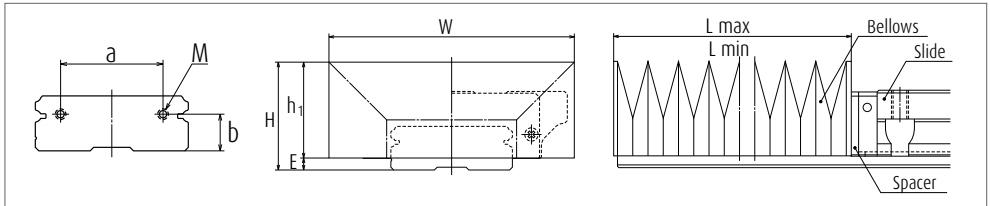


Fig. 7.8

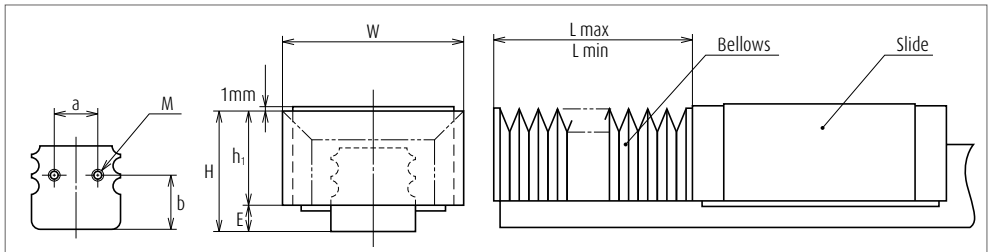


Fig. 7.9

[3] RA Series

* Please refer to page A255

Calculating length of bellows

- > The formula is as follows.
- > A bellows forms one block (BL) with six folds as shown in Fig. 7.10. The stroke is determined by multiplying by an integer of this BL.
- > Length when stretched to the maximum length:

$$L_{max} = 7 \times P \times \text{Number of BL}$$

- > Length when contracted to the minimum length:

$$L_{min} = 17 \times \text{Number of BL}$$

- > Stroke:

$$St = L_{max} - L_{min}$$

- > The dimension of P and the number of BL are shown in the bellows dimension table of each series.

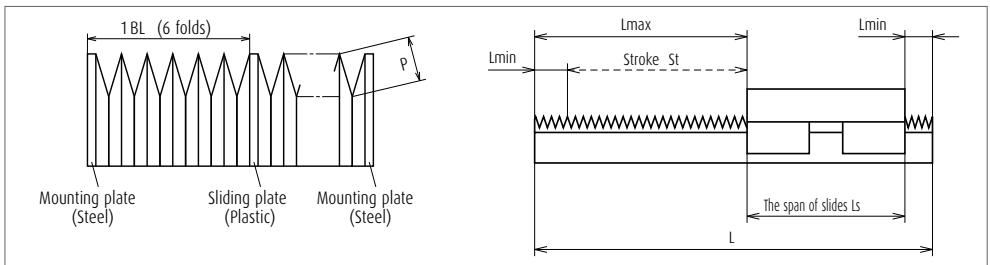


Fig. 7.10

A-3-8 Rust Prevention (Stainless Steel and Surface Treatment)

1. Stainless steel

NSK linear guide is available in stainless steel.

› Stainless steel standard series

PU Series **PE Series**
LE Series **Miniature LH Series** **LL Series**

› Available in stainless steel

NH Series
NS Series
LU Series

Select from the above when using in the environments which invite rust.

2. Surface treatment

(1) Recommended surface treatment

We recommend "low temperature chrome plating" and "fluoride low temperature chrome plating" for rust prevention because of the result of the humidity chamber test for antirust characteristics and their cost-effectiveness.

However, never apply any organic solvent to those treatments for degreasing because it has adverse effect on antirust characteristics.

Refer to the next page for the results of humidity chamber test. Please consult NSK for other surface treatment.

Low temperature chrome plating (Electrolytic rust prevention black treatment)

› Used to prevent corrosion, light reflection, and for cosmetic purpose.

Fluoride low temperature chrome plating

- › Fluoroplastic coating is provided following the low temperature chrome plating.
- › Resistance to corrosion is higher than electrolytic rust prevention film treatment.

(2) Rust prevention of fluoride low temperature chrome plating

The use environment of NSK linear guides is expanding from general industrial machines, semiconductor and liquid crystal manufacturing systems to aerospace equipment.

Among all measures to cope with environment, rust prevention is the most challenging. Such environment includes:

- › Moisture for washing machines and other equipment
- › Chemicals used in the wet processing of semiconductor and liquid crystal display manufacturing equipment

NSK has developed electrolytic rust prevention black film treatment (black chrome plating) which is added by fluororesin impregnating treatment. (Hereinafter referred as "Fluoride low temperature chrome plating") This surface treatment methods has proved its superiority as the rust prevention of linear guides which are used in the above equipment.

› What is "Fluoride low temperature chrome plating?"

This is a type of black chrome plating which forms a black film (1 to 2µm in thickness) on the metal surface. Fluoroplastic coating is added to the film to increase corrosion resistance.

- › Accuracy control is easily manageable due to low temperature treatment and to the absence of hydrogen embrittlement.
- › Product accuracy is less affected due to the thin film which has high-corrosion resistance.
- › This method is superior to other surface treatments in durability on the rolling surface.
- › Inexpensive compared with products with other surface treatment and stainless steel products.

However, do not use organic solvent because it adversely affects antirust property of the plating.

> Humidity chamber test

Table 8.1 Results of the humidity test









Test sample		Fluoride low temperature chrome plating (Recommended)	Hard chrome plating (Reference)	Electroless nickel plating (Reference)	Equivalent to SUS440C material	Standard steel
Rusting	Top	(Ground) B	(Ground) B	(Ground) A	(Ground) C	(Ground) D
	Side	(Ground) A	(Ground) A	(Ground) A	(Ground) C	(Ground) E
	Bottom	(Ground) A	(Ground) A	(Ground) A	(Ground) C	(Ground) E
	End	(Machined) A	(Machined) C	(Machined) A	(Machined) C	(Machined) E
	Chamfer/grinding recess	(Drawn) A	(Drawn) D	(Drawn) A	(Drawn) C	(Drawn) E
Corrosion-resistant property	<Test conditions> > Testing chamber: High temperature, highly moist chamber (made by DABAI ESPEC) > Temperature: 70°C > Relative humidity: 95% > Testing time: 96 h Time to "ramp-up" and "ramp-down" conditions of the temperature and the humidity Ramp-up: 5 h Ramp-down: 2 h					
	Film thickness	5 μm	0.5 - 7 μm	10 μm	—	—

- Rusting
- A: No rust
 - B: Not rusted, but slightly discolored
 - C: Spotty rust
 - D: Slightly rusted
 - E: Completely rusted

A-3-8 Rust Prevention (Stainless Steel and Surface Treatment)

> Chemical corrosion resistance test

Table 8.2 Results of the corrosion resistance test

Test conditions	Rail base material: Equivalent to SUS440C Chemical density: 1 mol/ℓ		
Fluoride low temperature chrome plating		Hard chrome plating (reference)	None surface treatment
	Immersed in solution for 24 hrs Nitric acid Immersed in solution for 24 hrs Fluoride Immersed in solution for 72 hrs Hydrochloric acid type washing solution $HCl : H_2O_2 : H_2O = 1 : 1 : 8$		
			
			
○	Hydrochloric acid (immersed)	○	▲
○	Sulfuric acid (immersed)	○	×
○	Ammonia or sodium hydroxide	○	△

○: Normal △: Partial surface damage ▲: Overall surface damage ×: Corroded

> Surface treatment durability test

Peeling resistance of surface treatment

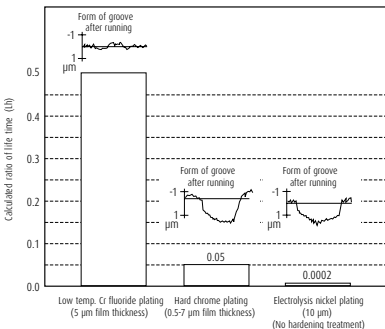


Fig. 8.1 Result of durability test

> Total evaluation

Table 8.3 Evaluation

	Rust prevention ability	Quality stability	Durability	Cost
Fluoride low temperature chrome plating (recommended)	◎	○	◎	◎
Hard chrome plating (reference)	○	×	△	△
Electroless nickel plating (reference)	◎	△	×	△
Material equivalent to SUS440C	○	◎	◎	△

◎: Excellent ○: Suitable in use △: Not so good for use ×: Problem in use

A-3-9 Special Environment

1. Heat-resistant specifications

- Standard linear guides use plastic for rolling element recirculation component. The maximum temperature in use for standard linear guides is 80°C.
- Use the linear guide with heat-resistant specifications under temperatures that exceed this limit.

Table 9.1 Comparison of materials: Standard and heat-resistant specifications

Component	Standard specification	Heat-resistant specification
Rail	Special high carbon steel (equivalent to SUS440C/JIS)	Special high carbon steel (equivalent to SUS440C/JIS)
Slide	Special high carbon steel (equivalent to SUS440C/JIS)	Special high carbon steel (equivalent to SUS440C/JIS)
Rolling elements	SUJ2, SUS440C	SUJ2, SUS440C
Retainer	Polyacetals	SUS304
Retaining wire	SUS304	SUS304
End cap	Polyacetals	SUS316L
Return guide	Polyacetals	SUS316L
End seal	Acrylonitril-butadiene rubber, SPC/JIS and stainless steel	Fluoro rubber, SPC/JIS and stainless steel
Bottom seal	Acrylonitril-butadiene rubber, SPC/JIS and stainless steel	Fluoro rubber, SPC/JIS and stainless steel

Heat resistant linear guides

NH Series NS Series
 LW Series LU Series
 LE Series

See page A66 for the availability.

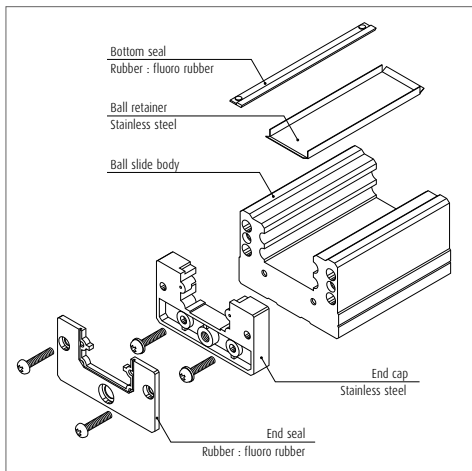


Fig. 9.1

2. Vacuum and clean specifications

- Based on its abundant experience and technology, NSK manufactures linear guides that can be used in a vacuum or in a clean environment. Please consult NSK for more details.
- Linear guide specifications vary for environmental conditions.

For example, "all stainless steel plus special grease, or solid film lubricant is suitable" for vacuum environment.


- NSK has low-dust generating grease "LG2" and "LGU" which are ideal for clean environment.

Refer to page A43 for details.

A-3-9 Special Environment

3. NSK linear guides for food processing equipment and medical devices for sanitary environment

Used with NSK K1 for food processing equipment and medical devices and grease for food processing equipment.

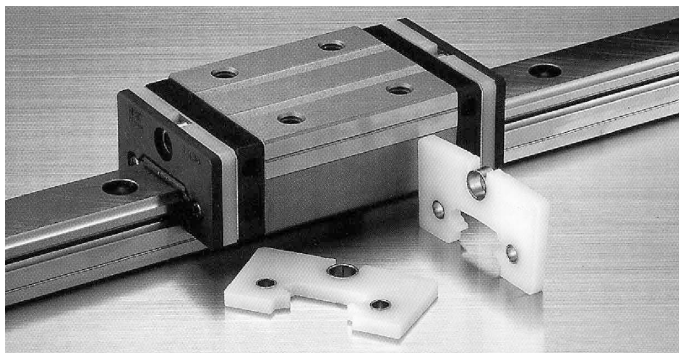

What is "NSK K1" for food processing equipment and medical devices?

With an amazing innovation lubrication unit, the NSK K1 for food processing equipment and medical devices utilizing the US Food and Drug Administration (FDA) compliant material, provides reliability when used in food processing equipment and medical devices. The newly developed porous synthetic resin contains abundant lubricant.

With the basic function of highly praised NSK K1 lubrication unit for general industry, more sophisticated materials make it applicable in food and medical equipment.

It also offers easy installation: it is installed inside the standard end seal.

(1) Features

1) The highest grade of category H1* grease of USDA** standard is used for NSK K1 lubrication unit.

*category H1: Lubricants permitted for use where there is possibility of incidental food contact

**USDA: USDA (The United States Department of Agriculture)

Features of grease for food processing machines

- > This grease is approved by USDA H1. (National Science Foundation [NSF] carries out certification for USDA.)
- > Superb water resistance and antirust capability
- > Superb wear resistance
- > Applicable for a centralized oiling system

2) Appropriate volume of grease


A supply of appropriate volume of grease reduces grease draining and scattering, and maintains a clean environment.

(2) Available models

Table 9.2 shows available models.

Table 9.2

NH Series	NH15, NH20, NH25, NH30 and NH35
NS Series	NS15, NS20, NS25, NS30 and NS35
LW Series	LW17, LW21, LW27 and LW35
PU Series	PU09, PU12 and PU15
LU Series	LU09, LU12 and LU15
PE Series	PE09, PE12 and PE15
LE Series	LE09, LE12 and LE15
Miniature LH Series	LH12

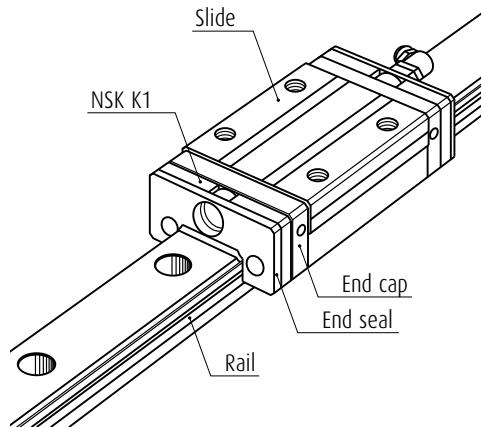

Precautions for use

To maintain optimal performance of NSK K1 lubrication unit over a long time, please follow the instructions below:

1. Temperatures range for use: Maximum temperature in use: 50°C
Momentary maximum temperature in use: 80°C
2. Chemicals that should not come to contact: Do not leave NSK K1 lubrication unit in organic solvent, white kerosene such as hexane, thinner which removes oil, and rust prevention oil which contains white kerosene.

Note: Water-type cutting oil, oil-type cutting oil and grease such as mineral-type and ester-type do not damage NSK K1 lubrication unit.

A-3-9 Special Environment

4. Specifications for special environments

Table 9.3 Linear guide specifications

Environment	Condition	NSK linear guide specifications				Technical Explanation Page No.
		Rail, slide	Steel balls/ rollers	Ball Recirculation component	Lubrication/surface treatment	
Clean	Atmosphere, normal temperature	Standard material	Standard material	Standard material	LG2 Grease, LGU Grease NSK K1 lubrication unit	D8 D10
		Martensitic stainless steel	Martensitic stainless steel	Austenitic stainless steel	LG2 Grease, LGU Grease NSK K1 lubrication unit Fluoride low temperature chrome plating	D8 D10 D5
	Fluoride grease					
	Atmosphere- Vacuum up to 200°C					
Vacuum	Atmosphere- Vacuum, normal temperature	Martensitic stainless steel	Martensitic stainless steel	Austenitic stainless steel	Fluoride grease	
	Atmosphere- Vacuum up to 200°C					
	Atmosphere- Vacuum up to 300°C				Molybdenum disulfide	
	High vacuum up to 500°C				Special silver film	D7
Corrosion resistance	Vapor, steam	Martensitic stainless steel	Martensitic stainless steel	Austenitic stainless steel		
	Acid, alkali	Standard material	Standard material	Standard material	Fluoride low temperature chrome plating	D5 D5 D5
		Martensitic stainless steel	Martensitic stainless steel	Austenitic stainless steel	Fluoride low temperature chrome plating	D5
	LG2 Grease, LGU Grease Fluoride low temperature chrome plating Fluoride grease				D8 D5	
	Strong acid, strong alkali				Fluoride grease	
	Organic solvent					
High temperature	Atmosphere up to 150°C	Standard material	Standard material	Austenitic stainless steel	ET-100K Grease	
	Atmosphere Up to 200°C	Martensitic stainless steel	Martensitic stainless steel		Fluoride grease	
	Atmosphere Up to 200°C, Corrosion resistant				Fluoride grease	
Low temperature	-273°C and higher	Martensitic stainless steel	Martensitic stainless steel	Austenitic stainless steel	Solid lubricant	
Radiation resistance	Atmosphere	Standard material	Standard material	Standard material	Radiation resistant grease	
		Martensitic stainless steel	Martensitic stainless steel	Austenitic stainless steel		
Foreign matters	Fine particles, wooden chips	Standard material	Standard material	Standard material	NSK K1 lubrication unit	D10
		Martensitic stainless steel	Standard material	Martensitic stainless steel		D10
	Water, under water			Martensitic stainless steel		Standard material
		Martensitic stainless steel	Martensitic stainless steel	Austenitic stainless steel		D10

5. Lubrication and materials

(1) Lubrication

Grease can be used for high rotation and magnetic field. However, grease evaporates or solidifies in special environment such as vacuum, high temperature, and low temperature. Solid lubricant is used when it is difficult to use grease. Functions of solid lubricant differ greatly by condition where it is used. It is important to select the most suitable solid lubrication for the environment.

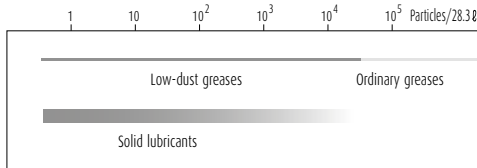


Fig. 9.2 Lubrication in clean environment

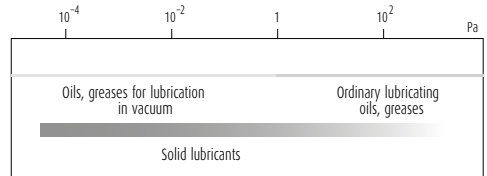


Fig. 9.3 Lubrication in vacuum

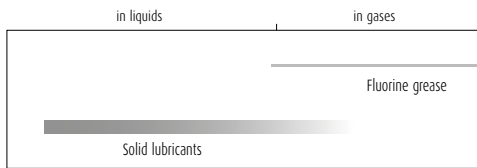


Fig. 9.4 Lubrication in corrosive environment

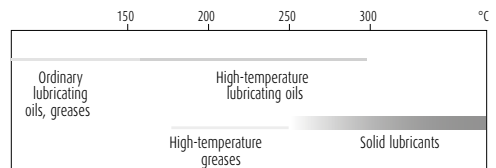


Fig. 9.5 Lubrication in high temperature

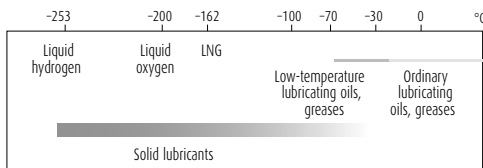


Fig. 9.6 Lubrication in low temperature

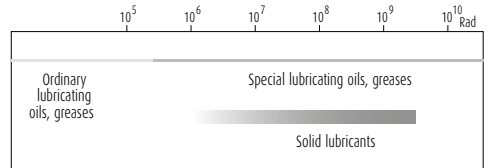


Fig. 9.7 Lubrication in radioactive environment

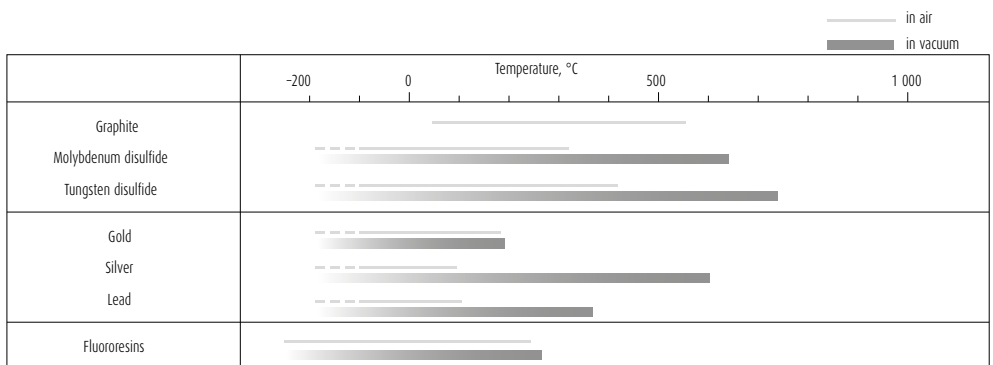


Fig. 9.8 Temperature range for using solid lubricants

A-3-9 Special Environment

(2) Materials

Iron type metals are used in vacuum, high temperature, and high speed environments as the basic material. We generally use nonmagnetic stainless steel for nonmagnetic materials.

Table 9.4 Characteristics of metal materials

Application	Type of steel	Linear expansivity ×10 ⁻⁶ /°C	Young's modulus GPa	Hardness *) HB
For clean environment, vacuum environment, corrosion resistance, low temperature, high temperature, radioactive resistance	Martensitic stainless steel SUS440C	10.1	200	580
	Austenitic stainless steel SUS304	16.3	193	150
	Precipitation hardening stainless steel SUS630	10.8	200	277 – 363
Nonmagnetic	Nonmagnetic stainless steel	17.0	195	420

*) Hardness of steel is usually indicated by Rockwell C Scale. For comparison, these figures are expressed by Brinell number.

6. Responsiveness of NSK linear guides for special environments

Series	Model No.	Special environment which linear guide can tolerate					
		Clean	Vacuum	Corrosion	High temp.	Hygienic	High dust proofing
NH	NH15	○		○		○	
	NH20	○	○	○	○	○	
	NH25	○	○	○	○	○	
	NH30	○	○	○	○	○	
	NH35	○		○	○	○	
	NH45	○		○	○		
	NH55	○		○			
	NH65	○		○			
VH	VH15	○		○			○
	VH20	○		○			○
	VH25	○		○			○
	VH30	○		○			○
	VH35	○		○			○
	VH45	○		○			○
NS	NS15	○	○	○	○	○	
	NS20	○	○	○	○	○	
	NS25	○	○	○	○	○	
	NS30	○	○	○	○*	○	
	NS35	○		○		○	
	LW	LW17	○		○	○*	○
LW21		○		○	○*	○	
LW27		○		○	○	○	
LW35		○		○		○	
LW50		○		○			
PU	PU05	○		○			
	PU07	○		○			
	PU09	○		○		○	
	PU12	○		○		○	
LU	PU15	○		○		○	
	LU05	○		○			
	LU07	○		○			
	LU09_L	○	○	○	○	○	
	LU09_R	○		○		○	
	LU12_L	○	○	○	○	○	
PE	LU12_R	○		○		○	
	LU15	○	○	○	○*	○	
	PE05	○		○			
	PE07	○		○			
	PE09	○		○		○	
	PE12	○		○		○	
	PE15	○		○		○	

Series	Model No.	Special environment which linear guide can tolerate					
		Clean	Vacuum	Corrosion	High temp.	Hygienic	High dust proofing
LE	LE05	○		○			
	LE07	○	○	○	○*		
	LE09_L	○	○	○	○*	○	
	LE09_R	○		○		○	
	LE12_L	○	○	○	○	○	
	LE12_R	○		○		○	
	LE15_L	○	○	○	○	○	
	LE15AR	○		○		○	
Miniature LH	LH08	○		○			
	LH10	○		○			
	LH12	○	○	○	○*	○	
RA	RA15	○		○			
	RA20	○		○			
	RA25	○		○			
	RA30	○		○			
	RA35	○		○			
	RA45	○		○			
RB	RA55	○		○			
	RA65	○		○			
	RB30	○		○			
	RB35	○		○			
	RB45	○		○			
	RB55	○		○			
LA	RB65	○		○			
	LA25	○		○			
	LA30	○		○			
	LA35	○		○			
	LA45	○		○			
	LA55	○		○			
HA	LA65	○		○			
	HA25	○		○			
	HA30	○		○			
	HA35	○		○			
	HA45	○		○			
HS	HA55	○		○			
	HS15	○		○			
	HS20	○		○			
	HS25	○		○			
	HS30	○		○			
HS35	○		○				

*) Applicable except for the dust-proofing parts.

7. Precautions for handling

Please observe the following precautions to maintain high functions of NSK linear guide.

- Products are washed to remove oil, and wrapped in a way to protect them from moisture. Use the product as soon as possible after opening the package.
- After opening, store the products in a clean, air-tight container such as desiccator with desiccating agent (e.g. silica gel). Do not apply rust preventive oil or an antirust paper that vaporizes rust preventive agent.
- Wear plastic gloves and handle product in a clean place.

Note: Please refer to the catalog "CAT. No. E1258 SPACEA" for the details of special environmental use.

A-3-10 Arrangement and Mounting of Linear Guide

1. Arrangement

- For NSK linear guides, the datum surfaces of the rail and of the slide are either marked with a "datum surface groove" or with an "arrow."
- In case that two or more linear guides are used together, one linear guide is designated as a reference side guide, and the rest is adjusting side guide(s). The reference side linear guide has its reference number, serial number, and "KL" mark on the opposite side of the datum surface (Fig. 10.1).
- When the datum surfaces of the reference side rail and slides are pressed to their mounting datum surfaces respectively, the variation of distance (mounting width W_2 or W_3) between the datum surfaces of the rails and that of the slides must be a minimum and therefore, it is specified as the standard. (Figs. 10.2 and 10.3)
- The ways to indicate the datum surfaces of each series are shown in Table 10.1.

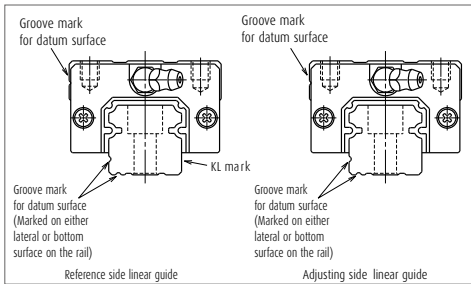


Fig. 10.1 Datum surface

Example of arrangement

- The arrangement of the linear guides must be determined taking into account the table mounting position (horizontal, vertical, inclined, or upside-down), strokes and the size of the machine base to which the table is mounted. Table 10.2 shows common arrangement examples and their properties (features/precautions).

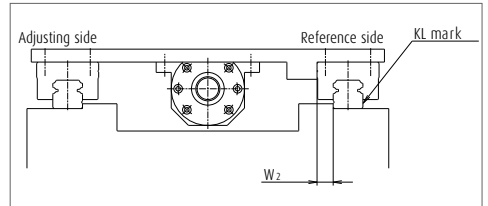


Fig. 10.2 Most common setting of the reference side rail

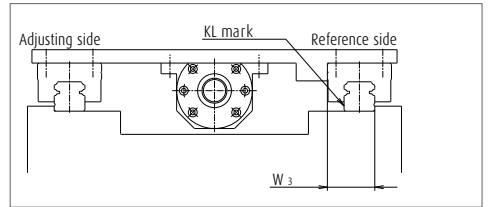
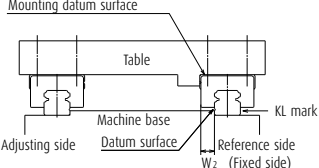

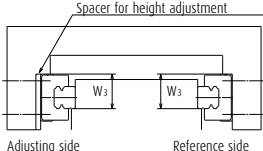
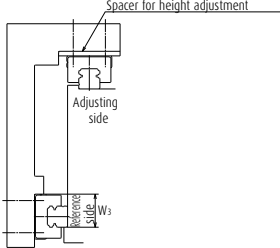
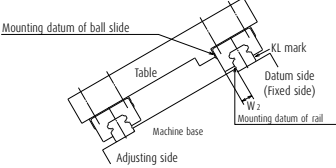
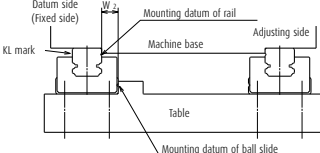


Fig. 10.3 Setting of the reference side rail in certain occasions

Table 10.1 Marks on the rail datum surfaces in each series

Model No.	Standard	LU05, 07, 09 PU05, 09, 12, 15 LE07, 09, 12	LU12, 15, NH15, NS15	PU07 LE05, 15 LE09, 12 (with a ball retainer) PE series LH08, 10, 12 LW17, 21 RA15
Material				
Special high carbon steel				
Stainless steel				

Table 10.2 Arrangement example

Arrangement	Features/Precautions
	<ul style="list-style-type: none"> › Easy for a highly-accurate installation (recommended arrangement)
	<ul style="list-style-type: none"> › Easy in highly-accurate installation › <u>The lubricant oil may not be supplied to slides. When oil lubricant is used, special care is required to design the oil supply routing.</u>
	<ul style="list-style-type: none"> › Slightly difficult for a highly-accurate installation › The life of the linear guides is affected by the mounting accuracy. › <u>When oil lubricant is used, special care is required to design the oil supply routing.</u>
	<ul style="list-style-type: none"> › Difficult for a highly-accurate installation › <u>When oil lubricant is used, special care is required to design the oil supply routing.</u>
	<ul style="list-style-type: none"> › Rather easy for a highly-accurate installation › <u>When oil lubricant is used, special care is required to design the oil supply routing.</u>
	<ul style="list-style-type: none"> › Easy in highly-accurate installation if the linear guides are installed to the machine base first, and then hung them upside down along with the machine base. › The slide may detach from the rail and fall down if the linear guide is damaged and rolling elements in the slide fall out. It is necessary to take preventive measures against the falling of the ball slide.

A-3-10 Arrangement and Mounting of Linear Guide

2. Mounting accuracy

(1) Accuracy of the mounting base of machine

- > The mounting accuracy of linear guide usually copies the accuracy of the machine base.
- > However, when two or more slides are assembled to each rail, the table stroke becomes shorter than the mounting surface. This, along with the fact that the mounting error is evenly spread, contributes to a higher table accuracy than the mounting surface accuracy, reducing the error to about 1/3 in average (Fig. 10.4).

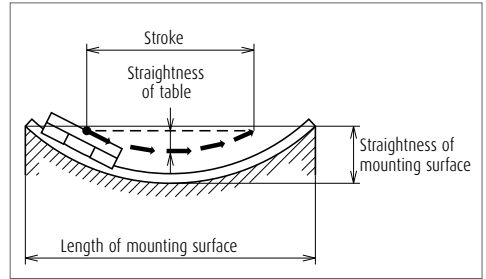


Fig. 10.4

(2) Installation error

- > Mounting error affects mainly three factors: life, friction and accuracy (Table 10.3).

Table 10.3 Influence of mounting error

Factor	Influence
Life	<ul style="list-style-type: none"> > Large mounting error generates a force which twists the slide and reduces its life. > It also distorts the contact point of the ball and the groove, and changes contact angle, thus lowering the table rigidity.
Friction	<ul style="list-style-type: none"> > NH and NS Series are affected very little by mounting error thanks to their small friction. (self aligning capability) > However, because of off-set Gothic arch grooves, their friction suddenly soars once the mounting error exceeds a certain level. > The mounting error severely affects friction of LA Series with heavy preload.
Accuracy	<ul style="list-style-type: none"> > When the rigidity of four slides is equal, the theoretical straightness becomes 1/2 of the installation error "e1". > However, this value becomes slightly larger due to the deformation of the rail and the machine base.

(3) Permissible values of mounting error

- > Among the three factors of life, friction, and accuracy, which are affected by the mounting error, NSK focuses on the life factor to determine the permissible mounting accuracy. The specifications are based on the following conditions.

For ball linear guides

- > The permissible load per ball slide due to the mounting error is 10% of the basic dynamic load rating C_{50} .
- > The rated life is 5 000 km.
- > The rigidity of the machine base is infinite.

For roller linear guide

- > The permissible load per roller slide due to the mounting error is 10% of the basic dynamic load rating C_{100} .
- > The rated life is 10 000 km.
- > The rigidity of the machine base is infinite.

C_{50} ; Basic dynamic load rating for 50 km rated fatigue life

C_{100} ; Basic dynamic load rating for 100 km rated fatigue life

- > **Figs. 10.5** and **10.6** are representing the mounting errors of e_1 and e_2 . Their permissible values are shown in the description of "**5. Installation**" of the each series.

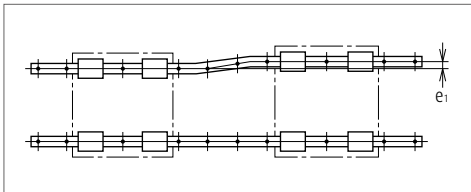


Fig. 10.5

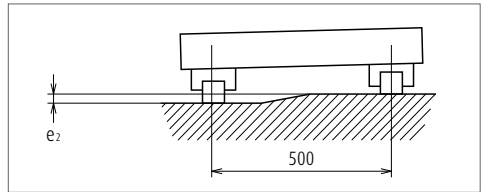


Fig. 10.6

A-3-10 Arrangement and Mounting of Linear Guide

(4) Running accuracy and the influence of even-off effect

When mounting on a machine base, the linear guide is affected by the flatness of the mounting surface. However, in the case of two-rail/four-slide specification, which is most widely used, the straightness as a table unit is generally less than the straightness as a single component.

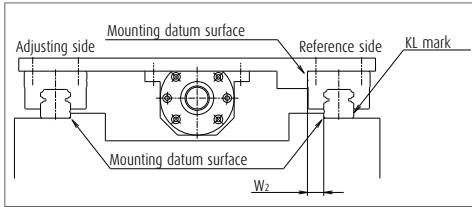


Fig. 10.7

This is due to the even-off effect generated by the shorter table stroke, compared to the rail length, as well as by interaction between the rails and slides.

Fig. 10.9 shows an actually measured straightness of the table which uses NSK linear guides. In this case, the final straightness of the table is about 1/5 of the straightness of the mounting surface.

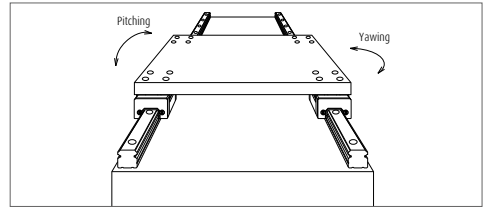


Fig. 10.8

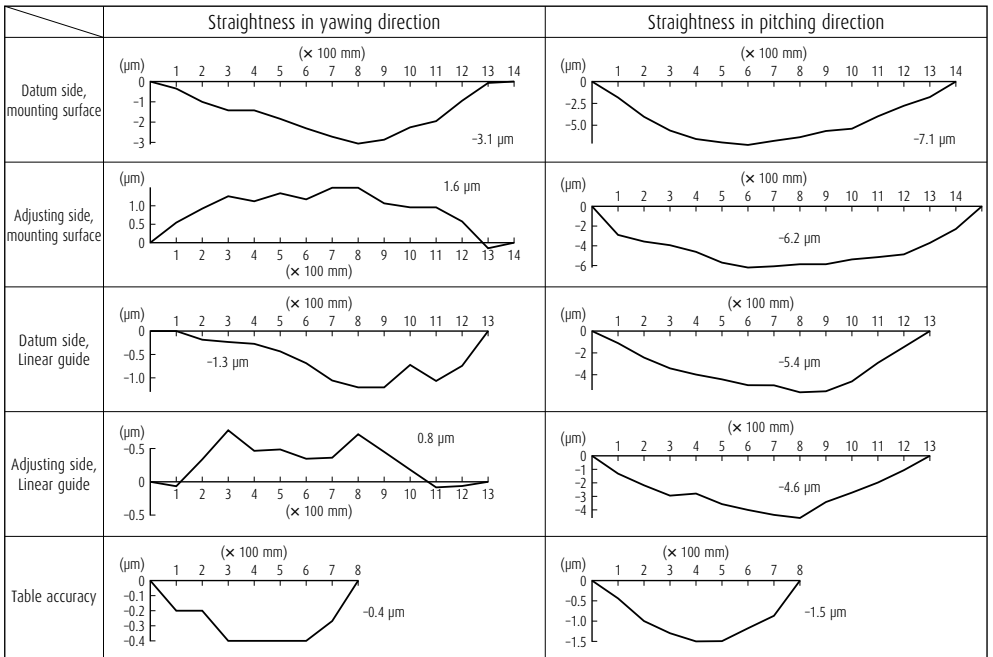


Fig. 10.9 Straightness of the table equipped with linear guide

3. Installation

(1) Shoulder height of the mounting surface of the machine base and corner radius r

› **Figs. 10.10 and 10.11**, show shoulder height of the mounting surface of the machine base and the size of corner radius. These figures are relevant when the linear guide is pressed to the shoulder of the machine base or table (the raised section from where the mounting surface begins), and horizontally secured to it. Recommended sizes are shown in the clause of "Shoulder height and corner radius r " of each series introduction.

› The shoulder should be thick (wide) enough, so it is not deformed by the pressing force.

(2) Tightening torque of the bolt

› **Table 10.4** shows tightening torque of the bolt when the rail is secured to the fixture of race way grinding machine.

› Apply same torque in this table when securing the rail to the machine base. Equal accuracy at the time of grinding can be obtained.

Table 10.4 Bolt tightening torque (Bolt material: High carbon chromium steel) Unit: N·m

Bolt size	Tightening torque	Bolt size	Tightening torque
M2	0.27	M8	22
M2.3	0.38	M10	43
M2.5	0.58	M12	76
M3	1.06	M14	122
M4	2.5	M16	196
M5	5.1	M18	265
M6	8.6	M22	520
M8	22	—	—

(3) Installation procedures

› There are two installation ways depending on the accuracy requirement.

- Installation with high accuracy
- Accuracy is not high, but easy to install

› For both methods, wipe off the rust preventive oil applied to the linear guide. Remove burrs and small bumps on the machine base and table mounting surface with an oilstone (**Fig. 10.12**).

› Apply machine oil or similar oil with low viscosity to the mounting surface to increase the rust preventive effect.

› Linear guides are precision products. Handle them with care.




Fig. 10.10 Shoulder for the rail datum face




Fig. 10.11 Shoulder for the slide datum face

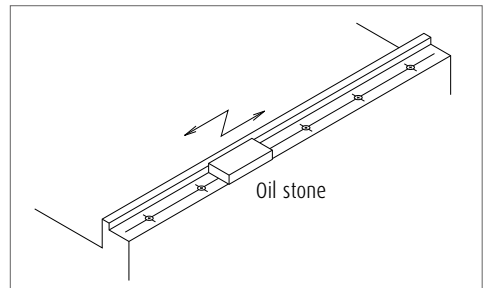


Fig. 10.12

A-3-10 Arrangement and Mounting of Linear Guide

1) Highly accurate installation

A) Rail installation procedures

a) When the machine base has a shoulder for the reference side rail.

- [1] Confirm that the rail is reference side rail, and the datum surface of the rail comes to face to face with the shoulder of the machine base. Keep the slides on the rail, and carefully place the rail on the machine base on its mounting surface. Loosely tighten the bolts.

At this time, press the rail from sideways to make the rail tightly contact to the shoulder of the machine base.

When using a shoulder plate, refer to **Table 10.4** for the bolt tightening torque (**Fig. 10.13**).

Refer to "4. Various methods to press linear guide sideways."

- [2] For final tightening of the bolts to secure the rail, tighten the bolt on either end of the rail, then proceed to other end.

If the datum surface is on the left side as shown in **Fig. 10.14**, tighten the bolt at the farthest end first, then proceed to the near end.

This way, creates a bolt rotating force that presses the rail against the shoulder. (Therefore, the rail is pressed sufficiently tight against the shoulder by merely pressing the rail by hand. However, if there is a possibility applying a lateral impact load, it is necessary to use a shoulder plate to prevent the rail from slipping.)

- [3] If the mounting surface of the machine base where the adjusting side rail is installed also has a shoulder, repeat the steps [1] - [2].
- [4] If there is no shoulder on the mounting surface of the machine base for the adjusting side rail: Secure a measuring table to the slides of the reference side rail (**Fig. 10.15**). Use this to adjust the parallelism of the adjusting side rail. Check parallelism of the adjusting side rail with a dial indicator from one end of the rail, tightening the bolts one by one.

The measuring table is more stable if secured to two slides, but one slides is sufficient.

Parallelism between two rails can also be checked by the same method in **Fig. 10.15** when there is a shoulder on the surface where the adjusting side rail is installed.

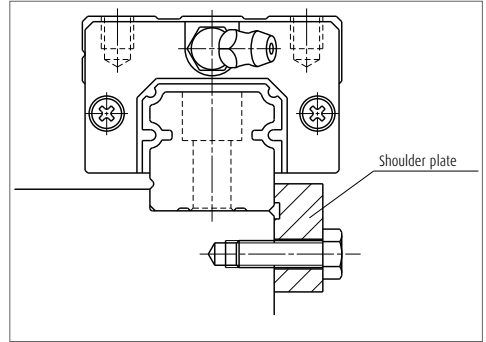


Fig. 10.13 Pressing the rail from sideways

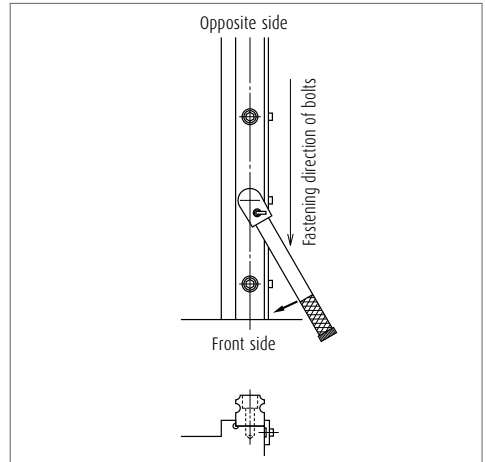


Fig. 10.14 Rail installation

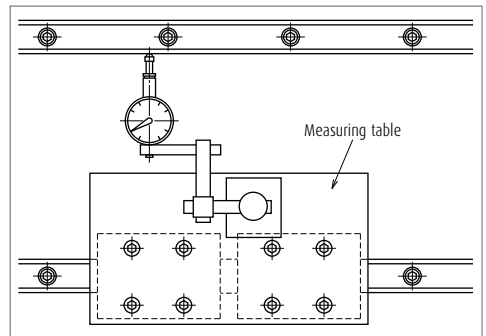


Fig. 10.15 Measuring parallelism

b) When the machine base does not have a shoulder on the side where the reference side rail is installed

- [1] Carefully place the reference side rail on its mounting surface of the machine base. Loosely tighten the bolts. Do not tighten the bolts all the way, but stop tightening when the bolt enters halfway into the bolt hole. This makes the proceeding steps easier.
- [2] Place the straight edge almost parallel to the reference side rail which is temporarily secured by the bolts. (At both ends of the rail and straight edge, the distance between them shall be almost same.)
- [3] Once the position of the straight edge is determined, use it as the reference. With a dial indicator, check parallelism with the rail, and adjust the rail if necessary. Then tighten the bolts.

Ensure that the straight edge does not move while the bolts are being tightened.

This procedure should be carried out starting from one end of the rail to the other end (**Fig. 10.16**).

- [4] Finally tighten all bolts with specified torque.
- [5] There are two ways for installation of adjusting side rail:
 1. Based on the straight edge which is used for reference side rail installation
 2. Based on the reference side rail which is installed prior to the adjusting side rail.

In both cases, use a dial indicator to measure parallelism.

Other procedures are the same as [1] - [4] above, and the [4] for the case where there is a shoulder on the machine base.

B) Procedures for slide installation

a) When the table has a shoulder

- [1] Arrange the slides so that locations match to their mounting section of the table. Carefully place the table on the slides. Loosely tighten all bolts.
- [2] While pressing the table from sideways, further tighten the bolts which secure the slides on the reference side, so the table shoulder and the slide's mounting datum surface are sufficiently tightly pressed.

If a shoulder plate is provided, first tighten the bolts of the plate, then further tighten the bolts to the slides (**Fig. 10.17**).

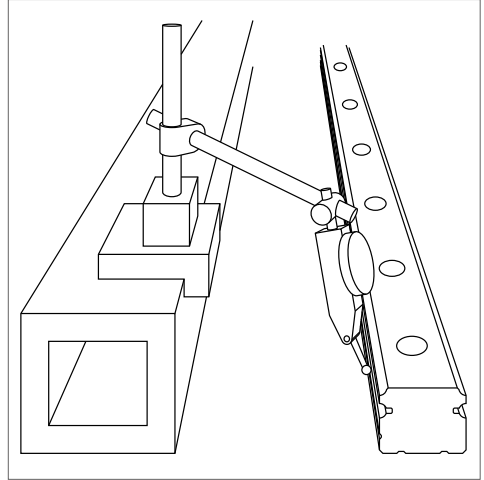


Fig. 10.16

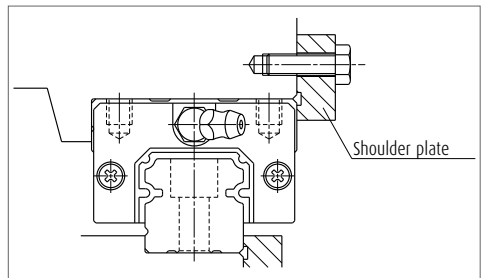


Fig. 10.17 Pressing slide from sideways

A-3-10 Arrangement and Mounting of Linear Guide

[3] Then, further tighten the bolts for slides on the adjusting side rail.

Move the table by hand to confirm that there is no abnormality such as excessive friction force during stroking. (This confirms that the correct installation steps were taken.)

[4] Finally, tighten all bolts with standard torque.

b) When table does not have a shoulder

[1] Arrange the slides so that locations match to their mounting section of the table. Carefully place the table on the slides. Loosely tighten bolts to secure the slides.

[2] Since the table does not have a shoulder, immediately tighten the bolts further to secure slides.

[3] Move the table by hand to confirm that there is no abnormality. Finally, tighten all bolts with the specified torque.

2) Easy installation

[1] Carefully place the reference side rail on the machine base. Then tighten the bolts to the specified torque.

[2] Loosely tighten the bolts on the adjusting side rail.

[3] Tighten the slides on the reference side rail and one slide on the adjustment side rail with the specified torque. Leave the rest of the slide on the adjusting side rail loosely tightened (**Fig. 10.18**).

[4] While moving the table with each pitch of the bolt for rail: With the specified torque, tighten the rail mounting bolt which is located immediately adjacent to the slide on the adjusting side rail that had been firmly tightened. Take this procedure from one end to the other.

[5] Return the table to the original position once. Then, tighten the rest of the slides on the adjusting side to the specified torque. By the same procedure as in [4], tighten the rest of the rail mounting bolts to the specified torque. Move the table to check any abnormality such as large friction force.

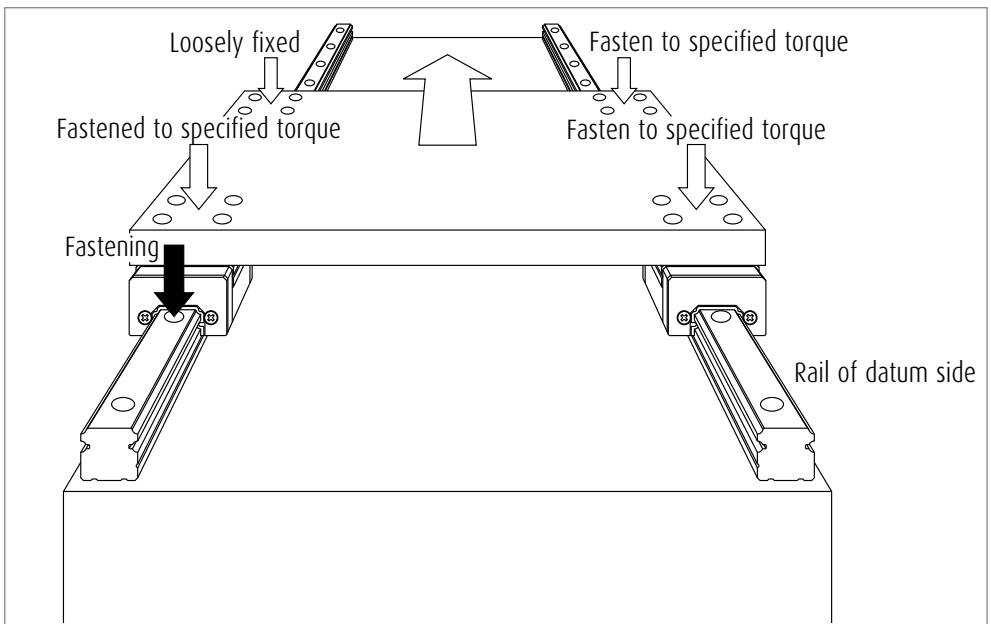


Fig. 10.18 Easy installation

(4) Various methods to press linear guide sideways

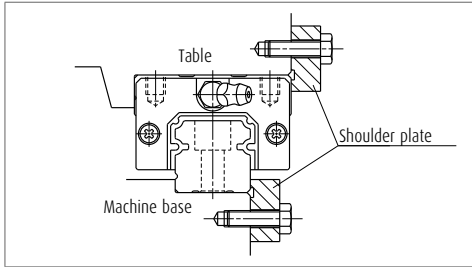


Fig. 10.19 Recommended method

- › This method is most widely used, and generally recommended. The slides and the rail should protrude slightly from the sides of the table and the machine base. The shoulder plate should have a recess, so that the corners of the rail and slide do not touch the shoulder plate.

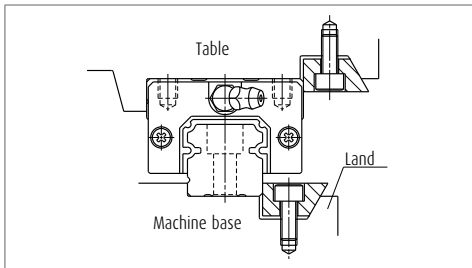


Fig. 10.20 Installation that requires caution

- › A tapered block is squeezed in. However, the slightest tightening of the bolt generates a large pressing force to the side. Too much tightening may cause the rail to deform, or the land (shown in the figure left) to warp to the right. This method requires caution.

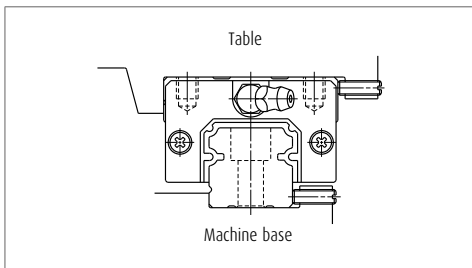


Fig. 10.21

- › The bolt that presses rail must be thin due to limited space.

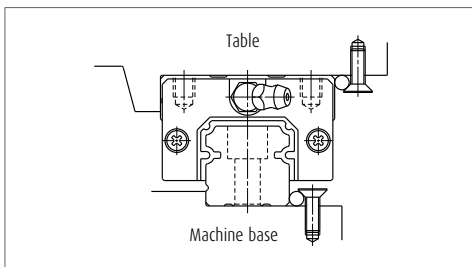


Fig. 10.22

- › Press a needle roller with a taper section of the head of a slotted pan head screw. Watch out for the position of the screw.

A-3-10 Arrangement and Mounting of Linear Guide

4. Assembly random-matching type linear guide

- › Slides of random-matching type are assembled on a provisional rail (an inserting tool) when it is delivered (Fig. 10.23).
- › NSK standard grease is packed into the slide, allowing immediate use.

Assembly procedures of a random-matching type linear guide

Follow steps as described below.

- (1) Wipe off the rust preventive oil from the rail and slide.
- (2) Please match a groove mark for the datum surface of slide and rail to set a desired assembling state W_2 or W_3 .
- (3) Align the provisional rail to the rail in the bottom and side surfaces. Press the provisional rail lightly against the rail, and move the slide over the rail (Fig. 10.23).

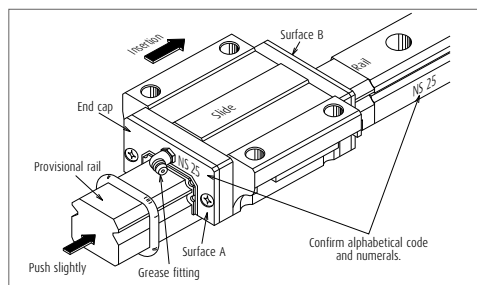


Fig. 10.23 Inserting slide into the rail

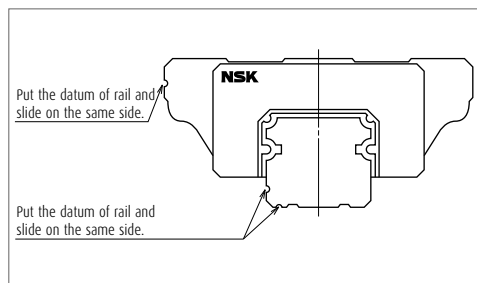


Fig. 10.24

5. Butting rail specification

- › A rail which requires the length that exceeds the machine capacity manufactured maximum length comes in butting specification.
- › The rails with butting specification are marked with alphabet (A, B, C ...) and an arrow on the opposite side of the mounting datum surface. Use the alphabets and arrows for assembly order and direction of the rail (Fig. 10.25). The random-matching rails for butting specification are only marked with the arrows.
- › The pitch of the rail mounting hole on the butting section should be as F in Fig. 10.26. When two rails are used in parallel, the butted sections should not align. This is to avoid change in the running accuracy of the table at the butted sections.
- › We recommend shifting the butting sections more than the length of a slide. If the higher running accuracy is required, consider installing the slides into the table so that they do not simultaneously pass the butting sections.

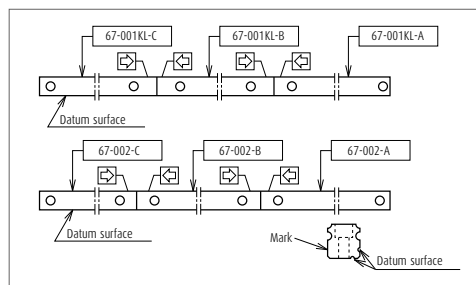


Fig. 10.25

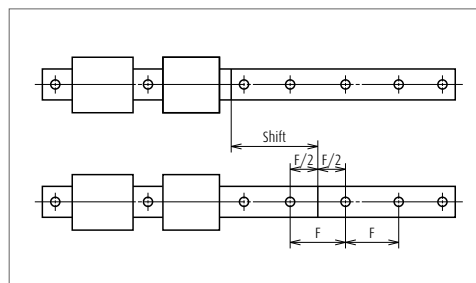


Fig. 10.26

6. Handling preloaded assembly

- > In case of the preloaded assembly (not random-matching type), do not remove slides from the rail as a general rule.
- > If it is unavoidable to remove slides from the rail, make certain to use a provisional rail (a jig used to insert a slide to the rail) as shown in **Fig. 10.27**.
- > The provisional rails for each series and sizes are available.
- > Pay due attention to the assembly mark when returning the slide back to the rail. Follow the cautions described below.

Mark for assembling ball slide and rail

- > Rails of preloaded assembly (not random-matching type) are marked with a reference number and a serial number on the opposite of the datum surface.
- > Slides to be combined are also marked with the same serial number (the reference number is not marked).
- > Furthermore, slides are marked with an arrow. Slides should be positioned with their arrows facing each other.
- > In case that the slides had to be removed from the rail, confirm their serial numbers and the directions of arrows for re-assembly (**Fig. 10.28**).
- > When two or more rails are used in a single set, serial numbers are in sequence if their reference numbers are the same. The linear guide with smallest serial number has the "KL" mark (**Fig. 10.29**).
- > When two or more rails of different reference number are used in a single set, the rails and slides have the same serial number. In this case, when slides are removed from the rail, it is unclear which rail each slide was previously installed on. When removing ball slides from the rail for an unavoidable reason (**Fig. 10.30**), sufficient precaution is required.

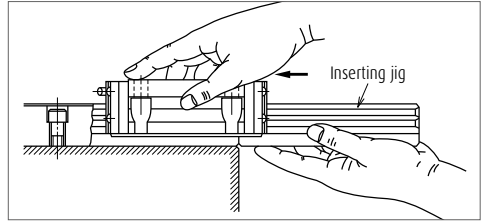


Fig. 10.27

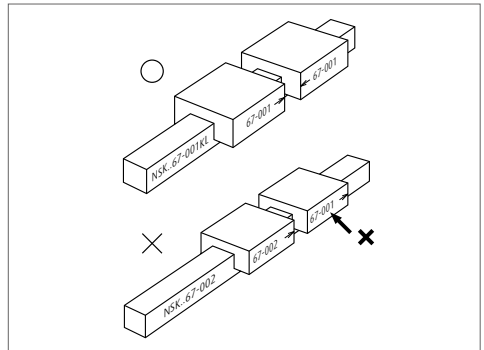


Fig. 10.28

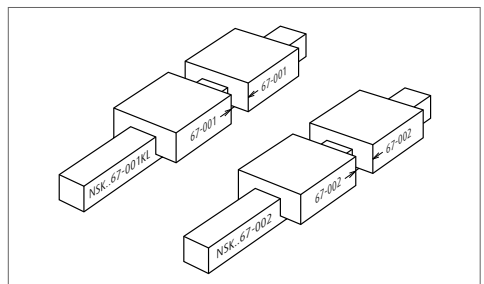


Fig. 10.29 When two rails have the same reference number

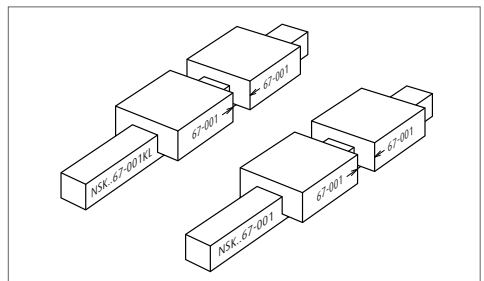


Fig. 10.30 When two rails have different reference number

A-3-11 Drills to Select Linear Guide

1. Single axis material handling system

This section explains the selection of linear guide, life calculation, and deformation at load acting point for a single axis material handling system equipped with linear guides.

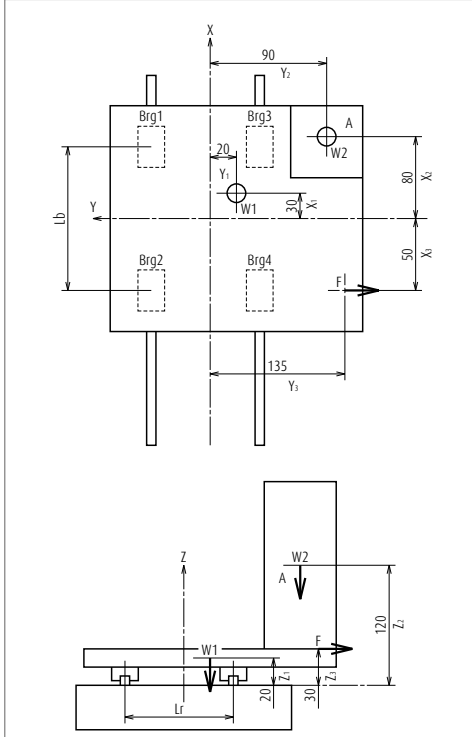


Fig. 11.1 Single axis material handling system

The work load is applied only to one way of stroke. Assume that the load is acting in full stroke as the condition of acting load is unknown.

Specification of the single axis material handling system

Table weight $W_1 : 150$ (N)

Weight of the work $W_2 : 200$ (N)

Acting load $F : 200$ (N)

Ball slide span $L_b : 100$ (mm)

Rail span $L_r : 90$ (mm)

Load point coordinates from the table center (mm)

Load	X axis	Y axis	Z axis
W1	30	-20	20
W2	80	-90	120
F	-50	-135	30

Stroke: 1 000 mm
(1 cycle: 2 000 mm)

Environment : 10 - 30 (°C)

Travel speed : 12 (m/min)

Time to reach travel speed : 0.25 (sec)

Operating hour : 16 (hr/day)

(1) Selection of linear guide model

Select a type of linear guide from "A-1-2 Structure and Characteristics of Linear Guide." Since this material handling system has two rails and four ball slides, **NH**, **NS**, and **PU Series** are suitable.

Here, we temporarily select PU15 because of the dimensions of mounting space.

(2) Calculating life

Calculate life of the selected PU15AL based on "A-3-2 Rating Life and Basic Load Rating."

Linear guide PU15AL

Basic dynamic load rating $C_{100} : 4\ 400\ (\text{N})$

Basic static load rating $C_0 : 6\ 600\ (\text{N})$

Load conditions of the linear guide

Table weight $W1 : 150\ (\text{N})$

Weight of the work $W2 : 200\ (\text{N})$

Applied load $F : 200\ (\text{N})$

Rail span $L_r : 90\ (\text{mm})$

Ball slide span $L_b : 100\ (\text{mm})$

From the time to reach travel speed and the travel speed, the table acceleration is $0.8\ \text{m/sec}^2$. Therefore, it is not necessary to take into account inertial force brought about by the table mass.

Calculation of the load applied to ball slide

Calculate two occasions:

1. There is the work mounted on the table.
2. No work mounted on the table.

From **Pattern 4** on page A19 in **Table 2.2**

When a work is mounted on the table

Vertical loads

$$\begin{aligned} M1 &= \sum_{j=1}^n (F_{yj} \cdot Z_{yj}) + \sum_{k=1}^n (F_{zk} \cdot Y_{zk}) \\ &= F \cdot Z_3 + W1 \cdot Y_1 + W2 \cdot Y_2 \\ &= -200 \times 30 + 150 \times (-20) + 200 \times (-90) \\ &= -27\ 000\ (\text{N} \cdot \text{mm}) \end{aligned}$$

$$\begin{aligned} M2 &= \sum_{i=1}^n \{F_{xi} \cdot (Z_{xi} - Z_b)\} + \sum_{k=1}^n (F_{zk} \cdot X_{zk}) \\ &= W1 \cdot X_1 + W2 \cdot X_2 \\ &= 150 \times 30 + 200 \times 80 \\ &= 20\ 500\ (\text{N} \cdot \text{mm}) \end{aligned}$$

$$\begin{aligned} F_{r1} &= \frac{\sum_{k=1}^n F_{zk}}{4} + \frac{M1}{2 \cdot L} + \frac{M2}{2 \cdot l_b} \\ &= \frac{W1 + W2}{4} + \frac{M1}{2 \cdot L_r} + \frac{M2}{2 \cdot L_b} \\ &= \frac{150 + 200}{4} + \frac{-27\ 000}{2 \times 90} + \frac{20\ 500}{2 \times 100} \\ &= 40\ (\text{N}) \end{aligned}$$

Similarly

$$F_{r2} = -165\ (\text{N})$$

$$F_{r3} = 340\ (\text{N})$$

$$F_{r4} = 135\ (\text{N})$$

Lateral loads

$$\begin{aligned} M3 &= -\sum_{i=1}^n \{F_{xi} \cdot (Y_{xi} - Y_b)\} + \sum_{j=1}^n (F_{yj} \cdot X_{yj}) \\ &= F \cdot X_3 \\ &= -200 \times (-50) \\ &= 10\ 000\ (\text{N} \cdot \text{mm}) \end{aligned}$$

A-3-11 Drills to Select Linear Guide

$$\begin{aligned}
 F_{s1} = F_{s3} &= \frac{\sum_{j=1}^n F_{yj}}{4} + \frac{M3}{2 \cdot l} \\
 &= \frac{F}{4} + \frac{M3}{2L_b} \\
 &= \frac{-200}{4} + \frac{10\,000}{2 \times 100} \\
 &= 0 \text{ (N)}
 \end{aligned}$$

Similarly

$$F_{s2} = F_{s4} = -100 \text{ (N)}$$

No work mounted on the table

Vertical direction load

$$\begin{aligned}
 M1 &= \sum_{j=1}^n (F_{yj} \cdot Z_{yj}) + \sum_{k=1}^n (F_{zk} \cdot Y_{zk}) \\
 &= F \cdot Z_3 + W1 \cdot Y_1 \\
 &= -200 \times 30 + 150 \times (-20) \\
 &= -9\,000 \text{ (N} \cdot \text{mm)}
 \end{aligned}$$

$$\begin{aligned}
 M2 &= \sum_{i=1}^n \{F_{xi} (Z_{xi} - Z_b)\} + \sum_{k=1}^n (F_{zk} \cdot X_{zk}) \\
 &= W1 \cdot X_1 \\
 &= 150 \times 30 \\
 &= 4\,500 \text{ (N} \cdot \text{mm)}
 \end{aligned}$$

$$\begin{aligned}
 F_{r1} &= \frac{\sum_{k=1}^n F_{zk}}{4} + \frac{M1}{2 \cdot L} + \frac{M2}{2 \cdot l} \\
 &= \frac{W1}{4} + \frac{M1}{2 \cdot L_r} + \frac{M2}{2 \cdot L_b} \\
 &= \frac{150}{4} + \frac{-9\,000}{2 \times 90} + \frac{4\,500}{2 \times 100} \\
 &= 10 \text{ (N)}
 \end{aligned}$$

Similarly

$$F_{r2} = -35 \text{ (N)}$$

$$F_{r3} = 110 \text{ (N)}$$

$$F_{r4} = 65 \text{ (N)}$$

Lateral loads

$$\begin{aligned}
 M3 &= -\sum_{i=1}^n \{F_{xi} \cdot (Y_{xi} - Y_b)\} + \sum_{j=1}^n (F_{yj} \cdot X_{yj}) \\
 &= F \cdot X_3 \\
 &= -200 \times (-50) \\
 &= 10\,000 \text{ (N} \cdot \text{mm)}
 \end{aligned}$$

$$\begin{aligned}
 F_{s1} = F_{s3} &= \frac{\sum_{j=1}^n F_{yj}}{4} + \frac{M3}{2 \cdot l} \\
 &= \frac{F}{4} + \frac{M3}{2 \cdot L_b} \\
 &= \frac{-200}{4} + \frac{10\,000}{2 \times 100} \\
 &= 0 \text{ (N)}
 \end{aligned}$$

Similarly

$$F_{s2} = F_{s4} = -100 \text{ (N)}$$

For calculation, take into consideration the positive or negative signs (+ or -) for load point coordinates.

Calculation of dynamic equivalent load

Use "A-3-2.2 3. Calculation of dynamic equivalent load."

It matches Position 4 in "Table 2.3 Loads in the arrangement of linear guides." Ball slide loads that must be considered are vertical and lateral direction loads.

In case of PU15AL,

Vertical direction dynamic equivalent load

$$F_r = F_r$$

Lateral direction dynamic equivalent load

$$F_{se} = F_s \cdot \tan \alpha = F_s$$

Use the formula for full dynamic equivalent load (page A23) to calculate F_e .

Results are shown in the table below.

Unit: N

Work mounted	Slide1	Slide2	Slide3	Slide4
$F_r (F_{r1} - F_{r4})$	40	- 165	340	135
$F_{se} (F_{s1} - F_{s4})$	0	- 100	0	- 100
F_e	40	215	340	185
No work mounted	Slide1	Slide2	Slide3	Slide4
$F_r (F_{r1} - F_{r4})$	10	- 35	110	65
$F_{se} (F_{s1} - F_{s4})$	0	- 100	0	- 100
F_e	10	118	110	133

Based on the results of calculations, a ball slide that bears the maximum dynamic equivalent load shall be taken as the representative of the linear guides for further life calculation. For this case, we take the Slide3.


Therefore;

Work mounted $F_{e1} = 340 \text{ (N)}$

No work mounted $F_{e2} = 110 \text{ (N)}$

Calculation of mean effective load

Based on "A-3-2.2 4. Calculation of mean effective load", calculate from the largest full dynamic equivalent loads.

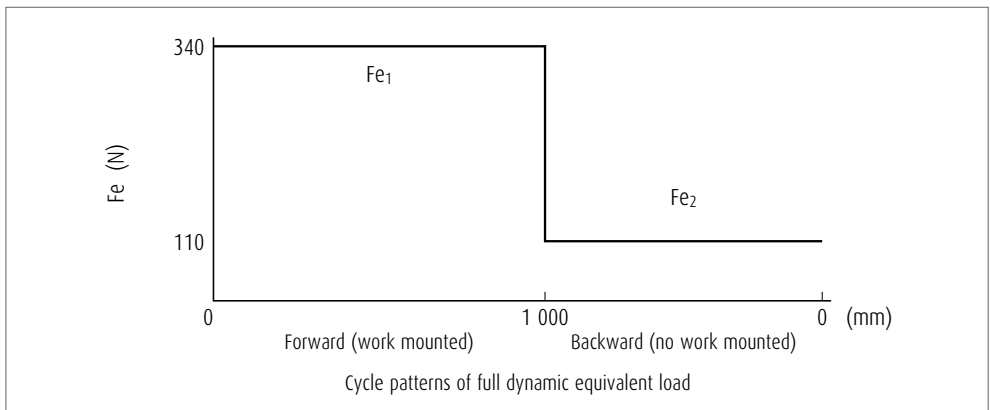

A-3-11 Drills to Select Linear Guide

From the cycle pattern, the mean effective load matches the case "1 When load and running distance vary stepwise." Therefore, use the following formula.

Assuming that L is: $L = L_1 + L_2$.

$$F_m = \sqrt[3]{\frac{1}{L} (F_{e1}^3 L_1 + F_{e2}^3 L_2)}$$

$$= \sqrt[3]{\frac{1}{2\,000} (340^3 \times 1\,000 + 110^3 \times 1\,000)}$$

$$= 273 \text{ (N)}$$

Determine various coefficients

Determine applicable coefficients from "A-3-2.2.5. Various coefficients."

Load factors

Use conditions are: Travel speed, 12 m/min; Acceleration, 0.8 m/sec² (0.082 G). As the load factor f_w is in the range of 1.0 to 1.5, use common value $f_w = 1.2$.

Hardness coefficient

The hardness of NSK linear guides is HRC58 to 62. Use a hardness coefficient $f_H = 1$ and take the value of basic dynamic load rating as it is.

Calculate rating life

Use "A-3-2.2.6 Calculation of rating life."

The basic dynamic load rating (C_{100}) of linear guide PU15AL : 4 400 (N)

Mean effective load F_m : 273 (N)

Load factor f_w : 1.2

Hardness coefficient f_H : 1

$$\text{Rating fatigue life } L = 100 \times \left(\frac{f_H \cdot C_{100}}{f_w \cdot F_m} \right)^3$$

$$= 100 \times \left(\frac{1 \times 4400}{1.2 \times 273} \right)^3$$

$$= \text{approximately } 242\,280 \text{ (km)}$$

Travel speed, 12 m/min; Operating hours, 16 hr/day.

Convert the above rating fatigue life into hours:

$$\frac{242\,280 \times 1\,000}{12 \times 60 \times 16} = \text{approximately } 21\,030 \text{ (days)}$$

Examine static load

Based on "A-3-2.2.7 Examination of static load", find out on which ball slide the static equivalent load P_0 becomes largest.

The basic static load rating (C_0) of linear guide PU15AL: 6 600 (N)

Ball slide No. 3 bears the largest load.

P_0 at this time:

$$P_0 = F_r + F_s = 340$$

Therefore, static permissible load coefficient fs is:

$$f_s = \frac{C_0}{P_0} = \frac{6\,600}{340} = 19.4$$

There is no problem at this value.

(3) Selection of accuracy grade and preload

Based on "A-3-4.3 Application examples of accuracy", select accuracy grade PN and preload Z1 for material handling system.

(4) Calculation of deformation

Calculate deformation by the weight of the mounted work W_2 . From "Rigidity of PU series", the rigidity of linear guide PU15AL with Z1 preload is:

$$K_s = K_r = 45 \text{ (N/}\mu\text{m)} = 45\,000 \text{ (N/mm)}$$

Deformation by the weight of the mounted work W_2 can be obtained as the difference in deformation when W_2 applies or does not apply.

From Pattern 4 in Table 2.2 (Page A19)

Work mounted:

$$\delta_{x1} = Y_d \cdot \frac{F_{s2} - F_{s1}}{L_b \cdot K_s} + Z_d \cdot \frac{F_{t1} - F_{t2}}{L_b \cdot K_r}$$

$$= -90 \times \frac{-100 - 0}{100 \times 45\,000} + 120 \times \frac{40 - (-165)}{100 \times 45\,000}$$

$$= 0.0075 \text{ (mm)} = 7.5 \text{ (}\mu\text{m)}$$

Similarly, $\delta_{y1} = -0.0082 \text{ (mm)} = -8.2 \text{ (}\mu\text{m)}$

$$\delta_{z1} = 0.0123 \text{ (mm)} = 12.3 \text{ (}\mu\text{m)}$$

No work mounted:

$$\begin{aligned}\delta_{x2} &= Y_d \cdot \frac{F_{s2} - F_{s1}}{L_b \cdot K_s} + Z_d \cdot \frac{F_{r1} - F_{r2}}{L_b \cdot K_r} \\ &= -90 \times \frac{-100 - 0}{100 \times 45\,000} + 120 \times \frac{10 - (-35)}{100 \times 45\,000} \\ &= 0.0032 \text{ (mm)} = 3.2 \text{ (}\mu\text{m)}\end{aligned}$$

$$\begin{aligned}\text{Similarly, } \delta_{y2} &= -0.0023 \text{ (mm)} = -2.3 \text{ (}\mu\text{m)} \\ \delta_{z2} &= 0.0039 \text{ (mm)} = 3.9 \text{ (}\mu\text{m)}\end{aligned}$$

Therefore, the difference in deformation by whether there is a mounted work or not is as follows:

$$\delta_x = \delta_{x1} - \delta_{x2} = 7.5 - 3.2 = 4.3 \text{ (}\mu\text{m)}$$

$$\delta_y = \delta_{y1} - \delta_{y2} = -8.2 - (-2.3) = -5.9 \text{ (}\mu\text{m)}$$

$$\delta_z = \delta_{z1} - \delta_{z2} = 12.3 - 3.9 = 8.4 \text{ (}\mu\text{m)}$$

2. Machining center

The following is a calculation example of a horizontal type machining center. Arrangements of each axis are shown in **Fig. 11.2** (front view) and **Fig. 11.3** (side view).

Operating conditions

Dimensions and load conditions are:

X axis column's weight W_x : 7 500 (N)

Y axis spindle head's weight W_y : 2 500 (N)

Z axis table's weight W_z : 5 500 (N)

X axis rail span XL_r : 450 (mm)

X axis ball slide span XL_b : 310 (mm)

Y axis rail span YL_r : 410 (mm)

Y axis ball slide span YL_b : 308 (mm)

Z axis rail span ZL_r : 660 (mm)

Z axis ball slide span ZL_b : 420 (mm)

X axis stroke : 400 (mm)

Y axis stroke : 350 (mm)

Z axis stroke : 500 (mm)

Average rapid traverse speed : 15 (m/min)

[Max. 30 (m/min)]

Starting accelerating speed : 1 (G)

Milling speed : 2.5 (m/min)

Drilling speed : 0.8 (m/min)

Cutting load

Milling process $F_x = F_y = 1\,000$ (N)

Drilling process $F_z = 3\,000$ (N)

A-3-11 Drills to Select Linear Guide

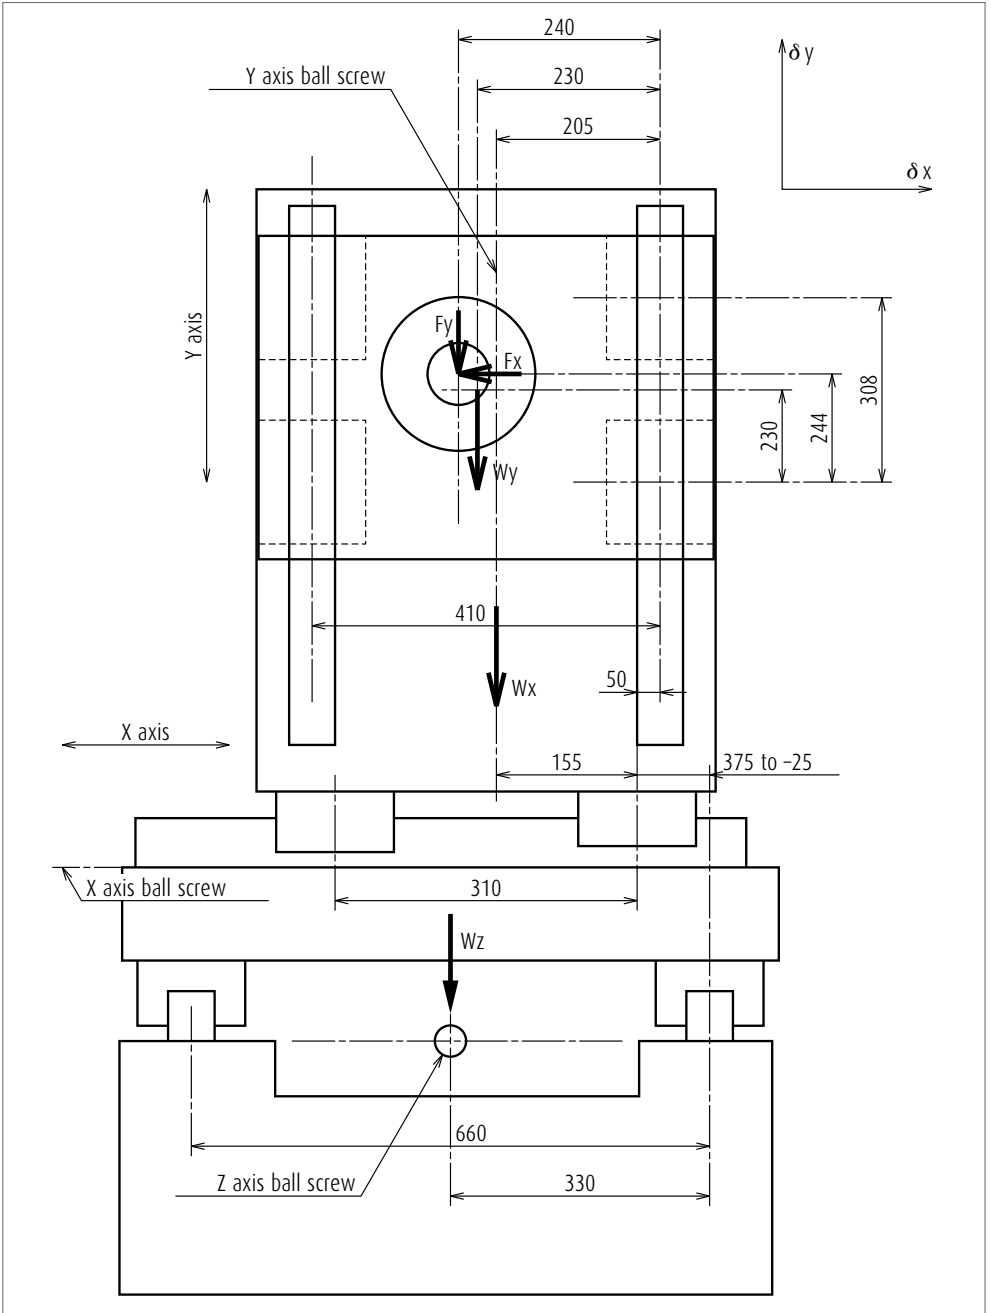


Fig. 11.2 Machining center (front view)

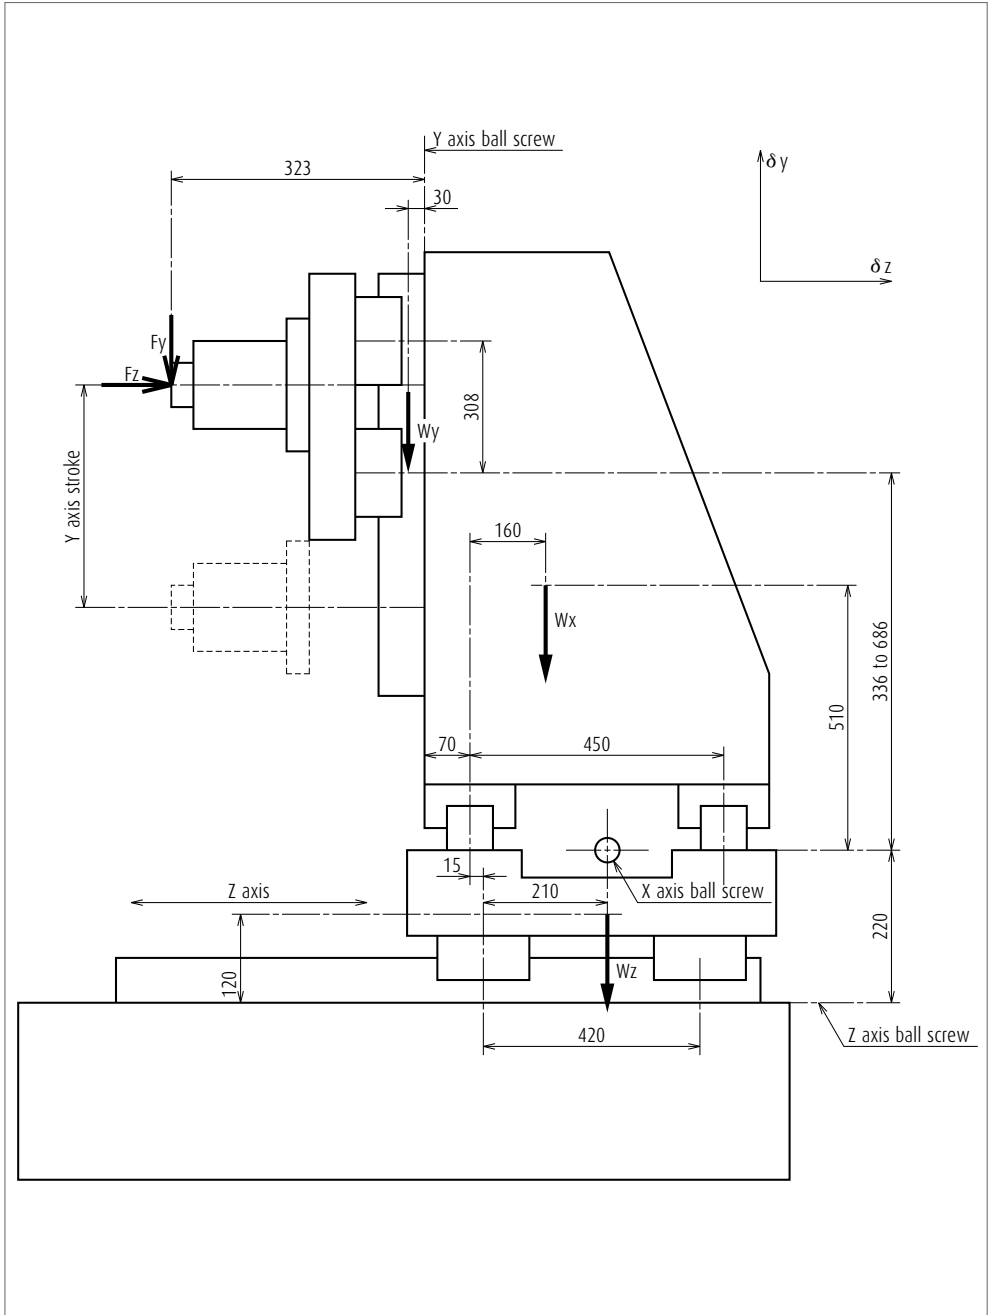


Fig. 11.3 Machining center (side view)

A-3-11 Drills to Select Linear Guide

(1) Selection of linear guide model

From the operating conditions, the linear guide should be LA Series which is suitable for the machining center.

Select below temporarily from shaft diameter of ball screw:

X axis LA55

Y axis LA35

Z axis LA65

(2) Selection of accuracy grade and preload

For machining center, select accuracy grade P5 and preload Z3.

(3) Calculation of life expectancy

Examination shall be done in three cases, no cutting load, milling process, and drilling process.

Inertial force associated with the starting acceleration is not considered in this case. However, it must be calculated for more accurate figures.

Calculation of the loads that apply to the ball slide

In case of no cutting load: $F_x = F_y = F_z = 0$

Calculate load on X, Y, Z axes using "Table 2.2" in "A-3-2.2 2 Calculating load to a ball slide".

X axis: Loads to consider W_x and W_y

Y axis: Loads to consider W_y

Z axis: Loads to consider W_x , W_y , and W_z

Unit: N

Axis	Load direction	Slide 1	Slide 2	Slide 3	Slide 4
X axis	Vertical direction F_r	1 156	955	4 045	3 844
	Lateral direction F_s	0	0	0	0
Y axis	Vertical direction F_r	122	-122	122	-122
	Lateral direction F_s	102	-102	102	-102
Z axis	Vertical direction F_r	765	3 860	3 890	6 985
	Lateral direction F_s	0	0	0	0

In case of milling process: $F_x = F_y = 1\ 000\ (N)$

Similarly,

X axis: Loads to consider W_x , W_y , F_x , and F_y

Y axis: Loads to consider W_y , F_x , and F_y

Z axis: Loads to consider W_x , W_y , W_z , F_x , and F_y

The table below shows the calculation of each load coordinates at stroke end which imposes most strict condition.

Unit: N

Axis	Load direction	Slide 1	Slide 2	Slide 3	Slide 4
X axis	Vertical direction F_r	2 277	-1 039	6 539	3 224
	Lateral direction F_s	997	-997	997	-997
Y axis	Vertical direction F_r	252	-1 040	1 040	-252
	Lateral direction F_s	54	-554	54	-554
Z axis	Vertical direction F_r	-771	3 796	4 453	9 020
	Lateral direction F_s	486	-986	486	-986

In case of drilling process: Fz = 3 000 (N)

X axis: Loads to consider Wx, Wy, and Fz

Y axis: Loads to consider Wy and Fz

Z axis: Loads to consider Wx, Wy, Wz, and Fz

The table below shows calculation of each load coordinates at a stroke end which imposes most strict condition.

Unit: N

Axis	Load direction	Slide 1	Slide 2	Slide 3	Slide 4
X axis	Vertical direction Fr	4 256	4 055	945	744
	Lateral direction Fs	919	581	919	581
Y axis	Vertical direction Fr	305	938	561	1 195
	Lateral direction Fs	102	-102	102	-102
Z axis	Vertical direction Fr	4 872	-247	7 997	2 878
	Lateral direction Fs	839	-839	839	-839

Calculation of dynamic equivalent load

Next, find dynamic equivalent load under each cutting condition. From "Table 2.3" in "A-3-2.2 3. Calculation of dynamic equivalent load", the necessary loads, Fr and Fse are, as the linear guide model is LA Series, obtained as follows.

Vertical dynamic equivalent load

$$Fr = Fr$$

Lateral dynamic equivalent load

$$Fse = Fs \cdot \tan \alpha = Fs$$

From the above, calculate Fe using formulas for full dynamic equivalent loads shown in page A23.

From calculation, the largest full dynamic equivalent loads are as follows.

Axis	Largest full dynamic equivalent load Fe (N)		
	No cutting load	For milling process	For drilling process
X axis	4 045	7 038	4 716
Y axis	173	1 317	1 246
Z axis	6 985	9 513	8 417

Calculation of full dynamic equivalent load taking account of preload

It is necessary to include the amount of preload for the calculation of rating life when Z3 preload is specified. Consider each preload and calculate full dynamic equivalent load. Calculate Fep using formulas in "A-3-3 6 Load and rating life when the preload is taken into account".

Preload P (X axis linear guide LA55): 8 100 (N)

Preload P (Y axis linear guide LA35): 3 450 (N)

Preload P (Z axis linear guide LA65): 13 800 (N)

From the above, the full dynamic equivalent loads taking preload into account are smaller than the load at which preload is relieved.

Axis	Largest full dynamic equivalent load Fe (N)		
	No cutting load	For milling process	For drilling process
X axis	10 336	12 104	10 724
Y axis	3 542	4 171	4 131
Z axis	17 663	19 138	18 494

Calculation of mean effective load

Calculate the mean effective loads from full dynamic equivalent loads. If duty cycle in the cutting process is not clear, set the mean effective load to 70% of the largest full dynamic equivalent load in all processes.

Therefore,

X axis: 12 104 × 0.7 = 8 473 (N)

Y axis: 4 171 × 0.7 = 2 920 (N)

Z axis: 19 138 × 0.7 = 13 397 (N)

A-3-11 Drills to Select Linear Guide

Determine various coefficients

Determine them based on "A-3-2.2 5. Various coefficients".

In this occasion,

$$\begin{aligned} \text{Load coefficient } f_W &: 1.5 \\ \text{Hardness coefficient } f_H &: 1 \end{aligned}$$

Calculation of rating life

Based on the calculated loads and various coefficients, calculate the rating life from "A-3-2.2 6. Calculation of rating life".

Basic dynamic load rating C_{100}

$$\text{(X axis linear guide LA55)} : 111\,000 \text{ (N)}$$

Basic dynamic load rating C_{100}

$$\text{(Y axis linear guide LA35)} : 49\,000 \text{ (N)}$$

Basic dynamic load rating C_{100}

$$\text{(Z axis linear guide LA65)} : 206\,000 \text{ (N)}$$

$$\text{Load coefficient } f_W : 1.5$$

$$\text{Hardness coefficient } f_H : 1$$

$$\text{Rating fatigue life } L = 100 \times \left(\frac{f_H \cdot C_{100}}{f_W \cdot F_m} \right)^3$$

From this,

$$\text{In case of X axis } L_x = 66\,617 \text{ (km)}$$

$$\text{In case of Y axis } L_y = 140\,012 \text{ (km)}$$

$$\text{In case of Z axis } L_z = 107\,722 \text{ (km)}$$

In case of roller linear guides, refer to "A-3-2.2 6. Calculation of rating life" (page A25).

Calculate using Pattern 4 in Table 2.2.

Load conditions	Deformation direction	Deformation of each axis (μm)			Total deformation (μm)
		X axis	Y axis	Z axis	
Table weight alone	δx	-0.2	-0.1	-3.1	-3.4
	δy	-4.6	-0.3	-4.2	-9.1
	δz	-4.3	-0.1	-4.9	-9.3
Milling process	δx	-9.9	-1.3	-6.7	-17.9
	δy	-6.4	-1.7	-5.2	-13.3
	δz	-6.1	-0.4	-7.7	-14.2
Drilling process	δx	-0.9	-0.3	-4.6	-5.8
	δy	1.4	0.8	2.8	5.0
	δz	5.5	1.2	7.6	14.3

Therefore, deformation at processing points at time of milling is:

$$\delta x = -17.9 - (-3.4) = -14.5 \text{ (}\mu\text{m)}$$

$$\delta y = -13.3 - (-9.1) = -4.2 \text{ (}\mu\text{m)}$$

$$\delta z = -14.2 - (-9.3) = -4.9 \text{ (}\mu\text{m)}$$

Examination of static loads based on "A-3-2.2 7"

Basic static load rating C_0

$$\text{(X axis linear guide LA55)} : 215\,000 \text{ (N)}$$

Basic static load rating C_0

$$\text{(Y axis linear guide LA35)} : 98\,000 \text{ (N)}$$

Basic static load rating C_0

$$\text{(Z axis linear guide LA65)} : 420\,000 \text{ (N)}$$

Examine a case of high-load milling process with large load.

$$\text{X axis } f_s = \frac{C_0}{P_0} = \frac{C_0}{(F_r + F_s)} = \frac{215\,000}{(6\,539 + 997)} = 28.5$$

Similarly,

$$\text{Y axis } f_s = 61.5$$

$$\text{Z axis } f_s = 42.0$$

Therefore, there is no problem.

(3) Calculation of deformation

Calculate deformation at the processing points. (The stroke position is the stroke end positions on Y axis and X axis.)

$$\text{Rigidity of X axis linear guide LA55Z3} : 1\,400 \text{ (N}/\mu\text{m)}$$

$$\text{Rigidity of Y axis linear guide LA35Z3} : 825 \text{ (N}/\mu\text{m)}$$

$$\text{Rigidity of Z axis linear guide LA65Z3} : 1\,730 \text{ (N}/\mu\text{m)}$$

Deformation at processing points at time of milling:

$$\delta x = -5.8 - (-3.4) = -2.4 \text{ (}\mu\text{m)}$$

$$\delta y = 5.0 - (-9.1) = 14.1 \text{ (}\mu\text{m)}$$

$$\delta z = 14.3 - (-9.3) = 23.6 \text{ (}\mu\text{m)}$$

If a rating life of this long period is not required, select a smaller linear guide model, and calculate the life again.

To reduce deformation at the processing point, select a linear guide model with higher rigidity, and then calculate the life again.

A-3-12 Reference

The articles in "Motion & Control (NSK Technical Journals)" which refer to NSK linear guides are listed in the table below for user convenience.

"Motion & Control" is compiled to introduce NSK products and its technologies.

For inquiries and orders of "Motion & Controls," please contact your local NSK sales offices, or Representatives.

Table 12.1 Motion & Control (NSK Technical Journal): Articles relating to linear guides (1997 -)

Issue No.	Date of Publication	Articles related to linear guides
No. 5	Dec. 1998	Development of the NSK K1 Seal for Linear Guides
No. 8	May 2000	NSK Linear Guides for High-Temperature Environments
No. 9	Oct. 2000	Recent Developments in Highly Precise NSK Linear Guides
No. 9	Oct. 2000	High-Performance Seals for NSK Linear Guides
No. 11	Oct. 2001	Development of the NSK S1 Series Ball Screws and Linear Guides High Load Capacity Mini LH Series of NSK Linear Guides
No. 12	Apr. 2002	NSK Linear Guides & Ball Screws Equipped with NSK K1 Lubrication Unit
No. 12	Apr. 2002	NSK S1 Series NSK Linear Guides and Ball Screws
No. 13	Oct. 2002	Translide -New Rolling Element Linear Motion Bearing-
No. 14	May. 2003	New Generation of NSK Linear Guides Miniature PU Series
No. 15	Dec. 2003	Ultra-Precision NSK Linear Guides for Machine Tools-the HA Series
No. 16	Aug. 2004	Numerical analysis Technology & NSK Linear Guides for Machine Tools
No. 16	Aug. 2004	NSK RA Series Roller Guide
No. 18	Aug. 2005	New Generation of NSK linear Guides Miniature PU Series/PE Series
No. 20	Aug. 2007	V1 Series of Highly Dust-Resistant NSK Linear Guides
No. 21	Dec.2009	Technological Trends of NSK Linear Guides for Industrial Machines Highly Accurate HS Series of Ultra-Precision NSK Linear Guides Linear Guides for Food Machine and Medical Devices
No. 22	Mar. 2011	Technological Trends of NSK Linear Guides for Industrial Machines High-Accuracy HS Series of Ultra-Precision NSK Linear Guides NSK Linear Guides for Food Processing Equipment and Medical Devices
No. 23	Jun. 2013	Technological Trends in Linear Motion Rolling Guides for Machine Tools
No. 24	Dec. 2014	Slight-Preload Type RA Series Roller Guides of NSK Linear Guides
No. 25	Sep. 2015	Precision-Grade, Medium-Preload, Random-Matching NSK linear Guides Random-Matching, Miniature PU and PE Series of NSK Linear Guides
No. 26	Apr. 2016	NSK Roller Guides Equipped with V1 Seals Random-matching, High-Precision-Grade RA Series Roller Guides
No. 27	Nov. 2016	NH Series and NS Series NSK Linear Guides: More than Twice the Life of Conventional NSK Linear Guides

A-4 NSK Linear Guides

1. Structure of NSK Linear Guides

By avoiding structural complexity, and by reducing the number of components, we not only enhanced the precision of linear guides, but also are able to keep costs low. We have added NSK's patented unique structural feature to the original invention (Fig. 1). This contributes to higher precision and lower prices.

NSK linear guides consist of a rail and a slide (Fig. 2). The balls or rollers roll on the race way surface, and are scooped up by the end caps attached to both ends of the slide. Then, the balls or rollers go through a passage made in the slide and circulate back to the other end.

2. Characteristics of NSK Linear Guides

The use of a unique offset Gothic arch groove (Fig. 3) allows the ball type of NSK linear guides to satisfy groove designs required for specific purposes.

This unique groove design facilitates precise measurement of the ball groove, thus enabling the stable and highly accurate production of the slides and the rails for random matching. (Fig. 4)

On top of that, we have developed and marketed the NSK Roller Guides, representing the culmination of NSK's analysis technology and tribology.

Such technologies ensure the features of NSK linear guides outlined below.

(1) High precision and quality

› High precision and quality come from our superb production and measuring technologies, strengthened by extensive experience in antifriction rotary bearings and ball screw production. Our quality assurance extends to the smallest components.

(2) High reliability and durability

› Logical simplicity in shape, along with stable processing, maintains high precision and reliability.

› Super-clean materials, our advanced heat treatment and processing technologies increase product durability.

(3) Abundant in type for any purpose

› Various series are available, and their slide models and size categories are standardized to satisfy any requirement. Our technology, polished by abundant experience in the use of special materials and surface treatments, meets the customer's most demanding expectations.

(4) Development of random-matching parts for short delivery time

› The adoption of the Gothic arch groove which makes measuring easy, and a new reliable quality control method has made random-matching of the rails and the ball or roller slides possible. The parts are stocked as standard products, thereby reducing delivery time.

(5) Patented static load carrying capacity (shock-resistance)

› When a super-high load (impact) is applied, our Gothic arch groove spreads the load to surfaces which usually do not come into contact in the ball type NSK linear guides. This increases impact load resistance (Fig. 5).

(6) Lineup of extremely high-load capacity series

› The LA series provides a top class high-load capacity for the ball linear guides through a unique load carrying configuration with three ball recirculation circuits on the one side.

By installing rollers that are the largest possible diameter and length, the NSK roller linear guides have realized the world's highest load capacity, far superior to the roller linear guides of other companies.

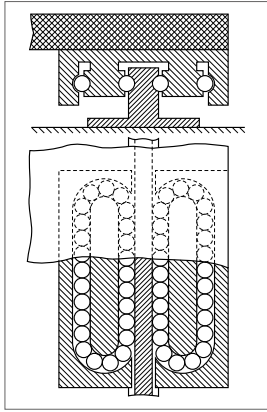


Fig. 1 > French Patent in 1932.
> Inventor: Gretsch (German)

NSK added its patented technology to the invention in Fig. 1, and improved the linear guide structure and realized low cost design.

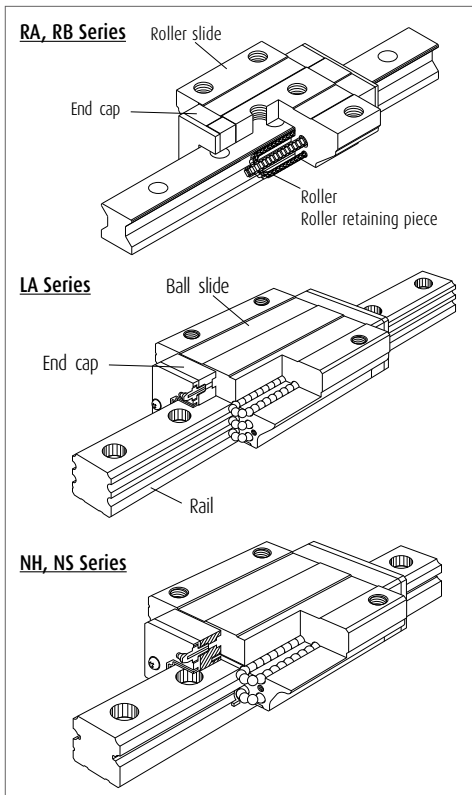


Fig. 2 Structure of NSK linear guides

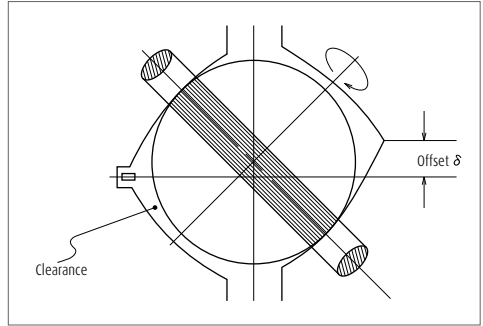


Fig. 3 Two contact point at offset Gothic arch groove

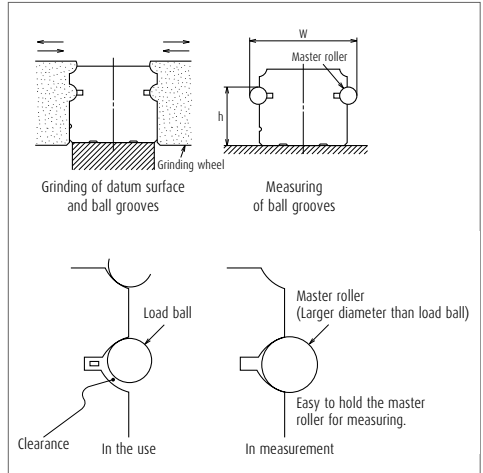


Fig. 4 Processing and measuring grooves

Measuring grooves accuracy is easy. You can obtain highly accurate results for all types of NSK series. This is why you can purchase rails and slides separately for random matching.

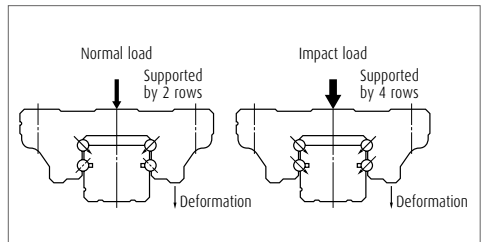






Fig. 5 Shock-resistance

A-4 NSK Linear Guides

3. Types and Characteristics of NSK Linear Guides

Category	Series	Slide shape	Shape/installation method	Load direction/capacity	Rolling element contact structure	
High vertical load carrying capacity type	Self-aligning type	NH	AN BN			
			AL BL			
			EM GM			
			High-load type	AN, AL		EM

Note For customers who have used the former LH or SH series, NH series is recommended as a substitute. Please confirm the correlation between NH series and former ones on the comparative table at A329.


Characteristics	Applications	Page
<p>The NH series is applicable to a wide range of uses from general industrial use to high-accuracy application.</p> <p>Random-matching of rails and ball slides is available as a standard.</p> <ul style="list-style-type: none"> > The contact angle between the ball and ball groove is set at 50 degrees. This design increases the load carrying capacity against the vertical directions, which is the main load acting direction in most operations. > The DF contact structure greatly absorbs the installation error in the perpendicular direction to the rail. > Balls make contact at two points thanks to the offset Gothic arch groove. This keeps friction to a minimum. > High resistance against shock load due to the unique load-carrying structure. > Gothic arch groove renders measuring of ball grooves accurate and easy. > Standardized random-matching type allows separate purchase of rails and ball slides. > Stainless steel standard type is also available for small sizes (NH15 to NH30). 	<ul style="list-style-type: none"> > Cartesian type robots > Robots that remove plastic molds from injection machine > Material handling equipment > Food processing machines > Packaging/packing machines > Printing machines > Woodworking machines > Paper manufacturing machines > Measuring equipment > Inspecting equipment > Semiconductor manufacturing equipment > LCD manufacturing equipment > Medical equipment > Electric discharge machines > Laser cutting machines > Press machines > Tool grinders > Flat surface grinders > NC lathes > Machining centers > Automatic tool changers 	A113
<div style="display: flex; justify-content: space-around; align-items: flex-start;"> <div style="text-align: center;"> <p>Super-high-load type</p> <p>BN, BL</p>  </div> <div style="text-align: center;"> <p>L₁</p>  </div> <div style="text-align: center;"> <p>GM</p>  </div> <div style="text-align: center;"> <p>L₁</p>  </div> </div>		

A-4 NSK Linear Guides











Category	Series	Slide shape	Shape/installation method	Load direction/capacity	Rolling element contact structure	
High vertical load carrying capacity type	Self-aligning type	VH	AN BN			
			AL BL			
			EM GM			
			High-load type AN, AL			

Characteristics	Applications	Page
<p>The VH series delivers outstanding dust-proof functionality and thus ensures long operating life under contaminated environments.</p> <p>Random-matching of rails and ball slides is available as a standard.</p> <ul style="list-style-type: none"> > The contact angle between the ball and the raceway is set at 50 degrees. This design increases the load carrying capacity against vertical directions, which is the main load acting direction in most operations. > The DF contact structure greatly absorbs the installation error in the perpendicular direction to the rail. > Thanks to the offset Gothic arch groove, balls make contacts at two points. This keeps friction to a minimum. > High resistance against shock load due to the unique load carrying structure. > Gothic arch groove renders measuring groove accurate and easy. > Standardized random-matching type allows separate purchase of rails and ball slides. > Penetration of fine contaminants is less than 1/10 of the existing products. > Operating life under contaminated environments is more than 5 times longer. 	<ul style="list-style-type: none"> > Automotive manufacturing equipment > Press machines > Machine tools loader/un-loader > Tire molding machines > Woodworking machines > Automatic doors 	A133


Super-high-load type

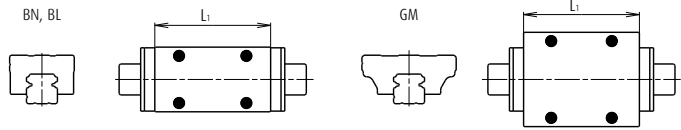

A-4 NSK Linear Guides

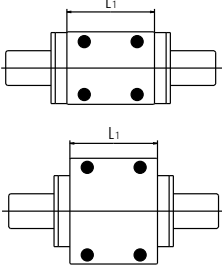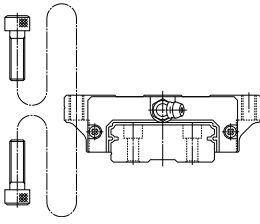Category	Series	Slide shape	Shape/installation method	Load direction/capacity	Rolling element contact structure
High vertical load carrying capacity type	Self-aligning type	CL AL			
		JM EM			
			<p>High-load type</p> <p>AL </p> <p>EM </p> <p></p>		
High moment capacity type	LW	EL			


Note For customers who have used the former LS or SS series, NS series is recommended as a substitute. Please confirm the correlation between NS series and former ones on the comparative table at A329.

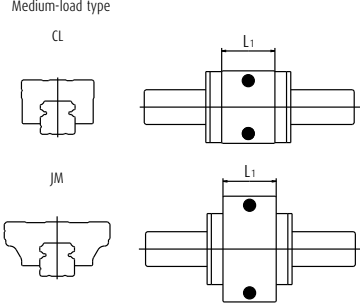Characteristics	Applications	Page
<p>The NS series is low in height, and is applicable to a wide range of uses from general industrial use to high-accuracy application.</p> <p>Random-matching of rails and ball slides is available as a standard.</p> <ul style="list-style-type: none"> > Compact and low profile. > The contact angle between the ball and the groove is set at 50 degrees. This design increases the load carrying capacity against vertical directions, which is the main load direction prevalent in most operations. > The DF contact structure greatly absorbs the installation error in the perpendicular direction of the rail. > Thanks to the offset Gothic arch groove, balls make contacts at two points. This keeps friction to a minimum. > High resistance against shock load due to the unique load carrying structure. > Gothic arch groove renders measuring groove accurate and easy. > Standardized random-matching type allows separate purchase of rails and ball slides. > Stainless steel type is also available. 	<ul style="list-style-type: none"> > Cartesian type robots > Robots that remove plastic molds from injection machine > Material handling equipment > Food processing machines > Packaging/packing machines > Printing machines > Woodworking machines > Paper manufacturing machines > Measuring equipment > Inspection equipment > Semiconductor manufacturing equipment > LCD manufacturing equipment > Medical equipment > Electric discharge machines > Laser cutting machines > Press machines 	A153
<p>Medium-load type</p> 		
<p>High-moment rigidity and low profile products are most suited for a single rail linear guideway system.</p> <p>Random-matching of rails and ball slides is available as a standard.</p> <ul style="list-style-type: none"> > The wide rail contributes to a high rolling moment carrying capacity and to great moment rigidity of a single rail linear guideway system. > Balls contact at two points in the Gothic arch groove, thus keeping friction to a minimum. > High resistance against shock load > Standardized random-matching type allows separate purchase of rails and ball slides. 	<ul style="list-style-type: none"> > Semiconductor manufacturing equipment > LCD manufacturing equipment > Conveyor systems > Medical equipment > Microscope XY stages 	A171

A-4 NSK Linear Guides





Category	Series	Slide shape	Shape/installation method	Load direction/capacity	Rolling element contact structure
Miniature type	Standard type				
	PU	AL AR TR UR BL			
	LU	AL TL AR TR BL UL			
	High moment capacity type				
PE	AR TR UR BR				
LE	AL TL AR TR BL UL CL SL				
			Standard type	High-load type	
			PU, LU	AL, TL, AR, TR	BL, UL, UR

Characteristics	Applications	Page
<p>Low inertia and low dust generation miniature series.</p> <ul style="list-style-type: none"> › Low dust generation and highly smooth operation › Super-compact size › Stainless steel is the standard material. › A ball retainer is a standard equipment. › Standardized random-matching type allows separate purchase of rails and ball slides. 	<ul style="list-style-type: none"> › Semiconductor manufacturing equipment › LCD manufacturing equipment › Medical equipment › Optical stages › Microscope XY stages › Conveying system of optical fibers › Miniature robots › Computer peripherals › Pneumatic equipment 	A187
<p>Miniature series</p> <ul style="list-style-type: none"> › Extremely compact size › Stainless steel is the standard material. › A ball retainer is a standard equipment. › Standardized random-matching type allows separate purchase of rails and ball slides. 		A197
<p>Wide rail miniature with low inertia and low dust generation.</p> <ul style="list-style-type: none"> › Low dust generation and highly smooth operation › Super-compact size › Stainless steel is the standard material. › A ball retainer is a standard equipment. › Standardized random-matching type allows separate purchase of rails and ball slides. 	<ul style="list-style-type: none"> › Semiconductor manufacturing equipment › LCD manufacturing equipment › Medical equipment › Optical stages › Microscope XY stages › Conveying optical fibers › Miniature robots › Computer peripherals › Pneumatic equipment 	A209
<p>Miniature wide series</p> <ul style="list-style-type: none"> › Super-small size in wide rail type › Stainless steel is the standard material. › A ball retainer is a standard equipment. › Standardized random-matching type allows separate purchase of rails and ball slides. 		A219

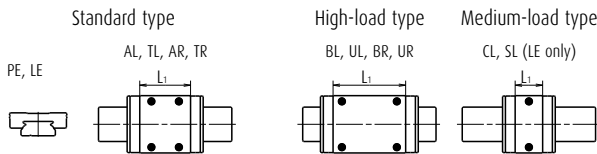



A-4 NSK Linear Guides

Category	Series	Slide shape	Shape/installation method	Load direction/capacity	Rolling element contact structure
Miniature type					
	Self-aligning type	LH	AN		
Four-way equal load carrying capacity type	Super-rigid type	AN BN			
		AL BL			
		EM GM			

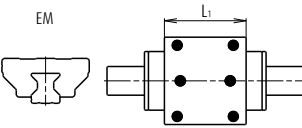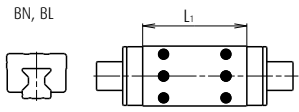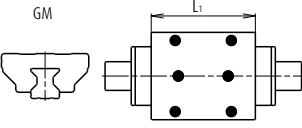Characteristics	Applications	Page
<p>High vertical load carrying capacity and self-aligning type miniature series</p> <ul style="list-style-type: none"> > The contact angle between the ball and ball groove is set at 50 degrees. This design increases the load carrying capacity against the vertical directions, which is the main load acting direction in most operations. > The DF contact structure greatly absorbs the installation error in the perpendicular direction to the rail. > Balls make contact at two points thanks to the offset Gothic arch groove. This keeps friction to a minimum. > High resistance against shock load due to the unique load-carrying structure. > Gothic arch groove renders measuring of ball grooves accurate and easy. > A ball retainer is a standard equipment. (LH10-12) > Stainless steel type is standard. 	<ul style="list-style-type: none"> > Semiconductor manufacturing equipment > LCD manufacturing equipment > Medical equipment > Optical stages > Microscope XY stages > Miniature robots > Computer peripherals > Pneumatic equipment 	A233
<p>The RA series roller guides have realized the world highest load capacity. Super-high rigidity and smooth motion contribute to higher performance of machine tools.</p> <ul style="list-style-type: none"> > Unique and optimum design of rollers and other component facilitate the high-load capacity and high rigidity. > High-performance seals, a standard feature in the roller guides, maintain the initial performance for a prolonged time. > The installation of retaining piece achieves smooth motion. > Standardized random-matching type allows separate purchase of rails and roller slides. 	<ul style="list-style-type: none"> > Machining centers > NC lathes > Heavy cutting machine tools > Gear cutters > Electric discharge machines > Press machines > Various types of grinders 	
<div style="display: flex; flex-direction: column; align-items: flex-start;"> <div style="margin-bottom: 20px;"> <p>High-load type</p> <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;"> <p>AN, AL</p>  </div> <div style="text-align: center;"> <p>EM</p>  </div> </div> </div> <div> <p>Super-high-load type</p> <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;"> <p>BN, BL</p>  </div> <div style="text-align: center;"> <p>GM</p>  </div> </div> </div> </div>		A245

A-4 NSK Linear Guides


Category	Series	Slide shape	Shape/installation method	Load direction/capacity	Rolling element contact structure
Four-way equal load carrying capacity type	Super-rigid type	AL TL BL UL			
		EM GM			
		RB	<p>High-load type</p> <p>AL•TL (excluding RB55AL) RB55AL</p> <p>EM</p>		
Four-way equal load carrying capacity type	Super-rigid type	AN BN			
		AL BL			
		EL GL			
		FL HL			

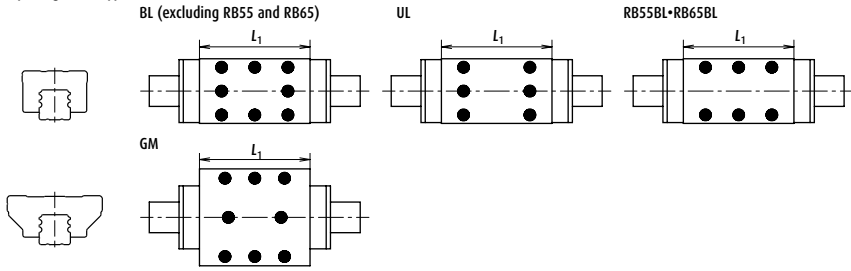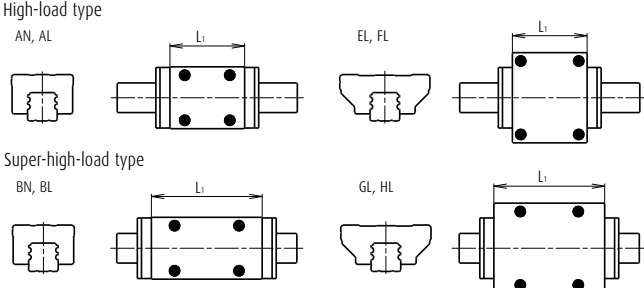Characteristics	Applications	Page
<p>The RB series can contribute to lower center of gravity of machines, while maintaining the load capacity of the RA series.</p> <ul style="list-style-type: none"> > Unique and optimum design of rollers and other component facilitate the high-load capacity and high rigidity. > High-performance seals, a standard feature in the roller guides, maintain the initial performance for a prolonged time. > The installation of retaining piece achieves smooth motion. 	<ul style="list-style-type: none"> > Machining centers > NC lathes > Heavy cutting machine tools > Gear cutters > Electric discharge machines > Press machines > Various types of grinders 	
<p>Super-high-load type</p> <p>BL (excluding RB55 and RB65) UL RB55BL•RB65BL</p> 		A265
<p>As well as providing a low friction operation, the LA series provides a top class high-load capacity for the ball linear guides. The series is most suited for machine tools.</p> <ul style="list-style-type: none"> > The contact angle between the ball and the raceway is set at 45 degrees. This makes load carrying capacity and rigidity equal in vertical and lateral directions. > Six-row ball grooves support the load from vertical and lateral directions, enhancing rigidity and increasing load carrying capacity. > Appropriate friction > Best suited for machine tools. 	<ul style="list-style-type: none"> > Machining centers > NC lathes > Heavy cutting machine tools > Gear cutters > Electric discharge machines > Press machines > Various types of grinders 	
<p>High-load type</p> <p>AN, AL EL, FL</p>  <p>Super-high-load type</p> <p>BN, BL GL, HL</p>		A281


A-4 NSK Linear Guides

Category	Series	Slide shape	Shape/installation method	Load direction/capacity	Rolling element contact structure	
Four-way equal load carrying capacity type	Super rigidity, high-precision type	AN				
		AL				
		EM				
		AN, AL				
High vertical load carrying capacity type	Self-aligning, super-precision type	AL				
		EM				
		AL				

Characteristics	Applications	Page
<p>The HA Series ball guide with high-precision and high-load carrying capacity, featuring high-motion accuracy equivalent to hydrostatic linear bearings.</p> <ul style="list-style-type: none"> ➤ Ball passage vibration has been reduced to one-third of conventional models by ultra-long ball slides and specification of new design. ➤ The contact angle between the ball and the raceway is set at 45 degrees. This makes load carrying capacity and rigidity equal in vertical and lateral directions. ➤ High motion accuracy is realized by the feature of super-finished ball groove (optional). ➤ End seals, bottom seals, and inner seals of high dust-proof specification are the standard equipment. ➤ Best suited for high-grade machine tools. 	<ul style="list-style-type: none"> ➤ Die molding machines ➤ High precision processing machine ➤ Heavy cutting machine tools ➤ Gear cutters ➤ Press machines ➤ Various types of NC grinders 	A301



<p>The HS Series ball guide with high-precision featuring high-motion accuracy equivalent to hydrostatic linear bearings.</p> <p>A Ball passage vibration has been reduced to one-third of conventional models by ultra-long ball slides and specification of new design.</p> <ul style="list-style-type: none"> ➤ The contact angle between the ball and the raceway is set at 50 degrees. The load carrying capacity against vertical directions, which is the main load acting direction in most operations, increases by this design. ➤ The DF contact structure greatly absorbs the installation error in the perpendicular direction of rail. ➤ Thanks to the offset Gothic arch groove, balls make contacts at two points, thus keeping friction low. 	<ul style="list-style-type: none"> ➤ High precision processing machines ➤ Electric discharge machines ➤ Various types of NC grinders ➤ LCD manufacturing equipment 	A315
---	--	------



A-4 NSK Linear Guides

4. Guide to Technical Services

(1) CAD drawing data

NSK offers CAD data for linear guides. Please visit the NSK website to download.

NSK website

<http://www.nsk.com>

- › Data in drawings are filed in the actual size (some parts are simplified). You can use these data without processing.
- › Drawings are three dimensional projection.
- › Dimension lines are omitted to render the data as standard drawing for database.

Data offered by CAD

NSK linear guides

NH Series

VH Series

NS Series

LW Series

PU Series

LU Series

PE Series

LE Series

Miniature LH Series

RA Series

RB Series

LA Series

HA Series

HS Series

(2) Telephone consultation with NSK engineers

This catalog contains technical explanation for each section. However, some descriptions and explanations may be insufficient due to page limitation, etc. To amend this shortcoming, NSK offers telephone assistance. NSK engineers are pleased to help you. Our local offices are listed in the last part of this catalog. Call local NSK office or Representative in your area.

5. Linear Guides: Handling Precautions

NSK linear guides are high quality and are easy to use. NSK places importance on safety in design. For maximum safety, please follow precautions as outlined below.

(1) Lubrication



Confirm lubrication.

- If your linear guide is rust prevention specification, thoroughly wipe the rust prevention oil and put lubricant inside of slide before using. For seal lubrication products, put lubricant on the rail.
- Do not mix greases of different brands.
- If your linear guide is rust prevention specifications, put lubricant inside of slide before using.

(2) Handling



Handle with care.



Do not disassemble.



Do not drop.




Do not give impact.

- Slides for random-matching are mounted on a provisional rail when they leave the factory. Handle the slide with care during installation on the rail.
- Do not disassemble the linear guide unless absolutely necessary. Not only does it allow dust to enter, but it lessens precision.
- The slide may move by simply tilting the rail. Make sure that the slide does not disengage from the rail.
- Standard end cap is made of plastic. Striking it or hitting it against an object may cause damage.

(3) Precautions in use



Do not contaminate.



Temperature limitation.



Do not hang upside down.

- Make every effort not to allow dust and foreign objects to enter.
- Please apply splash guard or bellows to the linear guide to prevent sticking solvent or coolant when it contains corrosive material.
- The temperature of the place where linear guides are used should not exceed 80°C (excluding heat-resistant type linear guides). A higher temperature may damage the plastic end cap.
- If the user cuts the rail, thoroughly remove burrs and sharp edges on the cut surface.
- When hanging upside-down (e.g. the rail is installed upside-down on the ceiling in which the slide faces downward), should the end cap be damaged, causing the balls or rollers to fall out, the slide may be detached from the rail and fall. For such use, take measures including installing a safety device.

(4) Storage



Store in the correct position.

- Linear guide may bend if the rail is stored in inappropriate position. Place it on a suitable surface, and store it in a flat position.

A-4 NSK Linear Guides

6. Design Precautions

The following points must be heeded in examining the life.



In case of oscillating stroke

- › If the balls or rollers do not rotate all the way, but only halfway, and if this minute stroke is repeated, lubricant disappears from the contact surface of balls or rollers and raceways. This generates "fretting," a premature wear. Fretting cannot be entirely prevented in such a case but it can be mitigated.
- › We recommend anti-fretting grease for oscillating stroke operations. Even in a case using a standard grease, the life can be markedly prolonged by adding a normal stroke travel (about the slide length) once every several thousand cycles.



When applying pitching or yawing moment

- › Load applied to the ball or roller rows inside the slide is inconsistent if pitching or yawing moment load is applied. Loads are heavy on the balls or rollers on each end of the row.
- › In such a case, a heavy load lubricant grease or oil is recommended. Another countermeasure is using one size larger model of linear guide to reduce the load per ball or roller.
- › Moment load is insignificant for 2-rail, 4-slide combination which is commonly used.



When an extraordinary large load is applied during stroke

- › If an extraordinary large load is applied at certain position of the stroke, calculate not only the life based on the mean effective load, but also the life based on the load in this range.
- › When an extraordinary heavy load is applied and thus the application of high tensile stress to fixing bolts of the rails and slides is foreseen, the strength of the bolts should be considered.



When calculated life is extraordinarily short (Less than 3000 km in calculated life.)

- › In such a case, the contact pressure to the balls or rollers and the rolling contact surface is extraordinarily high.
- › When a linear guide is operated under such state continually, the life is significantly affected by the loss of lubrication and the presence of dust, and thus the actual life becomes shorter than calculated.
- › It is necessary to reconsider the number of slides, the arrangement of slides, and the type of model in order to reduce the load to the slide.
- › It is necessary to consider preload for calculation of rating life when selecting Z3 (medium preload) or Z4 (heavy preload) as a preload. For the calculation of full dynamic equivalent loads that consider preload, see "A-3-3 6" on page A31. Please consult NSK for details.




Application at high speed

- › The standard maximum allowable speed of a linear guide under normal conditions is 100 m/min. However, the maximum allowable speed can be affected by accuracy of installation, temperature, external loading etc.
- › The end cap with high speed specification must be used when operating speed exceeds the permissible speed. In such a case, please consult NSK.




A-5-1 General Purpose Series



	Page
1. NH Series	A113
2. VH Series	A133
3. NS Series	A153
4. LW Series	A171

A-5-1.1 NH Series

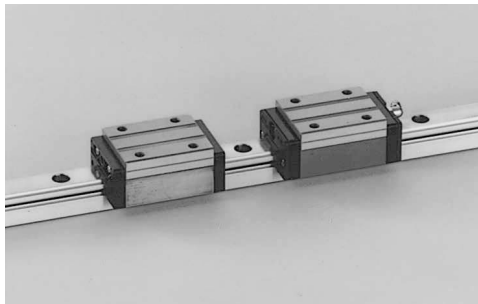

1. Features

(1) Improve rating life dramatically

Based on the LH series characterized by reliability and performance, a significant increase in durability has been attained. New ball groove geometry is introduced, which has been developed by utilizing NSK's state-of-the-art tribological and analytical technologies. Due to the optimized distribution of contact surface pressures, the rating life has dramatically increased.

As compared with the LH Series, the load rating capacity of the NH series has increased by 1.3 times, while the life span has increased doubled^{*1}. These features enable you to design a machine with a longer life and downsize the machine. Thus, your design capability is greatly enhanced.

^{*1}: Representative values of series.

(2) Ball circulation path with excellent high-speed property

By reexamining the design practice for the ball circulation path, we have attained smooth ball circulation and reduced noise level. So, NH series is suited for high-speed applications compared with the LH Series.

(3) All mounting dimensions are the same as those for the LH and SH Series

Regarding the mounting dimensions, such as the mounting height, mounting width, mounting hole diameter/pitch of the linear guide, etc., the mounting dimensions of the NH Series remain the same as those of the conventional LH series and SH series. So, the new NH Series linear guides can be used without making any design changes.

(4) High self-aligning capability (rolling direction)

Same as the DF combination in angular contact bearings, self-aligning capability is high because the cross point of the contact lines of balls and grooves comes inside, and thus reducing moment rigidity.

This increases the capacity to absorb errors in installation.

Note For customers who have used the former LH or SH series, NH series is recommended as a substitute. Please confirm the correlation between NH series and former ones on the comparative table at A329.

(5) High load carrying capacity in vertical direction

The contact angle is set at 50 degrees, and thus increasing load carrying capacity as well as rigidity in vertical direction.

(6) High resistance against impact load

The bottom ball groove is formed in Gothic arch and the center of the top and bottom grooves are offset as shown in **Fig. 2**. The vertical load is generally carried by the top ball rows, where balls are contacting at two points. Because of this design, the bottom ball rows will carry load when a large impact load is applied vertically as shown in **Fig. 3**. This assures high resistance to the impact load.

(7) High accuracy

As shown in **Fig. 4**, fixing the master rollers to the ball grooves is easy thanks to the Gothic arch groove. This makes easy and accurate measuring of ball grooves.

(8) Easy to handle, and designed with safety in mind.

Balls are retained in the retainer, therefore they do not fall out when the ball slide is withdrawn from the rail.

(9) Abundant models and sizes

Each size of NH Series has various models of ball slides, rendering the linear guide available for numerous uses.

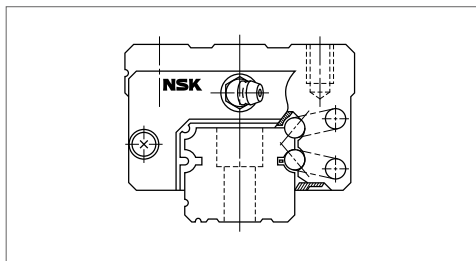


Fig. 1 NH Series

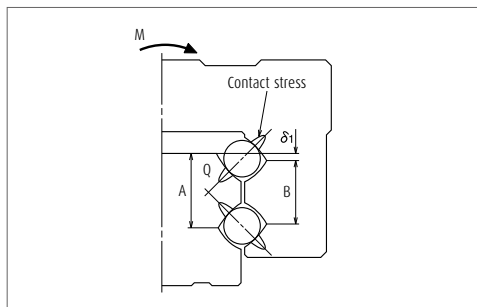


Fig. 2 Enlarged illustration of the offset Gothic arch groove

(10) Fast delivery

Lineup of random-matching rails and ball slides supports and facilitates fast delivery.

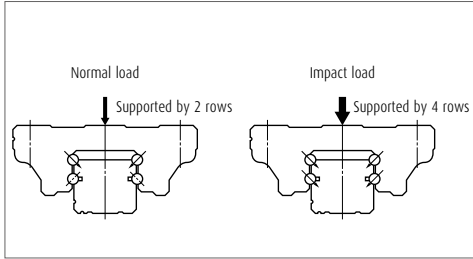


Fig. 3 When load is applied

High precision grade and medium preload types are also available in random matching. (Special high-carbon steel products)

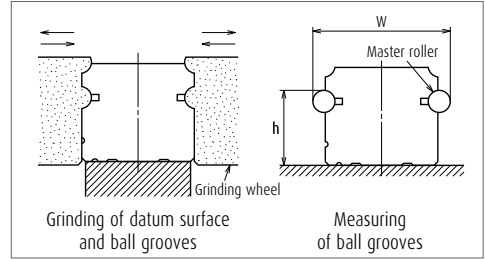


Fig. 4 Rail grinding and measuring

2. Ball slide shape

Ball slide Model	Shape/installation method	Type	
		High-load type	Super-high-load type
		Standard	Long
AN BN		AN 	BN
AL BL		AL 	BL
EM GM		EM 	GM

A-5-1.1 NH Series

3. Accuracy and preload

(1) Running parallelism of ball slide

Table 1

Unit: μm

Rail over all length (mm) over or less		Preloaded assembly (not random matching)					Random-matching type	
		Ultra precision P3	Super precision P4	High precision P5	Precision grade P6	Normal grade PN	High precision PH	Normal grade PC
- 50		2	2	2	4.5	6	2	6
50 - 80		2	2	3	5	6	3	6
80 - 125		2	2	3.5	5.5	6.5	3.5	6.5
125 - 200		2	2	4	6	7	4	7
200 - 250		2	2.5	5	7	8	5	8
250 - 315		2	2.5	5	8	9	5	9
315 - 400		2	3	6	9	11	6	11
400 - 500		2	3	6	10	12	6	12
500 - 630		2	3.5	7	12	14	7	14
630 - 800		2	4.5	8	14	16	8	16
800 - 1000		2.5	5	9	16	18	9	18
1 000 - 1 250		3	6	10	17	20	10	20
1 250 - 1 600		4	7	11	19	23	11	23
1 600 - 2 000		4.5	8	13	21	26	13	26
2 000 - 2 500		5	10	15	22	29	15	29
2 500 - 3 150		6	11	17	25	32	17	32
3 150 - 4 000		9	16	23	30	34	23	34

(2) Accuracy standard

The preloaded assembly has five accuracy grades; Ultra precision P3, Super precision P4, High precision P5, Precision P6 and Normal PN grades, while the random-matching type has High precision PH and Normal PC grade.

› Tolerance of preloaded assembly

Table 2

Unit: μm

Characteristics	Accuracy grade	Ultra precision P3	Super precision P4	High precision P5	Precision grade P6	Normal grade PN
Mounting height H		± 10	± 10	± 20	± 40	± 80
Variation of H (All ball slides on a set of rails)		3	5	7	15	25
Mounting width W_2 or W_3		± 15	± 15	± 25	± 50	± 100
Variation of W_2 or W_3 (All ball slides on reference rail)		3	7	10	20	30
Running parallelism of surface C to surface A Running parallelism of surface D to surface B		Shown in Table 1, Fig. 5 and Fig. 6				

› Tolerance of random-matching type

Table 3

Unit: μm

Accuracy grade	Model No.	High precision grade PH		Normal grade PC	
		NH15, 20, 25, 30, 35	NH45, 55, 65	NH15, 20, 25, 30, 35	NH45, 55, 65
Characteristics					
Mounting height H		± 20	± 30	± 20	± 30
Variation of mounting height H		15 ⁽¹⁾ 30 ⁽²⁾	20 ⁽¹⁾ 35 ⁽²⁾	15 ⁽¹⁾ 30 ⁽²⁾	20 ⁽¹⁾ 35 ⁽²⁾
Mounting width W_2 or W_3		± 30	± 35	± 30	± 35
Variation of mounting width W_2 or W_3		25	30	25	30
Running parallelism of surface C to surface A Running parallelism of surface D to surface B		See Table 1, Fig. 5 and Fig. 6			

Notes ① Variation on the same rail ② Variation on multiple rails

(3) Combinations of accuracy and preload

Table 4

		Accuracy grade						
		Ultra precision	Super precision	High precision	Precision grade	Normal grade	High precision	Normal grade
Without NSK K1 lubrication unit		P3	P4	P5	P6	PN	PH	PC
With NSK K1 lubrication unit		K3	K4	K5	K6	KN	KH	KC
With NSK K1 for food and medical equipment		F3	F4	F5	F6	FN	FH	FC
Preload	Fine clearance Z0	○	○	○	○	○	—	—
	Slight preload Z1	○	○	○	○	○	—	—
	Medium preload Z3	○	○	○	○	—	—	—
	Random-matching type with fine clearance ZT	—	—	—	—	—	—	○
	Random-matching type with slight preload ZZ	—	—	—	—	—	○	○
	Random-matching type with medium preload ZH	—	—	—	—	—	○	○

(4) Assembled accuracy

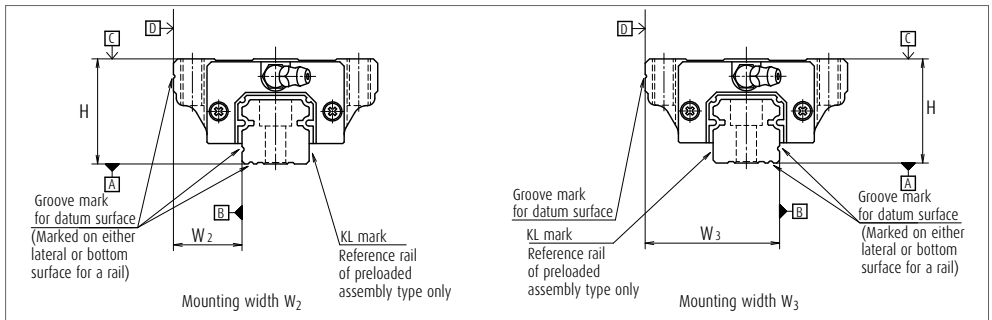


Fig. 5 Special high carbon steel

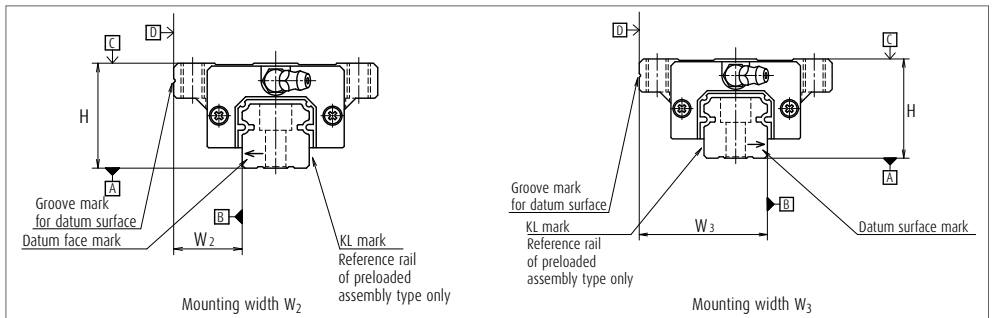


Fig. 6 Stainless steel

A-5-1.1 NH Series

(5) Preload and rigidity

We offer six levels of preload: Slight preload Z1, Medium preload Z3 and Fine clearance Z0, along with random-matching type of Medium preload ZH, Slight preload ZZ and Fine clearance ZI.

› Preload and rigidity of preloaded assembly

Table 5

Model No.		Preload (N)		Rigidity (N/ μ m)			
				Vertical direction		Lateral direction	
		Slight preload (Z1)	Medium preload (Z3)	Slight preload (Z1)	Medium preload (Z3)	Slight preload (Z1)	Medium preload (Z3)
High-load type	NH15 AN, EM	78	490	137	226	98	186
	NH20 AN, EM	147	835	186	335	137	245
	NH25 AL, AN, EM	196	1 270	206	380	147	284
	NH30 AL, AN	245	1 570	216	400	157	294
	NH30 EM	294	1 770	265	480	186	355
	NH35 AL, AN, EM	390	2 350	305	560	216	390
	NH45 AL, AN, EM	635	3 900	400	745	284	540
	NH55 AL, AN, EM	980	5 900	490	910	345	645
Super-high-load type	NH65 AN, EM	1 470	8 900	580	1 070	400	755
	NH15 BN, GM	98	685	196	345	137	284
	NH20 BN, GM	196	1 080	265	480	196	355
	NH25 BL, BN, GM	245	1 570	294	560	216	400
	NH30 BL, BN, GM	390	2 260	360	665	265	480
	NH35 BL, BN, GM	490	2 940	430	795	305	570
	NH45 BL, BN, GM	785	4 800	520	960	370	695
	NH55 BL, BN, GM	1 180	7 050	635	1 170	440	835
	NH65 BN, GM	1 860	11 300	805	1 480	550	1 040

Note Clearance for Fine clearance Z0 is 0 to 3 μ m. Therefore, preload is zero. However, Z0 of PN grade is 0 to 15 μ m.

› Clearance and preload of random-matching type

Table 6

Model No.	Fine clearance ZI	Slight preload ZZ	Medium preload ZH
NH15	-4 - 15	-4 - 0	-7 - -3
NH20		-5 - 0	-8 - -3
NH25		-5 - 0	-9 - -4
NH30		-7 - 0	-12 - -5
NH35	-5 - 15	-7 - 0	-12 - -5
NH45		-7 - 0	-14 - -7
NH55		-9 - 0	-18 - -9
NH65		-9 - 0	-19 - -10

Unit : μ m

Note Minus sign denotes that a value is an amount of preload (elastic deformation of balls).

4. Maximum rail length

Table 7 shows the limitations of rail length (maximum length). However, the limitations vary by accuracy grades.

Table 7 Length limitations of rails

Series	Material \ Size	Unit : mm							
		15	20	25	30	35	45	55	65
NH	Special high carbon steel	2 980	3 960	3 960	4 000	4 000	3 990	3 960	3 900
	Stainless steel	1 800	3 500	3 500	3 500				

Note Rails can be butted if user requirement exceeds the rail length shown in the table. Please consult NSK.

5. Installation

(1) Permissible values of mounting error

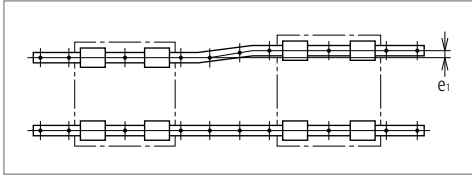


Fig. 7

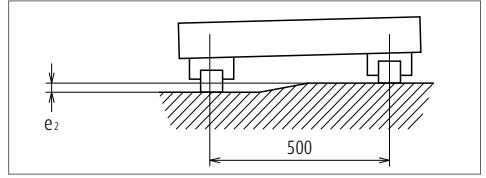


Fig. 8

Table 8

Unit : μm

Value	Preload	Model No.							
		NH15	NH20	NH25	NH30	NH35	NH45	NH55	NH65
Permissible values of parallelism in two rails e_1	Z0, ZI	22	30	40	45	55	65	80	110
	Z1, ZZ	18	20	25	30	35	45	55	70
	Z3, ZH	13	15	20	25	30	40	45	60
Permissible values of parallelism (height) in two rails e_2	Z0, ZI	375 $\mu\text{m}/500\text{ mm}$							
	Z1, ZZ, Z3, ZH	330 $\mu\text{m}/500\text{ mm}$							

(2) Shoulder height of the mounting surface and corner radius r




Fig. 9 Shoulder for the rail datum face




Fig. 10 Shoulder for the ball slide datum face

Table 9

Unit : mm

Model No.	Corner radius (maximum)		Shoulder height	
	r_a	r_b	H'	H''
NH15	0.5	0.5	4	4
NH20	0.5	0.5	4.5	5
NH25	0.5	0.5	5	5
NH30	0.5	0.5	6	6
NH35	0.5	0.5	6	6
NH45	0.7	0.7	8	8
NH55	0.7	0.7	10	10
NH65	1	1	11	11

6. Maximum allowable speed

An indication of the standard maximum allowable speed aiming at 10,000km operation with NH series under normal conditions is shown in Table 10. However, the maximum allowable speed can be affected by accuracy of installation, operating temperature, external load, etc. If the operation is made exceeding the permissible distance and speed, please consult NSK.

Table 10 Maximum allowable speed

Unit : m/min

Series	15	20	25	30	30	35	45	55
Size								
NH			300				200	150

A-5-1.1 NH Series

7. Lubrication components

Refer to page A38 and D13 for the lubrication of linear guides.

(1) Types of lubrication accessories

Fig. 11 and Table 11 show grease fittings and tube fittings.

We provide lubrication accessories with extended thread body length (L) for the addition of dust-proof accessories such as NSK K1 lubrication unit, double seal and protector.

We provide a suitable lubrication accessory for the special requirement on dust-proof accessories.

Consult NSK for a lubrication accessory with extended length of thread body for your convenience of replenishing lubricant.

When you require stainless lubrication accessories, please ask NSK.

Table 11 Grease fitting and tube fitting Unit : mm

Model No.	Dust proof specification	Dimension L		
		Grease fitting / Drive-in type	Tube fitting	
			SF Type	LF Type
NH15	Standard	5	-	-
	With NSK K1	10	-	-
	Double seal	*	-	-
	Protector	*	-	-
NH20	Standard	5	-	-
	With NSK K1	12	-	-
	Double seal	10	-	-
	Protector	10	-	-
NH25	Standard	5	5	5
	With NSK K1	12	12	12
	Double seal	10	9	9
	Protector	10	9	9
NH30	Standard	5	6	6
	With NSK K1	14	12	13
	Double seal	12	10	11
	Protector	12	10	11
NH35	Standard	5	6	6
	With NSK K1	14	12	13
	Double seal	12	10	11
	Protector	12	10	11
NH45	Standard	8	13.5	17
	With NSK K1	18	20	21.5
	Double seal	14	16	17
	Protector	14	13.5	17
NH55	Standard	8	13.5	17
	With NSK K1	18	20	21.5
	Double seal	14	16	17
	Protector	14	13.5	17
NH65	Standard	8	13.5	17
	With NSK K1	20	22	25.5
	Double seal	16	18	19
	Protector	16	13.5	17

*) A connector is required for this model. Please contact NSK for grease fittings..

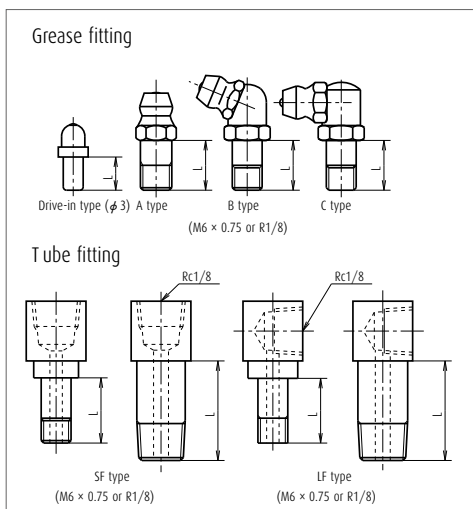


Fig. 11 Grease fitting and tube fitting

(2) Mounting position of lubrication accessories

The standard position of grease fittings is the end face of ball slide. They can be optionally mounted on the side of the end cap. (Fig. 12)

Please consult NSK for installation of grease or tube fittings to the ball slide body or side of end cap.

When using a piping unit with thread of M6 × 1, you require a connector to connect to a grease fitting mounting hole with M6 × 0.75. The connector is available from NSK.

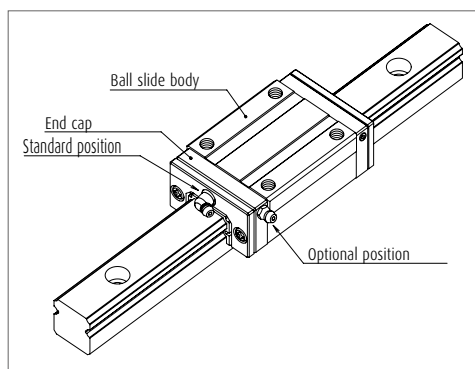


Fig. 12 Mounting position of lubrication accessories

8. Dust proof components

(1) Standard specification

The NH Series can be readily used as they have a dust protection means for normal conditions. As the standard equipment, the ball slides have an end seal on both ends, and bottom seals at the bottom.

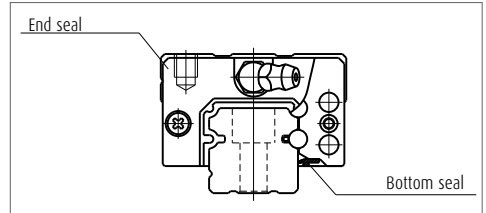


Fig. 13

Table 12 Seal friction per ball slide (maximum value)

Unit : N

Size \ Series	15	20	25	30	35	45	55	65
NH	8	9	10	10	12	17	22	29

(2) NSK K1 lubrication unit

Table 13 shows the dimension of linear guides equipped with the NSK K1 lubrication unit.

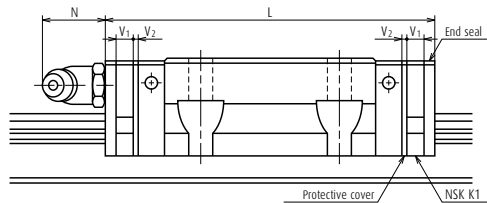


Table 13

Unit : mm

Model No.	Ball slide length	Ball slide model	Standard ball slide length	Ball slide length installed with two NSK K1 L	Per NSK K1 thickness V ₁	Protective cover thickness V ₂	Protruding area of the grease fitting N
NH15	Standard	AN, EM	55	65.6	4.5	0.8	(5)
	Long	BN, GM	74	84.6	4.5	0.8	(5)
NH20	Standard	AN, EM	69.8	80.4	4.5	0.8	(14)
	Long	BN, GM	91.8	102.4	4.5	0.8	(14)
NH25	Standard	AL, AN, EM	79.0	90.6	5.0	0.8	(14)
	Long	BL, BN, GM	107	118.6	5.0	0.8	(14)
NH30	Standard	AL, AN	85.6	97.6	5.0	1.0	(14)
	Standard	EM	98.6	110.6	5.0	1.0	(14)
	Long	BL, BN, GM	124.6	136.6	5.0	1.0	(14)
NH35	Standard	AL, AN, EM	109	122	5.5	1.0	(14)
	Long	BL, BN, GM	143	156	5.5	1.0	(14)
NH45	Standard	AL, AN, EM	139	154	6.5	1.0	(15)
	Long	BL, BN, GM	171	186	6.5	1.0	(15)
NH55	Standard	AL, AN, EM	163	178	6.5	1.0	(15)
	Long	BL, BN, GM	201	216	6.5	1.0	(15)
NH65	Standard	AN, EM	193	211	8.0	1.0	(16)
	Long	BN, GM	253	271	8.0	1.0	(16)

Notes 1) NSK K1 for food and medical equipments are available for NH15 to NH35.

2) Ball slide length equipped with NSK K1 = (Standard ball slide length) + (Thickness of NSK K1, V₁ × Number of NSK K1) + (Thickness of the protective cover, V₂ × 2)

A-5-1.1 NH Series

(3) Double seal

Use a double seal set as showing in **Table 14**, when installing an extra seal to completed standard products. (**Fig. 14**)

When installing a grease fitting after the installation of double seals, a connector as showing in **Fig.14** is required.

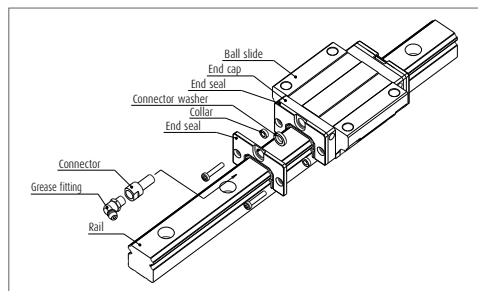


Fig. 14 Double seal

(4) Protector

Use a protector set as showing **Table 14**, when installing a protector to completed standard products. (**Fig.15**)

When installing a grease fitting after the installation of protectors, a connector as showing in **Fig.15** is required.

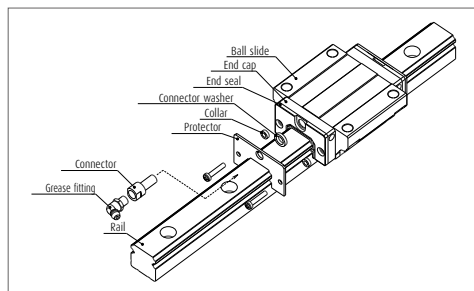


Fig. 15 Protector

Table 14 Double-seal set

Model No.	Reference No.		Increased thickness V_3 (mm)
	Without connector	With connector	
NH15	LH15WS-01	*	2.5
NH20	LH20WS-01	LH20WSC-01	2.5
NH25	LH25WS-01	LH25WSC-01	2.8
NH30	LH30WS-01	LH30WSC-01	3.6
NH35	LH35WS-01	LH35WSC-01	3.6
NH45	LH45WS-01	LH45WSC-01	4.3
NH55	LH55WS-01	LH55WSC-01	4.3
NH65	LH65WS-01	LH65WSC-01	4.9

Table 15 Protector set

Model No.	Reference No.		Increased thickness V_4 (mm)
	Without connector	With connector	
NH15	LH15PT-01	*	2.7
NH20	LH20PT-01	LH20PTC-01	2.9
NH25	LH25PT-01	LH25PTC-01	3.2
NH30	LH30PT-01	LH30PTC-01	4.2
NH35	LH35PT-01	LH35PTC-01	4.2
NH45	LH45PT-01	LH45PTC-01	4.9
NH55	LH55PT-01	LH55PTC-01	4.9
NH65	LH65PT-01	LH65PTC-01	5.5

*) For installation of a connector to a drive-in type grease fitting, contact NSK.

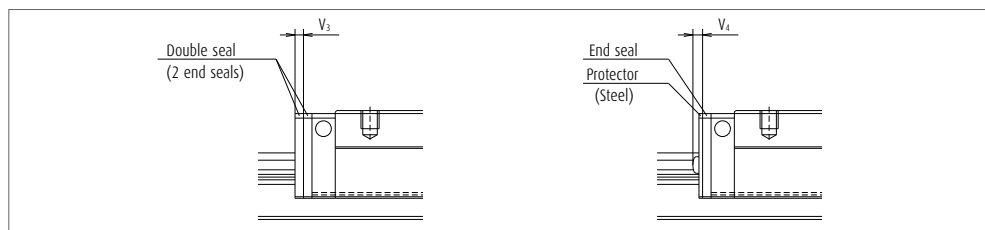


Fig. 16

(5) Cap to plug the rail mounting bolt hole

Table 16 Caps to plug rail bolt hole

Modell No.	Bolt to secure rail	Cap reference No.	Quantity/case
NH15	M4	LG-CAP/M4	20
NH20	M5	LG-CAP/M5	20
NH25	M6	LG-CAP/M6	20
NH30, NH35	M8	LG-CAP/M8	20
NH45	M12	LG-CAP/M12	20
NH55	M14	LG-CAP/M14	20
NH65	M16	LG-CAP/M16	20

(6) Inner seal

Inner seal is only available for models shown in the table below.

Table 17

Series	Model No.
NH	NH20, NH25, NH30, NH35, NH45, NH55, NH65

(7) Bellows

- › A bellows fastener kit, which includes one of bellows faster, two of M₁ set screws, two of M₂ set screws, and two collars for M₂ set screws as showing **Fig. 7.7** on page A55, is supplied with ellows for the ends.
- › Middle bellows are supplied with four set screws and four collars.
- › Use a bellows fastener kit as showing **Table 18**, when installing bellows to completed standard products.
- › When NSK K1, double seals or protectors are used, the set screws of bellows fastener kit are unable to use.
- › Please contact NSK for details.
- › Bellows fastener is available only for the horizontal mounting positions. For other mounting positions, sliding plate is required (see **Fig. 7.10** on page A56).
- › For fixing to the rail, make tap holes to the rail end surface. Fix the bellows mounting plate to the rail end surface through these tap holes by using a machine screw. NSK processes a tap hole to the rail end face when ordered with a linear guide.

Table 18 Bellows fastner kit reference No.

Modell No.	Kit reference No.
NH20	LH20FS-01
NH25	LH25FS-01
NH30	LH30FS-01
NH35	LH35FS-01
NH45	LH45FS-01
NH55	LH55FS-01
NH65	LH65FS-01

A-5-1.1 NH Series

Dimension tables of bellows NH Series

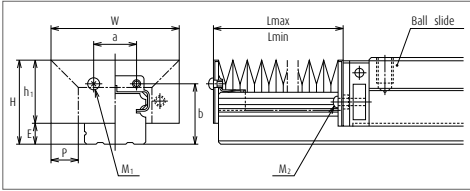


Fig. 17 Dimensions of bellows

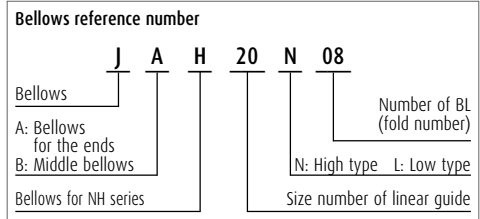


Table 19 Dimensions of bellows

Unit : mm

Model No.	H	h ₁	E	W	P	a	b	BL minimum length	M ₁ Tap × depth	M ₂ Tap × depth
JAH20N	29.5	24.5	5	48	10	13	22	17	M3 × 5	M2.5 × 16
JAH25L	35	28	7	51	10	16	26	17	M3 × 5	M3 × 18
JAH25N	39	32	7	61	15	16	26	17	M3 × 5	M3 × 18
JAH30L	41	32	9	60	12	18	31	17	M4 × 6	M4 × 22
JAH30N	44	35	9	66	15	18	31	17	M4 × 6	M4 × 22
JAH35L	47	37.5	9.5	72	15	24	34	17	M4 × 6	M4 × 23
JAH35N	54	44.5	9.5	82	20	24	34	17	M4 × 6	M4 × 23
JAH45L	59	45	14	83	15	32	44.5	17	M5 × 8	M5 × 28
JAH45N	69	55	14	103	25	32	44.5	17	M5 × 8	M5 × 28
JAH55L	69	54	15	101	20	40	50.5	17	M5 × 8	M5 × 30
JAH55N	79	64	15	121	30	40	50.5	17	M5 × 8	M5 × 30
JAH65N	89	73	16	131	30	48	61	17	M6 × 8	M6 × 35

Table 20 Numbers of folds (BL) and lengths of bellows

Unit : mm

Model No.	Number of BL	2	4	6	8	10	12	14	16	18	20
		L _{min}	34	68	102	136	170	204	238	272	306
JAH20N	Stroke	106	212	318	424	530	636	742	848	954	1 060
	L _{max}	140	280	420	560	700	840	980	1 120	1 260	1 400
	L _{min}	106	212	318	424	530	636	742	848	954	1 060
JAH25L	Stroke	140	280	420	560	700	840	980	1 120	1 260	1 400
	L _{max}	176	352	528	704	880	1 056	1 232	1 408	1 584	1 760
	L _{min}	134	268	402	536	670	804	938	1 072	1 206	1 340
JAH30L	Stroke	168	336	504	672	840	1 008	1 176	1 344	1 512	1 680
	L _{max}	176	352	528	704	880	1 056	1 232	1 408	1 584	1 760
	L _{min}	210	420	630	840	1 050	1 260	1 470	1 680	1 890	2 100
JAH35L	Stroke	176	352	528	704	880	1 056	1 232	1 408	1 584	1 760
	L _{max}	210	420	630	840	1 050	1 260	1 470	1 680	1 890	2 100
	L _{min}	246	492	738	984	1 230	1 476	1 722	1 968	2 214	2 460
JAH45L	Stroke	280	560	840	1 120	1 400	1 680	1 960	2 240	2 520	2 800
	L _{max}	176	352	528	704	880	1 056	1 232	1 408	1 584	1 760
	L _{min}	210	420	630	840	1 050	1 260	1 470	1 680	1 890	2 100
JAH45N	Stroke	316	632	948	1 264	1 580	1 896	2 212	2 528	2 844	3 160
	L _{max}	350	700	1 050	1 400	1 750	2 100	2 450	2 800	3 150	3 500
	L _{min}	246	492	738	984	1 230	1 476	1 722	1 968	2 214	2 460
JAH55L	Stroke	280	560	840	1 120	1 400	1 680	1 960	2 240	2 520	2 800
	L _{max}	386	772	1 158	1 544	1 930	2 316	2 702	3 088	3 474	3 860
	L _{min}	420	840	1 260	1 680	2 100	2 520	2 940	3 360	3 780	4 200
JAH65N	Stroke	386	772	1 158	1 544	1 930	2 316	2 702	3 088	3 474	3 860
	L _{max}	420	840	1 260	1 680	2 100	2 520	2 940	3 360	3 780	4 200

Note The values of an odd number BL quantity (3, 5, 7, ...) can be obtained by adding two values of even number BL on the both sides, then by dividing the sum by 2.



A-5-1.1 NH Series

9. Reference number

Reference numbers shall be set to individual NSK linear guide when its specifications are finalized, and it is indicated on its specification drawing.

Please specify the reference number, except design serial number, to identify the product when ordering, requiring estimates, or inquiring about specifications from NSK.

(1) Reference number for preloaded assembly

	NH	30	1200	AN	C	2	-**	P5	3	
Series name									Preload code (See page A116)	
Size									0: Z0, 1: Z1, 3: Z3	
Rail length (mm)									Accuracy code (See Table 22)	
Ball slide shape code (See page A114)									Design serial number	
Material/surface treatment code (See Table 21)									Added to the reference number.	
C: Special high carbon steel (NSK standard), K: Stainless steel									Number of ball slides per rail	

(2) Reference number for random-matching type

Ball slide	NAH	30	AN	S	Z	-K	
Random-matching ball slide series code							Option code
NAH: NH Series random-matching ball slide							-K: Equipped with NSK K1
Size							-F: Fluoride low temperature chrome plating+AS2 grease
Ball slide shape code (See page A114)							-F50: Fluoride low temperature chrome plating+LG2 grease
							Preload code
							No code: Fine clearance, Z: Slight preload, H: Medium preload
							Material code
							No code: Special high carbon steel (NSK standard), S: Stainless steel

Rail	N1H	30	1200	L	C	N	-**	PC	Z
Random-matching rail series code									Preload code (See page A116)
N1H: NH Series random-matching rail									T: Fine clearance
Size									Z: Slight preload (common rail for slight or medium preload)
Rail length (mm)									Accuracy code
Rail shape code: L									PH: High precision grade random-matching type
L: Standard									PC: Normal grade random-matching type
Material/surface treatment code (See Table 21)									Design serial number
									Added to the reference number.
									*Butting rail specification
									N: Non-butting, L: Butting specification
									*Please consult with NSK for butting rail specification.

The reference number coding for the assembly of random-matching type is the same as that of the preloaded assembly. However, only preload codes of "fine clearance T", "slight preload Z" and "medium preload H" are available (refer to page A116). Click!Speedy™ NSK Linear Guide Quick Delivery System uses a new numbering system. For details, please refer to the Click!Speedy general catalog CAT. No. E3191.

Table 21 Material/surface treatment code

Code	Description
C	Special high carbon steel (NSK standard)
K	Stainless steel (NH15 to NH30 only)
D	Special high carbon steel with surface treatment
H	Stainless steel with surface treatment
Z	Other, special

Note High-precision grade and medium preload of random-matching type are not available in stainless steel.

Table 22 Accuracy code


Accuracy	Standard (Without NSK K1)	With NSK K1	With NSK K1 for food and medical equipment
Ultra precision grade	P3	K3	F3
Super precision grade	P4	K4	F4
High precision grade	P5	K5	F5
Precision grade	P6	K6	F6
Normal grade	PN	KN	FN
High precision grade (random-matching type)	PH	KH	FH
Normal grade (random-matching type)	PC	KC	FC

Note Refer to pages A38 and A61 for NSK K1 lubrication unit.


A-5-1.1 NH Series

10. Dimensions


NH-AN (High-load type / Standard)
NH-BN (Super-high-load type / Long)

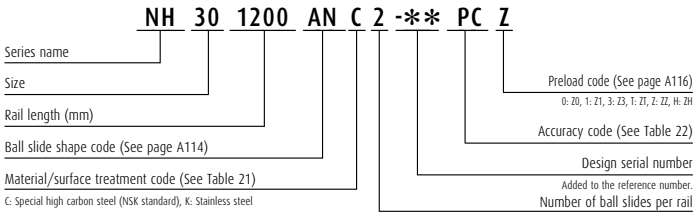


Front view of AN and BN types



Side view of AN type

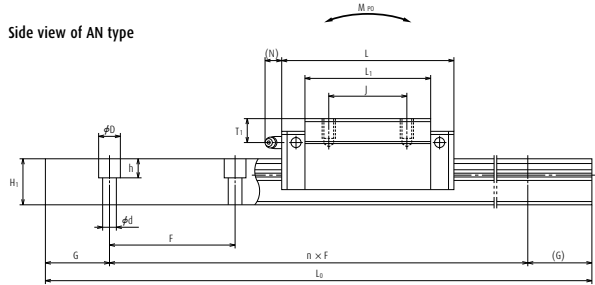

Side view of BN type



Model No.	Assembly			Ball slide											Width	Height	
	Height		Width	Length	Mounting hole			L ₁	K	T	Grease fitting			W ₁			H ₁
	H	E			B	J	M × pitch × ℓ				Hole size	T ₁	N				
NH15AN	28	4.6	9.5	34	55	26	26	M4×0.7×6	39	23.4	8	φ 3	8.5	3.3	15	15	
NH15BN	28	4.6	9.5	34	74	26	26	M4×0.7×6	58	23.4	8	φ 3	8.5	3.3	15	15	
NH20AN	30	5	12	44	69.8	32	36	M5×0.8×6	50	25	12	M6×0.75	5	11	20	18	
NH20BN	30	5	12	44	91.8	32	50	M5×0.8×6	72	25	12	M6×0.75	5	11	20	18	
NH25AN	40	7	12.5	48	79	35	35	M6×1×9	58	33	12	M6×0.75	10	11	23	22	
NH25BN	40	7	12.5	48	107	35	50	M6×1×9	86	33	12	M6×0.75	10	11	23	22	
NH30AN	45	9	16	60	85.6	40	40	M8×1.25×10	59	36	14	M6×0.75	10	11	28	26	
NH30BN	45	9	16	60	124.6	40	60	M8×1.25×10	98	36	14	M6×0.75	10	11	28	26	
NH35AN	55	9.5	18	70	109	50	50	M8×1.25×12	80	45.5	15	M6×0.75	15	11	34	29	
NH35BN	55	9.5	18	70	143	50	72	M8×1.25×12	114	45.5	15	M6×0.75	15	11	34	29	
NH45AN	70	14	20.5	86	139	60	60	M10×1.5×17	105	56	17	Rc1/8	20	13	45	38	
NH45BN	70	14	20.5	86	171	60	80	M10×1.5×17	137	56	17	Rc1/8	20	13	45	38	
NH55AN	80	15	23.5	100	163	75	75	M12×1.75×18	126	65	18	Rc1/8	21	13	53	44	
NH55BN	80	15	23.5	100	201	75	95	M12×1.75×18	164	65	18	Rc1/8	21	13	53	44	
NH65AN	90	16	31.5	126	193	76	70	M16×2×20	147	74	23	Rc1/8	19	13	63	53	
NH65BN	90	16	31.5	126	253	76	120	M16×2×20	207	74	23	Rc1/8	19	13	63	53	

Notes 1) External appearance of stainless steel ball slides differs from those of carbon steel ball slides.

Reference number for ball slide of random-matching type

Ball slide

NAH 30 AN S Z -K

Random-matching ball slide series code

NAH: NH Series random-matching ball slide

Size

Ball slide shape code (See page A114)

Option code

-K: Equipped with NSK K1

-F: Fluoride low temperature chrome plating+AS2 grease

-F5D: Fluoride low temperature chrome plating+LG2 grease


Preload code

No code: Fine clearance, Z: Slight preload, H: Medium preload


Material code

No code: Special high carbon steel (NSK standard), S: Stainless steel


AN and BN types



AN type



BN type



Reference number for rail of random-matching type

Rail

N1H 30 1200 L C N - PC Z**

Random-matching rail series code

N1H: NH Series random-matching rail

Size

Rail length (mm)

Rail shape code: L

L: Standard

Material/surface treatment code (See Table 21)

Preload code (See page A116)

Z: Slight preload (common rail for medium preload)

Accuracy code

PH: High precision grade, PC: Normal grade


Design serial number

Added to the reference number.

*Butting rail specification

N: Non-butting, L: Butting specification

*Please consult with NSK for butting rail specification.

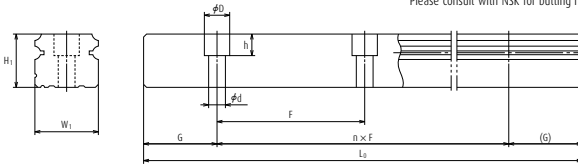

Unit: mm

Rail				Basic load rating								Weight	
Pitch F	Mounting bolt hole d × D × h	G	Maximum length L _{0max} () for stainless	2) Dynamic		Static	M _{RO}	Static moment (N·m)				Ball slide (kg)	Rail (kg/m)
				C ₅₀ (N)	C ₁₀₀ (N)	C ₀ (N)		M _{PO}		M _{YO}			
								One slide	Two slides	One slide	Two slides		
60	4.5×7.5×5.3	20	2 980	14 200	11 300	20 700	108	94.5	575	79.5	480	0.18	1.6
60	4.5×7.5×5.3	20	(1 800)	18 100	14 400	32 000	166	216	1 150	181	965	0.26	1.6
60	6×9.5×8.5	20	3 960	23 700	18 800	32 500	219	185	1 140	155	955	0.33	2.6
60	6×9.5×8.5	20	(3 500)	30 000	24 000	50 500	340	420	2 230	355	1 870	0.48	2.6
60	7×11×9	20	3 960	33 500	26 800	46 000	360	320	1 840	267	1 540	0.55	3.6
60	7×11×9	20	(3 500)	45 500	36 500	71 000	555	725	3 700	610	3 100	0.82	3.6
80	9×14×12	20	4 000	41 000	32 500	51 500	490	350	2 290	292	1 920	0.77	5.2
80	9×14×12	20	(3 500)	61 000	48 500	91 500	870	1 030	5 600	865	4 700	1.3	5.2
80	9×14×12	20	4 000	62 500	49 500	80 500	950	755	4 500	630	3 800	1.5	7.2
80	9×14×12	20	4 000	81 000	64 500	117 000	1 380	1 530	8 350	1 280	7 000	2.1	7.2
105	14×20×17	22.5	3 990	107 000	84 500	140 000	2 140	1 740	9 750	1 460	8 150	3.0	12.3
105	14×20×17	22.5	3 990	131 000	104 000	187 000	2 860	3 000	15 600	2 520	13 100	3.9	12.3
120	16×23×20	30	3 960	158 000	125 000	198 000	3 600	3 000	16 300	2 510	13 700	4.7	16.9
120	16×23×20	30	3 960	193 000	153 000	264 000	4 850	5 150	26 300	4 350	22 100	6.1	16.9
150	18×26×22	35	3 900	239 000	190 000	281 000	6 150	4 950	27 900	4 150	23 400	7.7	24.3
150	18×26×22	35	3 900	310 000	246 000	410 000	8 950	10 100	51 500	8 450	43 500	10.8	24.3

2) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)


C₅₀: the basic dynamic load rating for 50 km rated fatigue life C₁₀₀: the basic dynamic load rating for 100 km rated fatigue life

The basic static load rating shows static permissible load.


3) High-precision grade and medium preload of random-matching type are available for high-carbon steel products.

A-5-1.1 NH Series


NH-AL (High-load type / Standard)
NH-BL (Super-high-load type / Long)

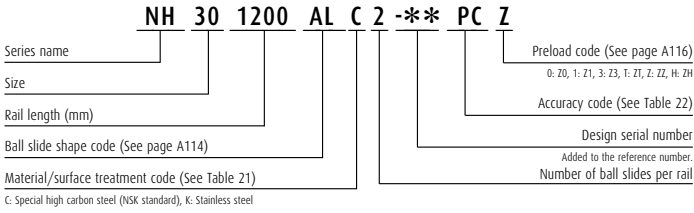


Front view of AL and BL types

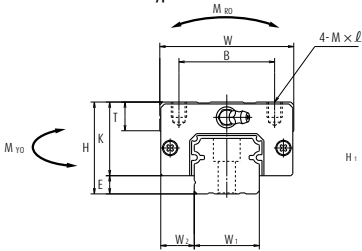

Side view of AL type

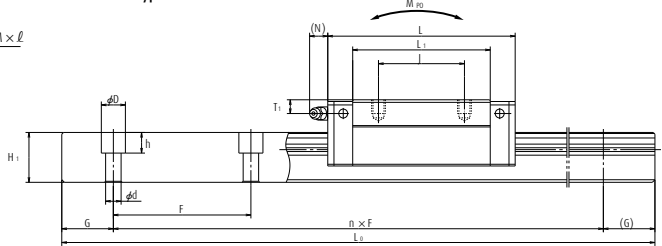

Side view of BL type



Model No.	Assembly			Ball slide											Width	Height		
	Height	E	W ₂	Width	Length	Mounting hole			L ₁	K	T	Grease fitting					W ₁	H ₁
						B	J	M × pitch × l				Hole size	T ₁	N				
NH25AL	36	7	12.5	48	79	35	35	M6×1×6	58	29	12	M6×0.75	6	11	23	22		
NH25BL	36	7	12.5	48	107	35	50	M6×1×6	86	29	12	M6×0.75	6	11	23	22		
NH30AL	42	9	16	60	85.6	40	40	M8×1.25×8	59	33	14	M6×0.75	7	11	28	26		
NH30BL	42	9	16	60	124.6	40	60	M8×1.25×8	98	33	14	M6×0.75	7	11	28	26		
NH35AL	48	9.5	18	70	109	50	50	M8×1.25×8	80	38.5	15	M6×0.75	8	11	34	29		
NH35BL	48	9.5	18	70	143	50	72	M8×1.25×8	114	38.5	15	M6×0.75	8	11	34	29		
NH45AL	60	14	20.5	86	139	60	60	M10×1.5×10	105	46	17	Rc1/8	10	13	45	38		
NH45BL	60	14	20.5	86	171	60	80	M10×1.5×10	137	46	17	Rc1/8	10	13	45	38		
NH55AL	70	15	23.5	100	163	75	75	M12×1.75×13	126	55	15	Rc1/8	11	13	53	44		
NH55BL	70	15	23.5	100	201	75	95	M12×1.75×13	164	55	15	Rc1/8	11	13	53	44		

Notes 1) External appearance of stainless steel ball slides differs from those of carbon steel ball slides.

Reference number for ball slide of random-matching type

Ball slide

NAH 30 AL S Z -K

Random-matching ball slide series code

NAH: NH Series random-matching ball slide

Size

Ball slide shape code (See page A114)

Option code

-K: Equipped with NSK K1
-F: Fluoride low temperature chrome plating+AS2 grease
-F50: Fluoride low temperature chrome plating+LG2 grease


Preload code

No code: Fine clearance, Z: Slight preload, H: Medium preload


Material code

No code: Special high carbon steel (NSK standard), S: Stainless steel


AL and BL types



AL type



BL type



Reference number for rail of random-matching type

Rail

N1H 30 1200 L C N - PC Z**

Random-matching rail series code

N1H: NH Series random-matching rail

Size

Rail length (mm)

Rail shape code: L

L: Standard

Material/surface treatment code (See Table 21)

Preload code (See page A116)

Z: Slight preload (common rail for medium preload)

Accuracy code

PH: High precision grade

PC: Normal grade


Design serial number

Added to the reference number.

*Butting rail specification

N: Non-butting, L: Butting specification

*Please consult with NSK for butting rail specification.

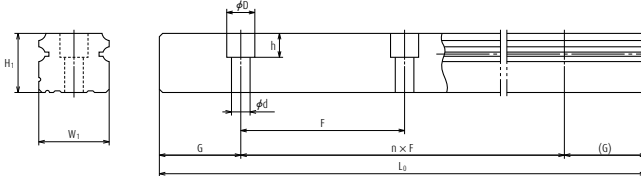

Unit: mm

Rail			Basic load rating							Weight			
Pitch F	Mounting bolt hole d x D x h	G (reference)	Maximum length L _{0max} () for stainless	2) Dynamic		Static	M _{RO}	Static moment (N·m)				Ball slide (kg)	Rail (kg/m)
				[50km] C ₅₀ (N)	[100km] C ₁₀₀ (N)	C ₀ (N)		M _{PO}		M _{YO}			
								One slide	Two slides	One slide	Two slides		
60	7x11x9	20	3 960	33 500	26 800	46 000	360	320	1 840	267	1 540	0.46	3.6
60	7x11x9	20	(3 500)	45 500	36 500	71 000	555	725	3 700	610	3 100	0.69	3.6
80	9x14x12	20	4 000	41 000	32 500	51 500	490	350	2 290	292	1 920	0.69	5.2
80	9x14x12	20	(3 500)	61 000	48 500	91 500	870	1 030	5 600	865	4 700	1.16	5.2
80	9x14x12	20	4 000	62 500	49 500	80 500	950	755	4 500	630	3 800	1.2	7.2
80	9x14x12	20	4 000	81 000	64 500	117 000	1 380	1 530	8 350	1 280	7 000	1.7	7.2
105	14x20x17	22.5	3 990	107 000	84 500	140 000	2 140	1 740	9 750	1 460	8 150	2.2	12.3
105	14x20x17	22.5	3 990	131 000	104 000	187 000	2 860	3 000	15 600	2 520	13 100	2.9	12.3
120	16x23x20	30	3 960	158 000	125 000	198 000	3 600	3 000	16 300	2 510	13 700	3.7	16.9
120	16x23x20	30	3 960	193 000	153 000	264 000	4 850	5 150	26 300	4 350	22 100	4.7	16.9

2) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)


C₅₀: the basic dynamic load rating for 50 km rated fatigue life C₁₀₀: the basic dynamic load rating for 100 km rated fatigue life

The basic static load rating shows static permissible load.


3) High-precision grade and medium preload of random-matching type are available for high-carbon steel products.

A-5-1.1 NH Series


NH-EM (High-load type / Standard)
 NH-GM (Super-high-load type / Long)

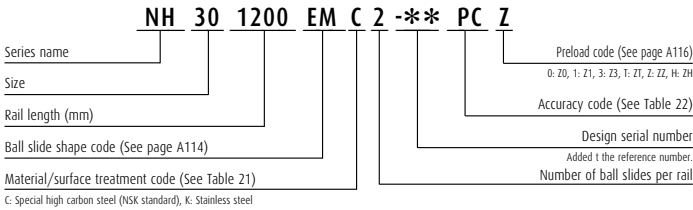


Front view of EM and GM types

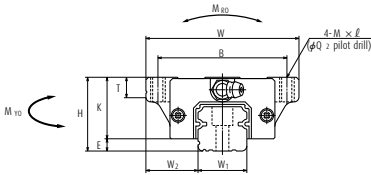

Side view of EM type

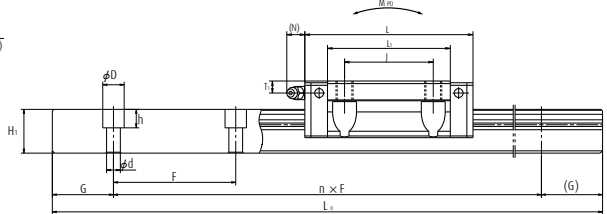

Side view of GM type



Model No.	Assembly			Ball slide													Width	Height		
	Height	E	W ₂	Width	Length	Mounting hole				Q ₂	L ₁	K	T	Grease fitting					W ₁	H ₁
						B	J	M × pitch × ℓ	Hole size					T ₁	N					
NH15EM	24	4.6	16	47	55	38	30	M5×0.8×7	4.4	39	19.4	8	φ 3	4.5	3.3	15	15			
NH15GM	24	4.6	16	47	74	38	30	M5×0.8×7	4.4	58	19.4	8	φ 3	4.5	3.3	15	15			
NH20EM	30	5	21.5	63	69.8	53	40	M6×1×9.5	5.3	50	25	10	M6×0.75	5	11	20	18			
NH20GM	30	5	21.5	63	91.8	53	40	M6×1×9.5	5.3	72	25	10	M6×0.75	5	11	20	18			
NH25EM	36	7	23.5	70	79	57	45	M8×1.25×10	6.8	58	29	11	M6×0.75	6	11	23	22			
NH25GM	36	7	23.5	70	107	57	45	(M8×1.25×11.5)	6.8	86	29	(12)	M6×0.75	6	11	23	22			
NH30EM	42	9	31	90	98.6	72	52	M10×1.5×12	8.6	72	33	11	M6×0.75	7	11	28	26			
NH30GM	42	9	31	90	124.6	72	52	(M10×1.5×14.5)	8.6	98	33	(15)	M6×0.75	7	11	28	26			
NH35EM	48	9.5	33	100	109	82	62	M10×1.5×13	8.6	80	38.5	12	M6×0.75	8	11	34	29			
NH35GM	48	9.5	33	100	143	82	62	M10×1.5×13	8.6	114	38.5	12	M6×0.75	8	11	34	29			
NH45EM	60	14	37.5	120	139	100	80	M12×1.75×15	10.5	105	46	13	Rc1/8	10	13	45	38			
NH45GM	60	14	37.5	120	171	100	80	M12×1.75×15	10.5	137	46	13	Rc1/8	10	13	45	38			
NH55EM	70	15	43.5	140	163	116	95	M14×2×18	12.5	126	55	15	Rc1/8	11	13	53	44			
NH55GM	70	15	43.5	140	201	116	95	M14×2×18	12.5	164	55	15	Rc1/8	11	13	53	44			
NH65EM	90	16	53.5	170	193	142	110	M16×2×24	14.6	147	74	23	Rc1/8	19	13	63	53			
NH65GM	90	16	53.5	170	253	142	110	M16×2×24	14.6	207	74	23	Rc1/8	19	13	63	53			

Notes

- 1) Parenthesized dimensions are for items made of stainless steel.
- 2) External appearance of stainless steel ball slides differs from those of carbon steel ball slides.

Reference number for ball slide of random-matching type

Ball slide

NAH 30 EM S Z -K

Random-matching ball slide series code

NAH: NH Series random-matching ball slide

Size

Ball slide shape code (See page A114)

Option code

-K: Equipped with NSK K1
-F: Fluoride low temperature chrome plating+AS2 grease
-F50: Fluoride low temperature chrome plating+LS2 grease


Preload code

No code: Fine clearance, Z: Slight preload, H: Medium preload


Material code

No code: Special high carbon steel (NSK standard), S: Stainless steel


EM and GM types



EM type



GM type



Reference number for rail of random-matching type

Rail

Random-matching rail series code

N1H: NH Series random-matching rail

Size

Rail length (mm)

Rail shape code: L

L: Standard

Material/surface treatment code (See Table 21)

N1H 30 1200 L C N - PC Z**

Preload code (See page A116)

Z: Slight preload (common rail for medium preload)

Accuracy code

PH: High precision grade

PC: Normal grade


Design serial number

Added to the reference number.

*Butting rail specification

N: Non-butting, L: Butting specification

*Please consult with NSK for butting rail specification.

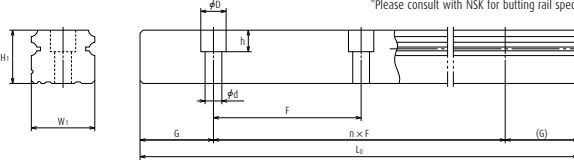

Unit: mm

Rail				Basic load rating								Weight	
Pitch F	Mounting bolt hole d × D × h	G (reference)	Maximum length L _{0max} () for stainless	3) Dynamic		Static	M _{RO}	Static moment (N·m)				Ball slide (kg)	Rail (kg/m)
				[50km] C ₅₀ (N)	[100km] C ₁₀₀ (N)	C ₀ (N)		M _{PO}		M _{VO}			
								One slide	Two slides	One slide	Two slides		
60	4.5×7.5×5.3	20	2 980	14 200	11 300	20 700	108	94.5	575	79.5	480	0.17	1.6
60	4.5×7.5×5.3	20	(1 800)	18 100	14 400	32 000	166	216.0	1 150	181.0	965	0.25	1.6
60	6×9.5×8.5	20	3 960	23 700	18 800	32 500	219	185.0	1 140	155.0	955	0.45	2.6
60	6×9.5×8.5	20	(3 500)	30 000	24 000	50 500	340	420.0	2 230	355.0	1 870	0.65	2.6
60	7×11×9	20	3 960	33 500	26 800	46 000	360	320.0	1 840	267.0	1 540	0.63	3.6
60	7×11×9	20	(3 500)	45 500	36 500	71 000	555	725.0	3 700	610.0	3 100	0.93	3.6
80	9×14×12	20	4 000	47 000	37 500	63 000	600	505.0	3 150	425.0	2 650	1.2	5.2
80	9×14×12	20	(3 500)	61 000	48 500	91 500	870	1 030.0	5 600	865.0	4 700	1.6	5.2
80	9×14×12	20	4 000	62 500	49 500	80 500	950	755.0	4 500	630.0	3 800	1.7	7.2
80	9×14×12	20	(3 500)	81 000	64 500	117 000	1 380	1 530.0	8 350	1 280.0	7 000	2.4	7.2
105	14×20×17	22.5	3 990	107 000	84 500	140 000	2 140	1 740.0	9 750	1 460.0	8 150	3	12.3
105	14×20×17	22.5	(3 990)	131 000	104 000	187 000	2 860	3 000.0	15 600	2 520.0	13 100	3.9	12.3
120	16×23×20	30	3 960	158 000	125 000	198 000	3 600	3 000.0	16 300	2 510.0	13 700	5	16.9
120	16×23×20	30	(3 960)	193 000	153 000	264 000	4 850	5 150.0	26 300	4 350.0	22 100	6.5	16.9
150	18×26×22	35	3 900	239 000	190 000	281 000	6 150	4 950.0	27 900	4 150.0	23 400	10	24.3
150	18×26×22	35	(3 900)	310 000	246 000	410 000	8 950	10 100.0	51 500	8 450.0	43 500	14.1	24.3


3) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)

C₅₀: the basic dynamic load rating for 50 km rated fatigue life C₁₀₀: the basic dynamic load rating for 100 km rated fatigue life

The basic static load rating shows static permissible load.

4) High-precision grade and medium preload of random-matching type are available for high-carbon steel products.

A-5-1.2 VH Series

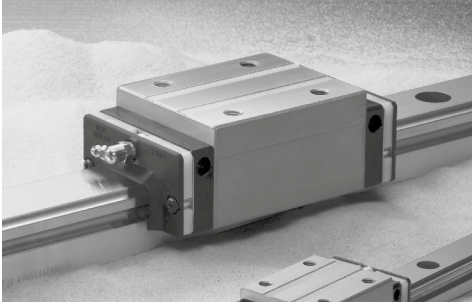

1. Features

(1) High-performance end seals

High-performance end seals with a multi-lip structure prevent the entry of various foreign matters.

(2) NSK K1 lubrication unit (standard)

Outstanding lubrication support of NSK K1 further improves sealing capability and durability. Additional NSK K1 units can be mounted for specific usage conditions and environments.

(3) Tapped holes on a rail bottom surface (optional)

In addition to standard mounting bolt holes (counterbores on a rail top surface), a specification for tapped holes on the rail bottom surface for enhanced sealing capability is available for the VH Series. (Refer to the dimension table.)

(4) High self-aligning capability (rolling direction)

Same as the DF combination in angular contact bearings, self-aligning capability is high because the cross point of the contact lines of balls and grooves comes inside, reducing moment rigidity.

This increases the capacity to absorb errors in installation.

(5) High load carrying capacity to vertical direction

The contact angle is set at 50 degrees, thus increasing load carrying capacity as well as rigidity in vertical direction.

(6) High resistance against impact load

The bottom ball groove is formed in Gothic arch and the center of the top and bottom grooves are offset as shown in **Fig. 2**. The vertical load is generally carried by the top rows, at where balls are contacting at two points. Because of this design, the bottom rows will carry load when a large impact load is applied vertically as shown in **Fig. 3**. This assures high resistance to the impact load.

(7) High accuracy

As showing in **Fig. 4**, fixing the master rollers to the ball grooves is easy thanks to the Gothic arch groove. This makes easy and accurate measuring of ball grooves.

(8) Random matching type

Random-matching of rails and ball slides are available.

(9) Improve rating life dramatically

New ball groove geometry is introduced, which has been developed by utilizing NSK's state-of-the-art tribological and analytical technologies. Due to the optimized distribution of contact surface pressures, the rating life has dramatically increased. As compared with the conventional products, the load rating capacity has increased to 1.3 times, while the life span has increased to twice^{*1)}.

*1) Representative values of series.

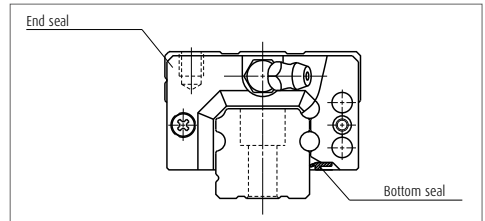


Fig. 1 VH Series

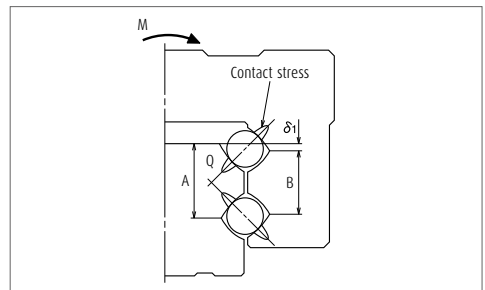


Fig. 2 Enlarged illustration of the offset Gothic arch groove

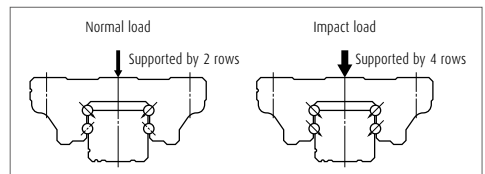


Fig. 3 When load is applied

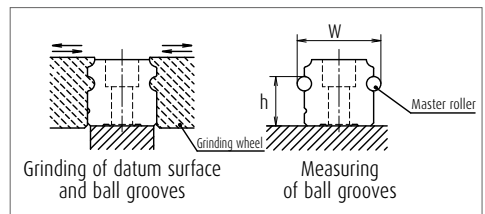


Fig. 4 Rail grinding and measuring

➤ **Comparison with NSK standard products**

Less than 1/10 the level of fine contaminants

Results of dust-proof tests reveal that the entry of fine contaminants is reduced to less than one-tenth of existing standard series due to improvements in sealing capability.

- Test sample : VH30AN
- Speed : 16.7 mm/sec
- Contaminant : Graphite powder
(average grain size: 0.037 mm) + Grease

Operating life under contaminated environments is more than 5 times longer

Durability test with rubber fragments

Extreme durability tests under contaminated environments using rubber fragments show that durability of the VH Series extended more than five times longer than the existing standard series, as shown in the graph.





- Test sample : VH30AN, preload code Z1
(preload of 245 N)
- Rail orientation : Horizontal (wall mount)
- Speed : 500 mm/sec
- Lubrication : AS2 grease
(prepacked AS2 only)
- Contaminant : Rubber fragments

Durability test with fine wood particles


Extreme durability tests in a contaminated environment with fine wood particles show that durability of the VH Series is more than doubled compared to the standard series, as shown in the graph.

- Test sample : VH30AN
(preload of 3 200 N)
- Rail orientation : Horizontal (wall mount)
- Speed : 400 mm/sec

- Lubrication : AS2 grease
(prepacked AS2 only)
- Contaminant : Fine wood particles

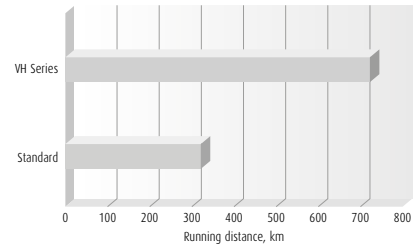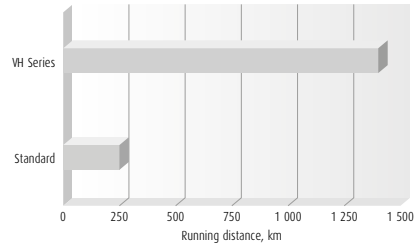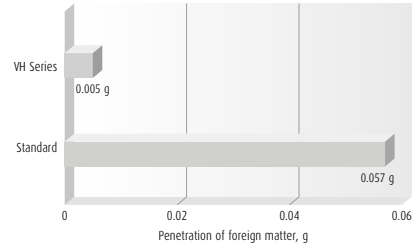

Before the passage of ball slide
(Heavily contaminated with wood particle)












After the passage of ball slide
(All contaminant particles are swept away)

The data shown in the catalog are the results of our tests, and no warranty is given to sealing performance on actual usage on machinery. Sealing performance is affected by usage environment and lubrication conditions. Dust covers and other measures to keep machinery free of dust are recommended.

A-5-1.2 VH Series

2. Ball slide shape

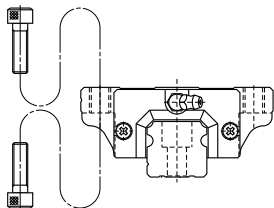Ball slide Model	Shape/installation method	Type (Upper row, Rating: Lower row, Ball slide length)	
		High-load type	Super-high-load type
		Standard	Long
AN BN		AN 	BN 
AL BL		AL 	BL 
EM GM		EM 	GM 

3. Accuracy and preload

(1) Running parallelism of ball slide

Table 1

Unit: μm

Rail length (mm)		Preloaded assembly (not random matching)					Random-matching type
		Ultra precision K3	Super precision K4	High precision K5	Precision grade K6	Normal grade KN	Normal grade KC
over	or less						
-	50	2	2	2	4.5	6	6
50	- 80	2	2	3	5	6	6
80	- 125	2	2	3.5	5.5	6.5	6.5
125	- 200	2	2	4	6	7	7
200	- 250	2	2.5	5	7	8	8
250	- 315	2	2.5	5	8	9	9
315	- 400	2	3	6	9	11	11
400	- 500	2	3	6	10	12	12
500	- 630	2	3.5	7	12	14	14
630	- 800	2	4.5	8	14	16	16
800	- 1000	2.5	5	9	16	18	18
1 000	- 1 250	3	6	10	17	20	20
1 250	- 1 600	4	7	11	19	23	23
1 600	- 2 000	4.5	8	13	21	26	26
2 000	- 2 500	5	10	15	22	29	29
2 500	- 3 150	6	11	17	25	32	32
3 150	- 4 000	9	16	23	30	34	34

(2) Accuracy standard

The preloaded assembly has five accuracy grades; Ultra precision K3, Super precision K4, High precision K5, Precision K6, and Normal KN grades, while the random-matching type has Normal KC grade only.

> Tolerance of preloaded assembly

Table 2

Unit: μm

Characteristics	Accuracy grade	Ultra precision K3	Super precision K4	High precision K5	Precision grade K6	Normal grade KN
Mounting height H		± 10	± 10	± 20	± 40	± 80
Variation of H (All ball slides on a set of rails)		3	5	7	15	25
Mounting width W_2 or W_3		± 15	± 15	± 25	± 50	± 100
Variation of W_2 or W_3 (All ball slides on reference rail)		3	7	10	20	30
Running parallelism of surface C to surface A Running parallelism of surface D to surface B		Shown in Table 1, Fig. 5 and Fig. 6				

> Tolerance of random-matching type; Normal grade, KC

Table 3

Unit: μm

Characteristics	Model No.	VH15, 20, 25, 30, 35	VH45, 55
Mounting height H		± 20	± 30
Variation of mounting height H		15 ① 30 ②	20 ⁽¹⁾ 30 ⁽²⁾
Mounting width W_2 or W_3		± 30	± 35
Variation of mounting width W_2 or W_3		25	30
Running parallelism of surface C to surface A Running parallelism of surface D to surface B		See Table 1, Fig. 5 and Fig. 6	

Notes ① Variation on the same rail ② Variation on multiple rails

A-5-1.2 VH Series

(3) Combinations of accuracy and preload

Table 4

		Accuracy grade					
		Ultra precision	Super precision	High precision	Precision grade	Normal grade	Normal grade
With NSK K1 lubrication unit		K3	K4	K5	K6	KN	KC
Preload	Fine clearance Z0	○	○	○	○	○	—
	Slight preload Z1	○	○	○	○	○	—
	Medium preload Z3	○	○	○	○	—	—
	Random-matching type with fine clearance ZT	—	—	—	—	—	○
	Random-matching type with slight preload ZZ	—	—	—	—	—	○

(4) Assembled accuracy

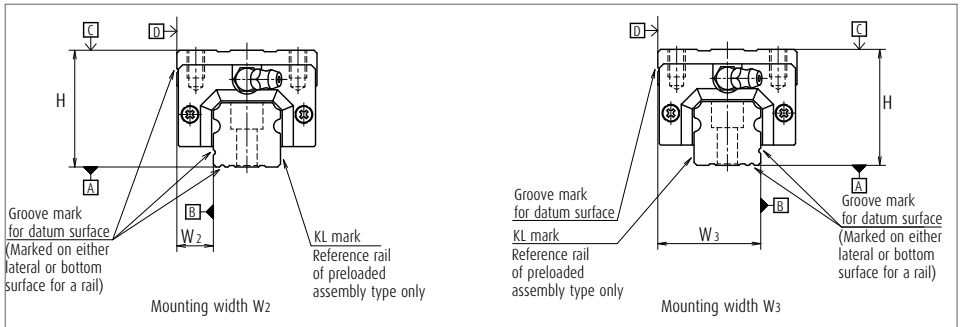


Fig. 5 Special high carbon steel

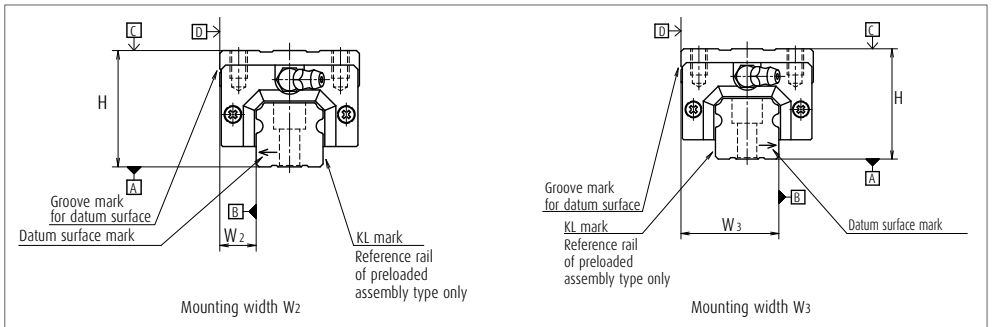


Fig. 6 Stainless steel

(5) Preload and rigidity

We offer five levels of preload: Slight preload Z1, Medium preload Z3 and Fine clearance Z0, along with random-matching type of Fine clearance Z1 and Slight preload ZZ.

› Preload and rigidity of preloaded assembly

Table 5

Model No.		Preload (N)		Rigidity (N/μm)			
				Vertical direction		Lateral direction	
		Slight preload Z1	Medium preload Z3	Slight preload Z1	Medium preload Z3	Slight preload Z1	Medium preload Z3
High-load type	VH15 AN, EM	78	490	137	226	98	186
	VH20 AN, EM	147	835	186	335	137	245
	VH25 AN, AL, EM	196	1 270	206	380	147	284
	VH30 AN, AL	245	1 570	216	400	157	294
	VH30 EM	294	1 770	265	480	186	355
	VH35 AN, AL, EM	390	2 350	305	560	216	390
	VH45 AN, AL, EM	635	3 900	400	745	284	540
	VH55 AN, AL, EM	980	5 900	490	910	345	645
Medium-load type	VH15 BN, GM	98	685	196	345	137	284
	VH20 BN, GM	196	1 080	265	480	196	355
	VH25 BN, BL, GM	245	1 570	294	560	216	400
	VH30 BN, BL, GM	390	2 260	360	665	265	480
	VH35 BN, BL, GM	490	2 940	430	795	305	570
	VH45 BN, BL, GM	785	4 800	520	960	370	695
	VH55 BN, BL, GM	1 180	7 050	635	1 170	440	835

Note Clearance for Fine clearance Z0 is 0 to 3 μm. Therefore, preload is zero. However, Z0 of PN grade is 0 to 15 μm.

› Preload of random-matching type

Table 6

Unit: μm

Model No.	Fine clearance Z1	Slight preload ZZ
VH15	-4 - 15	-4 - 0
VH20		-5 - 0
VH25		-5 - 0
VH30		-7 - 0
VH35		-7 - 0
VH45		-7 - 0
VH55		-9 - 0

Note Minus sign denotes that a value is an amount of preload (elastic deformation of balls).

4. Maximum rail length

Table 7 shows the limitations of rail length (maximum length). However, the limitations vary by accuracy grade.

Table 7 Length limitations of rails

Unit: mm

Series	Size	15	20	25	30	35	45	55
	Material							
VH	Special high carbon steel	2 000	3 960	3 960	4 000	4 000	3 990	3 960
	Stainless steel	1 800	3 500	3 500	3 500			

Note Rails can be butted if user requirement exceeds the rail length shown in the table. Please consult NSK.

A-5-1.2 VH Series

5. Installation

(1) Permissible values of mounting error

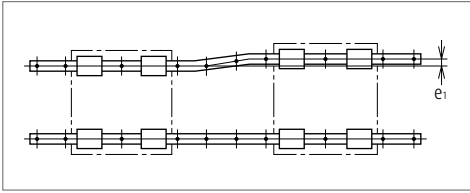


Fig. 7

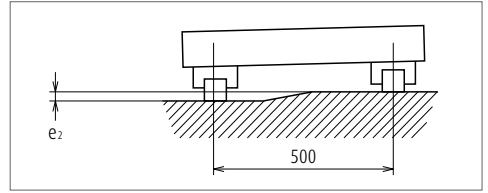


Fig. 8

Table 8

Unit: μm

Value	Preload	Model No.						
		VH15	VH20	VH25	VH30	VH35	VH45	VH55
Permissible values of parallelism in two rails e_1	Z0, ZT	22	30	40	45	55	65	80
	Z1, ZZ	18	20	25	30	35	45	55
	Z3	13	15	20	25	30	40	45
Permissible values of parallelism (height) in two rails e_2	Z0, ZT	375 $\mu\text{m}/500\text{ mm}$						
	Z1, ZZ, Z3	330 $\mu\text{m}/500\text{ mm}$						

(2) Shoulder height of the mounting surface and corner radius r




Fig. 9 Shoulder for the rail datum surface




Fig. 10 Shoulder for the ball slide datum surface

Table 9

Unit: mm

Model No.	Corner radius (maximum)		Shoulder height	
	r_a	r_b	H'	H''
VH15	0.5	0.5	4	4
VH20	0.5	0.5	4.5	5
VH25	0.5	0.5	5	5
VH30	0.5	0.5	6	6
VH35	0.5	0.5	6	6
VH45	0.7	0.7	8	8
VH55	0.7	0.7	10	10

(3) Specification for tapped holes on a rail bottom surface

- > Special high carbon steel is available for this specification.
- > Applicable accuracy grades are precision grade (K6) and normal grades (KN and KC) only.
- > The minimum rail length for production is 400 mm.
- > The tapping pitch is the same as the pitch for regular mounting bolt holes. Please refer to the dimension table.

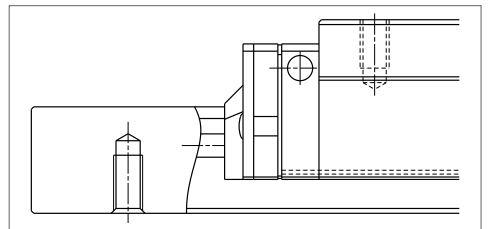


Fig. 11

6. Lubrication components

Refer to pages A38 and D13 for the lubrication of linear guides.

(1) Types of lubrication accessories

Table 10 and **Fig. 12** show grease fittings and tube fittings.

We provide lubrication accessories with extended thread body length (L) for the addition of dust-proof accessories such as NSK K1 lubrication unit, double seal and protector.

We provide a suitable lubrication accessory for the special requirement on dust-proof accessories.

Consult NSK for a lubrication accessory with extended length of thread body for your convenience of replenishing lubricant.

Please ask NSK for stainless lubrication accessories.

Table 10

Unit : mm

Model No.	Dust proof specification	Dimension L		
		Grease fitting / Drive-in type	Tube fitting	
			SF Type	LF Type
VH15	Standard*	10	-	-
	Double seal	**	-	-
	Protector	**	-	-
VH20	Standard*	12	-	-
	Double seal	18	-	-
	Protector	18	-	-
VH25	Standard*	12	15	16
	Double seal	18	23	24.5***
	Protector	18	17	18
VH30	Standard*	14	18	17.5
	Double seal	22	25	24.5
	Protector	22	19.5	19
VH35	Standard*	14	15	15
	Double seal	22	25	24.5
	Protector	22	21.5	22
VH45	Standard*	18	22	21.5
	Double seal	22	32	32
	Protector	28	28	30
VH55	Standard*	18	20	20
	Double seal	22	32	32
	Protector	28	28	30

*) NSK K1 units are mounted as a standard specification for VH series.

**) A connector is required for grease fitting. Please contact NSK.

***) Only available for AN and BN type ball slides.

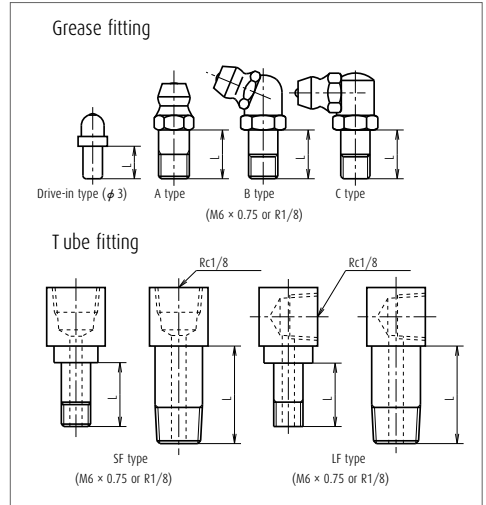


Fig. 12 Grease fitting and tube fitting

(2) Mounting position of lubrication accessories

The standard position of grease fittings is the end face of ball slide. We mount them on a side of end cap as an option.

(**Fig. 13**)

Please consult NSK for installation of grease or tube fittings to the ball slide body or side of end cap.

When using a piping unit with thread of $M6 \times 1$, you require a connector to connect to a grease fitting mounting hole with $M6 \times 0.75$. The connector is available from NSK.

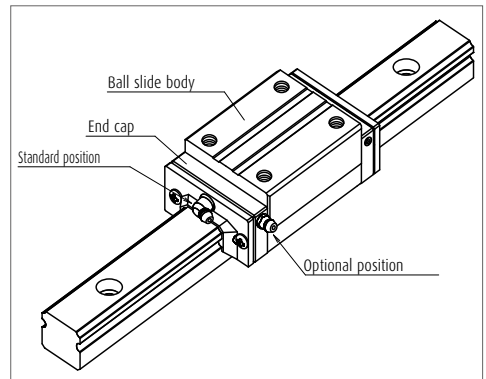


Fig. 13 Mounting position of lubrication accessories

A-5-1.2 VH Series

7. Dust proof components

(1) Standard specification

To keep foreign matters from entering inside the ball slide, VH Series has an end seal on both ends, and bottom seals at the bottom.

Two NSK K1, one at each end, are installed as the standard equipment.

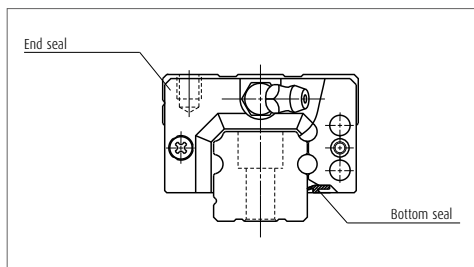


Fig. 14

Table 11 Seal friction per ball slide (maximum value)

Unit: N

Size \ Series	15	20	25	30	35	45	55
VH	11	13	14	17	23	33	44

(2) Double seal and protector

For VH Series, double-seal and protector can be installed only before shipping from the factory. Please consult NSK when you require them.

Table 12 shows the ball slide length when a double seal set and a protector are installed.

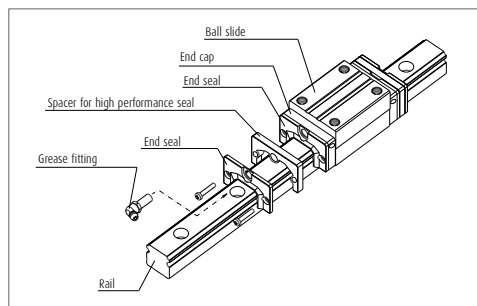


Fig. 15 Double seal

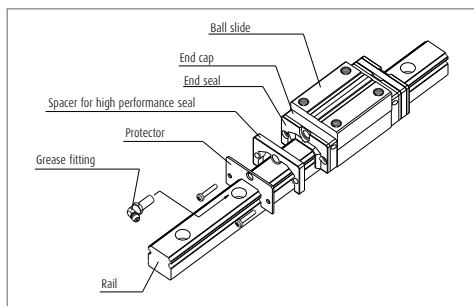


Fig. 16 Protector

Table 12

Unit: mm

Model No.	Ball slide length	Ball slide model	Ball slide length L		
			Standard	Double seal installation	Protector installation
VH15	Standard type	AN, EM	70.6	81.6	77
	Long type	BN, GM	89.6	100.6	96
VH20	Standard type	AN, EM	87.4	100.4	94.2
	Long type	BN, GM	109.4	122.4	116.2
VH25	Standard type	AN, AL, EM	97	110	104.4
	Long type	BN, BL, GM	125	138	132.4
VH30	Standard type	AN, AL EM	104.4 117.4	120.4 133.4	114.8 127.8
	Long type	BN, BL, GM	143.4	159.4	153.8
VH35	Standard type	AN, AL, EM	128.8	144.8	139.2
	Long type	BN, BL, GM	162.8	178.8	173.2
VH45	Standard type	AN, AL, EM	161.4	180.4	174.2
	Long type	BN, BL, GM	193.4	212.4	206.2
VH55	Standard type	AN, AL, EM	185.4	204.4	198.2
	Long type	BN, BL, GM	223.4	242.4	236.2

Note Ball slide length equipped with NSK K1 = (Standard ball slide length) + (Thickness of NSK K1, $V_1 \times$ Number of NSK K1) + (Thickness of the protective cover, $V_2 \times 2$)

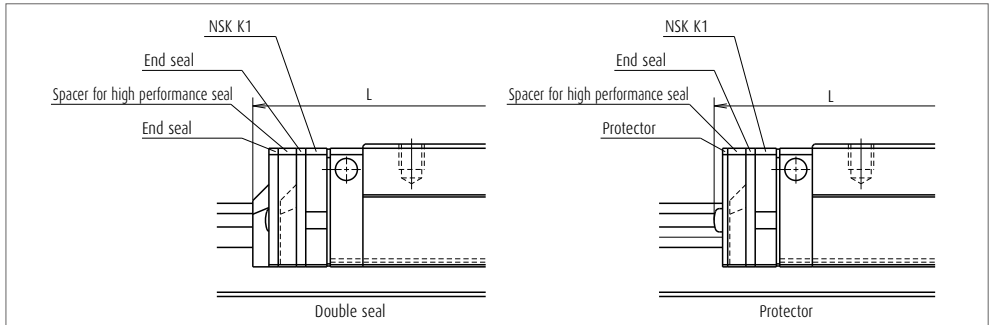


Fig. 17

(3) Cap to plug the rail mounting bolt hole

Table 13 Cap to plug the rail bolt hole

Model No.	Bolt to secure rail	Cap reference No.	Quantity /case
VH15	M4	LG-CAP/M4	20
VH20	M5	LG-CAP/M5	20
VH25	M6	LG-CAP/M6	20
VH30, VH35	M8	LG-CAP/M8	20
VH45	M12	LG-CAP/M12	20
VH55	M14	LG-CAP/M14	20

8. Design Precautions

Because the product is used under severe operating conditions that require high performance end seals, please inform NSK about your service conditions using the technical data sheet on page A152.

(4) Inner seal

The availability of inner seal is limited to the models shown below.

Table 14

Series	Model No.
VH	VH20, VH25, VH30, VH45, VH55


A-5-1.2 VH Series

9. Reference number



Reference numbers shall be set to individual NSK linear guide when its specifications are finalized, and it is indicated on its specification drawing.

Please specify the reference number, except design serial number, to identify the product when ordering, requiring estimates, or inquiring about specifications from NSK.

(1) Reference number for preloaded assembly

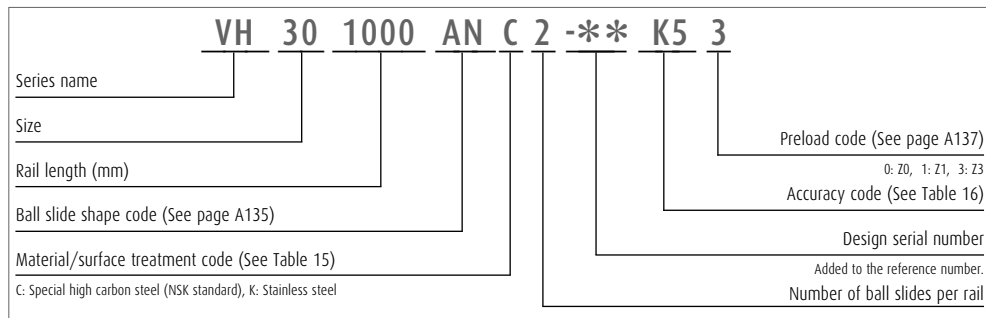

(2) Reference number for random-matching type

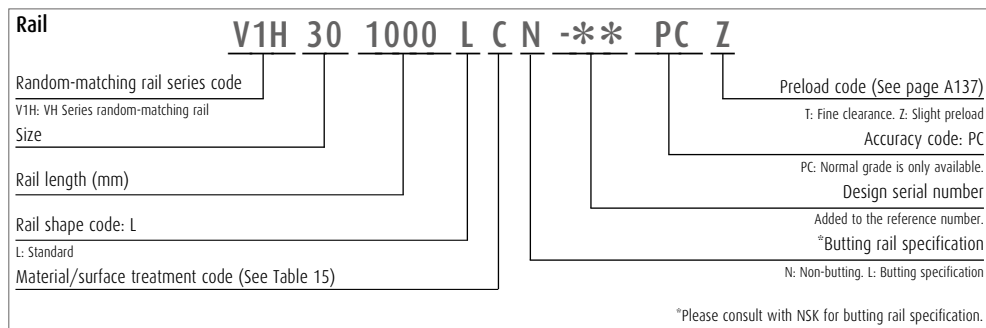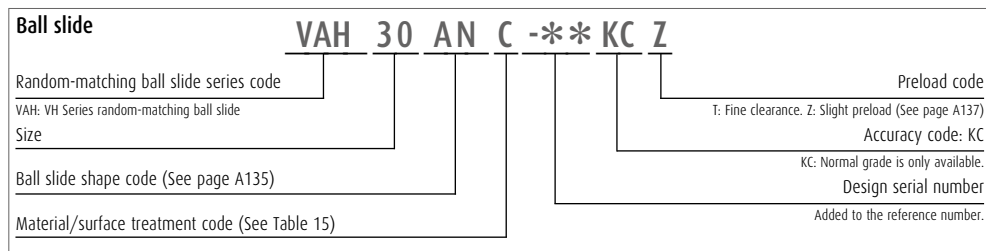

The reference number coding for the assembly of random-matching type is the same as that of preloaded assembly. However, the preload code of "fine clearance T" and "slight preload Z" is only applicable (refer to page A137).

Table 15 Material/surface treatment code

Code	Description
C	Special high carbon steel (NSK standard) + counterbores on a rail top surface
K	Stainless steel + counterbores on a rail top surface
D	Special high carbon steel with surface treatment + counterbores on a rail top surface
H	Stainless steel with surface treatment + counterbores on a rail top surface
V	Special high carbon steel (NSK standard) + tapped holes on a rail bottom surface
W	Special high carbon steel with surface treatment + tapped holes on a rail bottom surface
Z	Other, special

Table 16 Accuracy code


Accuracy	Standard (with NSK K1)
Ultra precision grade	K3
Super precision grade	K4
High precision grade	K5
Precision grade	K6
Normal grade	KN
Normal grade (random-matching type)	KC

Note Refer to page A38 for NSK K1 lubrication unit.


A-5-1.2 VH Series

10. Dimensions


VH-AN (High-load type / Standard)
 VH-BN (Super-high-load type / Long)

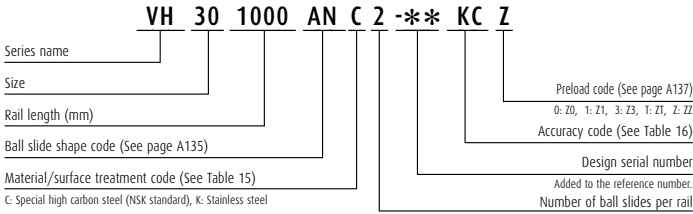


Front view of AN and BN type




Specification for tapped holes on a rail bottom face



Side view of AN type

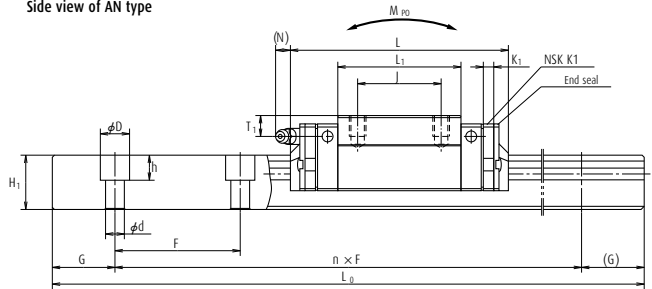

Side view of BN type

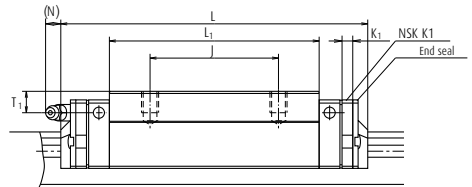

Model No.	Assembly		Ball slide											Width	Height		
	Height	E	Width	Length	Mounting hole			L ₁	K	T	K ₁	Grease fitting					
					B	J	M × pitch × ℓ					Hole size	T ₁			N	W ₁
VH15AN	28	4.6	9.5	34	70.6 (< 77)	26	26	M4×0.7×6	39	23.4	8	4.5	φ 3	8.5	1 (< 8.2)	15	15
VH15BN	28	4.6	9.5	34	89.6 (< 96)	26	26	M4×0.7×6	58	23.4	8	4.5	φ 3	8.5	1 (< 8.2)	15	15
VH20AN	30	5	12	44	87.4 (< 94.2)	32	36	M5×0.8×6	50	25	12	4.5	M6×0.75	5	11.1 (12.3)	20	18
VH20BN	30	5	12	44	109.4 (< 116.2)	32	50	M5×0.8×6	72	25	12	4.5	M6×0.75	5	11.1 (12.3)	20	18
VH25AN	40	7	12.5	48	97 (< 104.4)	35	35	M6×1×9	58	33	12	5	M6×0.75	10	9.6 (12.9)	23	22
VH25BN	40	7	12.5	48	125 (< 132.4)	35	50	M6×1×9	86	33	12	5	M6×0.75	10	9.6 (12.9)	23	22
VH30AN	45	9	16	60	104.4 (< 114.8)	40	40	M8×1.25×10	59	36	14	5	M6×0.75	10	11.4 (14.2)	28	26
VH30BN	45	9	16	60	143.4 (< 153.8)	40	60	M8×1.25×10	98	36	14	5	M6×0.75	10	11.4 (14.2)	28	26
VH35AN	55	9.5	18	70	128.8 (< 139.2)	50	50	M8×1.25×12	80	45.5	15	5.5	M6×0.75	15	10.9 (13.7)	34	29
VH35BN	55	9.5	18	70	162.8 (< 173.2)	50	72	M8×1.25×12	114	45.5	15	5.5	M6×0.75	15	10.9 (13.7)	34	29
VH45AN	70	14	20.5	86	161.4 (< 174.2)	60	60	M10×1.5×17	105	56	17	6.5	Rc1/8	20	12.5 (14.1)	45	38
VH45BN	70	14	20.5	86	193.4 (< 206.2)	60	80	M10×1.5×17	137	56	17	6.5	Rc1/8	20	12.5 (14.1)	45	38
VH55AN	80	15	23.5	100	185.4 (< 198.2)	75	75	M12×1.75×18	126	65	18	6.5	Rc1/8	21	12.5 (14.1)	53	44
VH55BN	80	15	23.5	100	223.4 (< 236.2)	75	95	M12×1.75×18	164	65	18	6.5	Rc1/8	21	12.5 (14.1)	53	44

- Notes**
- Figure inside (<) is the dimension when equipped with the protector.
 - VH Series does not have a ball retainer. Be aware that balls fall out when the ball slide is withdrawn from the rail.
 - External appearance of stainless steel ball slides differs from those of carbon steel ball slides.

Reference number for ball slide of random-matching type

Ball slide

VAH 30 AN C - KC Z**

Random-matching ball slide series code

VAH: VH Series random-matching ball slide

Size

Ball slide shape code (See page A135)

Material/surface treatment code (See Table 15)

Preload code (See page A137)

T: Fine clearance. Z: Slight preload


Accuracy code: KC

KC: Normal grade is only available.


Design serial number

Added to the reference number.


AN and BN types



AN type



BN type

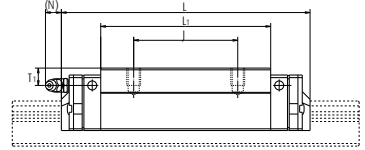

Reference number for rail of random-matching type

Rail

V1H 30 1000 L C N - PC Z**

Random-matching rail series code

V1H: VH Series random-matching rail

Size

Rail length (mm)

Rail shape code: L

L: Standard

Material/surface treatment code (See Table 15)

Preload code (See page A137)

T: Fine clearance. Z: Slight preload

Accuracy code: PC

PC: Normal grade is only available.


Design serial number

Added to the reference number.

*Butting rail specification

N: Non-butting. L: Butting specification

*Please consult with NSK for butting rail specification.

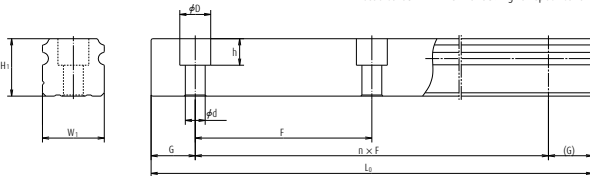

Unit: mm

Rail						Basic load rating								Weight	
Pitch F	Mounting bolt hole d × D × h	Tapped hole M ₂ × pitch × ℓ ₂	G (reference)	Maximum length L _{omax} for stainless ()	4) Dynamic		Static C ₀ (N)	M _{Ro}	Static moment (N·m)				Ball slide (kg)	Rail (kg/m)	
					[50km] C ₅₀ (N)	[100km] C ₁₀₀ (N)			One slide		Two slides				
							M _{P0}	M _{P0}	M _{Y0}	M _{Y0}					
60	4.5×7.5×5.3	M5×0.8×8	20	2 000	14 200	11 300	20 700	108	94.5	575	79.5	480	0.18	1.6	
60	4.5×7.5×5.3	M5×0.8×8	20	[1 800]	18 100	14 400	32 000	166	216	1 150	181	965	0.26	1.6	
60	6×9.5×8.5	M6×1×10	20	3 960	23 700	18 800	32 500	219	185	1 140	155	955	0.33	2.6	
60	6×9.5×8.5	M6×1×10	20	[3 500]	30 000	24 000	50 500	340	420	2 230	355	1 870	0.48	2.6	
60	7×11×9	M6×1×12	20	3 960	33 500	26 800	46 000	360	320	1 840	267	1 540	0.55	3.6	
60	7×11×9	M6×1×12	20	[3 500]	45 500	36 500	71 000	555	725	3 700	610	3 100	0.82	3.6	
80	9×14×12	M8×1.25×15	20	4 000	41 000	32 500	51 500	490	350	2 290	292	1 920	0.77	5.2	
80	9×14×12	M8×1.25×15	20	[3 500]	61 000	48 500	91 500	870	1 030	5 600	865	4 700	1.3	5.2	
80	9×14×12	M8×1.25×17	20	4 000	62 500	49 500	80 500	950	755	4 500	630	3 800	1.5	7.2	
80	9×14×12	M8×1.25×17	20	4 000	81 000	64 500	117 000	1 380	1 530	8 350	1 280	7 000	2.1	7.2	
105	14×20×17	M12×1.75×24	22.5	3 990	107 000	84 500	140 000	2 140	1 740	9 750	1 460	8 150	3.0	12.3	
105	14×20×17	M12×1.75×24	22.5	3 990	131 000	104 000	187 000	2 860	3 000	15 600	2 520	13 100	3.9	12.3	
120	16×23×20	M14×2×24	30	3 960	158 000	125 000	198 000	3 600	3 000	16 300	2 510	13 700	4.7	16.9	
120	16×23×20	M14×2×24	30	3 960	193 000	153 000	264 000	4 850	5 150	26 300	4 350	22 100	6.1	16.9	


4) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)

C₅₀: the basic dynamic load rating for 50 km rated fatigue life C₁₀₀: the basic dynamic load rating for 100 km rated fatigue life


The basic static load rating shows static permissible load.

A-5-1.2 VH Series


VH-AL (High-load type / Standard)
 VH-BL (Super-high-load type / Long)

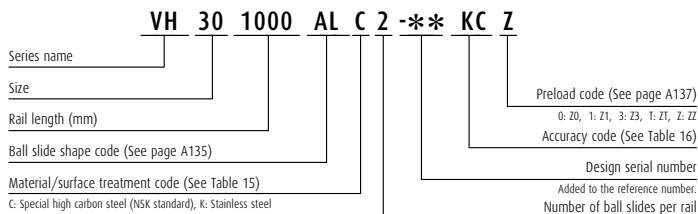


Front view of AL and BL type




Side view of AL type

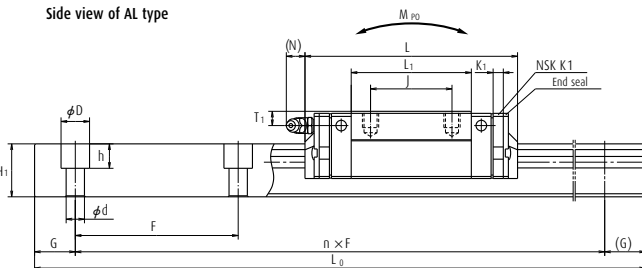

Specification for tapped holes on a rail bottom face



Side view of BL type

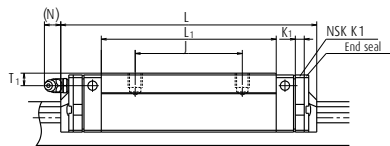

Model No.	Assembly		Ball slide											Width	Height			
	Height	E	Width	Length	Mounting hole			L ₁	K	T	K ₁	Grease fitting				W ₁	H ₁	
					H	W ₂	W					L	B					J
VH25AL	36	7	12.5	48	97 (104.4)	35	35	M6×1×6	58	29	12	5	M6×0.75	6	9.6 (12.9)	23	22	
VH25BL	36	7	12.5	48	125 (132.4)	35	50	M6×1×6	86	29	12	5	M6×0.75	6	9.6 (12.9)	23	22	
VH30AL	42	9	16	60	104.4 (114.8)	40	40	M8×1.25×8	59	33	14	5	M6×0.75	7	11.4 (14.2)	28	26	
VH30BL	42	9	16	60	143.4 (153.8)	40	60	M8×1.25×8	98	33	14	5	M6×0.75	7	11.4 (14.2)	28	26	
VH35AL	48	9.5	18	70	128.8 (139.2)	50	50	M8×1.25×8	80	38.5	15	5.5	M6×0.75	8	10.9 (13.7)	34	29	
VH35BL	48	9.5	18	70	162.8 (173.2)	50	72	M8×1.25×8	114	38.5	15	5.5	M6×0.75	8	10.9 (13.7)	34	29	
VH45AL	60	14	20.5	86	161.4 (174.2)	60	60	M10×1.5×10	105	46	17	6.5	Rc1/8	10	12.5 (14.1)	45	38	
VH45BL	60	14	20.5	86	193.4 (206.2)	60	80	M10×1.5×10	137	46	17	6.5	Rc1/8	10	12.5 (14.1)	45	38	
VH55AL	70	15	23.5	100	185.4 (198.2)	75	75	M12×1.75×13	126	55	18	6.5	Rc1/8	11	12.5 (14.1)	53	44	
VH55BL	70	15	23.5	100	223.4 (236.2)	75	95	M12×1.75×13	164	55	18	6.5	Rc1/8	11	12.5 (14.1)	53	44	

- Notes**
- 1) Figure inside () is the dimension when equipped with the protector.
 - 2) VH Series does not have a ball retainer. Be aware that balls fall out when the ball slide is withdrawn from the rail.
 - 3) External appearance of stainless steel ball slides differs from those of carbon steel ball slides.

Reference number for ball slide of random-matching type

Ball slide

VAH 30 AL C - KC Z**

Random-matching ball slide series code

VAH: VH Series random-matching ball slide

Size

Ball slide shape code (See page A135)

Material/surface treatment code (See Table 15)

Preload code (See page A137)

T: Fine clearance, Z: Slight preload


Accuracy code: KC

KC: Normal grade is only available.


Design serial number

Added to the reference number.


AL and BL types



AL type



BL type

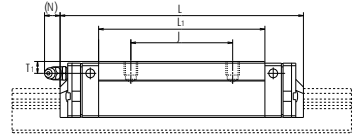

Reference number for rail of random-matching type

Rail

V1H 30 1000 L C N - PC Z**

Random-matching rail series code

V1H: VH Series random-matching rail

Size

Rail length (mm)

Rail shape code: L

L: Standard

Material/surface treatment code (See Table 15)

Preload code (See page A137)

T: Fine clearance, Z: Slight preload

Accuracy code: PC

PC: Normal grade is only available.


Design serial number

Added to the reference number.

*Butting rail specification

N: Non-butting, L: Butting specification

*Please consult with NSK for butting rail specification.

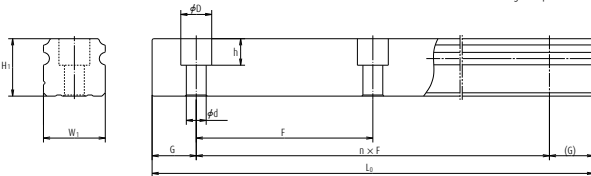

Unit: mm

Rail					Basic load rating							Weight		
Pitch F	Mounting bolt hole d × D × h	Tapped hole M ₂ × pitch × L ₂	G (reference)	Maximum length L _{0max} () for stainless	4) Dynamic		Static C ₀ (N)	M _{ro}	Static moment (N·m)				Ball slide (kg)	Rail (kg/m)
					[50km] C ₅₀ (N)	[100km] C ₁₀₀ (N)			M _{P0}		M _{Y0}			
									One slide	Two slides	One slide	Two slides		
60	7×11×9	M6×1×12	20	3 960	33 500	26 800	46 000	360	320	1 840	267	1 540	0.46	3.6
60	7×11×9	M6×1×12	20	[3 500]	45 500	36 500	71 000	555	725	3 700	610	3 100	0.69	3.6
80	9×14×12	M8×1.25×15	20	4 000	41 000	32 500	51 500	490	350	2 290	292	1 920	0.69	5.2
80	9×14×12	M8×1.25×15	20	[3 500]	61 000	48 500	91 500	870	1 030	5 600	865	4 700	1.16	5.2
80	9×14×12	M8×1.25×17	20	4 000	62 500	49 500	80 500	950	755	4 500	630	3 800	1.2	7.2
80	9×14×12	M8×1.25×17	20	4 000	81 000	64 500	117 000	1 380	1 530	8 350	1 280	7 000	1.7	7.2
105	14×20×17	M12×1.75×24	22.5	3 990	107 000	84 500	140 000	2 140	1 740	9 750	1 460	8 150	2.2	12.3
105	14×20×17	M12×1.75×24	22.5	3 990	131 000	104 000	187 000	2 860	3 000	15 600	2 520	13 100	2.9	12.3
120	16×23×20	M14×2×24	30	3 960	158 000	125 000	198 000	3 600	3 000	16 300	2 510	13 700	3.7	16.9
120	16×23×20	M14×2×24	30	3 960	193 000	153 000	264 000	4 850	5 150	26 300	4 350	22 100	4.7	16.9


4) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)

C₅₀: the basic dynamic load rating for 50 km rated fatigue life C₁₀₀: the basic dynamic load rating for 100 km rated fatigue life


The basic static load rating shows static permissible load.

A-5-1.2 VH Series


VH-EM (High-load type / Standard)
 VH-GM (Super-high-load type / Long)

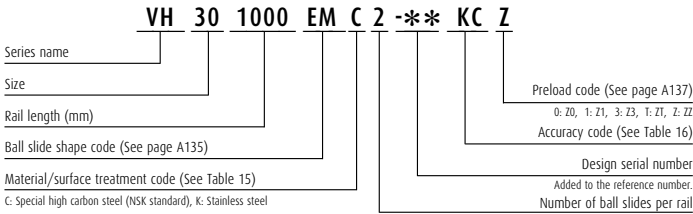


Front view of EM and GM type

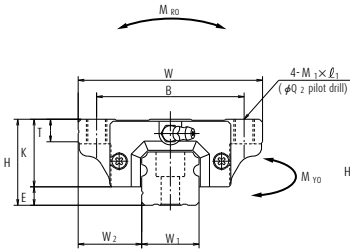


Side view of EM type

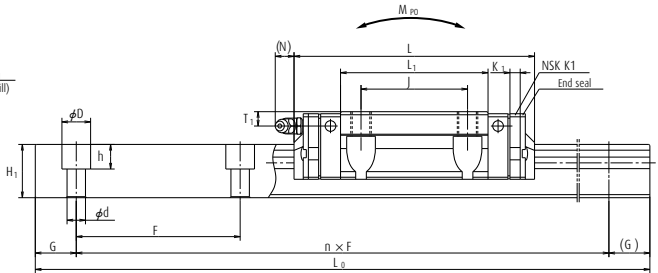

Specification for tapped holes on a rail bottom face



Side view of GM type

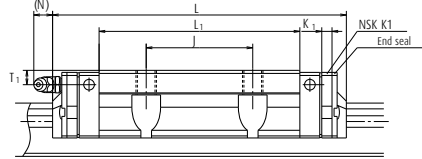

Model No.	Assembly			Ball slide														Width	Height
	Height	H	E	Width	W	Length	L	Mounting hole				Grease fitting							
								B	J	M × pitch × ℓ	Q ₂	L ₁	K	T	K ₁	Hole size	T ₁		
VH15EM	24	4.6	16	47	70.6 (< 77)	38	30	M5×0.8×7	4.4	39	19.4	8	4.5	φ 3	4.5	1 (< 8.2)	15	15	
VH15GM	24	4.6	16	47	89.6 (< 96)	38	30	M5×0.8×7	4.4	58	19.4	8	4.5	φ 3	4.5	1 (< 8.2)	15	15	
VH20EM	30	5	21.5	63	87.4 (< 94.2)	53	40	M6×1×9.5	5.3	50	25	10	4.5	M6×0.75	5	11.1 (< 12.3)	20	18	
VH20GM	30	5	21.5	63	109.4 (< 116.2)	53	40	M6×1×9.5	5.3	72	25	10	4.5	M6×0.75	5	11.1 (< 12.3)	20	18	
VH25AN	36	7	23.5	70	97 (< 104.4)	57	45	M8×1.25×10	6.8	58	29	11	5	M6×0.75	6	9.6 (< 12.9)	23	22	
VH25GM	36	7	23.5	70	125 (< 132.4)	57	45	[M8×1.25×11.5]	6.8	86	29	[12]	5	M6×0.75	6	9.6 (< 12.9)	23	22	
VH30EM	42	9	31	90	117.4 (< 127.8)	72	52	M10×1.5×12	8.6	72	33	11	5	M6×0.75	7	11.4 (< 14.2)	28	26	
VH30GM	42	9	31	90	143.4 (< 153.8)	72	52	[M10×1.5×14.5]	8.6	98	33	[15]	5	M6×0.75	7	11.4 (< 14.2)	28	26	
VH35EM	48	9.5	33	100	128.8 (< 139.2)	82	62	M10×1.5×13	8.6	80	38.5	12	5.5	M6×0.75	8	10.9 (< 13.7)	34	29	
VH35GM	48	9.5	33	100	162.8 (< 173.2)	82	62	M10×1.5×13	8.6	114	38.5	12	5.5	M6×0.75	8	10.9 (< 13.7)	34	29	
VH45EM	60	14	37.5	120	161.4 (< 174.2)	100	80	M12×1.75×15	10.5	105	46	13	6.5	M6×0.75	10	12.5 (< 14.1)	45	38	
VH45GM	60	14	37.5	120	193.4 (< 206.2)	100	80	M12×1.75×15	10.5	137	46	13	6.5	Rc1/8	10	12.5 (< 14.1)	45	38	
VH55EM	70	15	43.5	140	185.4 (< 198.2)	116	95	M14×2×18	12.5	126	55	15	6.5	Rc1/8	11	12.5 (< 14.1)	53	44	
VH55GM	70	15	43.5	140	223.4 (< 236.2)	116	95	M14×2×18	12.5	164	55	15	6.5	Rc1/8	11	12.5 (< 14.1)	53	44	

Notes

- 1) Figure inside (<) is the dimension when equipped with the protector.
- 2) Figure inside [] is applied to stainless products.
- 3) VH Series does not have a ball retainer. Be aware that balls fall out when the ball slide is withdrawn from the rail.
- 4) External appearance of stainless steel ball slides differs from those of carbon steel ball slides.

Reference number for ball slide of random-matching type

Ball slide

VAH 30 EM C - KC Z**

Random-matching ball slide series code

VAH: VH Series random-matching ball slide

Size

Ball slide shape code (See page A135)

Material/surface treatment code (See Table 15)

Preload code (See page A137)

T: Fine clearance, Z: Slight preload


Accuracy code: KC

KC: Normal grade is only available.


Design serial number

Added to the reference number.


EM and GM types



EM type



GM type



Reference number for rail of random-matching type

Rail

V1H 30 1000 L C N - PC Z**

Random-matching rail series code

V1H: VH Series random-matching rail

Size

Rail length (mm)

Rail shape code: L

L: Standard

Material/surface treatment code (See Table 15)

Preload code (See page A137)

T: Fine clearance, Z: Slight preload

Accuracy code: PC

PC: Normal grade is only available.


Design serial number

Added to the reference number.

*Butting rail specification

N: Non-butting, L: Butting specification

*Please consult with NSK for butting rail specification.

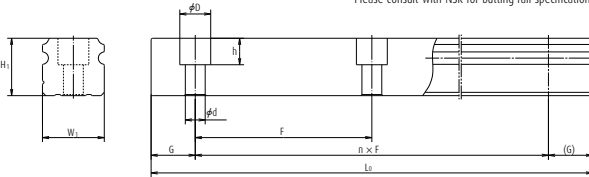

Unit: mm

Rail				Basic load rating								Weight		
Pitch F	Mounting bolt hole d × D × h	Tapped hole M ₂ × pitch × L ₂	G (reference)	Maximum length L _{0max} () for stainless	⁵⁾ Dynamic		Static C ₀ (N)	M _{R0}	Static moment (N-m)				Ball slide (kg)	Rail (kg/m)
					[50km] C ₅₀ (N)	[100km] C ₁₀₀ (N)			M _{P0}		M _{Y0}			
									One slide	Two slides	One slide	Two slides		
60	4.5×7.5×5.3	M5×0.8×8	20	2 000	14 200	11 300	20 700	108	94.5	575	79.5	480	0.17	1.6
60	4.5×7.5×5.3	M5×0.8×8	20	[1 800]	18 100	14 400	32 000	166	216	1 150	181	965	0.25	1.6
60	6×9.5×8.5	M6×1×10	20	3 960	23 700	18 800	32 500	219	185	1 140	155	955	0.45	2.6
60	6×9.5×8.5	M6×1×10	20	[3 500]	30 000	24 000	50 500	340	420	2 230	355	1 870	0.65	2.6
60	7×11×9	M6×1×12	20	3 960	33 500	26 800	46 000	360	320	1 840	267	1 540	0.63	3.6
60	7×11×9	M6×1×12	20	[3 500]	45 500	36 500	71 000	555	725	3 700	610	3 100	0.93	3.6
80	9×14×12	M8×1.25×15	20	4 000	47 000	37 500	63 000	600	505	3 150	425	2 650	1.2	5.2
80	9×14×12	M8×1.25×15	20	[3 500]	61 000	48 500	91 500	870	1 030	5 600	865	4 700	1.6	5.2
80	9×14×12	M8×1.25×17	20	4 000	62 500	49 500	80 500	950	755	4 500	630	3 800	1.7	7.2
80	9×14×12	M8×1.25×17	20	4 000	81 000	64 500	117 000	1 380	1 530	8 350	1 280	7 000	2.4	7.2
105	14×20×17	M12×1.75×24	22.5	3 990	107 000	84 500	140 000	2 140	1 740	9 750	1 460	8 150	3.0	12.3
105	14×20×17	M12×1.75×24	22.5	3 990	131 000	104 000	187 000	2 860	3 000	15 600	2 520	13 100	3.9	12.3
120	16×23×20	M14×2×24	30	3 960	158 000	125 000	198 000	3 600	3 000	16 300	2 510	13 700	5.0	16.9
120	16×23×20	M14×2×24	30	3 960	193 000	153 000	264 000	4 850	5 150	26 300	4 350	22 100	6.5	16.9

5) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)

C₅₀: the basic dynamic load rating for 50 km rated fatigue life C₁₀₀: the basic dynamic load rating for 100 km rated fatigue life

The basic static load rating shows static permissible load.

NSK Data Sheet for Linear Guides in Contaminated Environments

[Example]

(Please copy) 1/1

Model: Graphite milling machine

Location: Table axis

1. Operating Conditions

Operating Conditions	a) Ball or Roller slide motion b) Rail motion	Mounting Orientation	a) Vertical b) Horizontal c) Wall d) Upside-down e) Inclined f) Other
Stroke in Normal Use	200 [mm] (Please indicate operating pattern)		
Lubricant	a) Grease (Brand: <i>NSK AS2 grease</i>) b) Oil (Brand:)	Lubricating Method	a) Automatic b) Grease gun (cm ³ / min)
Operating Duration	2 years	months	

2. Linear Guide Environment (Accessories & Contamination)

Contaminant	<i>Graphite powder</i>	Contaminant Size	Particle size 20 - 60μm
Cause of Contamination	<i>Falls evenly on the rail surface.</i> (Please reference with photographs)		
Countermeasures (For already assembled parts, complete after inspection)	a) Telescopic cover b) Bellow c) Dust collector d) Dust-resistant lubricant e) Other () (Please supply drawings to demonstrate dust countermeasures)		

3. Linear Guide Dimensions

Model	<i>VH25AN</i>	Rail Length	540 mm	No. of Slides/Rail	2	Accuracy Grade	<i>P6</i>
Preload	<i>Z1</i>	Max. Speed	20 mm/sec	Dust-Proof Accessories	a) Double seal b) Mounting hole cap c) Protector d) Bellow		

Remarks

4. Durability Test

Durability test

→ Scheduled

→ Not scheduled (Reason:)

Linear Guide Use in Contaminated Environments

※Please read the below and tick the relevant boxes

- An evaluation test result of the special dust-resistant seal which NSK carried out is one case by a particular examination condition (alien substance environment and operating conditions). I accept that the special dust-resistant seal is unable to completely prevent contamination in such an environment and that life may be affected.
- In order to improve wear life in contaminated environments, NSK require **dust-proof accessories (covers, lubricating oil, dust collectors, etc)** in addition to the recommended seal exchange.
- Linear guide wear life is greatly impacted by contamination entering the slide, offset load from misalignment, as well as lubricating condition. **The final durability comes to need the evaluation confirmation with the actual machine.**

Company Name:	Date:
Department:	Name:
Address:	Tel: Fax:

NSK Ltd. Sales Representative	NSK Ltd. Sales Manager
Sign	Sign

NSK Ltd.

NSK Data Sheet for Linear Guides in Contaminated Environments

(Please copy) 1/1

Model: _____ Location: _____

1. Operating Conditions

Operating Conditions	a) Ball or Roller slide motion b) Rail motion	Mounting Orientation	a) Vertical b) Horizontal c) Wall d) Upside-down e) Inclined f) Other
Stroke in Normal Use	(mm) (Please indicate operating pattern)		
Lubricant	a) Grease (Brand: _____) b) Oil (Brand: _____)	Lubricating Method	a) Automatic b) Grease gun (_____ cm ³ /min)
Operating Duration	_____ years _____ months		

2. Linear Guide Environment (Accessories & Contamination)

Contaminant	_____	Contaminant Size	Particle size -
Cause of Contamination	(Please reference with photographs)		
Countermeasures (For already assembled parts, complete after inspection)	a) Telescopic cover b) Bellow e) Other (_____)	c) Dust collector	d) Dust-resistant lubricant
	(Please supply drawings to demonstrate dust countermeasures)		

3. Linear Guide Dimensions

Model	_____	Rail Length	_____ mm	No. of Slides/Rail	_____	Accuracy Grade	_____
Preload	_____	Max. Speed	_____ mm/sec	Dust-Proof Accessories	a) Double seal b) Mounting hole cap c) Protector d) Bellow		

Remarks

4. Durability Test

Durability test → Scheduled
→ Not scheduled (Reason: _____)


Linear Guide Use in Contaminated Environments

※Please read the below and tick the relevant boxes

- An evaluation test result of the special dust-resistant seal which NSK carried out is one case by a particular examination condition (alien substance environment and operating conditions). I accept that the special dust-resistant seal is unable to completely prevent contamination in such an environment and that life may be affected.
- In order to improve wear life in contaminated environments, NSK require **dust-proof accessories (covers, lubricating oil, dust collectors, etc)** in addition to the recommended seal exchange.
- Linear guide wear life is greatly impacted by contamination entering the slide, offset load from misalignment, as well as lubricating condition. **The final durability comes to need the evaluation confirmation with the actual machine.**

Company Name: _____	Date: _____	NSK Ltd. Sales Representative	NSK Ltd. Sales Manager
Department: _____	Name: _____		
Address: _____	Tel: _____	Fax: _____	Sign _____

NSK Ltd.

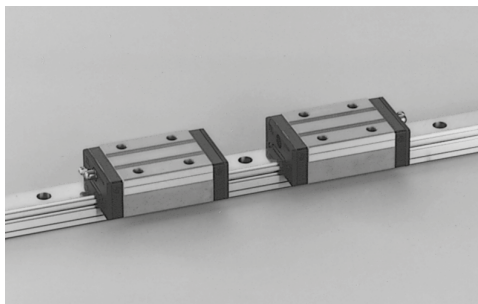

1. Features

(1) Improve rating life dramatically

Based on the LS series characterized by reliability and performance, a significant increase in durability has been attained. New ball groove geometry is introduced, which has been developed by utilizing NSK's state-of-the-art tribological and analytical technologies. Due to the optimized distribution of contact surface pressures, the rating life has dramatically increased.

As compared with the LS Series, the load rating capacity of the NS series has increased to 1.3 times, while the life span has increased to twice^{*1)}. These features enable you to design a machine with a longer life and downsize the machine. Thus, your design capability is greatly enhanced.

^{*1)}: Representative values of series.

(2) Ball circulation path with excellent high-speed property

By reexamining the design practice for the ball circulation path, we have attained smooth ball circulation and reduced noise level. So, NS series is suited for high-speed applications compared with the LS Series.

(3) All mounting dimensions are the same as those for the LS and SS Series

Regarding the mounting dimensions (mounting parts' dimensions), such as the mounting height, mounting width, mounting hole diameter/pitch of the linear guide, etc., the mounting dimensions of the NS Series remain the same as those of the conventional LS series and SS series. So, the new NS Series linear guides can be used without making any design changes.

(4) High self aligning capability (rolling direction)

Same as the DF combination in angular contact bearings, self-aligning capability is high because the cross point of the contact lines of balls and grooves comes inside, and thus reducing moment rigidity. This increases the capacity to absorb errors in installation.

(5) High load carrying capacity to vertical direction

The contact angle is set at 50 degrees, and thus increasing load carrying capacity as well as rigidity against the load in vertical direction.

(6) High resistance against impact load

The bottom ball groove is formed in Gothic arch and the center of the top and bottom grooves are offset as shown in Fig. 2. The vertical load is usually carried by top 2 rows, where balls are contacting at two points. Because of this design, the bottom rows will carry the load when a large impact load is applied as shown in Fig. 3. This assures high resistance to the impact load.

(7) High accuracy

As showing in Fig. 4, fixing the measuring rollers to the ball grooves is simple thanks to the Gothic arch groove. This makes easy and accurate measuring of ball grooves.

(8) Easy to handle, and designed with safety in mind.

Balls are retained in the retainer and do not fall out when the ball slide is withdrawn from the rail.

(9) Abundant models and sizes come in series.

Each size of NS Series has several ball slide models, rendering the linear guide available for numerous uses. The NS Series also has standardized long stainless-steel rail (maximum 3 500 mm).

(10) Fast delivery

Lineup of random-matching rails and ball slides supports and facilitates fast delivery.

High precision grade and medium preload types are also available in random matching. (Special high-carbon steel products)

Note: For customers who have used the former LS or SS series, NS series is recommended as a substitute. Please confirm the correlation between NS series and former ones on the comparative table at A329.

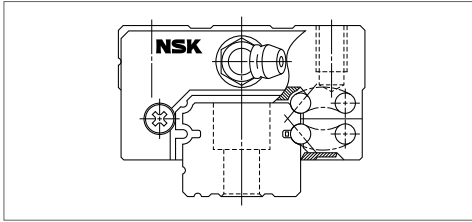


Fig. 1 NS Series

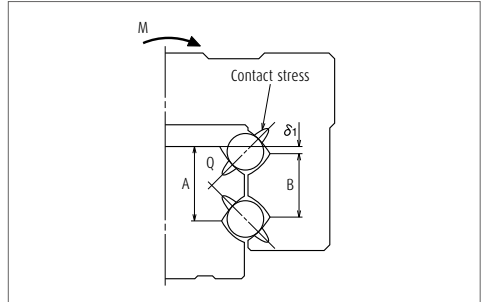


Fig. 2 Enlarged illustration of the offset Gothic arch groove

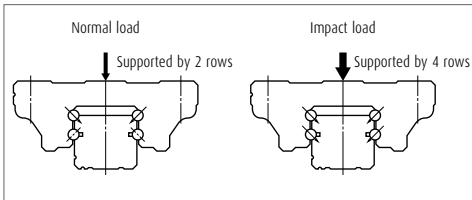


Fig. 3 When load is applied

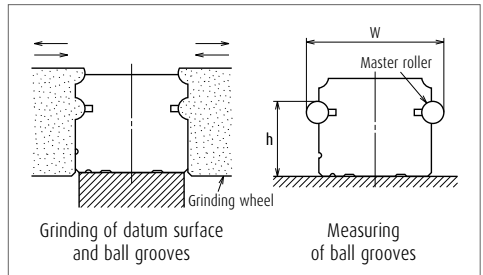


Fig. 4 Rail-grinding and measuring

2. Ball slide shape

Ball slide Model	Shape/installation method	Type (Upper row, Rating: Lower row, Ball slide length)	
		Medium-load type	High-load type
		Standard	Long
AL CL		CL 	AL
EM JM		JM 	EM

Note High-precision grade and medium preload of random-matching type are not applicable to EL, JL, FL and KL models.

A-5-1.4 NS Series

3. Accuracy and preload

(1) Running parallelism of ball slide

Table 1

Unit: μm

Rail length (mm)		Preloaded assembly (not random matching)					Random-matching type	
		Ultra precision P3	Super precision P4	High precision P5	Precision grade P6	Normal grade PN	High precision PH	Normal grade PC
over	or less							
-	50	2	2	2	4.5	6	2	6
50	- 80	2	2	3	5	6	3	6
80	- 125	2	2	3.5	5.5	6.5	3.5	6.5
125	- 200	2	2	4	6	7	4	7
200	- 250	2	2.5	5	7	8	5	8
250	- 315	2	2.5	5	8	9	5	9
315	- 400	2	3	6	9	11	6	11
400	- 500	2	3	6	10	12	6	12
500	- 630	2	3.5	7	12	14	7	14
630	- 800	2	4.5	8	14	16	8	16
800	- 1000	2.5	5	9	16	18	9	18
1 000	- 1 250	3	6	10	17	20	10	20
1 250	- 1 600	4	7	11	19	23	11	23
1 600	- 2 000	4.5	8	13	21	26	13	26
2 000	- 2 500	5	10	15	22	29	15	29
2 500	- 3 150	6	11	17	25	32	17	32
3 150	- 4 000	9	16	23	30	34	23	34

(2) Accuracy standard

The preloaded assembly has five accuracy grades; Ultra precision P3, Super precision P4, High precision P5, Precision P6 and Normal PN grades, while the random-matching type has High-precision PH and Normal PC grade.

> Tolerance of preloaded assembly

Table 2

Unit : μm

Characteristics	Accuracy grade	Ultra precision P3	Super precision P4	High precision P5	Precision grade P6	Normal grade PN
Mounting height H		± 10	± 10	± 20	± 40	± 80
Variation of H (All ball slides on a set of rails)		3	5	7	15	25
Mounting width W_2 or W_3		± 15	± 15	± 25	± 50	± 100
Variation of W_2 or W_3 (All ball slides on reference rail)		3	7	10	20	30
Running parallelism of surface C to surface A Running parallelism of surface D to surface B		See Table 1, Fig. 5 and Fig. 6				

> Tolerance of random-matching type

Table 3

Unit : μm

Characteristics	Model No.	High precision grade PH	Normal grade PC
Mounting height H		± 20	± 20
Variation of mounting height H		15 ① 30 ②	15 ① 30 ②
Mounting width W_2 or W_3		± 30	± 30
Variation of mounting width W_2 or W_3		20	25
Running parallelism of surface C to surface A Running parallelism of surface D to surface B		See Table 1, Fig. 5 and Fig. 6	

Notes: ① Variation on the same rail / ② Variation on multiple rails

(3) Combinations of accuracy and preload

Table 4

		Accuracy grade						
		Ultra precision	Super precision	High precision	Precision grade	Normal grade	High precision	Normal grade
Without NSK K1 lubrication unit		P3	P4	P5	P6	PN	PH	PC
With NSK K1 lubrication unit		K3	K4	K5	K6	KN	KH	KC
With NSK K1 for food and medical equipment		F3	F4	F5	F6	FN	FH	FC
Preload	Fine clearance Z0	○	○	○	○	○	—	—
	Slight preload Z1	○	○	○	○	○	—	—
	Medium preload Z3	○	○	○	○	—	—	—
	Random-matching type with fine clearance ZT	—	—	—	—	—	—	○
	Random-matching type with slight preload ZZ	—	—	—	—	—	○	○
	Random-matching type with medium preload ZH	—	—	—	—	—	○	○

(4) Assembled accuracy

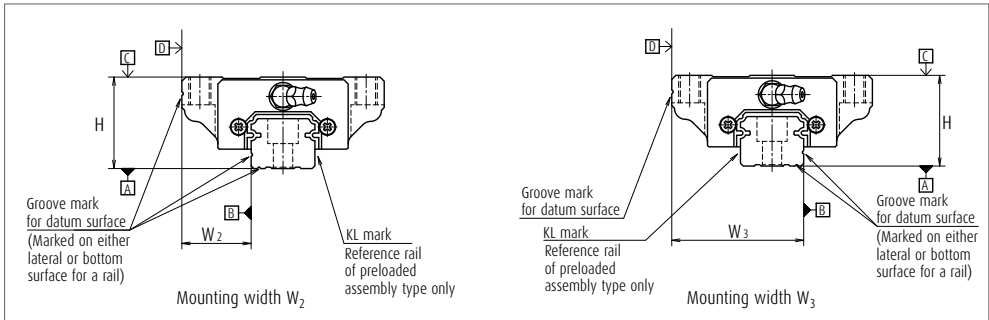


Fig. 5 Special high carbon steel

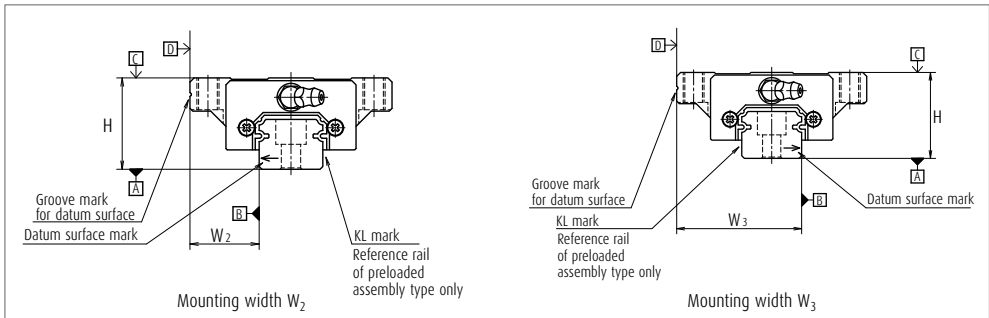


Fig. 6 Stainless steel

A-5-1.4 NS Series

(5) Preload and rigidity

We offer six levels of preload: Slight preload Z1, Medium preload Z3 and Fine clearance Z0, along with random-matching type of Medium preload ZH, Fine clearance ZT and Slight preload ZZ.

> Preload and rigidity of preloaded assembly

Table 5

Model No.		Preload (N)		Rigidity (N/μm)			
				Vertical direction		Lateral direction	
		Slight preload Z1	Medium preload Z3	Slight preload Z1	Medium preload Z3	Slight preload Z1	Medium preload Z3
High-load type	NS15 AL, EM	69	390	127	226	88	167
	NS20 AL, EM	88	540	147	284	108	206
	NS25 AL, EM	147	880	206	370	147	275
	NS30 AL, EM	245	1 370	255	460	186	345
	NS35 AL, EM	345	1 960	305	550	216	400
Medium-load type	NS15 CL, JM	49	294	78	147	59	108
	NS20 CL, JM	69	390	108	186	78	137
	NS25 CL, JM	98	635	127	235	88	177
	NS30 CL, JM	147	980	147	275	108	206
	NS35 CL, JM	245	1 370	186	335	137	245

Note Clearance for Fine clearance Z0 is 0 to 3μm. Therefore, preload is zero. However, Z0 of PN grade is 0 to 15μm.

> Clearance and preload of random-matching type

Table 6

Unit : μm

Model No.	Fine clearance ZT	Slight preload ZZ	Medium preload ZH
NS15	-4 - 15	-4 - 0	-7 - -3
NS20	-4 - 15	-4 - 0	-7 - -3
NS25	-5 - 15	-5 - 0	-9 - -4
NS30	-5 - 15	-5 - 0	-9 - -4
NS35	-5 - 15	-6 - 0	-10 - -4

Note Minus sign denotes that a value is an amount of preload (elastic deformation of balls).

4. Maximum rail length

Table 7 shows the limitations of rail length (maximum length). However, the limitations vary by accuracy grade.

Table 7 Length limitations of rails

Unit : mm

Series	Material \ Size	15	20	25	30	35
		NS	Special high carbon steel	2 920	3 960	3 960
	Stainless steel	1 700	3 500	3 500	3 500	3 500

Note Rails can be butted if user requirement exceeds the rail length shown in the table. Please consult NSK

5. Installation

(1) Permissible values of mounting error

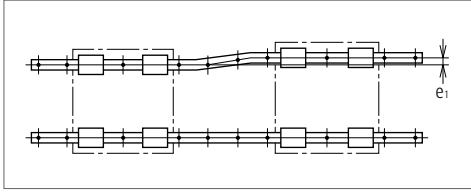


Fig. 7

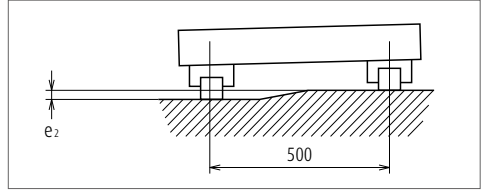


Fig. 8

Table 8

Unit : μm

Value	Preload	Model No.				
		NS15	NS20	NS25	NS30	NS35
Permissible values of parallelism in two rails e_1	Z0, ZT	20	22	30	35	40
	Z1, ZZ	15	17	20	25	30
	Z3, ZH	12	15	15	20	25
Permissible values of parallelism (height) in two rails e_2	Z0, ZT	375 $\mu\text{m}/500\text{ mm}$				
	Z1, ZZ, Z3, ZH	330 $\mu\text{m}/500\text{ mm}$				

(2) Shoulder height of the mounting surface and corner radius




Fig. 9 Shoulder for the rail datum face




Fig. 10 Shoulder for the ball slide datum face

Table 9

Unit : mm

Model No.	Corner radius (maximum)		Shoulder height	
	r_a	r_b	H'	H''
NS15	0.5	0.5	4	4
NS20	0.5	0.5	4.5	5
NS25	0.5	0.5	5	5
NS30	0.5	0.5	6	6
NS35	0.5	0.5	6	6

6. Maximum allowable speed

An indication of the standard maximum allowable speed aiming at 10,000km operation with NS series under normal conditions is shown in Table 10. However, the maximum allowable speed can be affected by accuracy of installation, operating temperature, external load, etc. If the operation is made exceeding the permissible distance and speed, please consult NSK.

Table 10 Maximum allowable speed

Unit : m/min

Series	15	20	25	30	30	35
Size						
NS	300					

A-5-1.4 NS Series

7. Lubrication components

Refer to pages A38 and D13 for the lubrication of linear guides.

(1) Types of lubrication accessories

Fig. 11 and Table 11 show grease fittings and tube fittings.

We provide lubrication accessories with extended thread body length (L) for the addition of dust-proof accessories such as NSK K1 lubrication unit, double seal and protector.

We provide a suitable lubrication accessory for the special requirement on dust-proof accessories.

Consult NSK for a lubrication accessory with extended length of thread body for your convenience of replenishing lubricant.

When you require stainless lubrication accessories, please ask NSK.

Table 11 Grease fitting and tube fitting Unit : mm

Model No.	Dust proof specification	Dimension L		
		Grease fitting / Drive-in type	SF Type	LF Type
NS15	Standard	5	-	-
	With NSK K1	10	-	-
	Double seal	*	-	-
	Protector	*	-	-
NS20	Standard	5	-	-
	With NSK K1	10	-	-
	Double seal	8	-	-
	Protector	8	-	-
NS25	Standard	5	6	6
	With NSK K1	12	11	11
	Double seal	10	9	9
	Protector	10	9	9
NS30	Standard	5	6	6
	With NSK K1	14	12	13
	Double seal	12	10	11
	Protector	12	10	11
NS35	Standard	5	6	6
	With NSK K1	14	12	13
	Double seal	12	10	11
	Protector	12	10	11

*) A connector is required for this model. Please contact NSK for grease fittings.

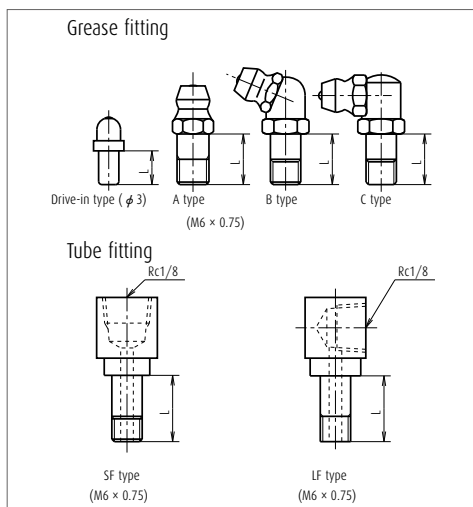


Fig. 11 Grease fitting and tube fitting

(2) Mounting position of lubrication accessories

The standard position of grease fittings is the end face of ball slide. We mount them on a side of end cap for an option.

(Fig. 12)

Please consult NSK for installation of grease or tube fittings to the ball slide body or side of end cap.

When using a piping unit with thread of M6 × 1, you require a connector to connect to a grease fitting mounting hole with M6 × 0.75. The connector is available from NSK.

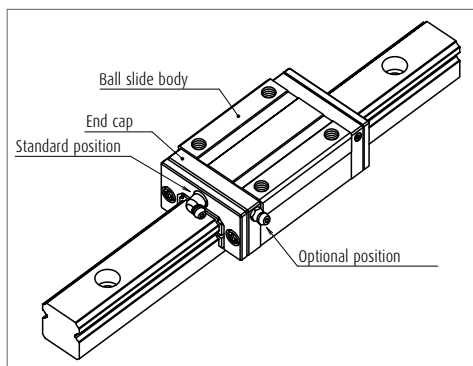


Fig. 12 Mounting position of lubrication accessories

8. Dust proof components

(1) Standard specification

The NS Series can be readily used as they have a dust protection for normal conditions. As the standard equipment, the ball slides have an end seal on both ends, and bottom seals at the bottom.

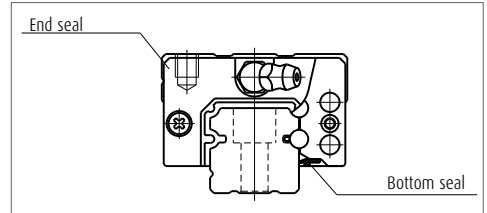


Fig. 13

Table 12 Seal friction per ball slide (maximum value)

Size \ Series	15	20	25	30	35
NS	8	9	9	9	10

Unit : N

(2) NSK K1 lubrication unit

Table 13 shows the dimension of linear guides equipped with the NSK K1 lubrication unit.

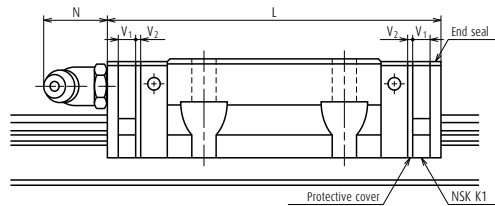


Table 13

Model No.	Ball slide length	Ball slide model	Standard ball slide length	Ball slide length installed with two NSK K1 L	Per NSK K1 thickness V ₁	Protective cover thickness V ₂	Protruding area of the grease fitting N
NS15	Standard	AL, EM	56.8	66.4	4.0	0.8	(5)
	Short	CL, JM	40.4	50			
NS20	Standard	AL, EM	65.2	75.8	4.5	0.8	(14)
	Short	CL, JM	47.2	57.8			
NS25	Standard	AL, EM	81.6	92.2	4.5	0.8	(14)
	Short	CL, JM	59.6	70.2			
NS30	Standard	AL, EM	96.4	108.4	5.0	1.0	(14)
	Short	CL, JM	67.4	79.4			
NS35	Standard	AL, EM	108	121	5.5	1.0	(14)
	Short	CL, JM	77	90			

Unit : mm

Note Ball slide length equipped with NSK K1 = (Standard ball slide length) + (Thickness of NSK K1, V₁ × Number of NSK K1) + (Thickness of the protective cover, V₂ × 2)

A-5-1.4 NS Series

(3) Double seal

Use a double seal set as shown in **Table 14**, when installing an extra seal to completed standard products. (**Fig. 14**)

When installing a grease fitting after the installation of double seals, a connector as shown in **Fig.14** is required.

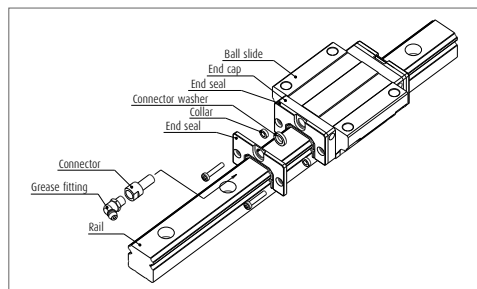


Fig. 14 Double seal

(4) Protector

Use a protector set as shown in **Table 15**, when installing a protector to completed standard products. (**Fig.15**)

When installing a grease fitting after the installation of protectors, a connector as shown in **Fig.15** is required.

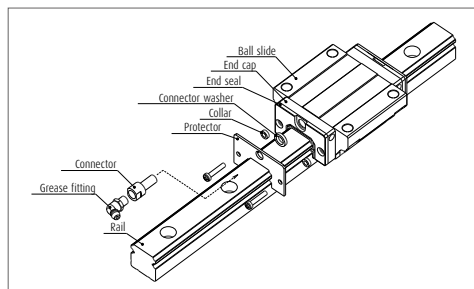


Fig. 15 Protector

Table 14 Double-seal set

Model No.	Reference No.		Increased thickness V_3 (mm)
	Without connector	With connector	
NS15	LS15WS-01	*	2.8
NS20	LS20WS-01	LS20WSC-01	2.5
NS25	LS25WS-01	LS25WSC-01	2.8
NS30	LS30WS-01	LS30WSC-01	3.6
NS35	LS35WS-01	LS35WSC-01	3.6

Table 15 Protector set

Model No.	Reference No.		Increased thickness V_4 (mm)
	Without connector	With connector	
NS15	LS15PT-01	*	3
NS20	LS20PT-01	LS20PTC-01	2.7
NS25	LS25PT-01	LS25PTC-01	3.2
NS30	LS30PT-01	LS30PTC-01	4.2
NS35	LS35PT-01	LS35PTC-01	4.2

*) For installation of a connector to a drive-in type grease fitting, contact NSK.

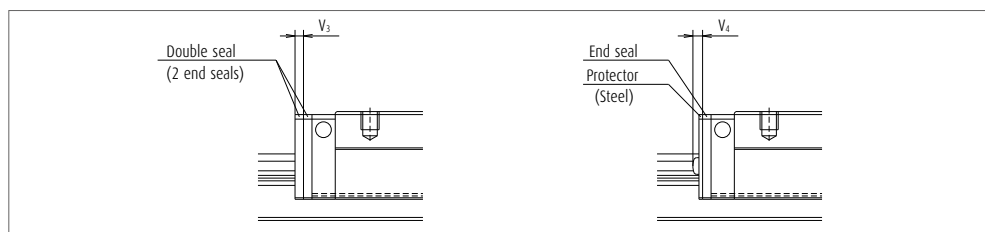


Fig. 16

(5) Cap to plug the rail mounting bolt hole

Table 16 Caps to plug rail bolt hole

Modell No.	Bolt to secure rail	Cap reference No.	Quantity/case
NS15	M3	LG-CAP/M3	20
NS15	M4	LG-CAP/M4	20
NS20	M5	LG-CAP/M5	20
NS25, NS30	M6	LG-CAP/M6	20
NS35	M8	LG-CAP/M8	20

(6) Inner seal

Inner seal is only available for the models shown below.

Table 17

Series	Model No.
NS	NS20, NS25, NS30, NS35

(7) Bellows

- > A bellows fastener kit, which includes one of bellows faster, two of M1 set screws, two of M2 set screws, and two collars for M2 set screws as showing **Fig. 7.7** on page A55, is supplied with bellows for the ends.
- > Middle bellows are supplied with four set screws and four collars.
- > Use a bellows fastener kit as showing **Table 18**, when installing bellows to completed standard products.
- > When NSK K1, double seals or protectors are used, the set screws of bellows fastener kit are unable to use. Please contact NSK for details.
- > Bellows fastener is available only for the horizontal mounting positions. For other mounting positions, sliding plate is required (see **Fig. 7.10** on page A56).
- > For fixing to the rail, make tap holes to the rail end surface. Fix the bellows mounting plate to the rail end surface through these tap holes by using a machine screw. NSK processes a tap hole to the rail end face when ordered with a linear guide.

Table 18 Bellows fastner kit reference No.

Modell No.	Kit reference No.
NS15	LS15FS-01
NS20	LS20FS-01
NS25	LS25FS-01
NS30	LS30FS-01
NS35	LS35FS-01

A-5-1.4 NS Series

Dimension tables of bellows NS Series

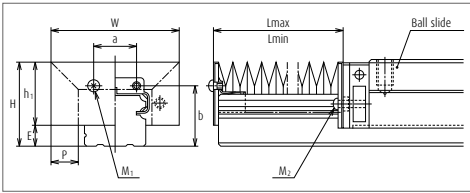


Fig. 17 Dimensions of bellows

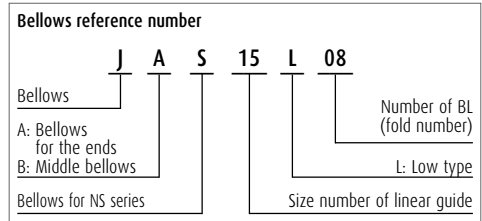


Table 19 Dimensions of bellows

Unit : mm

Model No.	H	h ₁	E	W	P	a	b	BL minimum length	M ₇ Tap × depth	M ₇ Tap × depth
JAS15L	23.5	18.9	4.6	43	10	8	16.5	17	M3 × 5	M3 × 14
JAS20L	27	21	6	48	10	13	19.7	17	M3 × 5	M2.5 × 14
JAS25L	32	25	7	51	10	15	23.2	17	M3 × 5	M3 × 18
JAS30L	41	32	9	66	15	16	29	17	M4 × 6	M4 × 19
JAS35L	47	36.5	10.5	72	15	22	33.5	17	M4 × 6	M4 × 22

Table 20 Numbers of folds (BL) and lengths of bellows

Unit : mm

Model No.	Number of BL	2	4	6	8	10	12	14	16	18	20
	L _{min}	34	68	102	136	170	204	238	272	306	340
JAS15L	Stroke	106	212	318	424	530	636	742	848	954	1 060
	L _{max}	140	280	420	560	700	840	980	1 120	1 260	1 400
JAS20L	Stroke	106	212	318	424	530	636	742	848	954	1 060
	L _{max}	140	280	420	560	700	840	980	1 120	1 260	1 400
JAS25L	Stroke	106	212	318	424	530	636	742	848	954	1 060
	L _{max}	140	280	420	560	700	840	980	1 120	1 260	1 400
JAS30L	Stroke	176	352	528	704	880	1 056	1 232	1 408	1 584	1 760
	L _{max}	210	420	630	840	1 050	1 260	1 470	1 680	1 890	2 100
JAS35L	Stroke	176	352	528	704	880	1 056	1 232	1 408	1 584	1 760
	L _{max}	210	420	630	840	1 050	1 260	1 470	1 680	1 890	2 100

Note The values of an odd number BL quantity (3, 5, 7, ...) can be obtained by adding two values of even number BL on the both side, then by dividing the sum by 2.



A-5-1.4 NS Series

9. Reference number

Reference numbers shall be set to individual NSK linear guide when its specifications are finalized, and it is indicated on its specification drawing.

Please specify the reference number, except design serial number, to identify the product when ordering, requiring estimates, or inquiring about specifications from NSK.

(1) Reference number for preloaded assembly

	NS	30	1200	AL	C	2	-**	P5	3	
Series name									Preload code (See page A156)	
Size									0: Z0, 1: Z1, 3: Z3	
Rail length (mm)									Accuracy code (See Table 22)	
Ball slide shape code (See page A154)									Design serial number	
Material/surface treatment code (See Table 21)									Added to the reference number.	
C: Special high carbon steel (NSK standard), K: Stainless steel									Number of ball slides per rail	

(2) Reference number for random-matching type

Ball slide	NAS	30	AL	S	Z	-K	
Random-matching ball slide series code							Option code
NAS: NS Series random-matching ball slide							-K: Equipped with NSK K1
Size							-F: Fluoride low temperature chrome plating+AS2 grease
Ball slide shape code (See page A154)							-F50: Fluoride low temperature chrome plating+LG2 grease
							Preload code
							No code: Fine clearance, Z: Slight preload, H: Medium preload
							Material code
							No code: Special high carbon steel (NSK standard), S: Stainless steel

Rail	N1S	30	1200	L	C	N	-**	PC	Z
Random-matching rail series code									Preload code (See page A156)
N1S: NS Series random-matching rail									T: Fine clearance
Size									Z: Slight preload (common rail for slight or medium preload)
Rail length (mm)									Accuracy code
Rail shape code:									PH: High precision grade random-matching type
L: Standard									PC: Normal grade random-matching type
T: N1S with mounting holes for M4									Design serial number
Material/surface treatment code (See Table 21)									Added to the reference number.
									*Butting rail specification
									N: Non-butting, L: Butting specification
									*Please consult with NSK for butting rail specification.

The reference number coding for the assembly of random-matching type is the same as that of the preloaded assembly. However, only preload codes of "fine clearance T" and "slight preload Z" are available (refer to page A156).

Click!Speedy™ NSK Linear Guide Quick Delivery System uses a new numbering system. For details, please refer to the Click!Speedy general catalog CAT. No. E3191.

Table 21 Material/surface treatment code

Code	Description
C	Special high carbon steel (NSK standard)
K	Stainless steel
D	Special high carbon steel with surface treatment
H	Stainless steel with surface treatment
Z	Other, special

Note High-precision grade and medium preload of random-matching type are not available in stainless steel.

Table 22 Accuracy code

Accuracy	Standard (Without NSK K1)	With NSK K1	With NSK K1 for food and medical equipment
Ultra precision grade	P3	K3	F3
Super precision grade	P4	K4	F4
High precision grade	P5	K5	F5
Precision grade	P6	K6	F6
Normal grade	PN	KN	FN
High precision grade (random-matching type)	PH	KH	FH
Normal grade (random-matching type)	PC	KC	FC


Note Refer to pages A38 and A61 for NSK K1 lubrication unit.

A-5-1.4 NS Series


10. Dimensions

NS-CL (Medium-load type / Short)


NS-AL (High-load type / Standard)

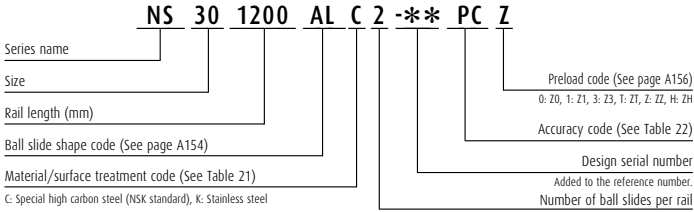


Front view of AL and CL type



Side view of AL type

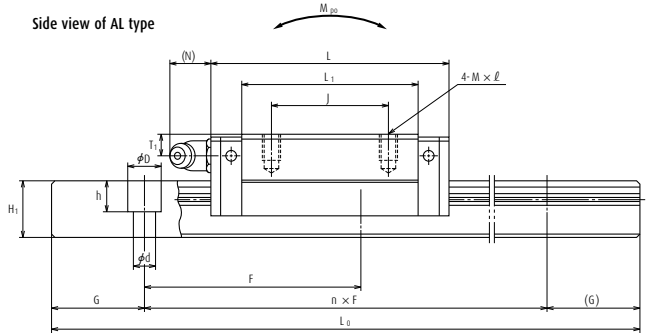

Side view of CL type



Model No.	Assembly			Ball slide										Width	Height			
	Height	E	W ₂	Width	Length	Mounting hole			L ₁	K	T	Grease fitting				W ₁	H ₁	
						B	J	M × pitch × ℓ				Hole size	T ₁					N
NS15CL	24	4.6	9.5	34	40.4	26	-	M4×0.7×6	23.6	19.4	10	φ 3	6	3	15	12.5		
NS15AL	24	4.6	9.5	34	56.8	26	26	M4×0.7×6	40	19.4	10	φ 3	6	3	15	12.5		
NS20CL	28	6	11	42	47.2	32	-	M5×0.8×7	30	22	12	M6×0.75	5.5	11	20	15.5		
NS20AL	28	6	11	42	65.2	32	32	M5×0.8×7	48	22	12	M6×0.75	5.5	11	20	15.5		
NS25CL	33	7	12.5	48	59.6	35	-	M6×1×9	38	26	12	M6×0.75	7	11	23	18		
NS25AL	33	7	12.5	48	81.6	35	35	M6×1×9	60	26	12	M6×0.75	7	11	23	18		
NS30CL	42	9	16	60	67.4	40	-	M8×1,25×12	42	33	13	M6×0.75	8	11	28	23		
NS30AL	42	9	16	60	96.4	40	40	M8×1,25×12	71	33	13	M6×0.75	8	11	28	23		
NS35CL	48	10.5	18	70	77	50	-	M8×1,25×12	49	37.5	14	M6×0.75	8.5	11	34	27.5		
NS35AL	48	10.5	18	70	108	50	50	M8×1,25×12	80	37.5	14	M6×0.75	8.5	11	34	27.5		

Notes 1) External appearance of stainless steel ball slides differs from those of carbon steel ball slides.

Reference number for ball slide of random-matching type

Ball slide

NAS 30 AL S Z -K

Random-matching ball slide series code

NAS: NS Series random-matching ball slide

Size

Ball slide shape code (See page A154)

Option code

-K: Equipped with NSK K1

-F: Fluoride low temperature chrome plating + AS2 grease

+F50: Fluoride low temperature chrome plating + LG2 grease


Preload code

No code: Fine clearance, Z: Slight preload, H: Medium preload


Material code

No code: Special high carbon steel (NSK standard), S: Stainless steel


AL and CL types



AL type



CL type



Reference number for rail of random-matching type

Rail

N15 30 1200 L C N - PC Z**

Random-matching rail series code

N15: NS Series random-matching rail

Size

Rail length (mm)

Rail shape code

L: Standard

T: NS15 with mounting holes for M4

Material/surface treatment code (See Table 21)

Preload code (See page A156)

Z: Slight preload (common rail for medium preload)

Accuracy code

PH: High precision grade, PC: Normal grade


Design serial number

Added to the reference number.

*Butting rail specification

N: Non-butting, L: Butting specification

*Please consult with NSK for butting rail specification.

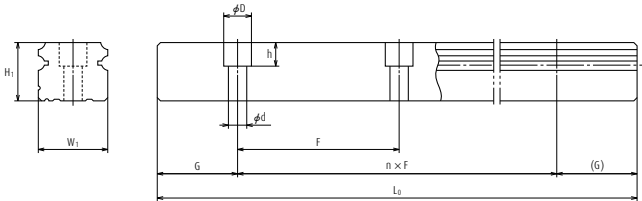

Unit: mm

Rail				Basic load rating								Weight	
Pitch	Mounting bolt hole	G	Maximum length	2) Dynamic		Static	M_{R0}	Static moment (N-m)				Ball slide (kg)	Rail (kg/m)
F	$d \times D \times h$	(reference)	L_{max} () for stainless	[50km] $C_{50}(N)$	[100km] $C_{100}(N)$	C_0 (N)		M_{P0}		M_{V0}			
								One slide	Two slides	One slide	Two slides		
60	*3.5×6×4.5	20	2 920	7 250	5 750	9 100	45.5	24.5	196	20.5	165	0.14	1.4
60	4.5×7.5×5.3	20	(1 700)	11 200	8 850	16 900	84.5	77	470	64.5	395	0.20	1.4
60	6×9.5×8.5	20	3 960	10 600	8 400	13 400	91.5	46.5	330	39	279	0.19	2.3
60	6×9.5×8.5	20	(3 500)	15 600	12 400	23 500	160	133	755	111	630	0.28	2.3
60	7×11×9	20	3 960	17 700	14 000	20 800	164	91	655	76	550	0.34	3.1
60	7×11×9	20	(3 500)	26 100	20 700	36 500	286	258	1 470	217	1 230	0.51	3.1
80	7×11×9	20	4 000	24 700	19 600	29 600	282	139	1 080	116	905	0.58	4.8
80	7×11×9	20	(3 500)	38 000	30 000	55 000	520	435	2 650	365	2 220	0.85	4.8
80	9×14×12	20	4 000	34 500	27 300	40 000	465	220	1 670	185	1 400	0.86	7.0
80	9×14×12	20	(3 500)	52 500	42 000	74 500	865	695	4 000	580	3 350	1.3	7.0

2) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)

C_{50} : the basic dynamic load rating for 50 km rated fatigue life C_{100} : the basic dynamic load rating for 100 km rated fatigue life

The basic static load rating shows static permissible load.


3) High-precision grade and medium preload of random-matching type are available for special high carbon steel products.

* Standard mounting hole of NS15 rail is for M4 bolts (Hole size: 4.5 × 7.5 × 5.3).


If you require mounting hole for M3 bolts (Hole size: 3.5 × 6 × 4.5), please specify when ordering.

A-5-1.4 NS Series


NS-JM (Medium-load type / Short)
NS-EM (High-load type / Standard)

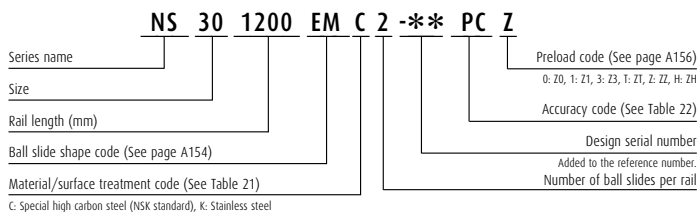


Front view of EM and JM types

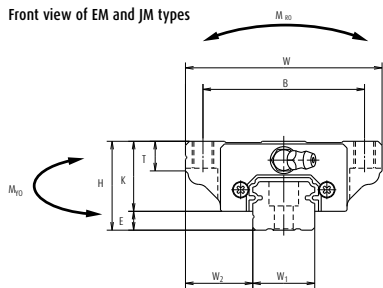

Side view of EM type

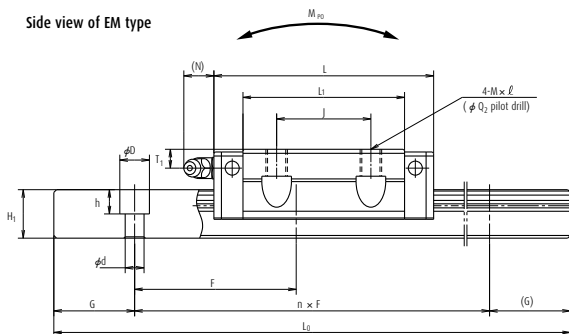

Side view of JM type

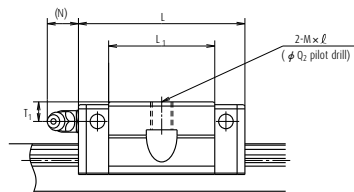

Model No.	Assembly			Ball slide													
	Height		W ₂	Width	Length	Mounting hole				L ₁	K	T	Grease fitting			W ₁	Height
	H	E				B	J	M × pitch × l	Q ₂				Hole size	T ₁	N		
NS15JM	24	4.6	18.5	52	40.4	41	-	M5×0.8×7	4.4	23.6	19.4	8	φ 3	6	3	15	12.5
NS15EM	24	4.6	18.5	52	56.8	41	26	M5×0.8×7	4.4	40	19.4	8	φ 3	6	3	15	12.5
NS20JM	28	6	19.5	59	47.2	49	-	M6×1×9	5.3	30	22	10	M6×0.75	5.5	11	20	15.5
NS20EM	28	6	19.5	59	65.2	49	32	(M6×1×9.5)	5.3	48	22	10	M6×0.75	5.5	11	20	15.5
NS25JM	33	7	25	73	59.6	60	-	M8×1.25×10	6.8	38	26	11	M6×0.75	7	11	23	18
NS25EM	33	7	25	73	81.6	60	35	(M8×1.25×11.5)	6.8	60	26	(12)	M6×0.75	7	11	23	18
NS30JM	42	9	31	90	67.4	72	-	M10×1.5×12	8.6	42	33	11	M6×0.75	8	11	28	23
NS30EM	42	9	31	90	96.4	72	40	(M10×1.5×14.5)	8.6	71	33	(15)	M6×0.75	8	11	28	23
NS35JM	48	10.5	33	100	77	82	-	M10×1.5×13	8.6	49	37.5	12	M6×0.75	8.5	11	34	27.5
NS35EM	48	10.5	33	100	108	82	50	(M10×1.5×14.5)	8.6	80	37.5	(15)	M6×0.75	8.5	11	34	27.5

- Notes
- 1) External appearance of stainless steel ball slides differs from those of carbon steel ball slides.
 - 2) Parenthesized dimensions are for items made of stainless steel.

Reference number for ball slide of random-matching type

Ball slide

NAS 30 EM S Z -K

Random-matching ball slide series code

NAS: NS Series random-matching ball slide

Size

Ball slide shape code (See page A154)

Option code

-K: Equipped with NSK K1

-F: Fluoride low temperature chrome plating + AS2 grease

-F50: Fluoride low temperature chrome plating + LG2 grease


Preload code

No code: Fine clearance, Z: Slight preload, H: Medium preload


Material code

No code: Special high carbon steel (NSK standard), S: Stainless steel


EM and JM types



EM type



JM type



Reference number for rail of random-matching type

Rail

N1S 30 1200 L C N - PC Z**

Random-matching rail series code

N1S: NS Series random-matching rail

Size

Rail length (mm)

Rail shape code

L: Standard

T: NS15 with mounting holes for M4

Material/surface treatment code (See Table 21)

Preload code (See page A156)

I: Fine clearance,

Z: Slight preload (common rail for medium preload)

Accuracy code

PH: High precision grade

PC: Normal grade


Design serial number

Added to the reference number.

*Butting rail specification

N: Non-butting, L: Butting specification

*Please consult with NSK for butting rail specification.

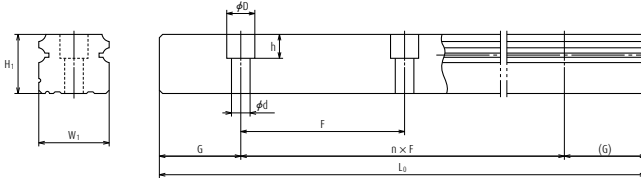

Unit: mm

Rail				Basic load rating							Weight		
Pitch	Mounting bolt hole	G	Maximum length	3) Dynamic		Static	M_{R0}	Static moment (N-m)				Ball slide (kg)	Rail (kg/m)
F	$d \times D \times h$	(reference)	L_{max} () for stainless	[50km] $C_{50}(N)$	[100km] $C_{100}(N)$	C_0 (N)		M_{P0}		M_{V0}			
								One slide	Two slides	One slide	Two slides		
60	*3.5×6×4.5	20	2 920	7 250	5 750	9 100	45.5	24.5	196	20.5	165	0.17	1.4
60	4.5×7.5×5.3	20	(1 700)	11 200	8 850	16 900	84.5	77	470	64.5	395	0.26	1.4
60	6×9.5×8.5	20	3 960	10 600	8 400	13 400	91.5	46.5	330	39	279	0.24	2.3
60	6×9.5×8.5	20	(3 500)	15 600	12 400	23 500	160	133	755	111	630	0.35	2.3
60	7×11×9	20	3 960	17 700	14 000	20 800	164	91	655	76	550	0.44	3.1
60	7×11×9	20	(3 500)	26 100	20 700	36 500	286	258	1 470	217	1 230	0.66	3.1
80	7×11×9	20	4 000	24 700	19 600	29 600	282	139	1 080	116	905	0.76	4.8
80	7×11×9	20	(3 500)	38 000	30 000	55 000	520	435	2 650	365	2 220	1.2	4.8
80	9×14×12	20	4 000	34 500	27 300	40 000	465	220	1 670	185	1 400	1.2	7.0
80	9×14×12	20	(3 500)	52 500	42 000	74 500	865	695	4 000	580	3 350	1.7	7.0

3) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)

C_{50} : the basic dynamic load rating for 50 km rated fatigue life C_{100} : the basic dynamic load rating for 100 km rated fatigue life

The basic static load rating shows static permissible load.

4) High-precision grade and medium preload of random-matching type are available for special high carbon steel products.

* Standard mounting hole of NS15 rail is for M4 bolts (Hole size: 4.5 × 7.5 × 5.3).

If you require mounting hole for M3 bolts (Hole size: 3.5 × 6 × 4.5), please specify when ordering.

A-5-1.5 LW Series

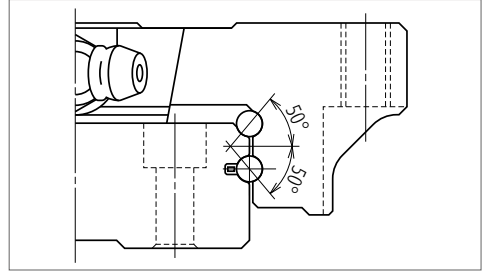
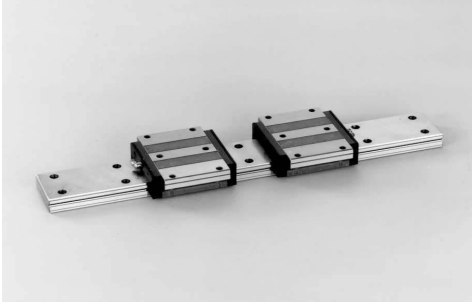


Fig. 1 Balls in contact

1. Features

(1) Ideal for use of single rail

Thanks to the wide rail, rigidity and load carrying capacity are high against moment load from rolling direction. This makes the LW Series ideal for a single rail, compact linear guideway system.

(2) High load carrying capacity to vertical direction

The contact angle is set at 50 degrees, increasing load carrying capacity as well as rigidity in vertical direction.

(3) High resistance against impact load

Same as the NH and NS series, the offset Gothic arch grooves support a large load, such as an impact, by four rows.

(4) High accuracy

Fixing master rollers to ball grooves is easy thanks to the Gothic arch groove. This makes easy and accurate measuring of ball grooves.

(5) Easy to handle, and designed with safety in mind

Balls are retained in the retainer and do not fall out when a ball slide is withdrawn from the rail.

(6) Fast delivery

Lineup of random-matching rails and ball slides supports and facilitates fast delivery.

2. Ball slide shape

Ball slide Model	Shape/installation method	Type
EL		

3. Accuracy and preload

(1) Running parallelism of ball slide

Table 1

Unit: μm

Rail length (mm)		Preloaded assembly (not random matching)			Random-matching type
		High precision P5	Precision grade P6	Normal grade PN	Normal grade PC
over	or less				
-	50	2	4.5	6	6
50 -	80	3	5	6	6
80 -	125	3.5	5.5	6.5	6.5
125 -	200	4	6	7	7
200 -	250	5	7	8	8
250 -	315	5	8	9	9
315 -	400	6	9	11	11
400 -	500	6	10	12	12
500 -	630	7	12	14	14
630 -	800	8	14	16	16
800 -	1 000	9	16	18	18
1 000 -	1 250	10	17	20	20
1 250 -	1 600	11	19	23	23
1 600 -	2 000	13	21	26	26
2 000 -	2 500	15	22	29	29
2 500 -	3 150	17	25	32	32
3 150 -	4 000	23	30	34	34

(2) Accuracy standard

The preloaded assembly has three accuracy grades; High precision P5, Precision P6, and Normal PN grades, while the random-matching type has Normal PC grade only.

> Tolerance of preloaded assembly type

Table 2

Unit: μm

Characteristics	Accuracy grade	High precision P5	Precision grade P6	Normal grade PN
Mounting height H		± 20	± 40	± 80
Variation of H (All ball slides on a set of rails)		7	15	25
Mounting width W_2 or W_3		± 25	± 50	± 100
Variation of W_2 or W_3 (All ball slides on reference rail)		10	20	30
Running parallelism of surface C to surface A Running parallelism of surface D to surface B		Shown in Table 1 and Fig. 2		

> Tolerance of random-matching type: Normal grade PC

Table 3

Unit: μm

Characteristics	Model No.
	LW17, 21, 27, 35, 50
Mounting height H	± 20
Variation of mounting height H	15 ① 30 ②
Mounting width W_2 or W_3	± 30
Variation of mounting width W_2 or W_3	25
Running parallelism of surface C to surface A Running parallelism of surface D to surface B	See Table 1 and Fig. 2

Notes ① Variation on the same rail / ② Variation on multiple rails

A-5-1.5 LW Series

(3) Combinations of accuracy and preload

Table 4

		Accuracy grade			
		High precision	Precision grade	Normal grade	Normal grade
Without NSK K1 lubrication unit		P5	P6	PN	PC
With NSK K1 lubrication unit		K5	K6	KN	KC
With NSK K1 for food and medical equipment		F5	F6	FN	FC
Preload	Fine clearance Z0	○	○	○	—
	Slight preload Z1	○	○	○	—
	Medium preload Z3	○	○	—	—
	Random-matching type with fine clearance ZT	—	—	—	○
	Random-matching type with slight preload ZZ	—	—	—	○

Note Z3 medium preload is only applicable to models of LW35 and LW50.

(4) Assembled accuracy

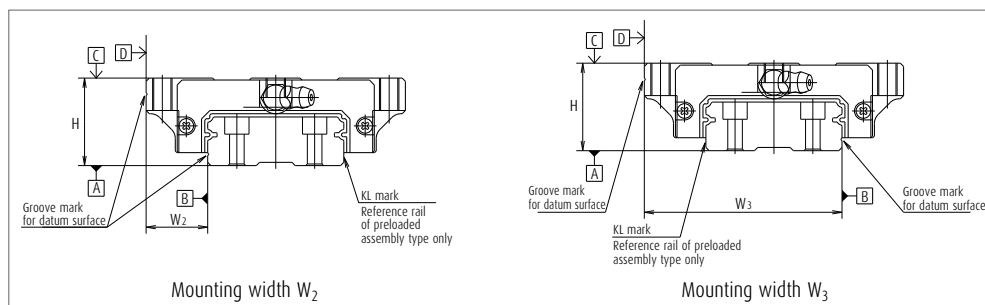


Fig. 2

(5) Preload and rigidity

We offer five levels of preload: Slight preload Z1, Medium preload Z3 and Fine clearance Z0, along with Random-matching type of Fine clearance ZT and Slight preload ZZ. Rigidities are for the median of the preload range.

> Preload and rigidity of preloaded assembly

Table 5

Model No.	Preload (N)		Rigidity (N/μm)			
			Vertical direction		Lateral direction	
	Slight preload Z1	Medium preload Z3	Slight preload Z1	Medium preload Z3	Slight preload Z1	Medium preload Z3
LW17 EL	0 - 245	—	156	—	112	—
LW21 EL	0 - 294	—	181	—	130	—
LW27 EL	0 - 390	—	226	—	167	—
LW35 EL	0 - 490	785	295	440	213	315
LW50 EL	0 - 590	1 470	345	600	246	425

Note Clearance for Fine clearance Z0 is 0 to 3μm. Therefore, preload is zero. However, Z0 of PN grade is 0 to 15μm.

> Clearance and preload of random-matching type

Table 6

Unit: μm

Model No.	Fine clearance Z1	Slight preload Z2
LW17	-3 - 15	-3.5 - 0
LW21	-3 - 15	-3.5 - 0
LW27	-4 - 15	-4 - 0
LW35	-5 - 15	-5 - 0
LW50	-5 - 15	-7 - 0

Note Minus sign denotes elastic deformation of balls representing.

5. Installation

(1) Permissible values of mounting error

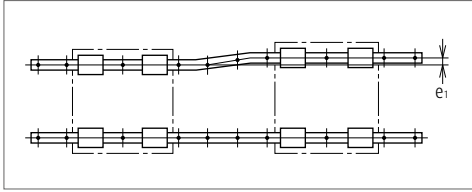


Fig. 3

4. Maximum rail length

Table 7 shows the limitations of rail length (maximum length). However, the limitations vary by accuracy grade.

Table 7 Length limitations of rails

Unit: mm

Model No.	Material	Size				
		17	21	27	35	50
LW	Special high carbon steel	1 000	1 600	2 000	2 000	2 000

Note Rails can be butted if user requirement exceeds the rail length shown in the table. Please consult NSK.

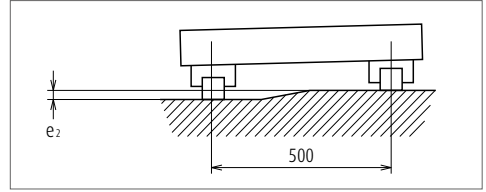


Fig. 4

Table 8

Unit: μm

Value	Preload	Model No.				
		LW17	LW21	LW27	LW35	LW50
Permissible values of parallelism in two rails e_1	Z0, Z1	20	20	25	38	50
	Z1, Z2	9	9	13	23	34
Permissible values of parallelism (height) in two rails e_2	Z0, Z1	100 $\mu\text{m}/500$ mm				
	Z1, Z2	45 $\mu\text{m}/500$ mm				

(2) Shoulder height of the mounting surface and corner radius




Fig. 5 Shoulder for the rail datum face




Fig. 6 Shoulder for the ball slide datum face

Table 9

Unit: mm

Model No.	Corner radius (maximum)		Shoulder height	
	r_a	r_b	H'	H''
LW17	0.3	0.3	2.2	4
LW21	0.3	0.3	2.5	5
LW27	0.5	0.5	3.5	5
LW35	0.5	0.8	3.5	5
LW50	0.8	0.8	4	6

A-5-1.5 LW Series

6. Lubrication components

Refer to pages A38 and D13 for the lubrication of linear guides.

(1) Types of lubrication accessories

Fig. 7 and Table 10 show grease fittings and tube fittings.

We provide lubrication accessories with extended thread body length (L) for the addition of dust-proof accessories such as NSK K1 lubrication unit, double seal and protector.

We provide a suitable lubrication accessory for the special requirement on dust-proof accessories.

Consult NSK for a lubrication accessory with extended length of thread body for your convenience of replenishing lubricant.

Please ask NSK for stainless lubrication accessories.

Table 10

Unit: mm

Model No.	Dust-proof specification	Dimension L		
		Grease fitting / Drive-in type	Tube fitting	
			SF Type	LF Type
LW17	Standard	5	-	-
	With NSK K1	10	-	-
	Double seal	*	-	-
	Protector	*	-	-
LW21	Standard	5	-	-
	With NSK K1	12	-	-
	Double seal	10	-	-
	Protector	10	-	-
LW27	Standard	5	5	5
	With NSK K1	12	12	12
	Double seal	10	9	9
	Protector	10	9	9
LW35	Standard	5	6	6
	With NSK K1	14	14	13
	Double seal	10	10	9
	Protector	10	10	9
LW50	Standard	8	13.5	17
	With NSK K1	18	18	19
	Double seal	14	16	17
	Protector	14	13.5	17

*) A connector is required for the grease fitting. Please contact NSK.

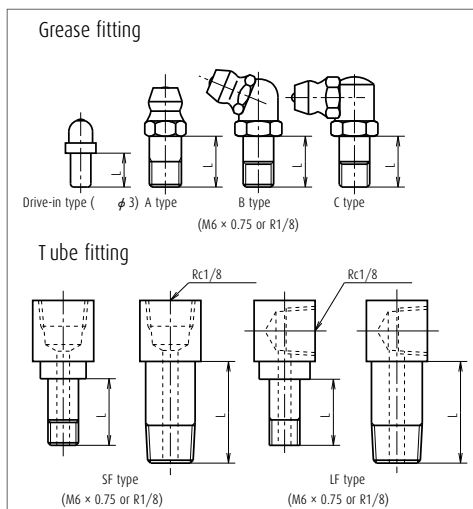


Fig. 7 Grease fitting and tube fitting

(2) Mounting position of lubrication accessories

The standard position of grease fittings is the end face of ball slide. We may mount them on a side of end cap for LW27, 35, and 50 as an option. **(Fig. 8)**

Please consult NSK for installation of grease or tube fittings to the ball slide body or side of end cap.

When using a piping unit with thread of $M6 \times 1$, you require a connector for a connection to a grease fitting mounting hole with $M6 \times 0.75$. The connector is available from NSK.

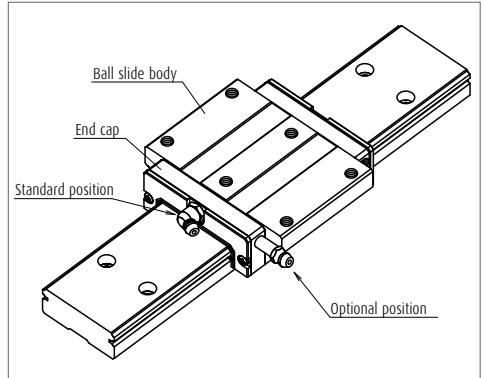


Fig. 8 Mounting position of lubrication accessories

A-5-1.5 LW Series

7. Dust-proof components

(1) Standard specification

The LW Series can be readily used as they have a dust protection means for normal conditions. As the standard equipment, the series has an end seal on both ends and bottom seals at the bottom.

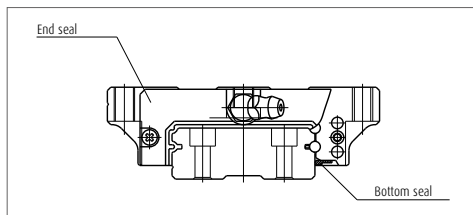


Fig. 13

Table 11 Seal friction per ball slide (maximum value)

Unit: N

Size \ Series	17	21	27	35	50
LW	6	8	12	16	20

(2) NSK K1 lubrication unit

Table 12 shows the dimension of linear guides equipped with the NSK K1 lubrication unit.

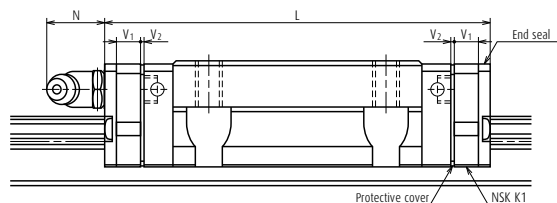


Table 12

Unit: mm

Model No.	Ball slide length	Ball slide model	Standard ball slide length	Ball slide length installed with two NSK K1	Per NSK K1 thickness	Protective cover thickness	Protruding area of the grease fitting
				L	V ₁	V ₂	N
LW17	Standard	EL	51.4	61.6	4.5	0.6	(5)
LW21	Standard	EL	58.8	71.4	5.5	0.8	(13)
LW27	Standard	EL	74	86.6	5.5	0.8	(13)
LW35	Standard	EL	108	123	6.5	1.0	(13)
LW50	Standard	EL	140.6	155.6	6.5	1.0	(14)

- Note**
- 1) NSK K1 for food and medical equipments are available for the models of LW17 to LW35.
 - 2) Ball slide length equipped with NSK K1 = (Standard ball slide length) + (Thickness of NSK K1, V₁ × Number of NSK K1) + (Thickness of the protective cover, V₂ × 2)

(3) Double seal

Use a double seal set as showing in **Table 13**, when installing an extra seal to completed standard products. **(Fig. 10)**
When installing a grease fitting after the installation of double seals, a connector as showing **Fig.10** is required.

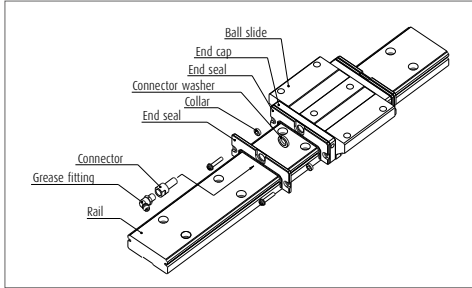


Fig. 10 Double seal

(4) Protector

Use a protector set as showing **Table 14**, when installing a protector to completed standard products. **(Fig.11)**
When installing a grease fitting after the installation of protectors, a connector as showing **Fig.11** is required.

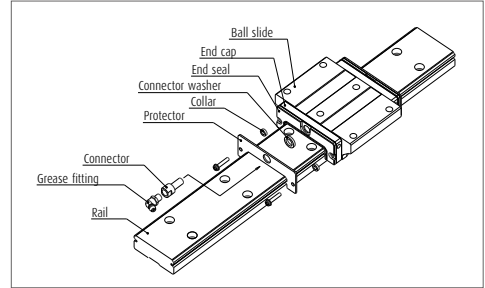


Fig. 11 Protector seal

Table 13 Double-seal set

Model No.	Reference No.		Increased thickness V_3 (mm)
	Without connector	With connector	
LW17	LW17WS-01	*	2.6
LW21	LW21WS-01	LW21WSC-01	2.8
LW27	LW27WS-01	LW27WSC-01	2.5
LW35	LW35WS-01	LW35WSC-01	3
LW50	LW50WS-01	LW50WSC-01	3.6

Table 14 Protector set

Model No.	Reference No.		Increased thickness V_4 (mm)
	Without connector	With connector	
LW17	LW17PT-01	*	3.2
LW21	LW21PT-01	LW21PTC-01	3.2
LW27	LW27PT-01	LW27PTC-01	2.9
LW35	LW35PT-01	LW35PTC-01	3.6
LW50	LW50PT-01	LW50PTC-01	4.2

*) For installation of a connector to a drive-in type grease fitting, contact NSK.

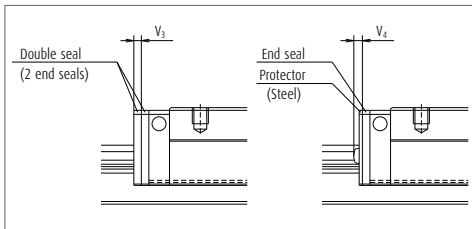


Fig. 12

(5) Cap to plug the rail mounting bolt hole

Table 15 Caps to plug rail bolt hole

Modell No.	Bolt to secure rail	Cap reference No.	Quantity/case
LW17, LW21, LW27	M4	LG-CAP/M4	20
LW35	M6	LG-CAP/M6	20
LW50	M8	LG-CAP/M8	20

A-5-1.5 LW Series

(6) Bellows

- > Make tap holes to the rail end face to fix the bellows mounting plate. NSK processes tap holes to the rail end face when ordered with a linear guide.

Dimension tables of bellows

LW Series

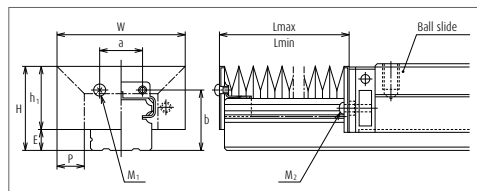


Fig. 17 Dimensions of bellows

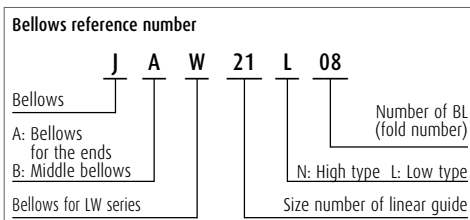


Table 16 Dimensions of bellows

Unit : mm

Model No.	H	h ₁	E	W	P	a	b	BL minimum length	Tap (M) × depth
JAW17N	25.5	23	2.5	68	15	22	6	17	M3 × 6
JAW21N	29	26	3	75	17	26	7	17	M3 × 6
JAW27N	37	33	4	85	20	28	10	17	M3 × 6
JAW35L	34	30	4	100	14	48	12	17	M4 × 8
JAW35N	41	37	4	115	20	48	12	17	M4 × 8
JAW50L	46.5	42	4.5	135	20	70	14	17	M4 × 8
JAW50N	56.5	52	4.5	160	30	70	14	17	M4 × 8

Table 20 Numbers of folds (BL) and lengths of bellows

Unit : mm

Model No.	Number of BL	2	4	6	8	10	12	14	16	18	20
	L _{min}	34	68	102	136	170	204	238	272	306	340
JAW17N	Stroke	176	352	528	704	880	1 056	1 232	1 408	1 584	1 760
	L _{max}	210	420	630	840	1 050	1 260	1 470	1 680	1 890	2 100
JAW21N	Stroke	204	408	612	816	1 020	1 224	1 428	1 632	1 836	2 040
	L _{max}	238	476	714	952	1 190	1 428	1 666	1 904	2 142	2 380
JAW27N	Stroke	246	492	738	984	1 230	1 476	1 722	1 968	2 214	2 460
	L _{max}	280	560	840	1 120	1 400	1 680	1 960	2 240	2 520	2 800
JAW35L	Stroke	162	324	486	648	810	972	1 134	1 296	1 458	1 620
	L _{max}	196	392	588	784	980	1 176	1 372	1 568	1 764	1 960
JAW35N	Stroke	218	436	654	872	1 090	1 308	1 526	1 744	1 962	2 180
	L _{max}	252	504	756	1 008	1 260	1 512	1 764	2 016	2 268	2 520
JAW50L	Stroke	246	492	738	984	1 230	1 476	1 722	1 968	2 214	2 460
	L _{max}	280	560	840	1 120	1 400	1 680	1 960	2 240	2 520	2 800
JAW50N	Stroke	386	772	1 158	1 544	1 930	2 316	2 702	3 088	3 474	3 860
	L _{max}	420	840	1 260	1 680	2 100	2 520	2 940	3 360	3 780	4 200

Note The values of an odd number BL quantity (3, 5, 7, ...) can be obtained by adding two values of even number BL on the both sides, then by dividing the sum by 2.




A-5-1.5 LW Series

8. Reference number



Reference numbers shall be set to individual NSK linear guide when its specifications are finalized, and it is indicated on its specification drawing.

Please specify the reference number, except design serial number, to identify the product when ordering, requiring estimates, or inquiring about specifications from NSK.

(1) Reference number for preloaded assembly

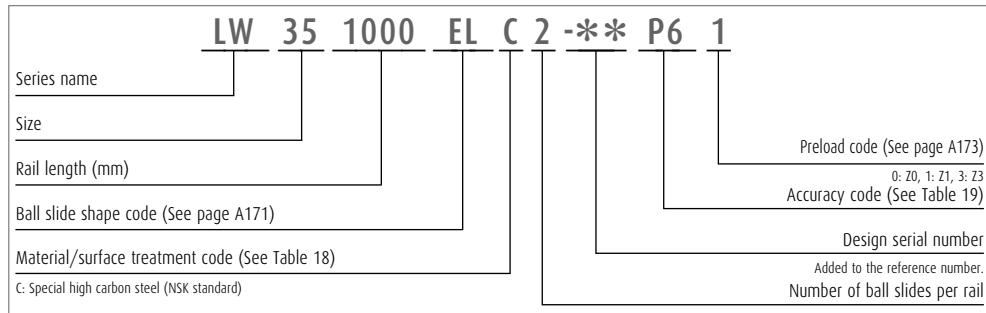

(2) Reference number for random-matching type

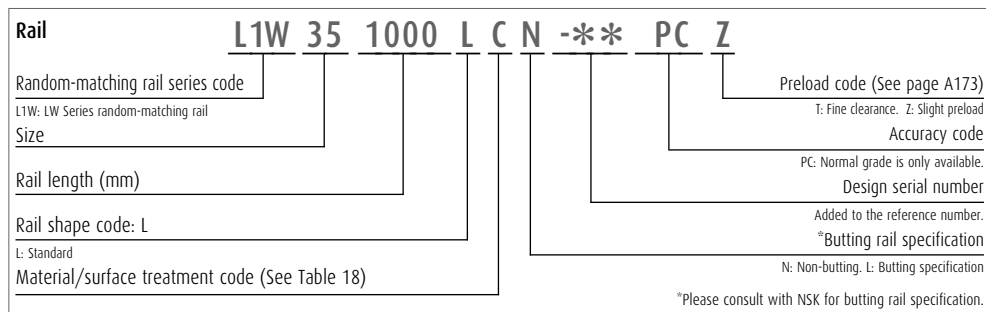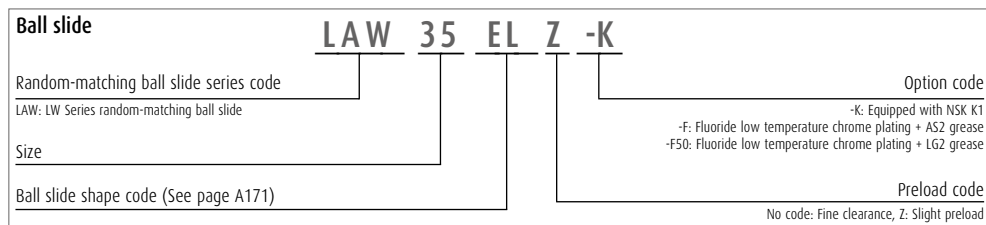

The reference number coding for the assembly of random-matching type is the same as that of preloaded assembly. However, only preload codes of "fine clearance T" and "slight preload Z" are available (refer to page A173).

Click!Speedy™ NSK Linear Guide Quick Delivery System uses a new numbering system. For details, please refer to the Click!Speedy general catalog CAT. No. E3191.

Table 18 Material/surface treatment code

Code	Description
C	Special high carbon steel (NSK standard)
D	Special high carbon steel with surface treatment
Z	Other, special

Table 19 Accuracy code


Accuracy	Standard (Without NSK K1)	With NSK K1	With NSK K1 for food and medical equipment
High precision grade	P5	K5	F5
Precision grade	P6	K6	F6
Normal grade	PN	KN	FN
Normal grade (random-matching type)	PC	KC	FC

Note Refer to pages A38 and A61 for NSK K1 lubrication unit.


A-5-1.5 LW Series

(9) Dimensions


LW-EL

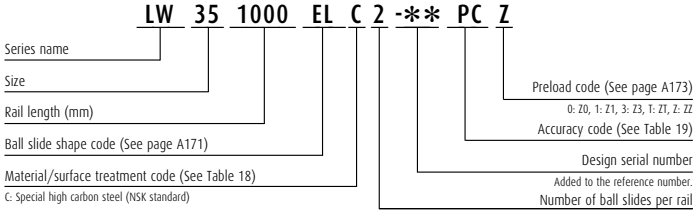

Front view

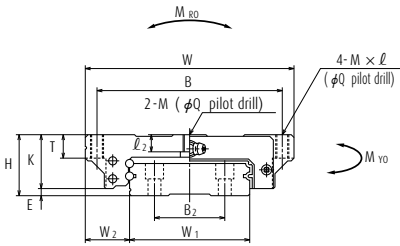


Side view


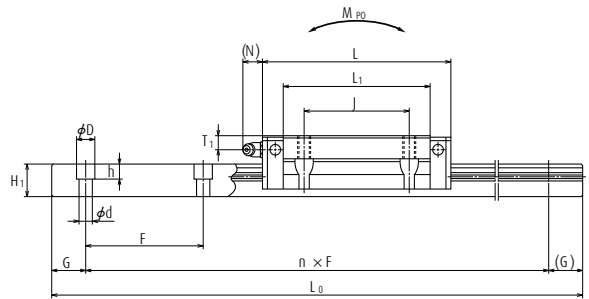


Model No.	Assembly			Ball slide													Width	Height		
	Height	E	W ₂	Width	Length	Mounting hole					L ₁	K	T	Grease fitting					W ₁	H ₁
						B	J	M × pitch × l	l ₂	Q				Hole size	T ₁	N				
LW17EL	17	2.5	13.5	60	51.4	53	26	M4×0.7×6	3.2	3.3	35	14.5	6	φ 3	4	3	33	8.7		
LW21EL	21	3	15.5	68	58.8	60	29	M5×0.8×8	3.7	4.4	41	18	8	M6×0.75	4.5	11	37	10.5		
LW27EL	27	4	19	80	74	70	40	M6×1×10	6	5.3	56	23	10	M6×0.75	6	11	42	15		
LW35EL	35	4	25.5	120	108	107	60	M8×1.25×14	9	6.8	84	31	14	M6×0.75	8	11	69	19		
LW50EL	50	4.5	36	162	140.6	144	80	M10×1.5×18	14	8.6	108	45.5	18	Rc1/8	14	14	90	24		

Reference number for ball slide of random-matching type

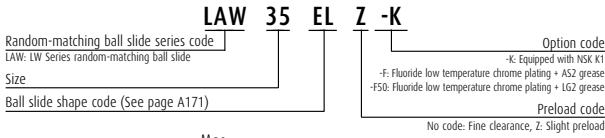

Reference number for rail of random-matching type

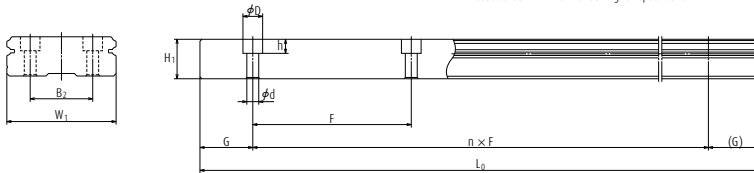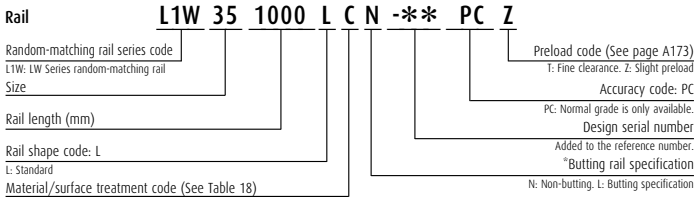


Unit: mm

Rail					Basic load rating								Weight	
Pitch B ₂	Mounting bolt hole F	Mounting bolt hole d × D × h	G (reference)	Maximum length L _{0max} () for stainless	1) Dynamic		Static C ₀ (N)	M _{Ro}	Static moment (N-m)				Ball slide (g)	Rail (g/100mm)
					[50km] C ₅₀ (N)	[100km] C ₁₀₀ (N)			M _{P0}		M _{Y0}			
							One slide	Two slides	One slide	Two slides				
18	40	4.5×7.5×5.3	15	1 000	5 600	4 450	11 300	135	44	288	37	242	0.2	2.1
22	50	4.5×7.5×5.3	15	1 600	6 450	5 150	13 900	185	65.5	400	55	335	0.3	2.9
24	60	4.5×7.5×5.3	20	2 000	12 800	10 200	26 900	400	171	970	143	815	0.5	4.7
40	80	7×11×9	20	2 000	33 000	26 400	66 500	1 690	645	3 550	545	2 990	1.5	9.6
60	80	9×14×12	20	2 000	61 500	48 500	117 000	3 900	1 530	8 200	1 280	6 900	4.0	15.8

Note The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)
C₅₀: the basic dynamic load rating for 50 km rated fatigue life C₁₀₀: the basic dynamic load rating for 100 km rated fatigue life

A-5-2 Miniature Series



	Page
1. PU Series	A187
2. LU Series	A197
3. PE Series	A209
4. LE Series	A219
5. Miniature LH Series	A233

A-5-2.1 PU Series (Miniature type)

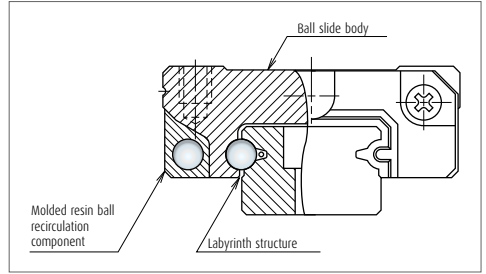
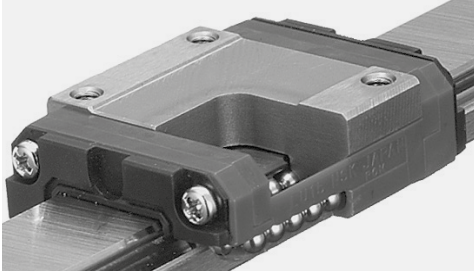


Fig. 1

1. Features

(1) Motion performance

Newly designed recirculation component facilitates smooth circulation of steel balls.

(2) Lightweight

The ball slide is fabricated to be approximately 20% lighter than LU Series by the application of resin to a part of its body.

(3) Reduced noise intensity

Resin components applied in ball circulating circuits reduce collision noise between steel balls and the inner wall of circulating circuits.

(4) Low dust generation

The structure is designed to prevent dust generation.

(5) Excellent dust-proofing

It is designed to minimize the clearance between the side of rails and the inner walls of the slide, and prevent foreign matters from entering the ball slide.

(6) High corrosion resistance

High corrosion-resistant martensite stainless steel is incorporated as a standard feature to provides excellent corrosion resistance.

(7) Easy to handle

Safety design includes a retainer that prevents steel balls from dropping out of the ball slide even when the slide is removed from the rail.




(8) Long-term maintenance-free

Superb features of NSK K1 Lubrication unit realize a long-term, maintenance-free operation.

(9) Fast delivery

Lineup of random-matching rails and ball slides facilitates fast delivery. (PU09 to PU15)

2. Ball slide shape

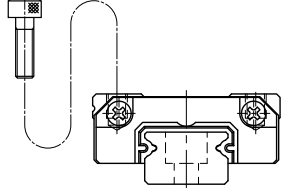Ball slide Model	Shape/installation method	Type (Upper row, Rating: Lower row, Ball slide length)	
		Standard type	High-load type
		Standard	Long
AR TR AL UR BL BR		TR, AR, AL 	UR, BL, BR 

3. Accuracy and preload

(1) Running parallelism of ball slide

Table 1

Unit: μm

Rail length (mm)		Preloaded assembly (not random matching)				Random-matching type
		Super precision P4	High precision P5	Precision grade P6	Normal grade PN	Normal grade PC
over	or less					
-	50	2	2	4.5	6	6
50	- 80	2	3	5	6	6
80	- 125	2	3.5	5.5	6.5	6.5
125	- 200	2	4	6	7	7
200	- 250	2.5	5	7	8	8
250	- 315	2.5	5	8	9	9
315	- 400	3	6	9	11	11
400	- 500	3	6	10	12	12
500	- 630	3.5	7	12	14	14
630	- 800	4.5	8	14	16	16
800	- 1 000	5	9	16	18	18
1 000	- 1 250	6	10	17	20	20

A-5-2.1 PU Series (Miniature type)

(2) Accuracy standard

The preloaded assembly has four accuracy grades; Super precision P4, High precision P5, Precision grade P6, and normal grade PN, while the random-matching type has Normal grade PC only.

Table 2 shows the accuracy standard for the preloaded assembly type while Table 3 shows the accuracy standard for the random-matching types.

> Tolerance of preloaded assembly type

Table 2

Unit: μm

Characteristics	Accuracy grade	Super precision P4	High precision P5	Precision grade P6	Normal grade PN
Mounting height H		± 10	± 15	± 20	± 40
Variation of H (All ball slides on a set of rails)		5	7	15	25
Mounting width W_2 or W_3		± 15	± 20	± 30	± 50
Variation of W_2 or W_3 (All ball slides on reference rail)		7	10	20	30
Running parallelism of surface C to surface A	Shown in Table 1 and Fig. 2				
Running parallelism of surface D to surface B					

> Tolerance of random-matching type: Normal grade PC

Table 3

Unit: μm

Characteristics	Model No.	PU09, 12 and 15
Mounting height H		± 20
Variation of mounting height H		15 ① 30 ②
Mounting width W_2 or W_3		± 20
Variation of mounting width W_2 or W_3		20
Running parallelism of surface C to surface A	Shown in Table 1 and Fig. 2	
Running parallelism of surface D to surface B		

Notes ① Variation on the same rail / ② Variation on multiple rails

(3) Assembled accuracy

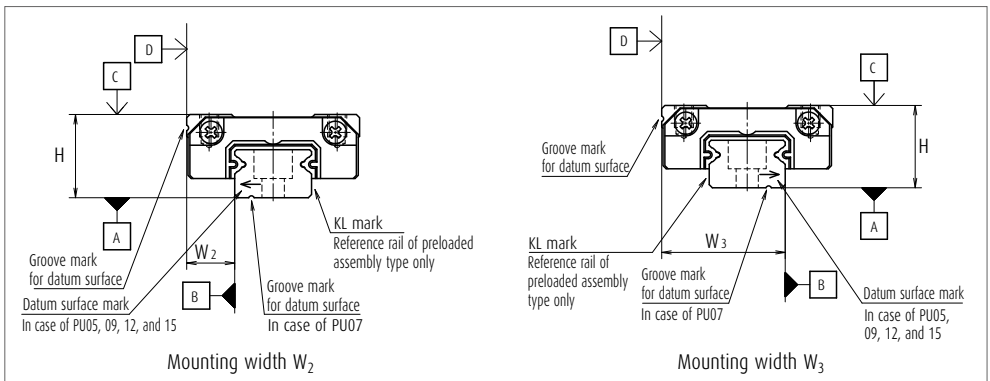


Fig. 2

Note Please refer to page A67 for marks on the datum surfaces.

(4) Preload and rigidity

We offer three levels of preload: Slight preload Z1 and Fine clearance Z0 for preloaded assembly type, along with Fine clearance ZT for random-matching type. Values for preload and rigidity of the preloaded assembly type are shown in **Table 4**. Rigidities are for the median of the preload range.

> Preload and rigidity of preloaded assembly

Table 4

Model No.		Preload (N)		Rigidity (N/μm)	
		Slight preload (Z1)		Slight preload (Z1)	
Standard type	PU05TR	0 - 3		17	
	PU07AR	0 - 8		22	
	PU09TR	0 - 10		30	
	PU12TR	0 - 17		33	
	PU15AL	0 - 33		45	
High-load type	PU09UR	0 - 14		46	
	PU12UR	0 - 25		52	
	PU15BL	0 - 51		75	

Note Clearance of Fine clearance Z0 is 0 to 3 μm. Therefore, preload is zero.

> Clearance of random-matching type

Table 5

Unit : μm

Model No.		Fine clearance ZT
Standard type	PU09TR	3 or less
	PU12TR	
	PU15AL	
High-load type	PU09UR	5 or less
	PU12UR	
	PU15BL	

4. Maximum rail length

Table 6 shows the limitations of rail length (maximum length). However, the limitations vary by accuracy grade.

Table 6 Length limitations of rails

Unit: mm

Series	Material	Size	05	07	09	12	15
		PU	Stainless steel	210	375	600	800

Note Rails can be butted if user requirement exceeds the rail length shown in the table. Please consult NSK.

A-5-2.1 PU Series (Miniature type)

5. Installation

(1) Permissible values of mounting error

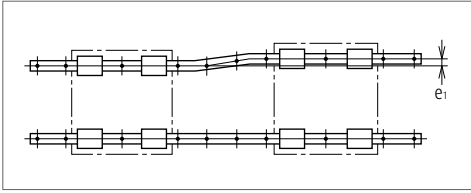


Fig. 3

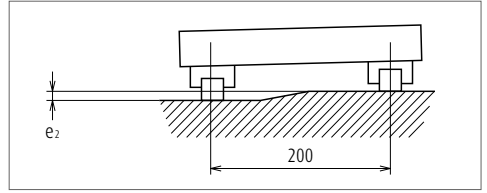


Fig. 4

Table 7

Unit: μm

Value	Preload	Model No.				
		PU05	PU07	PU09	PU12	PU15
Permissible values of parallelism in two rails e_1	Z0, ZT	10	12	15	20	25
	Z1	7	10	13	15	21
Permissible values of parallelism (height) in two rails e_2	Z0, ZT	150 $\mu\text{m}/200\text{ mm}$				
	Z1	90 $\mu\text{m}/200\text{ mm}$				

(2) Shoulder height of the mounting surface and corner radius




Fig. 5 Shoulder for the rail datum face




Fig. 6 Shoulder for the ball slide datum face

Table 8

Unit: mm


Model No.	Corner radius (maximum)		Shoulder height	
	r_a	r_b	H'	$H''^*)$
PU05	0.2	0.2	0.7	2.3
PU07	0.2	0.3	1.2	2.5
PU09	0.3	0.3	1.9	2.6
PU12	0.3	0.3	2.5	3.4
PU15	0.3	0.5	3.5	4.4

*) H'' is the minimum recommended value based on the dimension T in dimension table.

6. Lubrication accessory

Model of PU15 can select drive-in type grease fitting as an option.

For the models of PU05 to PU12, apply grease directly to the ball grooves of rail using a point nozzle.

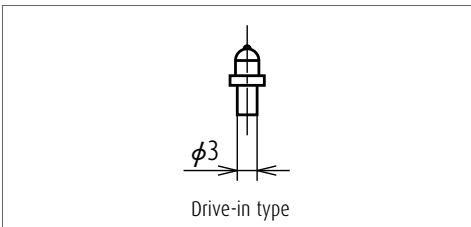

7. Dust-proof components

(1) Standard specification

An end seal provided to both ends of a ball slide as a standard feature.

Seal friction per standard ball slide is shown in **Table 9**.

Table 9 Seal friction per ball slide (maximum value)

Unit: N

Series	05	07	09	12	15
PU	0.3	0.3	0.5	0.5	0.5

(2) NSK K1 lubrication unit

Table 10 shows the dimension of linear guides equipped with the NSK K1 lubrication unit.

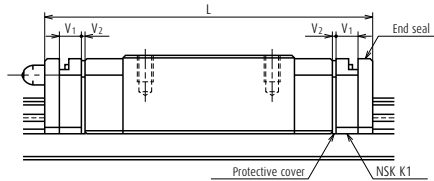


Table 10

Unit: mm

Model No.	Ball slide length	Ball slide model	Standard ball slide length	Ball slide length installed with two NSK K1 L	Thickness of NSK K1, V ₁	Thickness of protective cover, V ₂
PU05	Standard	TR	19.4	24.4	2	0.5
PU07	Standard	AR	23.4	29.4	2.5	0.5
PU09	Standard	TR	30	36.4	2.7	0.5
PU09	Long	UR	41	47.4	2.7	0.5
PU12	Standard	TR	35	42	3	0.5
PU12	Long	UR	48.7	55.7	3	0.5
PU15	Standard	AL	43	51.2	3.5	0.6
PU15	Long	BL	61	69.2	3.5	0.6

Note Ball slide length equipped with NSK K1 = (Standard ball slide length) + (Thickness of NSK K1, V₁ × Number of NSK K1) + (Thickness of the protective cover V₂ × 2)

A-5-2.1 PU Series (Miniature type)

8. Reference number

Reference numbers shall be set to individual NSK linear guide when its specifications are finalized, and it is indicated on its specification drawing.

Please specify the reference number, except design serial number, to identify the product when ordering, requiring estimates, or inquiring about specifications from NSK.

(1) Reference number for preloaded assembly

	PU	15	0470	AL	K	2	-**	P5	1	
Series name									Preload code (See page A190)	
Size									Accuracy code (See Table 12) 0: Z0, 1: Z1	
Rail length (mm)									Design serial number	
Ball slide shape code (See page A188)									Added to the reference number.	
Material/surface treatment code (See Table 11)									Number of ball slides per rail	
K: Stainless steel										

(2) Reference number for random-matching type

Ball slide	PAU	15	AL	S	-K	
Random-matching ball slide series code					Option code	
PAU: PU Series random-matching ball slide					-K: Equipped with NSK K1	
Size					Material code	
Ball slide shape code (See page A188)					S: Stainless steel	

Rail	P1U	15	0470	R	K	N	-**	PC	T
Random-matching rail series code									Preload code (See page A190)
P1U: PU Series random-matching rail									T: Fine clearance
Size									Accuracy code: PC
Rail length (mm)									PC: Normal grade is only available.
Rail shape code									Design serial number
S: PU09, 12. R: PU15									Added to the reference number.
Material/surface treatment code (See Table 11)									*Butting rail specification
N: Non-butting. L: Butting specification									
*Please consult with NSK for butting rail specification.									

The reference number coding for the assembly of random-matching type is the same as that of preloaded assembly. However, only preload code of "fine clearance T" is available (refer to page A190).

Click!Speedy™ NSK Linear Guide Quick Delivery System uses a new numbering system. For details, please refer to the Click!Speedy general catalog CAT. No. E3191.

Table 11 Material/surface treatment code

Code	Description
K	Stainless steel
H	Stainless steel with surface treatment
Z	Other, special

Table 12 Accuracy code

Accuracy	Standard (Without NSK K1)	With NSK K1	With NSK K1 for food and medical equipment
Super precision grade	P4	K4	F4
High precision grade	P5	K5	F5
Precision grade	P6	K6	F6
Normal grade	PN	KN	FN
Normal grade (random-matching type)	PC	KC	FC


Note Refer to pages A38 and A61 for the NSK K1 lubrication unit.

A-5-2.1 PU Series (Miniature type)


9. Dimensions

PU-TR, AR, AL (Standard type / Standard)


PU-UR, BL (High-load type / Long)

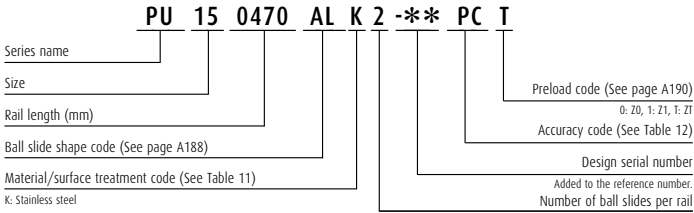

Front view

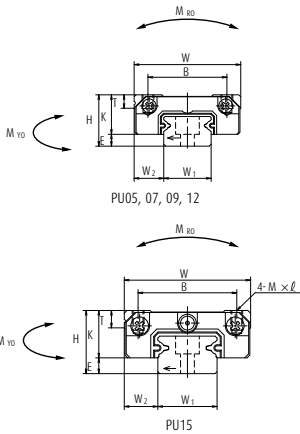

Side view

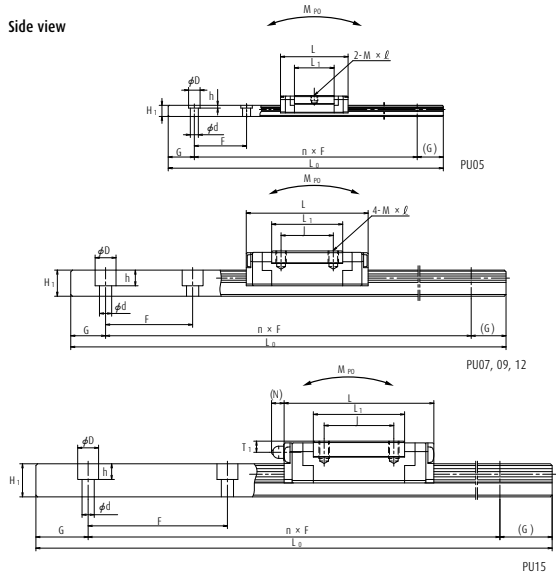

Model No.	Assembly			Ball slide										Width	Height		
	Height	E	W ₂	Width	Length	Mounting hole				L ₁	K	T	Oil hole				
						B	J	M × pitch × l	Hole size				T ₁			N	W ₁
PU05TR	6	1	3.5	12	19.4	8	-	M2×0.4×1.5	11.4	5	2.3	φ 0.9	1.5	-	5	3.2	
PU07AR	8	1.5	5	17	23.4	12	8	M2×0.4×2.4	13.3	6.5	2.45	φ 1.5	1.8	-	7	4.7	
PU09TR	10	2.2	5.5	20	30	15	10	M3×0.5×3	19.6	7.8	2.6	-	-	-	9	5.5	
PU09UR	10	2.2	5.5	20	41	15	16	M3×0.5×3	30.6	7.8	2.6	-	-	-	9	5.5	
PU12TR	13	3	7.5	27	35	20	15	M3×0.5×3.5	20.4	10	3.4	-	-	-	12	7.5	
PU12UR	13	3	7.5	27	48.7	20	20	M3×0.5×3.5	34.1	10	3.4	-	-	-	12	7.5	
PU15AL	16	4	8.5	32	43	25	20	M3×0.5×5	26.2	12	4.4	φ 3	3.2	(3.6)	15	9.5	
PU15BL	16	4	8.5	32	61	25	25	M3×0.5×5	44.2	12	4.4	φ 3	3.2	(3.6)	15	9.5	

Notes

- The ball slide of PU05TR has only two mounting tap holes in the center.

Reference number for ball slide of random-matching type


PAU 15 AL S -K

Random-matching ball slide series code
PAU: PU Series random-matching ball slide

Size
Ball slide shape code (See page A188)

Option code
-K: Equipped with NSK KT

Material code
S: Stainless steel

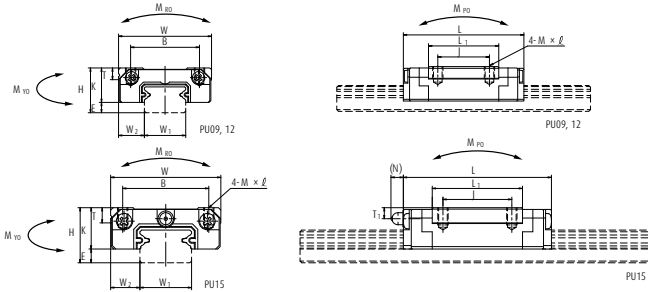

Reference number for rail of random-matching type

P1U 15 0470 R K N - PC T**


Random-matching rail series code
P1U: PU Series random-matching rail

Size
Rail length (mm)
Rail shape code
S: PU09, 12. R: PU15

Material/surface treatment code (See Table 11)

Preload code (See page A190)
T: Fine clearance
Accuracy code: PC
PC: Normal grade is only available.
Design serial number
Added to the reference number.
*Butting rail specification
N: Non-butting. L: Butting specification

*Please consult with NSK for butting rail specification.

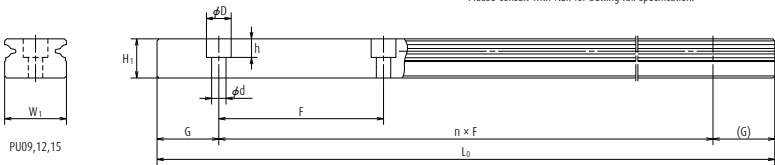

Unit: mm

Rail				Basic load rating								Weight	
Pitch F	Mounting bolt hole d × D × h	G (reference)	Maximum length L _{0max}	2) Dynamic		Static		Static moment (N·m)				Ball slide (g)	Rail (g/100mm)
				[50km] C ₅₀ (N)	[100km] C ₁₀₀ (N)	C ₀ (N)	M _{RO}	M _{P0}		M _{Y0}			
								One slide	Two slides	One slide	Two slides		
15	2.3×3.3×0.8	5	210	520	410	775	2.06	1.28	9.90	1.28	9.90	4	11
15	2.4×4.2×2.3	5	375	1 090	860	1 370	5.20	2.70	21.8	2.70	21.8	8	23
20	3.5×6×4.5	7.5	600	1 490	1 180	2 150	9.90	6.10	41.0	6.10	41.0	16	35
20	3.5×6×4.5	7.5	600	2 100	1 670	3 500	16.2	15.6	88.0	15.6	88.0	25	35
25	3.5×6×4.5	10	800	2 830	2 250	3 500	21.1	11.4	73.5	11.4	73.5	32	65
25	3.5×6×4.5	10	800	4 000	3 150	5 700	34.5	28.3	174	28.3	174	53	65
40	3.5×6×4.5	15	1 000	5 550	4 400	6 600	49.5	25.6	190	25.6	190	59	105
40	3.5×6×4.5	15	1 000	8 100	6 400	11 300	84.5	69.5	435	69.5	435	100	105

2) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)

C₅₀: the basic dynamic load rating for 50 km rated fatigue life C₁₀₀: the basic dynamic load rating for 100 km rated fatigue life

3) To fix rail of PU05TR, use M2 × 0.4 cross-recessed pan head machine screw for precision instrument.

(JIS 10-70 No. 0 pan head machine screw No.1.)

(JIS: Japanese Camera Industrial Standard.)

A-5-2.2 LU Series (Miniature type)

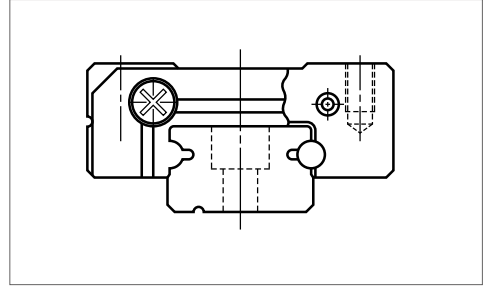


Fig. 1 LU Series

1. Features

(1) Super-small type

This compact guide owes its design to the single ball groove on both right and left sides (Gothic arch).

(2) Equal load carrying capacity in vertical and lateral directions

The contact angle is set at 45 degrees, thus facilitating the equal load carrying capacity in vertical and lateral directions. This also provides equal rigidity in both directions.

(3) Stainless steel is also standardized

Items made of the martensitic stainless steel are available as standard.

(4) Some series have a ball retainer

Ball slide types AR and TR come with a ball retainer. Balls are retained in the retainer and do not fall out when the ball slide is withdrawn from the rail. (Ball slides of random-matching type as well as LU15 come with ball retainer.)

(5) Fast delivery

Random-matching of rails and ball slides are available. (LU09 to LU15)

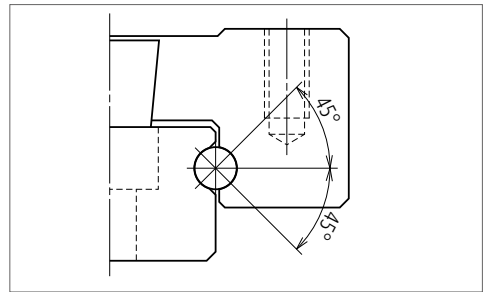





Fig. 2 Balls are in contact.

2. Ball slide shape

Ball slide Model	Shape/installation method	Type (Upper row, Rating: Lower row, Ball slide length)	
		Standard type	High-load type
		Standard	Long
AL TL AR TR BL UL		AL, TL, TR, AR 	BL, UL 

Specification	Detail	Type	
Mounting hole	Normal	AL, AR	BL
	Large	TL, TR	UL
Ball retainer	Without	AL*, TL	BL*, UL
	With	AR, TR	-

*) LU15 is equipped with ball retainer

3. Accuracy and preload

(1) Running parallelism of ball slide

Table 1

Unit: μm

Rail length (mm)		Preloaded assembly type (not random matching)				Random-matching type
		Super precision P4	High precision P5	Precision grade P6	Normal grade PN	Normal grade PC
over	or less					
-	50	2	2	4.5	6	6
50	- 80	2	3	5	6	6
80	- 125	2	3.5	5.5	6.5	6.5
125	- 200	2	4	6	7	7
200	- 250	2.5	5	7	8	8
250	- 315	2.5	5	8	9	9
315	- 400	3	6	9	11	11
400	- 500	3	6	10	12	12
500	- 630	3.5	7	12	14	14
630	- 800	4.5	8	14	16	16
800	- 1 000	5	9	16	18	18
1 000	- 1 250	6	10	17	20	20

A-5-2.2 LU Series (Miniature type)

(2) Accuracy standard

The preloaded assembly type has four accuracy grades; Super precision P4, High precision P5, Precision P6, and Normal grade PN, while the random-matching type has Normal grade PC only.

Table 2 shows the accuracy standard for the preloaded assembly type, while Table 3 shows the accuracy standard for the random-matching type.

> Tolerance of preloaded assembly

Table 2

Characteristics	Accuracy grade	Unit: μm			
		Super precision P4	High precision P5	Precision grade P6	Normal grade PN
Mounting height H		± 10	± 15	± 20	± 40
Variation of H (All ball slides on a set of rails)		5	7	15	25
Mounting width W_2 or W_3		± 15	± 20	± 30	± 50
Variation of W_2 or W_3 (All ball slides on reference rail)		7	10	20	30
Running parallelism of surface C to surface A Running parallelism of surface D to surface B		Refer to Table 1 and Fig. 3			

> Tolerance of random-matching type: Normal grade PC

Table 3

Characteristics	Accuracy grade	Unit: μm
		LU09, 12, 15
Mounting height H		± 20
Variation of mounting height H		40
Mounting width W_2 or W_3		± 20
Variation of mounting width W_2 or W_3		40
Running parallelism of surface C to surface A Running parallelism of surface D to surface B		Refer to Table 1 and Fig. 3

(3) Assembled accuracy

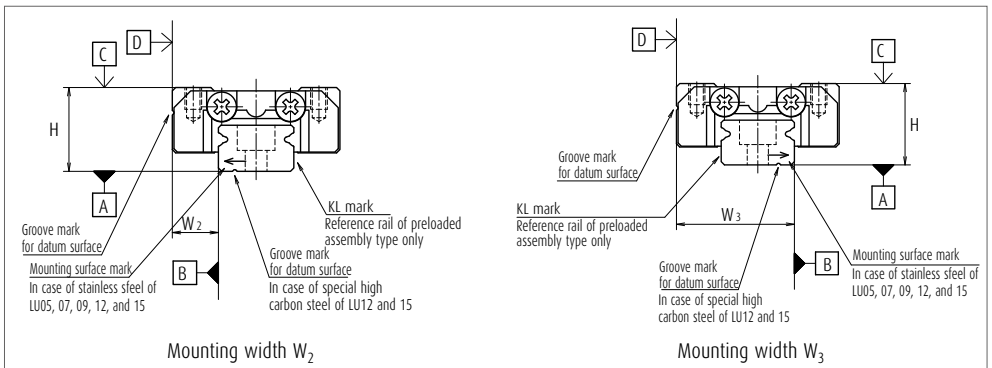


Fig. 3

Note Please refer to page A67 for marks on the datum surfaces.

(4) Preload and rigidity

We offer three levels of preload: Slight preload Z1 and Fine clearance Z0, along with random-matching type of Fine clearance ZT. Values for preload and rigidity of the preloaded assembly type are shown in **Table 4**. Rigidities are for the median of the preload range.

> Preload and rigidity of preloaded assembly

Table 4

Model No.		Preload (N)	Rigidity (N/ μ m)
		Slight preload (Z1)	Slight preload (Z1)
Standard type	LU05 TL	0 - 3	15
	LU07 AL	0 - 8	22
	LU09 AL, TL	0 - 12	26
	LU09 AR, TR	0 - 10	30
	LU12 AL, TL	0 - 17	33
	LU12 AR, TR	0 - 17	33
	LU15 AL	0 - 33	45
High-load type	LU09 BL, UL	0 - 17	43
	LU12 BL, UL	0 - 25	52
	LU15 BL	0 - 51	75

Note Clearance of Fine clearance Z0 is 0 to 3 μ m. Therefore, preload is zero. However, the clearance of the Z0 of PN grade is 3 to 10 μ m.

> Clearance of random-matching type

Table 5

Unit: μ m

Model No.	Fine clearance ZT
LU09	0 - 15
LU12	0 - 15
LU15	0 - 15

4. Maximum rail length

Table 6 shows the limitations of rail length. However, the limitations vary by accuracy grades.

Table 6 Length limitation of rails

Unit: mm

Series	Material \ Size	05	07	09	12	15
		LU	Special high carbon steel	-	-	1 200
	Stainless steel	210	375	600	800	1 000

Note Rails can be butted if user requirement exceeds the rail length shown in the table. Please consult NSK.

A-5-2.2 LU Series (Miniature type)

5. Installation

(1) Permissible values of mounting error

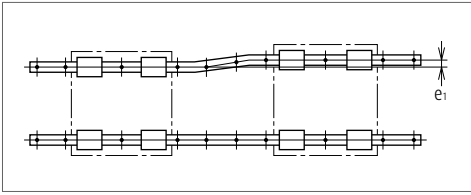


Fig. 4

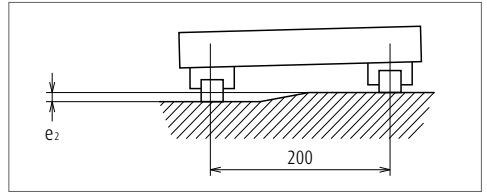


Fig. 5

Table 7

Unit: μm

Value	Preload	Model No.				
		LU05	LU07	LU09	LU12	LU15
Permissible values of parallelism in two rails e_1	Z0, ZT	10	12	15	20	25
	Z1	7	10	13	15	21
Permissible values of parallelism (height) in two rails e_2	Z0, ZT	150 $\mu\text{m}/200\text{ mm}$				
	Z1	90 $\mu\text{m}/200\text{ mm}$				

(2) Shoulder height of the mounting surface and corner radius




Fig. 6 Shoulder for the rail datum surface




Fig. 7 Shoulder for the ball slide datum surface

Table 8

Unit: mm

Model No.	Corner radius (maximum)		Shoulder height	
	r_a	r_b	H'	H''
LU05	0.2	0.2	0.7	2
LU07	0.2	0.3	1.2	3
LU09	0.3	0.3	1.9	3
LU12	0.3	0.3	2.5	4
LU15	0.3	0.5	3.5	5

6. Lubrication accessories

There is no standard grease fitting for LU05 to LU15.

For the LU Series, apply grease directly to the ball grooves of rail using a point nozzle.

7. Dust-proof components

(1) Standard specification

End seal: Provided to both ends of the ball slide as a standard feature.

LU05TL, LU07AL, LU09AL, and LU09TL can install the side seal as an option.

› Seal friction per standard ball slide is shown in **Table 9**.

Table 9 Seal friction per ball slide (maximum value)

Unit: N

Series	Size	05	07	09	12	15
LU		0.3	0.3	0.5	0.5	0.5

(2) NSK K1 lubrication unit

The installed dimensions of the NSK K1 lubrication unit are shown in **Table 10**.

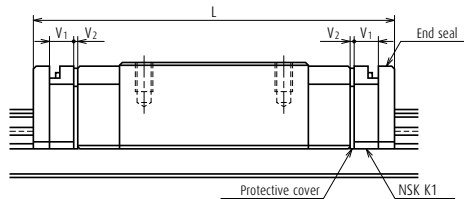


Table 10

Unit: mm

Model No.	Ball slide length	Ball slide model	Standard ball slide length	Ball slide length installed with two NSK K1 L	Per NSK K1 thickness V ₁	Protective cover thickness V ₂
LU05	Standard	TL	18*	24.4	2.0	0.5
LU07	Standard	AL	20.4*	29.4	2.5	0.5
LU09	Standard	AR, TR	30	36.4	2.7	0.5
LU09	Standard	AL, TL	26.8*	34.2	2.7	0.5
LU09	Long	BL, UL	41	47.4	2.7	0.5
LU12	Standard	AR, TR	35.2	42.2	3.0	0.5
LU12	Standard	AL, TL	34	41	3.0	0.5
LU12	Long	BL, UL	47.5	54.5	3.0	0.5
LU15	Standard	AL	43.6	51.8	3.5	0.6
LU15	Long	BL	61	69.2	3.5	0.6

*) Standard ball slide length of LU05TL, LU07AL, LU09AL and LU09TL does not include the thickness of the end seal (1.5 mm). However, it includes the height of the screw head for end cap installation (Included length - LU05, 0.8 mm; LU07, no projection; LU09, 1 mm)

Note Ball slide length equipped with NSK K1 =
 (Standard ball slide length) + (Thickness of NSK K1, V₁ × Number of NSK K1) +
 (Thickness of the protective cover V₂ × 2)

A-5-2.2 LU Series (Miniature type)

8. Reference number

Reference numbers shall be set to individual NSK linear guide when its specifications are finalized, and it is indicated on its specification drawing.

Please specify the reference number, except design serial number, to identify the product when ordering, requiring estimates, or inquiring about specifications from NSK.

(1) Reference number for preloaded assembly

	LU	12	0270	AR	K	2	-**	P5	1	
Series name									Preload code (See page A200)	
Size									Accuracy code (See Table 12) 0: Z0, 1: Z1	
Rail length (mm)									Design serial number	
Ball slide shape code (See page A198)									Added to the reference number.	
Material/surface treatment code (See Table 11)									Number of ball slides per rail	
C: Special high carbon steel (NSK standard), K: Stainless steel										

(2) Reference number for random-matching type

Ball slide	LAU	12	AR	S	-K	
Random-matching ball slide series code					Option code	
LAU: LU Series random-matching ball slide					-K: Equipped with NSK K1	
Size					Material code	
Ball slide shape code (See page A198)					No code: Special high carbon steel (NSK standard), S: Stainless steel	

Rail	L1U	12	0270	R	K	N	-**	PC	T	
Random-matching rail series code									Preload code (See page A200)	
L1U: LU Series random-matching rail									T: Fine clearance	
Size									Accuracy code: PC	
Rail length (mm)									PC: Normal grade is only available.	
Rail shape code									Design serial number	
L: Standard, R: LU09 and LU12 standard, equipped with ball retainer.									Added to the reference number.	
S: LU09 and LU12 with ball retainer and mounting holes for M3									*Butting rail specification	
T: LU09 and LU12 without ball retainer and mounting holes for M3									N: Non-butting, L: Butting specification	
Material/surface treatment code (See Table 11)									*Please consult with NSK for butting rail specification.	

The reference number coding for the assembly of random-matching type is the same as that of the preloaded assembly. However, only the preload code of "Fine clearance T" is available (refer to page A200).

Table 11 Material/surface treatment code

Code	Description
C	Special high carbon steel (NSK standard)
K	Stainless steel
D	Special high carbon steel with surface treatment
H	Stainless steel with surface treatment
Z	Other, special

Table 12 Accuracy code

Accuracy	Standard (Without NSK K1)	With NSK K1
Super precision grade	P4	K4
High precision grade	P5	K5
Precision grade	P6	K6
Normal grade	PN	KN
Normal grade (random-matching type)	PC	KC

Note Refer to page A38 for NSK K1 lubrication unit.

A-5-2.2 LU Series (Miniature type)


9. Dimensions

LU-AL (Standard type / Standard, LU15 is equipped with ball retainer)


LU-TL (Standard type / Standard, Large mounting hole)

LU-AR (Standard type / Standard, With ball retainer)


LU-TR (Standard type / Standard, Large mounting hole, with ball retainer)

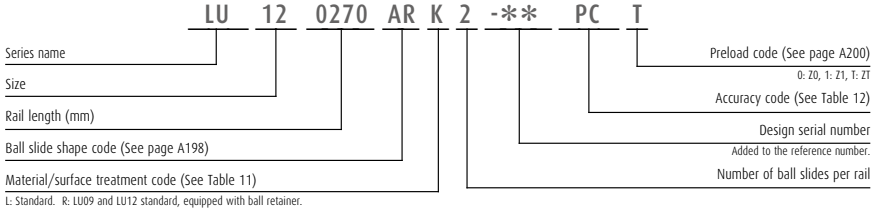

Front view

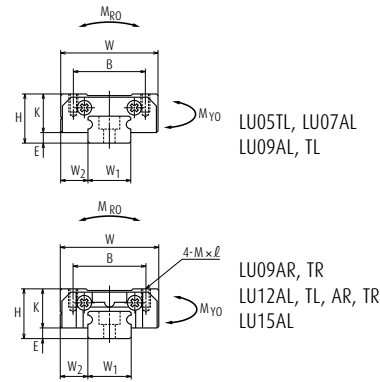

Side view

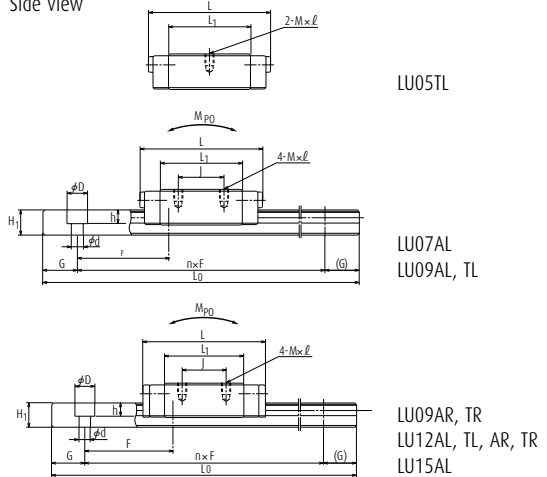

Model No.	Assembly			Ball slide							Width	Height	Pitch
	Height	E	W ₂	Width	Length	Mounting hole			L ₁	K			
						B	J	M × pitch × l					
LU05TL	6	1	3.5	12	18	8	—	M2×0.4×1.5	12	5	5	3.2	15
LU05TL	6	1	3.5	12	18	8	—	M2×0.4×1.5	12	5	5	3.2	15
LU07AL	8	1.5	5	17	20.4	12	8	M2×0.4×2.4	13.6	6.5	7	4.7	15
LU07AL	8	1.5	5	17	20.4	12	8	M2×0.4×2.4	13.6	6.5	7	4.7	15
LU09AL	10	2.2	5.5	20	26.8	15	13	M2×0.4×2.5	18	7.8	9	5.5	20
LU09AL	10	2.2	5.5	20	26.8	15	10	M3×0.5×3	18	7.8	9	5.5	20
LU09AR	10	2.2	5.5	20	30	15	13	M2×0.4×2.5	20	7.8	9	5.5	20
LU09TR	10	2.2	5.5	20	30	15	10	M3×0.5×3	20	7.8	9	5.5	20
LU12AL	13	3	7.5	27	34	20	15	M2.5×0.45×3	21.8	10	12	7.5	25
LU12TL	13	3	7.5	27	34	20	15	M3×0.5×3.5	21.8	10	12	7.5	25
LU12AR	13	3	7.5	27	35.2	20	15	M2.5×0.45×3	21.8	10	12	7.5	25
LU12TR	13	3	7.5	27	35.2	20	15	M3×0.5×3.5	21.8	10	12	7.5	25
LU15AL	16	4	8.5	32	43.6	25	20	M3×0.5×4	27	12	15	9.5	40
LU15AL	16	4	8.5	32	43.6	25	20	M3×0.5×4	27	12	15	9.5	40

- Notes
- 1) LU05TL, LU07AL, LU09TL, LU09AR, LU09TR, LU12AR and LU12TR come in stainless steel only.
 - 2) Ball slide of LU05TL has only two mounting tap holes in the center.
 - 3) End seals of LU05TL, LU07AL, LU09AL and LU09TL are available on request.




Reference number for ball slide of random-matching type

Random matching with retainer: LU09 - 12 are AR/TR, LU15 is AL.


LAU-AR (With ball retainer)

LAU-TR (Large mounting hole, with ball retainer)

LAU-AL (LU15 is equipped with ball retainer)

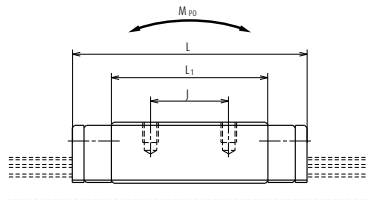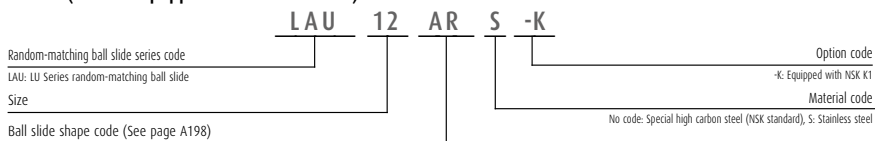


Reference number for rail of random-matching type

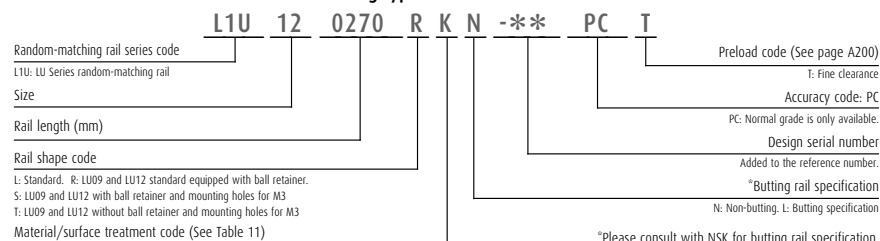

L: Standard. R: LU09 and LU12 standard equipped with ball retainer.
 S: LU09 and LU12 with ball retainer and mounting holes for M3
 T: LU09 and LU12 without ball retainer and mounting holes for M3

*Please consult with NSK for butting rail specification.

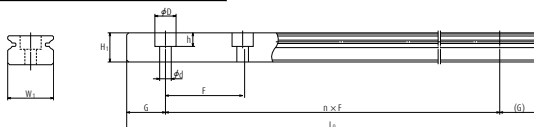

Unit: mm

Rail		Basic load rating							Weight			
Mounting bolt hole d × D × h	G (reference)	Max. length L _{0max} () for stainless	⁵⁾ Dynamic		Static C ₀ (N)	M _{R0}	Static moment (N-m)				Ball slide (g)	Rail (g/100 mm)
			[50km] C ₅₀ (N)	[100km] C ₁₀₀ (N)			M _{P0}		M _{P70}			
							One slide	Two slides	One slide	Two slides		
2.3×3.3×1.5	5	—	545	435	740	1.93	1.22	8.85	1.22	8.85	4	11
2.3×3.3×1.5	5	(210)	545	435	740	1.93	1.22	8.85	1.22	8.85	4	11
2.4×4.2×2.3	5	—	1 090	865	1 370	4.90	2.66	18.6	2.66	18.6	10	23
2.4×4.2×2.3	5	(375)	1 090	865	1 370	4.90	2.66	18.6	2.66	18.6	10	23
2.6×4.5×3	7.5	1 200	1 760	1 400	2 220	10.2	6.10	38.5	6.10	38.5	17	35
3.5×6×4.5	7.5	(600)	1 760	1 400	2 220	10.2	6.10	38.5	6.10	38.5	17	35
2.6×4.5×3	7.5	—	1 490	1 180	2 150	9.9	6.10	41.0	6.10	41.0	19	35
3.5×6×4.5	7.5	(600)	1 490	1 180	2 150	9.9	6.10	41.0	6.10	41.0	19	35
3×5.5×3.5	10	1 800	2 830	2 250	3 500	21.1	11.4	78.5	11.4	78.5	38	65
3.5×6×4.5	10	(800)	2 830	2 250	3 500	21.1	11.4	78.5	11.4	78.5	38	65
3×5.5×3.5	10	—	2 830	2 250	3 500	21.1	11.4	81.5	11.4	81.5	38	65
3.5×6×4.5	10	(800)	2 830	2 250	3 500	21.1	11.4	81.5	11.4	81.5	38	65
3.5×6×4.5	15	2 000	5 550	4 400	6 600	49.5	25.6	193	25.6	193	70	105
3.5×6×4.5	15	(1 000)	5 550	4 400	6 600	49.5	25.6	193	25.6	193	70	105

4) To fix rail of LU05TL, use M2 × 0.4 cross-recessed pan head machine screw for precision instrument.

(JIS 10-70 No. 0 pan head machine screw No.1.)

(JIS: Japanese Camera Industrial Standard.)


5) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)

C₅₀: the basic dynamic load rating for 50 km rated fatigue life C₁₀₀: the basic dynamic load rating for 100 km rated fatigue life


A-5-2.2 LU Series (Miniature type)

LU-BL (High-load type / Long)

LU-UL (High-load type / Long, large mounting hole)

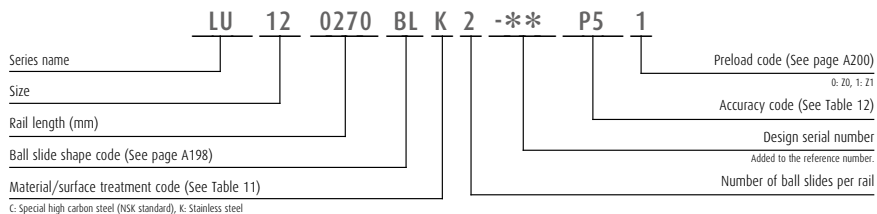


Front view



Model No.	Assembly			Ball slide							Width	Height	Pitch			
	Height	E	W ₂	Width	Length	Mounting hole			L ₁	K				W ₁	H ₁	F
						B	J	M × pitch × ℓ								
LU09BL	10	2.2	5.5	20	41	15	16	M2×0.4×2.5	31.2	7.8	9	5.5	20			
LU09UL	10	2.2	5.5	20	41	15	16	M3×0.5×3	31.2	7.8	9	5.5	20			
LU12BL	13	3	7.5	27	47.5	20	20	M2.5×0.45×3	35.3	10	12	7.5	25			
LU12UL	13	3	7.5	27	47.5	20	20	M3×0.5×3.5	35.3	10	12	7.5	25			
LU15BL	16	4	8.5	32	61	25	25	M3×0.5×4	44.4	12	15	9.5	40			

- Notes**
- 1) LU09UL is available only in stainless steel.
 - 2) LU15BL is equipped with ball retainer.

Side view

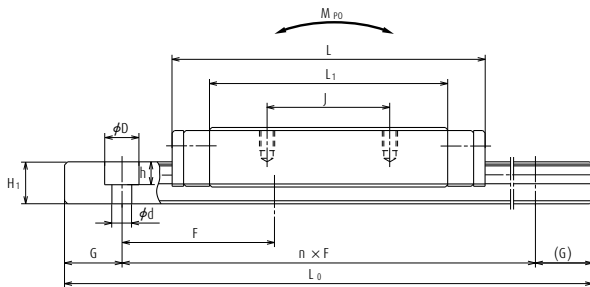

Unit: mm

Rail		Basic load rating								Weight		
Mounting bolt hole $d \times D \times h$	G (reference)	Maximum length L_{0max} () for stainless	3) Dynamic		Static	M_{R0}	Static moment (N-m)				Ball slide (g)	Rail (g/100 mm)
			[50km] $C_{50}(N)$	[100km] $C_{100}(N)$	C_N (N)		M_{P0}		M_{Y0}			
							One slide	Two slides	One slide	Two slides		
2.6×4.5×3	7.5	1 200	2 600	2 070	3 900	17.9	17.2	98.0	17.2	98.0	29	35
3.5×6×4.5	7.5	(600)	2 600	2 070	3 900	17.9	17.2	98.0	17.2	98.0	29	35
3×5.5×3.5	10	1 800	4 000	3 150	5 700	34.5	28.3	169	28.3	169	59	65
3.5×6×4.5	10	(800)	4 000	3 150	5 700	34.5	28.3	169	28.3	169	59	65
3.5×6×4.5	15	2 000	8 100	6 400	11 300	84.5	69.5	435	69.5	435	107	105
3.5×6×4.5	15	(1 000)	8 100	6 400	11 300	84.5	69.5	435	69.5	435	107	105

3) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)

C_{50} : the basic dynamic load rating for 50 km rated fatigue life C_{100} : the basic dynamic load rating for 100 km rated fatigue life

A-5-2.3 PE Series (Miniature wide type)

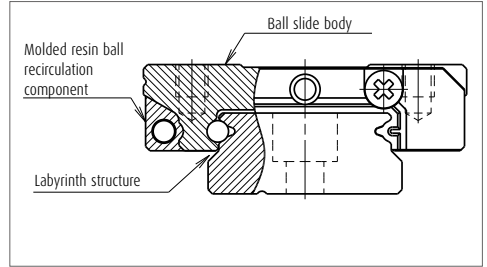


Fig. 1

1. Features

(1) Ideal for use of single rail

The PE Series linear guides are miniature and wide rail type. Thanks to the wide rail, load carrying capacity is high against moment load from rolling direction.

(2) Motion performance

Newly designed recirculation component facilitates smooth circulation of steel balls.

(3) Lightweight

The ball slide is fabricated to be approximately 20% lighter than that of the LE Series by the application of resin to a part of its body.

(4) Reduced noise intensity

Resin components applied in ball circulating circuits reduce collision noise between steel balls and the inner wall of circulating circuits.

(5) Low dust generation

The structure is designed to prevent dust generation.

(6) Excellent dust-proofing

It is designed to minimize the clearance between the side of rails and the inner walls of the slide, and prevent foreign matters from entering the ball slide.

(7) High corrosion resistance

High corrosion-resistant martensite stainless steel incorporated as a standard feature provides excellent resistance to corrosion.

(8) Easy to handle

Safety design includes a retainer that prevents steel balls from dropping out of the ball slide even when the slide is removed from the rail.




(9) Long-term maintenance-free

Equipped with NSK K1 Lubrication Unit realizes long-term, maintenance-free use.

(10) Fast delivery

Lineup of random-matching rails and ball slides in the series supports random matching and facilitates fast delivery. (PE09 to PE15)

2. Ball slide shape

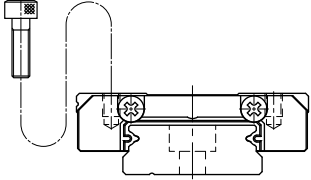Ball slide Model	Shape/installation method	Type (Upper row, Rating: Lower row, Ball slide length)	
		Standard type	High-load type
		Standard	Long
AR TR UR BR		AR, TR 	UR, BR 

3. Accuracy and preload

(1) Running parallelism of ball slide

Table 1

Unit: μm

Rail length (mm)		Preloaded assembly type (not random matching)				Random-matching type
		Super precision P4	High precision P5	Precision grade P6	Normal grade PN	Normal grade PC
over	or less					
-	50	2	2	4.5	6	6
50	- 80	2	3	5	6	6
80	- 125	2	3.5	5.5	6.5	6.5
125	- 200	2	4	6	7	7
200	- 250	2.5	5	7	8	8
250	- 315	2.5	5	8	9	9
315	- 400	3	6	9	11	11
400	- 500	3	6	10	12	12
500	- 630	3.5	7	12	14	14
630	- 800	4.5	8	14	16	16
800	- 1 000	5	9	16	18	18
1 000	- 1 250	6	10	17	20	20

A-5-2.3 PE Series (Miniature wide type)

(2) Accuracy standard

The preloaded assembly type has four accuracy grades; Super precision P4, High precision P5, Precision P6, and Normal PN grades, while the random-matching type has Normal grade PC only.

Table 2 shows the accuracy standard for the preloaded assembly type while Table 3 shows the accuracy standard for the random-matching types.

> Tolerance of preloaded assembly

Table 2

Unit: μm

Characteristics	Accuracy grade	Super precision P4	High precision P5	Precision grade P6	Normal grade PN
Mounting height H		± 10	± 15	± 20	± 40
Variation of H (All ball slides on a set of rails)		5	7	15	25
Mounting width W_2 or W_3		± 15	± 20	± 30	± 50
Variation of W_2 or W_3 (All ball slides on reference rail)		7	10	20	30
Running parallelism of surface C to surface A Running parallelism of surface D to surface B		Shown in Table 1 and Fig. 2			

> Tolerance of random-matching type: Normal grade PC

Table 3

Unit: μm

Characteristics	Model No.
	PE09, 12 and 15
Mounting height H	± 20
Variation of mounting height H	15① 30②
Mounting width W_2 or W_3	± 20
Variation of mounting width W_2 or W_3	20
Running parallelism of surface C to surface A Running parallelism of surface D to surface B	Shown in Table 1 and Fig. 2

Note ① Variation on the same rail ② Variation on multiple rails

(3) Assembled accuracy

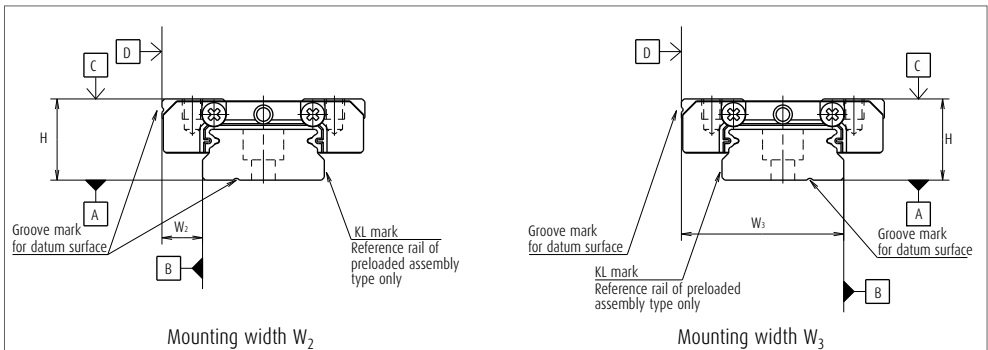


Fig. 2

(4) Preload and rigidity

We offer three levels of preload: Slight preload Z1 and Fine clearance Z0, along with random-matching type of Fine clearance ZT. Values for preload and rigidity of the preloaded assembly types are shown in **Table 4**. Rigidities are for the median of the preload range.

› Preload and rigidity of preloaded assembly

Table 4

Model No.		Preload (N)	Rigidity (N/μm)
		Slight preload (Z1)	Slight preload (Z1)
Standard type	PE05AR	0 - 28	45
	PE07TR	0 - 29	46
	PE09TR	0 - 37	61
	PE12AR	0 - 40	63
	PE15AR	0 - 49	66
High-load type	PE09UR	0 - 54	86
	PE12BR	0 - 59	97
	PE15BR	0 - 75	114

Note Clearance of Fine clearance Z0 is 0 to 3 μm. Therefore, preload is zero.

› Clearance of random-matching typ

Table 5

Unit: μm

Model No.		Fine clearance ZT
Standard type	PE09TR	3 or less
	PE12AR	3 or less
	PE15AR	3 or less
High-load type	PE09UR	5 or less
	PE12BR	5 or less
	PE15BR	5 or less

4. Maximum rail length

Table 6 shows the limitations of rail length. However, the limitations vary by accuracy grades.

Table 6 Length limitation of rails

Unit: mm

Series	Material \ Size	05	07	09	12	15
		PE	Stainless steel	150	600	800

Note Rails can be butted if user requirement exceeds the rail length shown in the table. Please consult NSK.

A-5-2.3 PE Series (Miniature wide type)

5. Installation

(1) Permissible values of mounting error

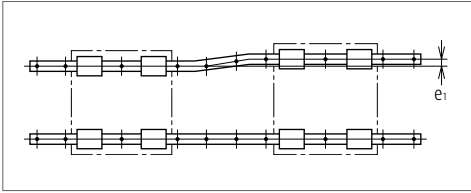


Fig. 3

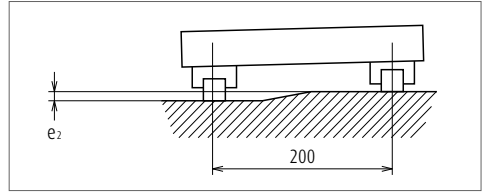


Fig. 4

Table 7

Unit: μm

Value	Preload	Model No.				
		PE05	PE07	PE09	PE12	PE15
Permissible values of parallelism in two rails e_1	Z0, ZT	10	12	15	18	22
	Z1	5	7	10	13	17
Permissible values of parallelism (height) in two rails e_2	Z0, ZT	50 $\mu\text{m}/200\text{ mm}$				
	Z1	35 $\mu\text{m}/200\text{ mm}$				

(2) Shoulder height of the mounting surface and corner radius r




Fig. 5 Shoulder for the rail datum surface




Fig. 6 Shoulder for the ball slide datum surface

Table 8

Unit: mm


Model No.	Corner radius (maximum)		Shoulder height	
	r_a	r_b	H'	H''^*
PE05	0.2	0.2	1.1	2.5
PE07	0.2	0.3	1.7	3
PE09	0.3	0.3	3.5	2.8
PE12	0.3	0.3	3.5	3.2
PE15	0.3	0.5	3.5	4.1

*) H'' is the minimum recommended value based on the dimension T in dimension table.

6. Lubrication accessory

Model of PE15 can select drive-in type grease fitting as an option.

For the model of PE05 to PE12, apply grease directly to the ball grooves of rail using a point nozzle.

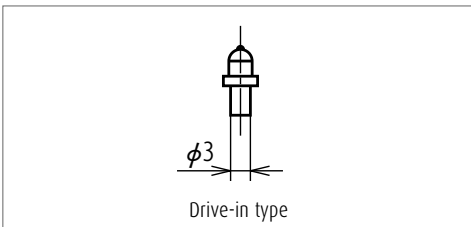

7. Dust-proof components

(1) Standard specification

End seal: Provided to both ends of the ball slide as a standard feature.

Seal friction per standard ball slide is shown in **Table 9**.

Table 9 Seal friction per ball slide (maximum value)

Unit: N

Series \ Size	05	07	09	12	15
PE	0.4	0.4	0.8	1	1.2

(2) NSK K1 lubrication unit

Table 10 shows the dimension of linear guides equipped with the NSK K1 lubrication unit.

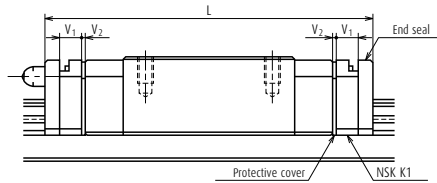


Table 10

Unit: mm

Model No.	Ball slide length	Ball slide model	Standard ball slide length	Ball slide length equipped with two NSK K1 L	Thickness of NSK K1, V ₁	Thickness of protective cover, V ₂
PE05	Standard	AR	24.1	28.9	2	0.4
PE07	Standard	TR	31.1	37.1	2.5	0.5
PE09	Standard	TR	39.8	46.8	3	0.5
PE09	Long	UR	51.2	58.2	3	0.5
PE12	Standard	AR	45	53	3.5	0.5
PE12	Long	BR	60	68	3.5	0.5
PE15	Standard	AR	56.6	66.2	4	0.8
PE15	Long	BR	76	85.6	4	0.8

Note Ball slide length equipped with NSK K1 =
 (Standard ball slide length) + (Thickness of NSK K1, V₁ × Number of NSK K1) +
 (Thickness of the protective cover V₂ × 2)

A-5-2.3 PE Series (Miniature wide type)

8. Reference number

Reference numbers shall be set to individual NSK linear guide when its specifications are finalized, and it is indicated on its specification drawing.

Please specify the reference number, except design serial number, to identify the product when ordering, requiring estimates, or inquiring about specifications from NSK.

(1) Reference number for preloaded assembly

	PE	15	0470	AR	K	2	-**	P5	1	
Series name										
Size										
Rail length (mm)										Preload code (See page A212) 0: Z0, 1: Z1
Ball slide shape code (See page A210)										Accuracy code (See Table 12)
Material/surface treatment code (See Table 11) K: Stainless steel										Design serial number Added to the reference number.
										Number of ball slides per rail

(2) Reference number for random-matching type

Ball slide	PAE	15	AR	S	-K	
Random-matching ball slide series code PAE: PE Series random-matching ball slide						Option code -K: Equipped with NSK K1
Size						Material code S: Stainless steel
Ball slide shape code (See page A210)						

Rail	P1E	15	0470	P	K	N	-**	PC	T
Random-matching rail series code P1E: PE Series random-matching rail									Preload code (See page A212) T: Fine clearance
Size									Accuracy code: PC PC: Normal grade is only available.
Rail length (mm)									Design serial number Added to the reference number.
Rail shape code R: PE09, 12. P: PE15									^{*)} Butting rail specification N: Non-butting, L: Butting specification
Material/surface treatment code (See Table 11)									^{*)} Please consult with NSK for butting rail specification.

Reference number coding for the assembly of random-matching type is the same as that of the preloaded assembly. However, only preload code of "Fine clearance T" is available (refer to page A212).

Click!Speedy™ NSK Linear Guide Quick Delivery System uses a new numbering system. For details, please refer to the Click!Speedy general catalog CAT. No. E3191.

Table 11 Material/surface treatment code

Code	Description
K	Stainless steel
H	Stainless steel with surface treatment
Z	Other, special

Table 12 Accuracy code

Accuracy	Standard (Without NSK K1)	With NSK K1	With NSK K1 for food and medical equipment
Super precision grade	P4	K4	F4
High precision grade	P5	K5	F5
Precision grade	P6	K6	F6
Normal grade	PN	KN	FN
Normal grade (random-matching type)	PC	KC	FC


Note Refer to pages A38 and A61 for NSK K1 lubrication unit.

A-5-2.3 PE Series (Miniature wide type)


9. Dimensions

PE-AR, TR (Standard type / Standard)


PE-UR, BR (High-load type / Long)

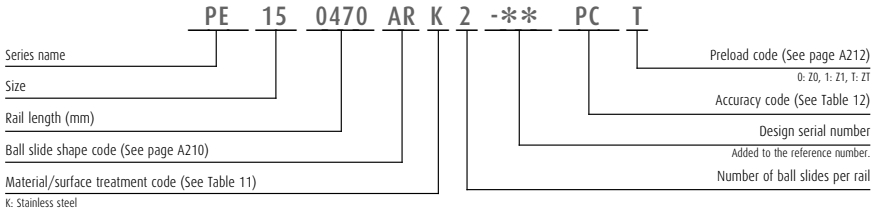

Front view

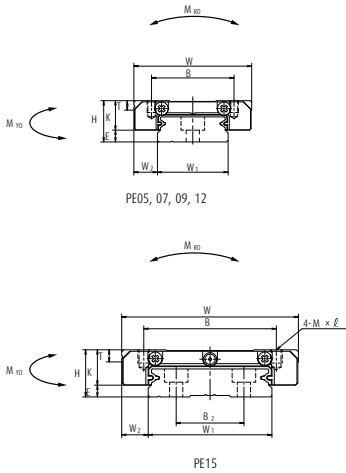



Side view

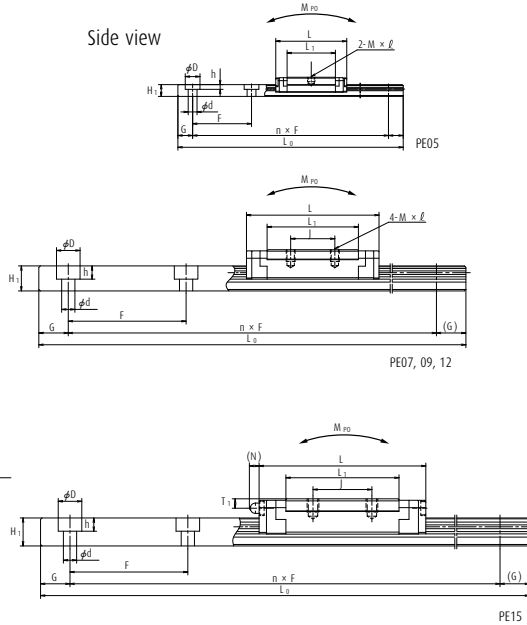



Model No.	Assembly			Ball slide												
	Height	E	W ₂	Width	Length	Mounting hole			L ₁	K	T	Oil hole			Width	Height
						B	J	M × pitch × ℓ				Hole size	T ₁	N		
PE05AR	6.5	1.4	3.5	17	24.1	13	—	M2.5×0.45×1.5	16.4	5.1	2.5	φ 0.9	1.3	—	10	4
PE07TR	9	2	5.5	25	31.1	19	10	M3×0.5×2.8	20.8	7	3	φ 1.9	1.9	—	14	5.2
PE09TR	12	4	6	30	39.8	21	12	M3×0.5×3	26.6	8	2.8	φ 2	2.3	—	18	7.5
PE09UR	12	4	6	30	51.2	23	24	M3×0.5×3	38	8	2.8	φ 2	2.3	—	18	7.5
PE12AR	14	4	8	40	45	28	15	M3×0.5×4	31	10	3.2	φ 2.5	2.7	—	24	8.5
PE12BR	14	4	8	40	60	28	28	M3×0.5×4	46	10	3.2	φ 2.5	2.7	—	24	8.5
PE15AR	16	4	9	60	56.6	45	20	M4×0.7×4.5	38.4	12	4.1	φ 3	3.2	(3.3)	42	9.5
PE15BR	16	4	9	60	76	45	35	M4×0.7×4.5	57.8	12	4.1	φ 3	3.2	(3.3)	42	9.5

Notes 1) Ball slide of PE05AR has only two mounting tap holes in the center.

Reference number for ball slide of random-matching type

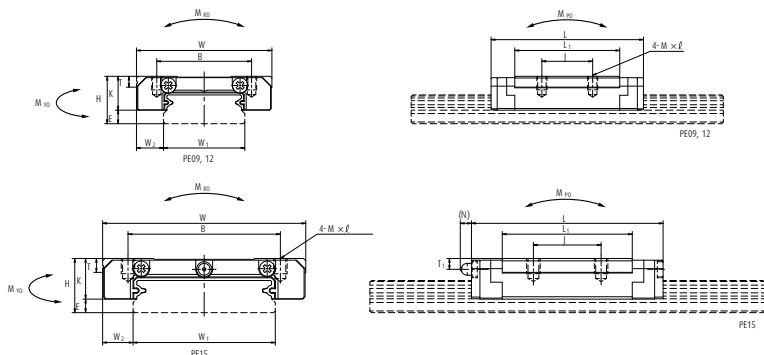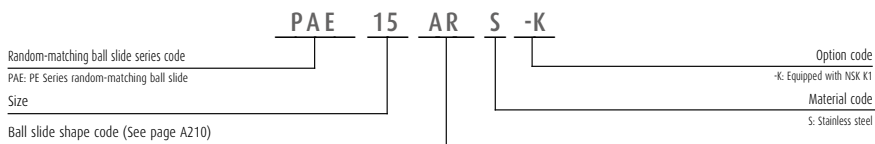

Reference number for rail of random-matching type

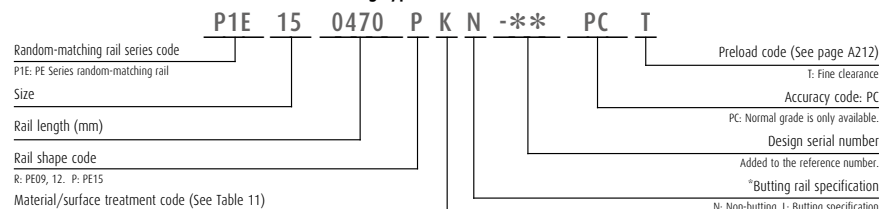

Unit: mm

Rail				Basic load rating								Weight		
B ₂	F	Mounting bolt hole d × D × h	G (reference)	Maximum length L _{0max}	Dynamic		Static C ₀ (N)	M _{RO}	Static moment (N-m)				Ball slide (g)	Rail (g/100 mm)
					C ₅₀ (N)	C ₁₀₀ (N)			M _{PO}		M _{YO}			
									One slide	Two slides	One slide	Two slides		
—	20	3.5×1.6	7.5	150	690	550	1 160	6.00	2.75	17.5	2.75	17.5	7	34
—	30	3.5×6×3.2	10	600	1 580	1 260	2 350	16.7	7.20	46.0	7.20	46.0	19	55
—	30	3.5×6×4.5	10	800	3 000	2 390	4 500	36.5	17.3	113	17.3	113	35	95
—	30	3.5×6×4.5	10	800	4 000	3 150	6 700	54.5	37.5	210	37.5	210	50	95
—	40	4.5×8×4.5	15	1 000	4 350	3 450	6 350	70.5	29.3	180	29.3	180	66	140
—	40	4.5×8×4.5	15	1 000	5 800	4 600	9 550	106	63.5	345	63.5	345	98	140
23	40	4.5×8×4.5	15	1 200	7 600	6 050	10 400	207	59.0	370	59.0	370	140	275
23	40	4.5×8×4.5	15	1 200	10 300	8 200	16 000	320	135	740	135	740	211	275

2) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)

C₅₀: the basic dynamic load rating for 50 km rated fatigue life C₁₀₀: the basic dynamic load rating for 100 km rated fatigue life

5) To fix rail of PE05AR, use M2.5 × 0.45 cross-recessed pan head machine screw for precision instrument.

(JIS 10-70 No. 0 pan head machine screw No.3.)

(JIS: Japanese Camera Industrial Standard.)

A-5-2.4 LE Series (Miniature wide type)

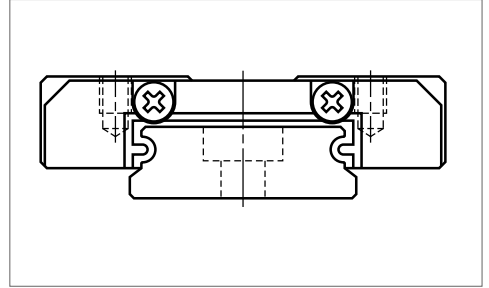
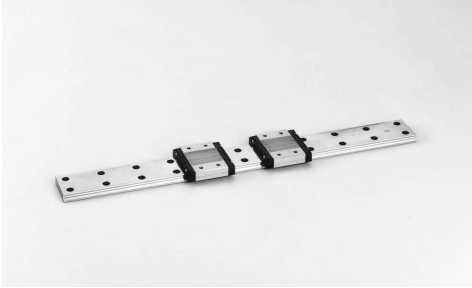


Fig. 1 LE Series

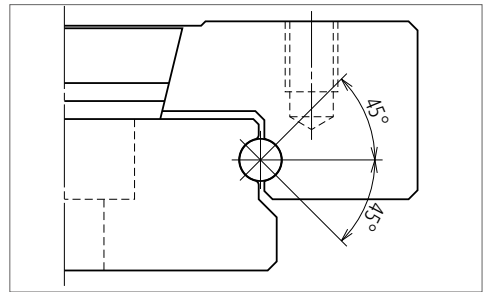


Fig. 2 Balls are in contact.

1. Features

(1) Ideal for use of single rail

The LE Series linear guides are miniature and wide rail type. Thanks to the wide rail, load carrying capacity is high against moment load from rolling direction.

(2) Equal load carrying capacity in vertical and lateral directions

Contact angle is set at 45 degrees, equally dispersing the load from vertical and lateral directions. This also provides equal rigidity in the two directions.

(3) Guides are super-thin.

Super-thin guides owe their design to the single ball groove on right and left sides (Gothic arch).

(4) High accuracy

Fixing the master rollers to the ball grooves is easy thanks to the Groove arch groove. This makes easy and accurate measuring of ball grooves.

(5) Stainless steel is standard.

Rails and ball slides are made of martensitic stainless steel.





(6) Ball retainer is available in some series.

Some series come with a ball retainer (ball slide shape: AR and TR). Balls are retained in the retainer and do not fall out when a ball slide is withdrawn from the rail (random-matching type ball slides come with a ball retainer).

(7) Fast delivery

Random matching of rails and ball slides are available. (LE09 to LE15)

2. Ball slide shape

Ball slide Model	Shape/installation method	Type (Upper row, Rating: Lower row, Ball slide length)		
		Medium-load type	Standard type	High-load type
		Short	Standard	Long
AL TL AR TR BL UL CL SL		CL, SL 	AL, TL, AR, TR 	BL, UL 

Specification	Detail	Type		
Mounting hole	Normal	CL*	AL, AR	BL*
Mounting hole	Large	SL*	TL, TR	UL*
Ball retainer	Without	CL, SL	AL, TL	BL, UL
Ball retainer	With	—	AR, TR	—

* Only applicable to LE09

3. Accuracy and preload

(1) Running parallelism of ball slide

Table 1

Unit: μm

Rail length (mm)		Preloaded assembly type (not random matching)			Random-matching type
		High precision P5	Precision grade P6	Normal grade PN	Normal grade PC
over	or less				
—	50	2	4.5	6	6
50	— 80	3	5	6	6
80	— 125	3.5	5.5	6.5	6.5
125	— 200	4	6	7	7
200	— 250	5	7	8	8
250	— 315	5	8	9	9
315	— 400	6	9	11	11
400	— 500	6	10	12	12
500	— 630	7	12	14	14
630	— 800	8	14	16	16
800	— 1 000	9	16	18	18
1 000	— 1 250	10	17	20	20

A-5-2.4 LE Series (Miniature wide type)

(2) Accuracy standard

The preloaded assembly type has three accuracy grades; High precision P5, Precision P6, and Normal PN grades, while the random-matching type has Normal grade PC only.

Table 2 shows the accuracy standard for the preloaded assembly type while **Table 3** shows the accuracy standard for the random-matching type.

> Tolerance of preloaded assembly

Table 2

		Unit: μm		
Characteristics	Accuracy grade	High precision P5	Precision grade P6	Normal grade PN
Mounting height H		± 15	± 20	± 40
Variation of H (All ball slides on a set of rails)		7	15	25
Mounting width W_2 or W_3		± 20	± 30	± 50
Variation of W_2 or W_3 (All ball slides on reference rail)		10	20	30
Running parallelism of surface C to surface A		Refer to Table 1 and Fig. 3		
Running parallelism of surface D to surface B				

> Tolerance of random-matching type: Normal grade PC

Table 3

		Unit: μm
Characteristics	Accuracy grade	LU09, 12, 15
Mounting height H		± 20
Variation of mounting height H		40
Mounting width W_2 or W_3		± 20
Variation of mounting width W_2 or W_3		40
Running parallelism of surface C to surface A		Refer to Table 1 and Fig. 3
Running parallelism of surface D to surface B		

(3) Assembled accuracy

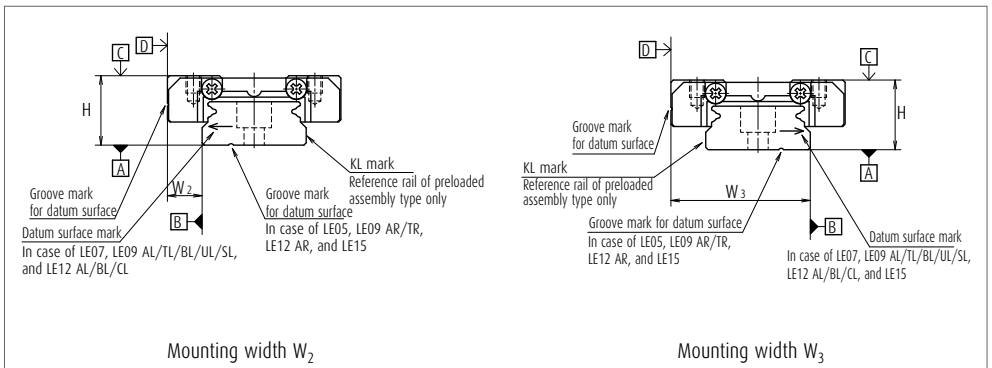


Fig. 3

(4) Preload and rigidity

We offer three levels of preload: Slight preload Z1 and Fine clearance Z0 for the preloaded assembly type, along with Fine clearance Z1 for the random-matching type. Values for preload and rigidity of the preloaded assembly type are shown in Table 4. Rigidities are for the median of the preload range.

› Preload and rigidity of preloaded assembly

Table 4

Model No.		Preload (N)	Rigidity (N/μm)
		Slight preload (Z1)	Slight preload (Z1)
Standard type	LE05 AL	0 - 23	36
	LE07 TL	0 - 29	46
	LE09 AL, TL, AR, TR	0 - 37	61
	LE12 AL, AR	0 - 40	63
	LE15 AL, AR	0 - 49	66
Medium-load type	LE05 CL	0 - 18	29
	LE07 SL	0 - 16	28
	LE09 CL, SL	0 - 21	33
	LE12 CL	0 - 23	36
	LE15 CL	0 - 29	44
High-load type	LE07 UL	0 - 43	71
	LE09 BL, UL	0 - 54	86
	LE12 BL	0 - 59	97
	LE15 BL	0 - 75	114

Note The clearance of Fine clearance Z0 is 0 to 3 μm. Therefore, preload is zero. However, the clearance of the Z0 of PN grade is 3 to 10 μm.

› Clearance of random-matching type

Table 5

Unit: μm

Model No.	Fine clearance Z1
LE09	0 - 15
LE12	0 - 15
LE15	0 - 15

4. Maximum rail length

Table 6 shows the limitations of rail length. The limitations vary by accuracy grades.

Table 6 Length limitation of rails

Unit: mm

Series	Material \ Size	05	07	09	12	15
		LE	Stainless steel	150	600	800

Note Rails can be butted if user requirement exceeds the rail length shown in the table. Please consult NSK.

A-5-2.4 LE Series (Miniature wide type)

5. Installation

(1) Permissible values of mounting error

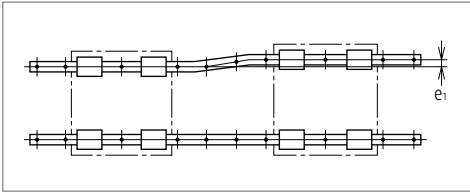


Fig. 4

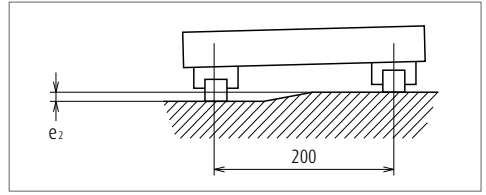


Fig. 5

Table 7

Unit: μm

Value	Preload	Model No.				
		LU05	LU07	LU09	LU12	LU15
Permissible values of parallelism in two rails e_1	Z0, ZT	10	12	15	18	22
	Z1	5	7	10	13	17
Permissible values of parallelism (height) in two rails e_2	Z0, ZT	50 $\mu\text{m}/200 \text{ mm}$				
	Z1	35 $\mu\text{m}/200 \text{ mm}$				

(2) Shoulder height of the mounting surface and corner radius r




Fig. 6 Shoulder for the rail datum surface




Fig. 7 Shoulder for the ball slide datum surface

Table 8


Unit: mm

Model No.	Corner radius (maximum)		Shoulder height	
	r_a	r_b	H'	H''
LE05	0.2	0.2	1.1	2
LE07	0.2	0.3	1.7	3
LE09	0.3	0.3	3.5	3
LE12	0.3	0.3	3.5	4
LE15	0.3	0.5	3.5	5

6. Lubrication accessories

Model of LE15AR can select drive-in type grease fitting as option. There is no standard grease fitting for LE05 to LE12.

For the models of LE05 to LE15 except for LE15AR, apply grease directly to the ball grooves of rail, using a point nozzle.



7. Dust-proof components

(1) Standard specification

End seal: Provided to both ends of the ball slide as a standard feature.

› Seal friction per standard ball slide is shown in **Table 9**.

Table 9 Seal friction per ball slide (maximum value)

Unit: N

Size Series	05	07	09	12	15
LE	0.4	0.4	0.8	1.0	1.2

(2) NSK K1 lubrication unit

The installed dimensions of the NSK K1 lubrication unit are shown in **Table 10**.

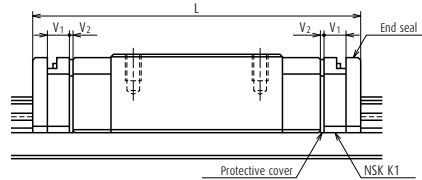


Table 10

Unit: mm

Model No.	Ball slide length	Ball slide model	Standard ball slide length	Ball slide length installed with two NSK K1 L	Per NSK K1 thickness V ₁	Protective cover thickness V ₂
LE07	Standard	TL	31	37	2.5	0.5
LE07	Long	UL	42	48	2.5	0.5
LE07	Short	SL	22.4	28.4	2.5	0.5
LE09	Standard	AL, TL	39	46	3.0	0.5
LE09	Standard	AR, TR	39.8	46.8	3.0	0.5
LE09	Long	BL, UL	50.4	57.4	3.0	0.5
LE09	Short	CL, SL	26.4	33.4	3.0	0.5
LE12	Standard	AL	44	52	3.5	0.5
LE12	Standard	AR	45	53	3.5	0.5
LE12	Long	BL	59	67	3.5	0.5
LE12	Short	CL	30.5	38.5	3.5	0.5
LE15	Standard	AL	55.0	64.6	4.0	0.8
LE15	Standard	AR	56.6	66.2	4.0	0.8
LE15	Long	BL	74.4	84	4.0	0.8
LE15	Short	CL	41.4	51	4.0	0.8

Note Ball slide length equipped with NSK K1 =
(Standard ball slide length) + (Thickness of NSK K1, V₁ × Number of NSK K1) + (Thickness of the protective cover V₂ × 2)


A-5-2.4 LE Series (Miniature wide type)

8. Reference number



Reference numbers shall be set to individual NSK linear guide when its specifications are finalized, and it is indicated on its specification drawing.

Please specify the reference number, except design serial number, to identify the product when ordering, requiring estimates, or inquiring about specifications from NSK.

(1) Reference number for preloaded assembly

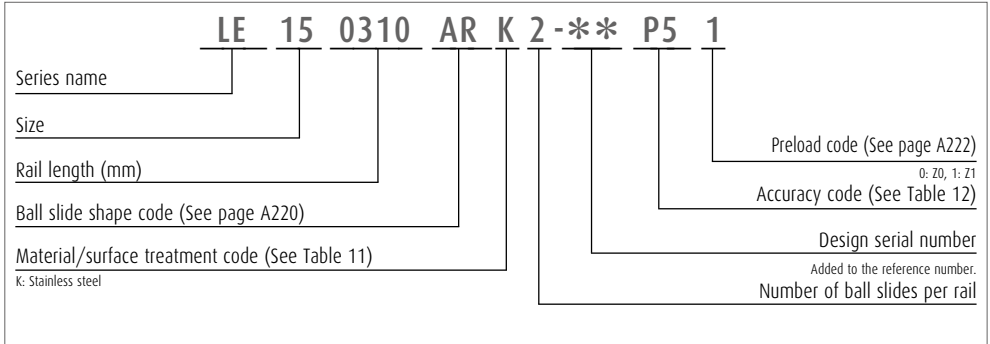

(2) Reference number for random-matching type

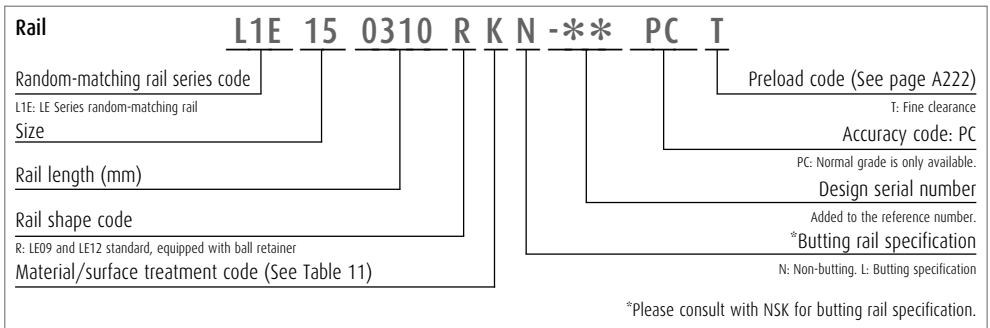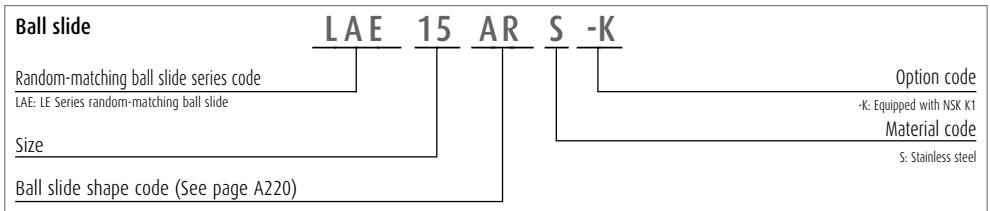

The reference number coding for the assembly of random-matching type is the same as that of the preloaded assembly. However, only the preload code of "Fine clearance T" is available (refer to page A222).

Table 11 Material/surface treatment code

Code	Description
K	Stainless steel
H	Stainless steel with surface treatment
Z	Other, special

Table 12 Accuracy code

Accuracy	Standard (Without NSK K1)	With NSK K1
High precision grade	P5	K5
Precision grade	P6	K6
Normal grade	PN	KN
Normal grade (random-matching type)	PC	KC

Note Refer to page A38 for NSK K1 lubrication unit.

A-5-2.4 LE Series (Miniature wide type)


9. Dimensions

LE-AL (Standard type / Standard)


LE-TL (Standard type / Standard, large mounting hole)

LE-AR (Standard type / Standard, with ball retainer)


LE-TR (Standard type / Standard, large mounting hole, with ball retainer)

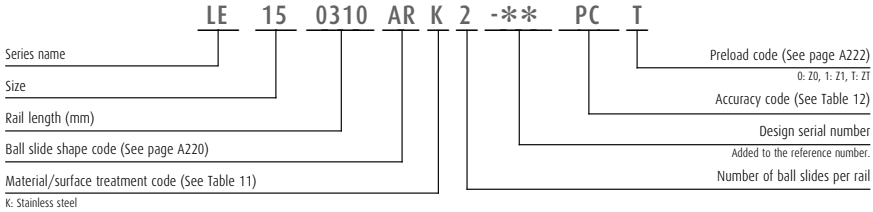

Front view




LE05, 07, 09, 12




LE15

Side view



LE05

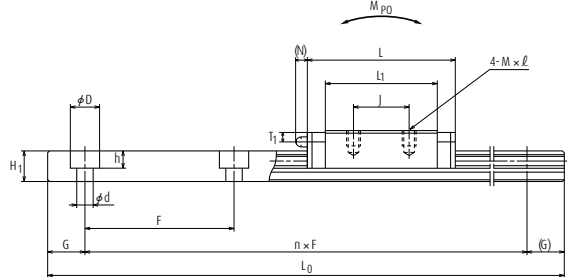

LE07, 09, 12, 15

Model No.	Assembly				Ball slide							Grease fitting					
	Height	H	E	W ₂	Width	Length	Mounting hole			L ₁	K	Hole size	T ₁	N	Width	Height	Pitch
							B	J	M × pitch × l								
LE05AL	6.5	1.4	3.5	17	24	13	—	M2.5×0.45×2	17	5.1	—	—	—	10	4	—	20
LE07TL	9	2	5.5	25	31	19	10	M3×0.5×3	21.2	7	—	—	—	14	5.2	—	30
LE09AL	12	4	6	30	39	21	12	M2.6×0.45×3	27.6	8	—	—	—	18	7.5	—	30
LE09TL	12	4	6	30	39	21	12	M3×0.5×3	27.6	8	—	—	—	18	7.5	—	30
LE09AR	12	4	6	30	39.8	21	12	M2.6×0.45×3	27.6	8	—	—	—	18	7.5	—	30
LE09TR	12	4	6	30	39.8	21	12	M3×0.5×3	27.6	8	—	—	—	18	7.5	—	30
LE12AL	14	4	8	40	44	28	15	M3×0.5×4	31	10	—	—	—	24	8.5	—	40
LE12AR	14	4	8	40	45	28	15	M3×0.5×4	31	10	—	—	—	24	8.5	—	40
LE15AL	16	4	9	60	55	45	20	M4×0.7×4.5	38.4	12	—	—	—	42	9.5	23	40
LE15AR	16	4	9	60	56.6	45	20	M4×0.7×4.5	38.4	12	φ3	3.2	3	42	9.5	23	40


Notes 1) Ball slide of LE05 has only two mounting tap holes.

Reference number for ball slide of random-matching type


Random matching with retainer: LAE09AR/TR, LAE12AR, LAE15AR

LAE-AR (With ball retainer)

LAE-TR (Large mounting hole with ball retainer)

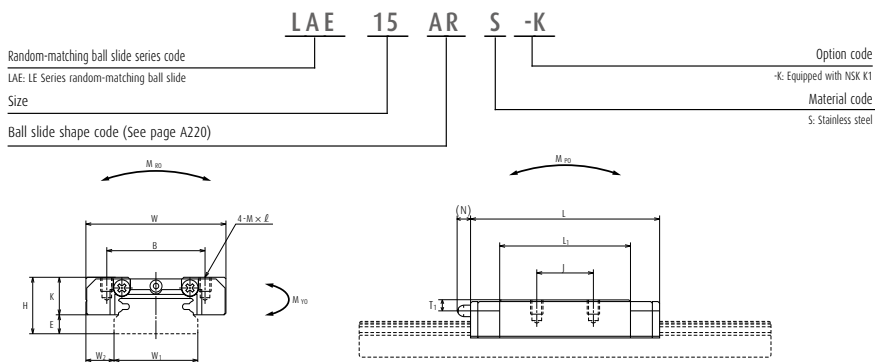


Reference number for rail of random-matching type

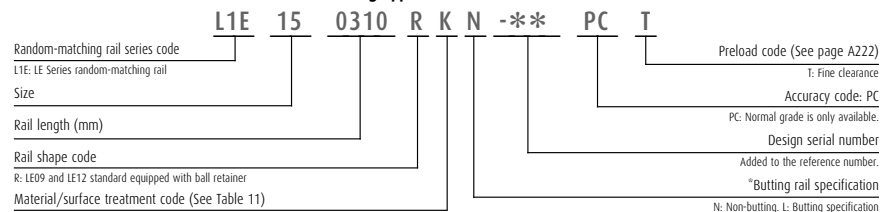


*Please consult with NSK for butting rail specification.



LE09, 12



LE15

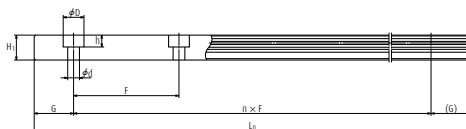

Unit: mm

Rail		Basic load rating								Weight		
Mounting bolt hole $d \times D \times h$	G (reference)	Max. length L_{0max}	2) Dynamic		Static C_0 (N)	M_{R0}	Static moment (N-m)				Ball slide (g)	Rail (g/100 mm)
			[50km] $C_{50}(N)$	[100km] $C_{100}(N)$			M_{P0}		M_{Y0}			
					One slide		Two slides	One slide	Two slides			
3.5×1.6	7.5	150	725	575	1 110	5.65	2.58	16.9	2.58	16.9	11	34
3.5×6×3.2	10	600	1 580	1 260	2 350	16.7	7.20	46.0	7.20	46.0	25	55
3.5×6×4.5	10	800	3 000	2 400	4 500	36.5	17.3	110	17.3	110	40	95
3.5×6×4.5	10	800	3 000	2 400	4 500	36.5	17.3	110	17.3	110	40	95
3.5×6×4.5	10	800	3 000	2 400	4 500	36.5	17.3	113	17.3	113	40	95
3.5×6×4.5	10	800	3 000	2 400	4 500	36.5	17.3	113	17.3	113	40	95
4.5×8×4.5	15	1 000	4 350	3 450	6 350	70.5	29.3	175	29.3	175	75	140
4.5×8×4.5	15	1 000	4 350	3 450	6 350	70.5	29.3	180	29.3	180	75	140
4.5×8×4.5	15	1 200	7 600	6 050	10 400	207	59.0	360	59.0	360	150	275
4.5×8×4.5	15	1 200	7 600	6 050	10 400	207	59.0	370	59.0	370	150	275

2) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)

C_{50} : the basic dynamic load rating for 50 km rated fatigue life C_{100} : the basic dynamic load rating for 100 km rated fatigue life


3) For fixing a rail of LE05AL, use M2.5 × 0.45 cross-recessed pan head machine screw for precision instruments.

(JCS 10-70: No.0 pan head machine screw No.3) (JCS: Japanese Camera Industrial Standard)


A-5-2.4 LE Series (Miniature wide type)

LE-BL (High-load type / Long)


LE-UL (High-load type / Long, large mounting hole)

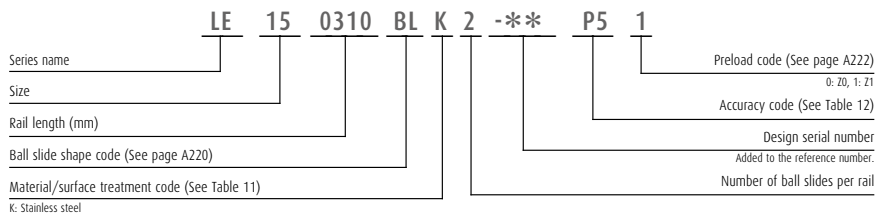

Front view

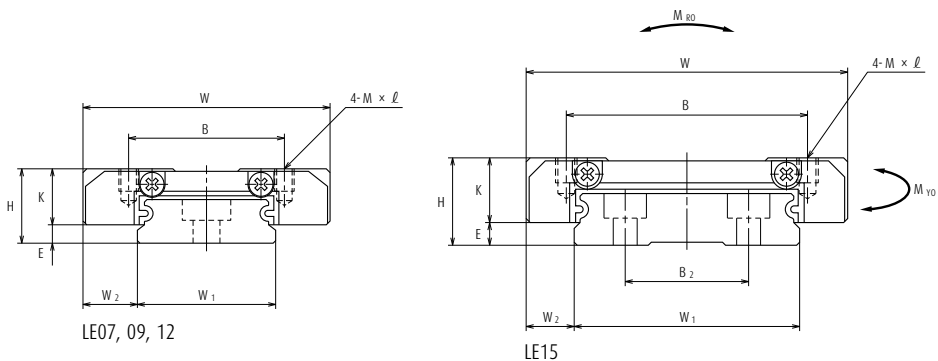

Model No.	Assembly			Ball slide										
	Height H	E	W ₂	Width W	Length L	Mounting hole			L ₁	K	Width W ₁	Height H ₁	B ₂	Pitch F
						B	J	M × pitch × l						
LE07UL	9	2	5.5	25	42	19	19	M3×0.5×3	32.2	7	14	5.2	—	30
LE09BL	12	4	6	30	50.4	23	24	M2.6×0.45×3	39	8	18	7.5	—	30
LE09UL	12	4	6	30	50.4	23	24	M3×0.5×3	39	8	18	7.5	—	30
LE12BL	14	4	8	40	59	28	28	M3×0.5×4	46	10	24	8.5	—	40
LE15BL	16	4	9	60	74.4	45	35	M4×0.7×4.5	57.8	12	42	9.5	23	40

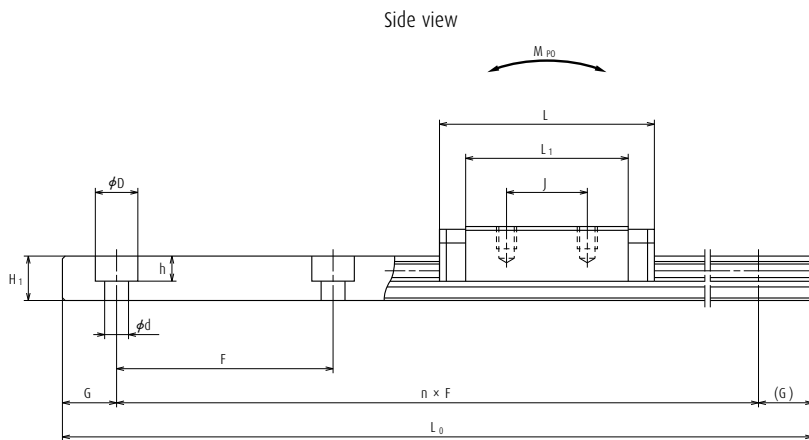

Unit: mm

Rail			Basic load rating								Weight	
Mounting bolt hole $d \times D \times h$	G (reference)	Maximum length L_{0max}	3) Dynamic		Static	Static moment (N·m)				Ball slide (g)	Rail (g/100 mm)	
			[50km] $C_{50}(N)$	[100km] $C_{100}(N)$	C_0 (N)	M_{R0}	M_{P0}		M_{Y0}			
							One slide	Two slides	One slide			Two slides
3.5×6×3.2	10	600	2 180	1 730	3 700	26.4	17.3	94.5	17.3	94.5	39	55
3.5×6×4.5	10	800	4 000	3 150	6 700	54.5	37.5	206	37.5	206	58	95
3.5×6×4.5	10	800	4 000	3 150	6 700	54.5	37.5	206	37.5	206	58	95
4.5×8×4.5	15	1 000	5 800	4 600	9 550	106	63.5	340	63.5	340	115	140
4.5×8×4.5	15	1 200	10 300	8 200	16 000	320	135	725	135	725	235	275

Note 1) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)


C_{50} : the basic dynamic load rating for 50 km rated fatigue life

C_{100} : the basic dynamic load rating for 100 km rated fatigue life


A-5-2.4 LE Series (Miniature wide type)

LE-CL (Medium-load type / Short)

LE-SL (Medium-load type / Short, large mounting hole)

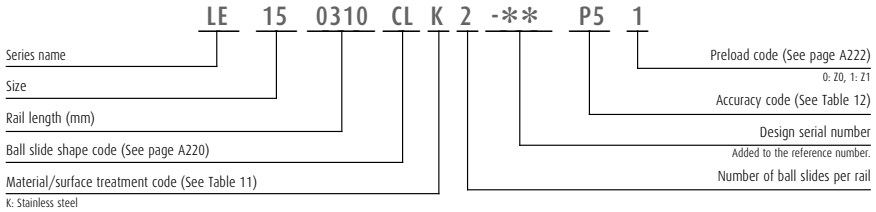


Front view

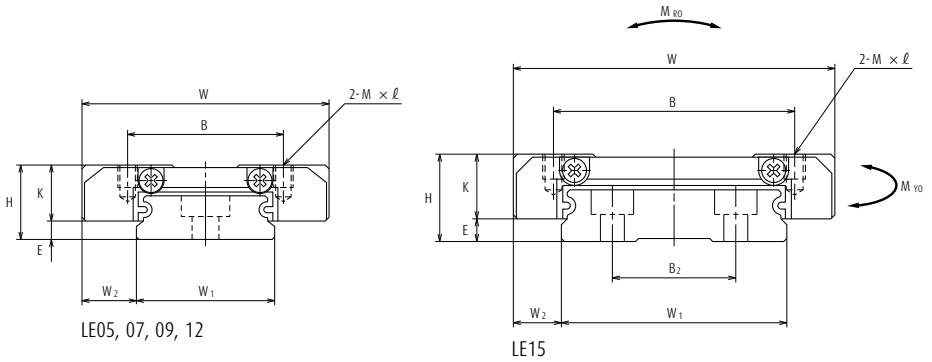

Model No.	Assembly			Ball slide							Pitch			
	Height	E	W ₂	Width	Length	Mounting hole			L ₁	K		Width	Height	B ₂
						B	J	M × pitch × l						
LE05CL	6.5	1.4	3.5	17	20	13	—	M2.5×0.45×2	13	5.1	10	4	—	20
LE07SL	9	2	5.5	25	22.4	19	—	M3×0.5×3	12.6	7	14	5.2	—	30
LE09CL	12	4	6	30	26.4	21	—	M2.6×0.45×3	15	8	18	7.5	—	30
LE09SL	12	4	6	30	26.4	21	—	M3×0.5×3	15	8	18	7.5	—	30
LE12CL	14	4	8	40	30.5	28	—	M3×0.5×4	17.5	10	24	8.5	—	40
LE15CL	16	4	9	60	41.4	45	—	M4×0.7×4.5	24.8	12	42	9.5	23	40

Notes 1) Ball slide of CL and SL types have only two mounting tap holes in the center.

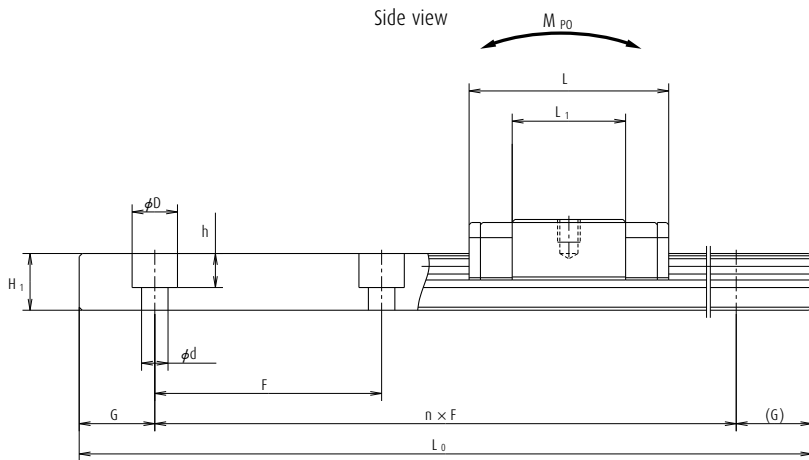

Unit: mm

Rail		Basic load rating								Weight		
Mounting bolt hole $d \times D \times h$	G (reference)	Maximum length L_{0max}	3) Dynamic		Static C_N (N)	M_{R0}	Static moment (N-m)				Ball slide (g)	Rail (g/100 mm)
			[50km] C_{50} (N)	[100km] C_{100} (N)			M_{P0}		M_{Y0}			
					One slide		Two slides	One slide	Two slides			
3×5×1.6	7.5	150	595	470	835	4.25	1.51	10.0	1.51	10.0	8	34
3.5×6×3.2	10	600	980	775	1 170	8.35	2.01	18.5	2.01	18.5	17	55
3.5×6×4.5	10	800	1 860	1 480	2 240	18.2	4.85	41.0	4.85	41.0	25	95
3.5×6×4.5	10	800	1 860	1 480	2 240	18.2	4.85	41.0	4.85	41.0	25	95
4.5×8×4.5	15	1 000	2 700	2 140	3 150	35.0	8.15	67.0	8.15	67.0	50	140
4.5×8×4.5	15	1 200	5 000	3 950	5 650	113	19.4	162	19.4	162	110	275

2) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)

C_{50} : the basic dynamic load rating for 50 km rated fatigue life C_{100} : the basic dynamic load rating for 100 km rated fatigue life

3) For fixing a rail of LE05CL, use cross-recessed pan head machine screw for precision instruments M2.5 × 0.45 (JIS 10-70: Japan Camera Industry Association, No.0, class 3).

A-5-2.5 Miniature LH Series

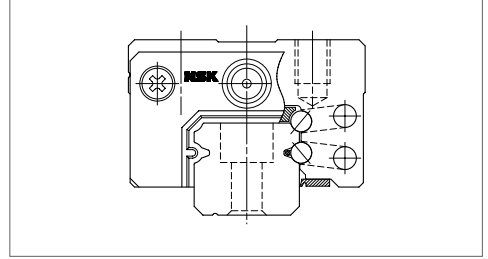
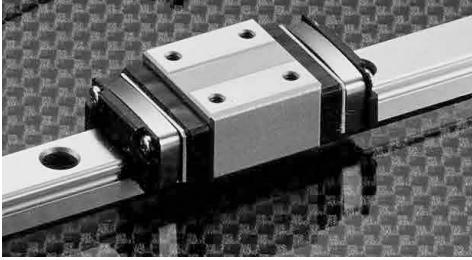


Fig. 1 LH Series

1. Features

(1) High self-aligning capability (rolling direction)

Same as the DF combination in angular contact bearings, self-aligning capability is high because the cross point of the contact lines of balls and grooves comes inside, and thus reducing moment rigidity. This increases the capacity to absorb errors in installation.

(2) High load carrying capacity to vertical direction

The contact angle is set at 50 degrees, and thus increasing load carrying capacity as well as rigidity in vertical direction.

(3) High resistance against impact load

The bottom ball groove is formed in Gothic arch and the center of the top and bottom grooves are offset as shown in Fig. 2. The vertical load is generally carried by the top ball rows, where balls are contacting at two points. Because of this design, the bottom ball rows will carry load when a large impact load is applied vertically as shown in Fig. 3. This assures high resistance to the impact load.

(4) High accuracy

As showing in Fig. 4, fixing the master rollers to the ball grooves is easy thanks to the Gothic arch groove. This makes easy and accurate measuring of ball grooves.

(5) High corrosion resistance

High corrosion-resistant martensite stainless steel is incorporated as a standard feature to provides excellent corrosion resistance.

(6) Easy to handle

Safety design includes a retainer that prevents steel balls from dropping out of the ball slide even when the slide is removed from the rail. (LH10-12)

(7) Long-term maintenance-free

Superb features of NSK K1 Lubrication unit realize a long-term, maintenance-free operation.

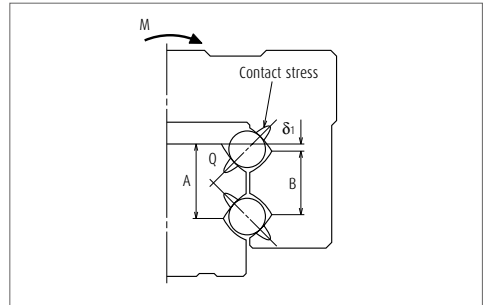


Fig. 2 Enlarged illustration of the offset Gothic arch groove

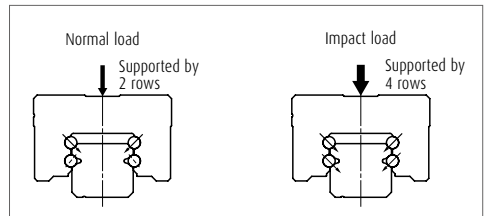


Fig. 3 When load is applied

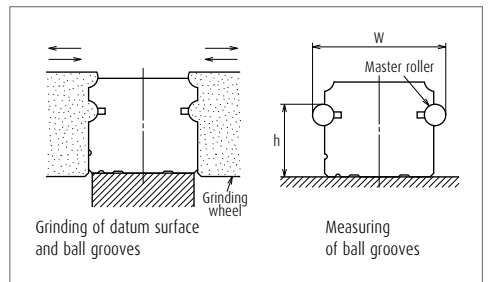
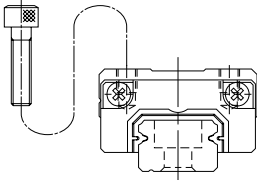
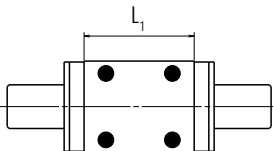


Fig. 4 Rail grinding and measuring

2. Ball slide shape

Ball slide Model	Shape/installation method	Type
AN		AN 

3. Accuracy and preload

(1) Running parallelism of ball slide

Table 1

Unit: μm

Rail length (mm)		Preloaded assembly			
		Super precision P4	High precision P5	Precision grade P6	Normal grade PN
over	or less				
-	50	2	2	4.5	6
50	- 80	2	3	5	6
80	- 125	2	3.5	5.5	6.5
125	- 200	2	4	6	7
200	- 250	2.5	5	7	8
250	- 315	2.5	5	8	9
315	- 400	3	6	9	11
400	- 500	3	6	10	12
500	- 630	3.5	7	12	14
630	- 800	4.5	8	14	16

(2) Accuracy standard

The preloaded assembly has four accuracy grades; Super precision P4, High precision P5, Precision P6 and Normal PN grades.

› Tolerance of preloaded assembly

Table 2

Unit: μm

Characteristics	Accuracy grade	Super precision P4	High precision P5	Precision grade P6	Normal grade PN
Mounting height H		± 10	± 20	± 40	± 80
Variation of H (All ball slides on a set of rails)		3	5	7	15
Mounting width W_2 or W_3		± 10	± 15	± 25	± 50
Variation of W_2 or W_3 (All ball slides on reference rail)		5	7	10	20
Running parallelism of surface C to surface A Running parallelism of surface D to surface B		Shown in Table 1, Fig. 5			

A-5-2.5 Miniature LH Series

(3) Combinations of accuracy and preload

Table 3

		Accuracy grade			
		Super precision	High precision	Precision grade	Normal grade
Without NSK K1 lubrication unit		P4	P5	P6	PN
With NSK K1 lubrication unit		K4	K5	K6	KN
With NSK K1 for food and medical equipment		F4	F5	F6	FN
Preload	Fine clearance Z0	○	○	○	○
	Slight preload Z1	○	○	○	○

(4) Assembled accuracy

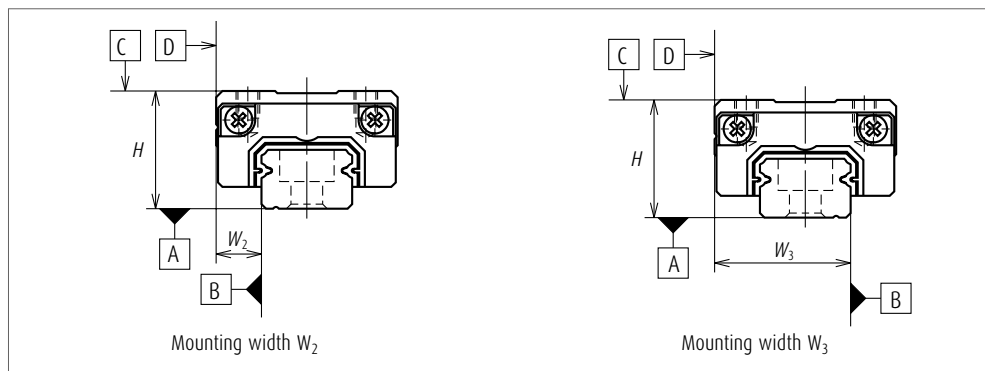


Fig. 5

(5) Preload and rigidity

We offer two levels of preload: Slight preload Z1 and Fine clearance Z0.

> Preload and rigidity of preloaded assembly

Table 4

Model No.	Preload (N)	Rigidity (N/ μ m)	
		Vertical direction	Lateral direction
	Slight preload Z1	Slight preload Z1	Slight preload Z1
LH08AN	5	33	23
LH10AN	9	44	31
LH12AN	22	68	47

Note Clearance for Fine clearance Z0 is 0 to 3 μ m. Therefore, preload is zero. However, Z0 of PN grade is 0 to 5 μ m.

4. Maximum rail length

Table 5 shows the limitations of rail length (maximum length). However, the limitations vary by accuracy grades.

Table 5 Length limitation of rails

Unit: mm

Series	Material	Size	08	10	12
LH	Stainless steel		375	600	800

Note Rails can be butted if user requirement exceeds the rail length shown in the table. Please consult NSK.

5. Installation

(1) Permissible values of mounting error

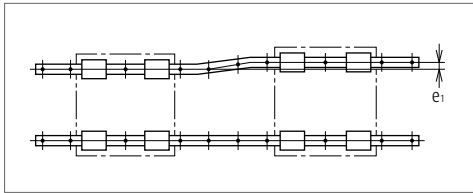


Fig. 6

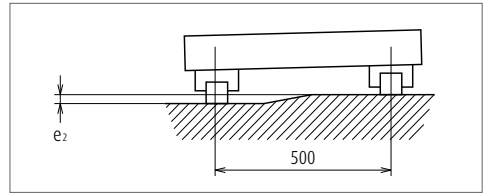


Fig. 7

Table 6

Unit: μm

Value	Preload	Model No.		
		LH08	LH10	LH12
Permissible values of parallelism in two rails e_1	Z0	9	12	19
	Z1	8	11	18
Permissible values of parallelism (height) in two rails e_2	Z0	375 $\mu\text{m}/500\text{ mm}$		
	Z1	330 $\mu\text{m}/500\text{ mm}$		

(2) Shoulder height of the mounting surface and corner radius r




Fig. 8 Shoulder for the rail datum surface




Fig. 9 Shoulder for the ball slide datum surface

Table 7

Unit: mm

Model No.	Corner radius (maximum)		Shoulder height	
	r_a	r_b	H'	H''
LH08	0.3	0.5	1.8	3
LH10	0.3	0.5	2.1	4
LH12	0.3	0.5	2.7	4

A-5-2.5 Miniature LH Series

6. Lubrication accessory

Model of LH12 can select drive-in type grease fitting as an option.

For the models of LH08 to LH10, apply grease directly to the ball grooves of rail using a point nozzle.

7. Dust-proof components

(1) Standard specification

The LH Series can be readily used as they have a dust protection means for normal conditions. As the standard equipment, the ball slides have an end seal on both ends, and bottom seals at the bottom.

However, the bottom seals are not used to LH08 and 10.

Table 8 Seal friction per ball slide (maximum value)

Unit: N

Series \ Size	08	10	12
LE	0.5	1	1.5




Fig. 10

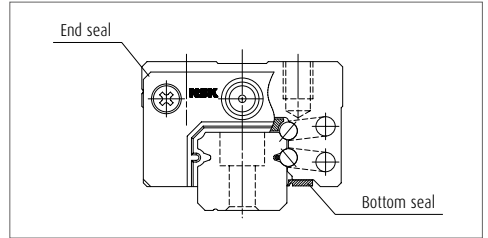


Fig. 11

(2) NSK K1 lubrication unit

Table 9 shows the dimension of linear guides equipped with the NSK K1 lubrication unit

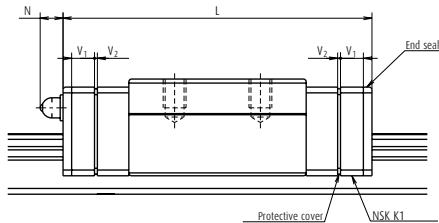


Table 9

Unit: N

Model No.	Ball slide length	Ball slide model	Standard ball slide length	Ball slide length installed with two NSK K1 L	Per NSK K1 thickness V_1	Protective cover thickness V_2	Protruding area of the grease fitting N
LH08	Standard	AN	24	31	3	0.5	—
LH10	Standard	AN	31	40	4	0.5	—
LH12	Standard	AN	45	54	4	0.5	(4)

Notes 1) NSK K1 for food and medical equipment are available for LH12.

2) Ball slide length equipped with NSK K1 = (Standard ball slide length) + (Thickness of NSK K1, $V_1 \times$ Number of NSK K1) + (Thickness of the protective cover, $V_2 \times 2$)

(3) Cap to plug the rail mounting bolt hole

Table 10 Caps to plug rail bolt hole

Model No.	Bolt to secure rail	Cap reference No.	Quantity /case
LH12	M3	LG-CAP/M3	20

A-5-2.5 Miniature LH Series

8. Reference number

Reference numbers shall be set to individual NSK linear guide when its specifications are finalized, and it is indicated on its specification drawing.

Please specify the reference number, except design serial number, to identify the product when ordering, requiring estimates, or inquiring about specifications from NSK.

(1) Reference number for preloaded assembly

	LH	12	0800	AN	K	2	-**	P5	1	
Series name										
Size										
Rail length (mm)										
Ball slide shape code (See page A234)										
Material/surface treatment code (See Table 11)										
<small>K: Stainless steel</small>										
										Preload code (See page A235)
										<small>0: Z0, 1: Z1</small> Accuracy code (See Table 12)
										Design serial number
										<small>Added to the reference number.</small> Number of ball slides per rail

Table 11 Material/surface treatment code

Code	Description
K	Stainless steel
H	Stainless steel with surface treatment
Z	Other, special

Table 12 Accuracy code


Accuracy	Standard (Without NSK K1)	With NSK K1	With NSK K1 for food and medical equipment
Super precision grade	P4	K4	F4
High precision grade	P5	K5	F5
Precision grade	P6	K6	F6
Normal grade	PN	KN	FN

Note Refer to pages A38 and A61 for NSK K1 lubrication unit.




A-5-2.5 Miniature LH Series

9. Dimensions

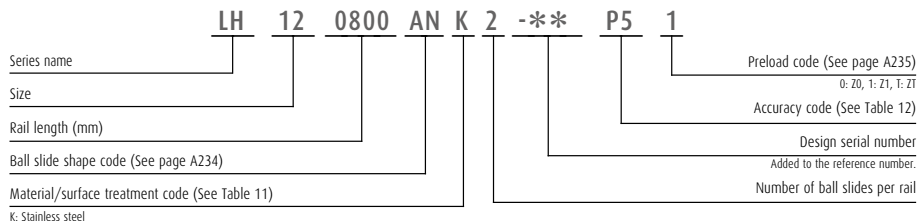

Front view

Side view

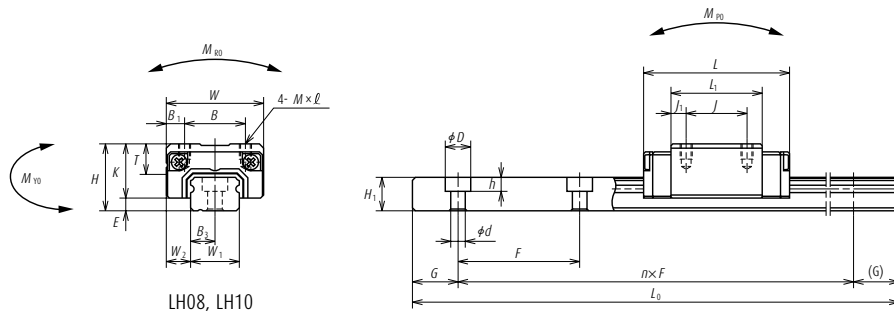


LH08, LH10

Model No.	Assembly				Ball slide											
	Height	E	W ₂	Width	Length	Mounting hole			L ₁	K	T	Grease fitting			Width	Height
						B	J	M × pitch × ℓ				Hole size	T ₁	N		
LH08AN	11	2.1	4	16	24	10	10	M2×0.4×2.5	15	8.9	—	—	—	—	8	5.5
LH10AN	13	2.4	5	20	31	13	12	M2.6×0.45×3	20.2	10.6	6	—	—	—	10	6.5
LH12AN	20	3.2	7.5	27	45	15	15	M4×0.7×5	31	16.8	6	φ 3	5	4	12	10.5

Notes 1) LH08 does not have a ball retainer. Be aware that balls fall out when the ball slide is withdrawn from the rail.

Front view

Side view

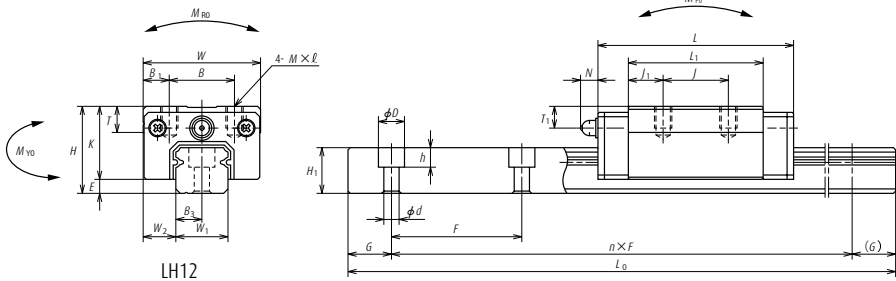

LH12

Unit: mm

Rail				Basic load rating								Weight	
Pitch F	Mounting bolt hole d × D × h	G (reference)	Maximum length L _{0max}	2) Dynamic		Static	Static moment (N-m)				Ball slide (g)	Rail (g/100 mm)	
				[50km] C ₅₀ (N)	[100km] C ₁₀₀ (N)	C ₀ (N)	M _{RO}	M _{PO}		M _{YO}			
								One slide	Two slides	One slide			Two slides
20	2.4×4.2×2.3	7.5	375	1 240	985	2 630	7.25	4.55	32.5	3.8	27.2	13	31
25	3.5×6×3.5	10	600	2 250	1 790	4 500	16.2	10.5	73.0	8.8	61.0	26	44
40	3.5×6×4.5	15	800	5 650	4 500	11 300	47.5	41.5	254	35	214	82	88

2) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)

C₅₀; the basic dynamic load rating for 50 km rated fatigue life C₁₀₀; the basic dynamic load rating for 100 km rated fatigue life

A-5-3 High Rigidity Series



1.	RA Series	Page A245
2.	RB Series	A265
3.	LA Series	A281

A-5-3.1 Roller Guide RA Series

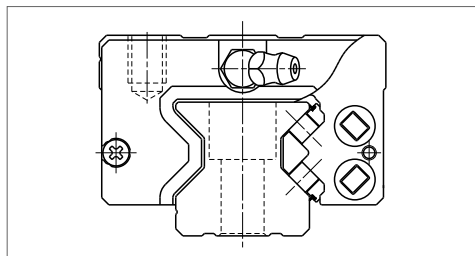
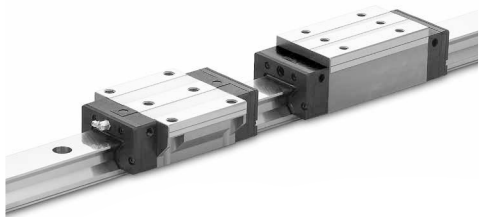


Fig. 1 RA Series

1. Features

(1) Super-high load capacity

By installing rollers that are the largest possible diameter and length within the existing standard cross-section dimension in a rational layout based on our advanced analysis technology, we have realized the world's highest load capacity,* far superior to conventional roller guides. Super-long life is achieved and impact load can be sufficiently handled.

* As of September 1, 2003; NSK's research and comparison on the existing products of the same sizes.

(2) Super-high rigidity

Using NSK's advanced analysis technology, we pursued a complete, optimal design, down to the detailed shape of roller slides and rails, thereby realizing super-high rigidity superior to that of competitor's roller guides.

(3) Super-high motion accuracy

NSK has developed its own unique method of simulating rolling element passage vibration and method of designing optimal roller slide specifications for damping roller passage vibration. These developments have dramatically enhanced roller slide motion accuracy for the RA series.

(4) Smooth motion

Installation of a retaining piece between rollers restrains the roller skew peculiar to roller slides, thereby achieving smooth motion.

(5) Low friction

Using rollers for rolling elements helps minimize dynamic friction.

(6) Random matching

Random-matching of rails and roller slides are available. (RA25 to RA65)

(7) Specification with highly dustproof V1 seal

Specification with newly developed, highly dustproof V1 seal which is the end seal with enhanced abrasion resistance is also available. (RA35 - 55)

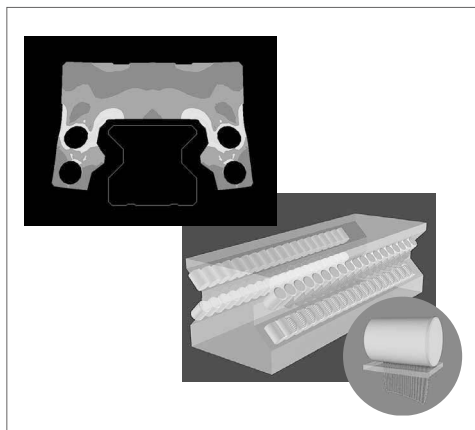


Fig. 2 Analysis example

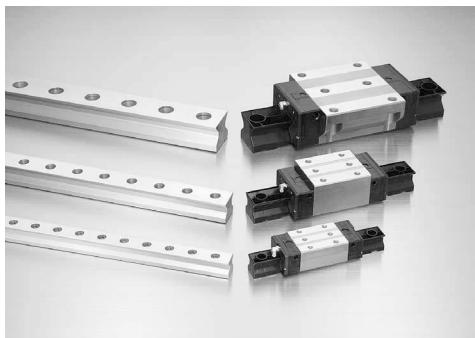

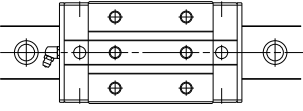
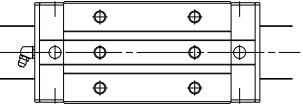

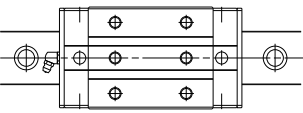
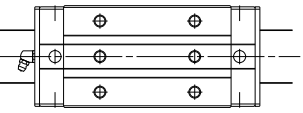

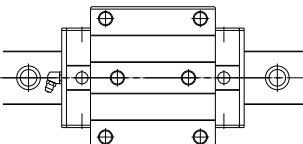
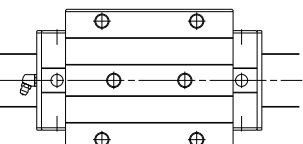


Fig. 3 Random-matching type

2. Roller slide shape

Roller slide model	Shape/installation method	Type (Upper row, Rating: Lower row, Roller slide length)	
		High-load type	Super-high-load type
		Standard	Long
AN BN		AN 	BN 
AL BL		AL 	BL 
EM GM		EM 	GM 

3. Accuracy and preload

(1) Running parallelism of roller slide

Table 1

Rail length (mm)	Ultra precision P3	Super precision P4	High precision P5	Precision grade P6
	Preloaded assembly	Preloaded assembly	Preloaded assembly Random-matching type	Preloaded assembly
- 50	2	2	2	4.5
50 - 80	2	2	3	5
80 - 125	2	2	3.5	5.5
125 - 200	2	2	4	6
200 - 250	2	2.5	5	7
250 - 315	2	2.5	5	8
315 - 400	2	3	6	9
400 - 500	2	3	6	10
500 - 630	2	3.5	7	12
630 - 800	2	4	8	14
800 - 1 000	2.5	4.5	9	16
1 000 - 1 250	3	5	10	17
1 250 - 1 600	4	6	11	19
1 600 - 2 000	4.5	7	13	21
2 000 - 2 500	5	8	15	22
2 500 - 3 150	6	9.5	17	25
3 150 - 3 900	9	16	23	30

Unit: μm

A-5-3.1 Roller Guide RA Series

(2) Accuracy standard

The preloaded assembly has four accuracy grades; Ultra precision P3, Super precision P4, High precision P5, and Precision P6 grades, while the random-matching type has High precision PH grade only.

> Tolerance of preloaded assembly

Table 2

Unit: μm

Characteristics	Accuracy grade	Ultra precision P3	Super precision P4	High precision P5	Precision grade P6
Mounting height H		± 8	± 10	± 20	± 40
Variation of H (All ball slides on a set of rails)		3	5	7	15
Mounting width W_2 or W_3		± 10	± 15	± 25	± 50
Variation of W_2 or W_3 (All ball slides on reference rail)		3	7	10	20
Running parallelism of surface C to surface A Running parallelism of surface D to surface B		Shown in Table 1 and Fig. 4			

> Tolerance of random-matching type

Table 3

Unit: μm

Characteristics	Accuracy grade	High precision PH
Mounting height H		± 20
Variation of mounting height H		15①
		25②
Mounting width W_2 or W_3		± 25
Variation of mounting width W_2 or W_3		20
Running parallelism of surface C to surface A Running parallelism of surface D to surface B		See Table 1 and Fig. 4

Note ① Variation on the same rail ② Variation on multiple rails

(3) Combination of accuracy and preload

Table 4

	Accuracy grade					
	Ultra precision	Super precision	High precision	Precision grade	High precision	
Without NSK K1 lubrication unit	P3	P4	P5	P6	PH	
With NSK K1 lubrication unit	K3	K4	K5	K6	KH	
Preload	Slight preload Z1	○	○	○	—	
	Medium preload Z3	○	○	○	—	
	Random-matching type with slight preload ZZ	—	—	—	—	○
	Random-matching type with medium preload ZH	—	—	—	—	○

(4) Assembled accuracy

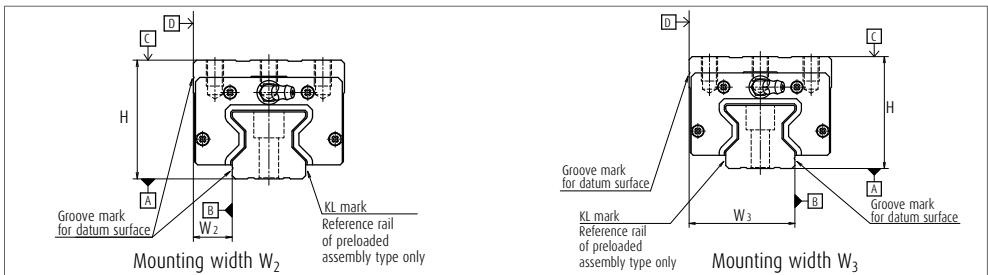


Fig. 3

(5) Preload and rigidity

Four types of preload are available: Medium preload Z3 and Slight preload Z1 for preloaded assembly, and Medium preload ZH and slight preload ZZ for Random-matching type.

► Preload of preloaded assembly

Table 5

Model No.		Preload (N)	
		Slight preload (Z1)	Medium preload (Z3)
High-load type	RA15 AN, AL, EM	—	1 030
	RA20 AN, EM	—	1 920
	RA25 AN, AL, EM	880	2 920
	RA30 AN, AL, EM	1 170	3 890
	RA35 AN, AL, EM	1 600	5 330
	RA45 AN, AL, EM	2 780	9 280
	RA55 AN, AL, EM	3 870	12 900
	RA65 AN, EM	6 300	21 000
Super-high-load type	RA15 BN, BL, GM	—	1 300
	RA20 BN, GM	—	2 400
	RA25 BN, BL, GM	1 060	3 540
	RA30 BN, BL, GM	1 430	4 760
	RA35 BN, BL, GM	2 020	6 740
	RA45 BN, BL, GM	3 480	11 600
	RA55 BN, BL, GM	5 040	16 800
	RA65 BN, GM	8 640	28 800

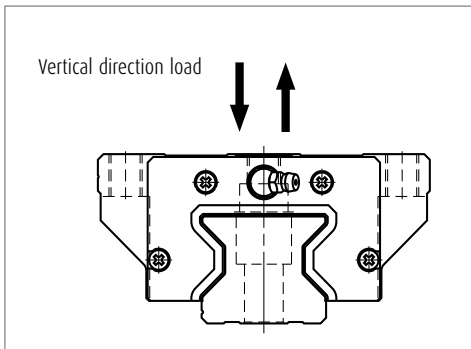


Fig. 5 Direction of load

A-5-3.1 Roller Guide RA Series

> Rigidity of medium preload

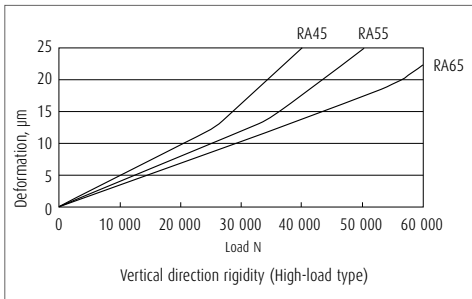
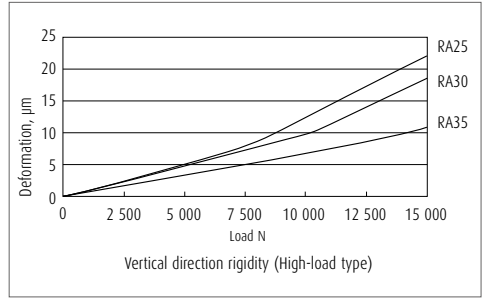
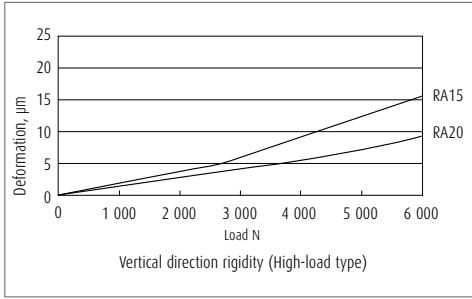


Fig. 6 Vertical direction theoretical rigidity line:
High-load type (Roller slide shape: AN, AL, EM)

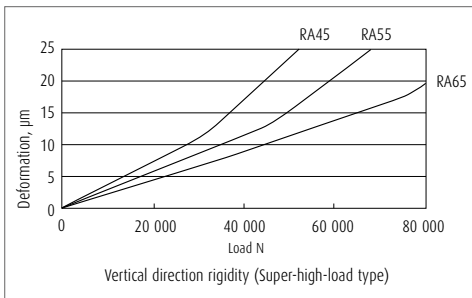
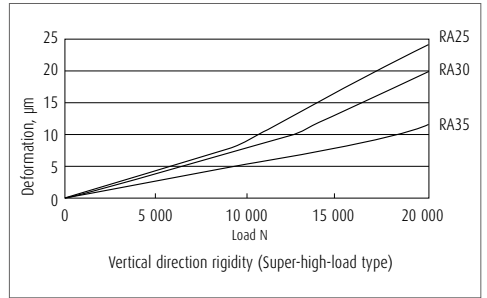
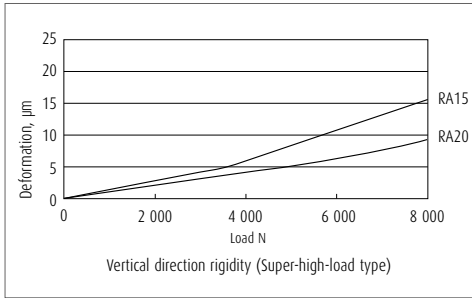


Fig. 7 Vertical direction theoretical rigidity line:
Super-high-load type (Roller slide shape: BN, BL, GM)

4. Maximum rail length

Table 5 shows the limitations of rail length (maximum length). However, the limitations vary by accuracy grades.

Table 6 Length limitation of rails

Unit: mm

Series	Size	15	20	25	30	35	45	55	65
RA		2 000	3 000	3 900	3 900	3 900	3 650	3 600	3 600

Note Rails can be butted if user requirement exceeds the rail length shown in the table. Please consult NSK.

5. Installation

(1) Permissible values of mounting error

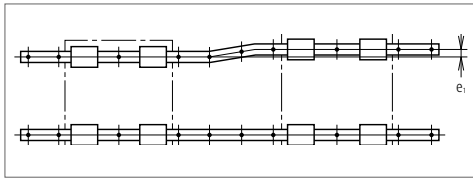


Fig. 8

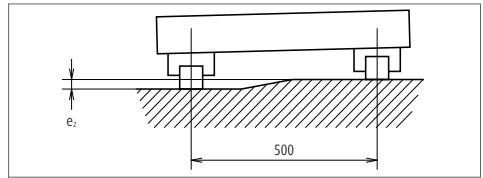


Fig. 9

Table 7

Unit: μm

Value	Preload	Model No.							
		RA15	RA20	RA25	RA30	RA35	RA45	RA55	RA65
Permissible values of parallelism in two rails e_1	Z1, ZZ	—	—	14	18	21	27	31	49
	Z3, ZH	5	7	9	11	13	17	19	30
Permissible values of parallelism (height) in two rails e_2	Z1, ZZ	290 μm / 500 mm							
	Z3, ZH	150 μm / 500 mm							

(2) Shoulder height of the mounting surface and corner radius




Fig. 10 Shoulder for the rail datum surface




Fig. 11 Shoulder for the roller slide datum surface

Table 8

Unit: mm

Model No.	Corner radius (maximum)		Shoulder height	
	r_a	r_b	H'	H''
RA15	0.5	0.5	3	4
RA20	0.5	0.5	4	5
RA25	0.5	1	4	5
RA30	1	1	5	6
RA35	1	1	5	6
RA45	1.5	1	6	8
RA55	1.5	1.5	7	10
RA65	1.5	1.5	11	11

A-5-3.1 Roller Guide RA Series

6. Lubrication components

Refer to pages A38 and D13 for the lubrication of linear guides.

(1) Types of lubrication accessories

Fig. 14 and Table 11 show grease fittings and tube fittings.

(2) Mounting position of lubrication accessories

- ▶ The standard position of grease fittings and tube fittings is the end face of roller slide. We can mount them on a side of end cap for an option. (Fig. 12) Please consult NSK for installation of grease or tube fittings to the roller slide body or the side of end cap.
- ▶ A lubrication hole can also be provided on the top of the end cap. Fig.13, Table 9 and Table 10 show the mounting position. A spacer is required for AN and BN shape roller slides. The spacers are available from NSK.
- ▶ When using a piping unit with thread of M6 × 1, you require a connector to connect it to a grease fitting mounting hole with M6 × 0.75. The connectors are available from NSK.

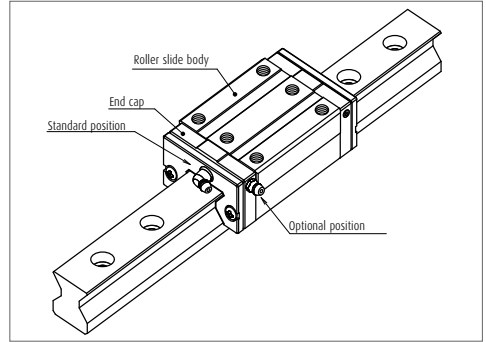


Fig. 12 Mounting position of lubrication accessories

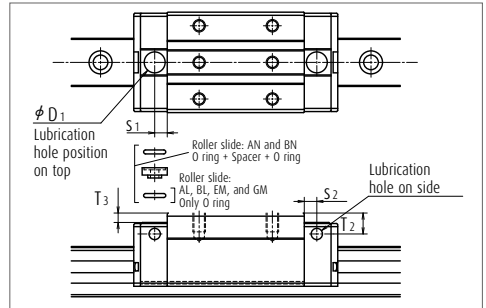


Fig.13 Top and side lubrication hole positions

Table 9 Top and side lubrication hole positions

Unit : mm

Model No.	Roller slide model	Grease fitting size	S_2	T_2	O ring (JIS)	Spacer	D_1	S_1	T_3
RA15	AN, BN	$\phi 3$	4	7	P5	Necessary	8.2	4.4	4.2
RA20	AN, BN	$\phi 3$	4	4	P6	—	9.2	5.4	0.2
RA25	AN, BN	M6×0.75	6	10	P7+P5	Necessary	10.0	6	4.5
RA30	AN, BN	M6×0.75	5	10	P7+P5	Necessary	10.4	6	3.5
RA35	AN, BN	M6×0.75	5.5	15	P7+P5	Necessary	10.4	7	7.4
RA45	AN, BN	Rc 1/8	7.2	20	P7+P5	Necessary	10.4	7.2	10.4
RA55	AN, BN	Rc 1/8	7.2	21	P7	Necessary	10.4	7.2	10.4
RA65	AN, BN	Rc 1/8	7.2	19	P7	—	10.4	7.2	0.4

Table 10 Top and side lubrication hole positions

Unit : mm

Model No.	Roller slide model	Grease fitting size	S_2	T_2	O ring (JIS)	D_1	S_1	T_3
RA15	AL, BL, EM, GM	$\phi 3$	4	3	P5	8.2	4.4	0.2
RA20	EM, GM	$\phi 3$	4	4	P6	9.2	5.4	0.2
RA25	AL, BL, EM, GM	M6×0.75	6	6	P7	10.0	6	0.4
RA30	AL, BL, EM, GM	M6×0.75	5	7	P7	10.4	6	0.4
RA35	AL, BL, EM, GM	M6×0.75	5.5	8	P7	10.4	7	0.4
RA45	AL, BL, EM, GM	Rc 1/8	7.2	10	P7	10.4	7.2	0.4
RA55	AL, BL, EM, GM	Rc 1/8	7.2	11	P7	10.4	7.2	0.4
RA65	EM, GM	Rc 1/8	7.2	19	P7	10.4	7.2	0.4

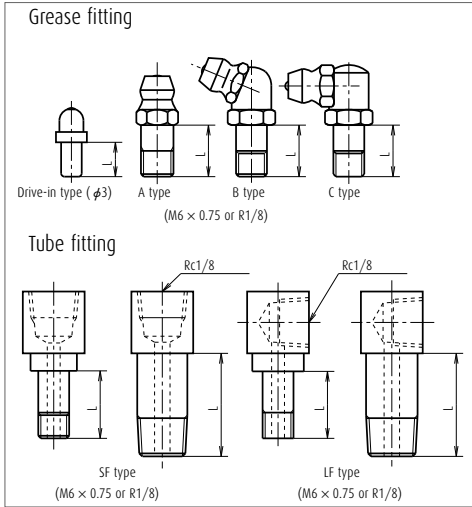


Fig. 14 Grease fitting and tube fitting

7. Dust-proof components

(1) Standard specification

The RA series is equipped with end, inner* and bottom seals to prevent foreign matter from entering the inside of the roller slide. Under normal applications, the RA series can be used without modification.

For severe usage conditions, optional rail covers** are available. Contact NSK for information on how to mount the cover.

*) Inner seals for the models of RA15 and RA20 are available as options.

***) The rail cover is available to the models of RA25 to RA65.

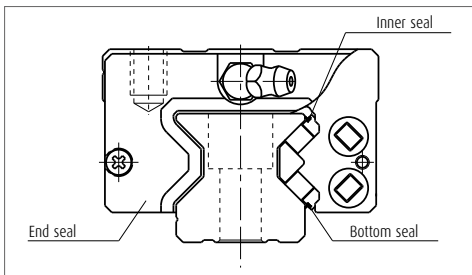


Fig. 15

Table 11

Model No.	Dust proof specification	Dimension L		
		Grease fitting/ Drive-in fitting	Tube fitting SF Type	LF Type
RA15	Standard	5	-	-
RA15	With NSK K1	10	-	-
RA15	Double seal	8	-	-
RA15	Protector	8	-	-
RA20	Standard	5	-	-
RA20	With NSK K1	10	-	-
RA20	Double seal	8	-	-
RA20	Protector	10	-	-
RA25	Standard	5	5	5
RA25	With NSK K1	12	12	12
RA25	Double seal	10	9	9
RA25	Protector	10	9	9
RA30	Standard	5	6	6
RA30	With NSK K1	14	14	15
RA30	Double seal	12	12	11
RA30	Protector	12	10	11
RA35	Standard	5	6	6
RA35	With NSK K1	14	14	15
RA35	Double seal	12	12	11
RA35	Protector	12	10	11
RA45	Standard	8	13.5	17
RA45	With NSK K1	18	20	21.5
RA45	Double seal	14	16	17
RA45	Protector	14	16	17
RA55	Standard	8	13.5	17
RA55	With NSK K1	18	20	21.5
RA55	Double seal	14	16	17
RA55	Protector	14	16	17
RA65	Standard	8	13.5	17
RA65	With NSK K1	20	20	20
RA65	Double seal	14	18	17
RA65	Protector	14	16	17



Fig. 16 Rail cover

Table 12 Seal friction per roller side (maximum value)

Series	Size	Unit: mm							
		15	20	25	30	35	45	55	65
RA		4	5.5	5	5	6	8	8	14

A-5-3.1 Roller Guide RA Series

(2) NSK K1 lubrication unit

Table 12 shows the dimension of linear guides equipped with the NSK K1 lubrication unit.

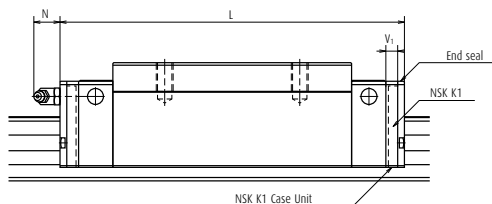


Table 13

Unit: mm

Model No.	Roller slide length	Roller slide model	Standard roller slide length	With two NSK K1	Thickness of NSK K1 V1	Protruding area of the grease fitting N
RA15	Standard	AN, AL, EM	70	79	4.5	(3)
RA15	Long	BN, BL, GM	85.4	94.4	4.5	(3)
RA20	Standard	AN, EM	86.5	95.5	4.5	(3)
RA20	Long	BN, GM	106.3	115.3	4.5	(3)
RA25	Standard	AN, AL, EM	97.5	107.5	5	(11)
RA25	Long	BN, BL, GM	115.5	125.5	5	(11)
RA30	Standard	AN, AL, EM	110.8	122.8	6	(11)
RA30	Long	BN, BL, GM	135.4	147.4	6	(11)
RA35	Standard	AN, AL, EM	123.8	136.8	6.5	(11)
RA35	Long	BN, BL, GM	152	165	6.5	(11)
RA45	Standard	AN, AL, EM	154	168	7	(14)
RA45	Long	BN, BL, GM	190	204	7	(14)
RA55	Standard	AN, AL, EM	184	198	7	(14)
RA55	Long	BN, BL, GM	234	248	7	(14)
RA65	Standard	AN, EM	228.4	243.4	7.5	(14)
RA65	Long	BN, GM	302.5	317.5	7.5	(14)

Note Roller slide length equipped with NSK K1 = (Standard roller slide length) + (Thickness of NSK K1 Case Unit × Number of NSK K1 Case Unit)

(3) Double seal and protector

For RA Series, double seal and protector can be installed only before shipping from the factory.

Table 14 shows the increased thickness when end seal and protector are installed.

Table 14

Unit: mm

Modell No.	Thickness of end seal V ₃	Thickness of protector V ₄
RA15	3	2.7
RA20	3	3.3
RA25	3.2	3.3
RA30	3.4	3.6
RA35	3.4	3.6
RA45	4	4.2
RA55	4	4.2
RA65	5	5.5

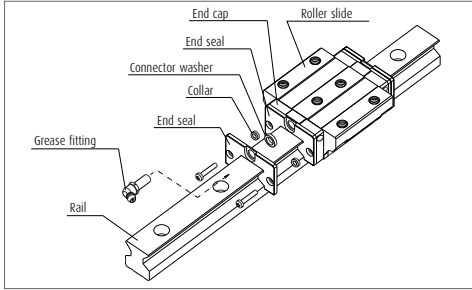


Fig. 17 Double seal

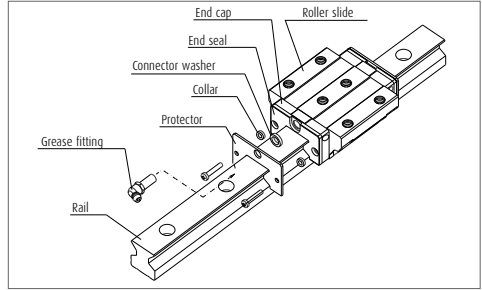


Fig. 18 Protector

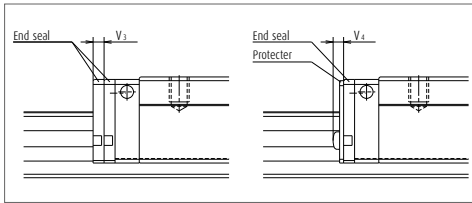


Fig. 19

(4) Rail cover

When the rail cover is used, use the cover bracket to secure the rail cover. Fig.20 shows the dimensions for the cover bracket. The required room at the end of the rail is:

- > Inside: 10.5 mm or less
- > Outside: 4 mm or less (Common to the models of RA25 to RA65)
Please confirm the interference with your machine at the stroke end.
- > Machine stroke
- > Room for the end of the rail

The height of the rail with the rail cover is shown in Table 15.

Table 15 Height of rails equipped with rail cover

Unit: mm

Modell No.	Standard height H1	Cover installation
RA25	24	24.2
RA30	28	28.2
RA35	31	31.25
RA45	38	38.3
RA55	43.5	43.8
RA65	55	55.3

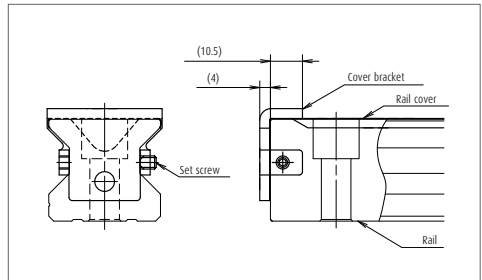


Fig. 20 End configuration of rail equipped with the rail cover

(5) Cap to plug the rail mounting bolt hole




Table 16 Caps to plug rail bolt hole

Modell No.	Bolt to secure rail	Cap reference No.	Quantity /case
RA15	M4	LG-CAP/M4	20
RA20	M5	LG-CAP/M5	20
RA25	M6	LG-CAP/M6	20
RA30, RA35	M8	LG-CAP/M8	20
RA45	M12	LG-CAP/M12	20
RA55	M14	LG-CAP/M14	20
RA65	M16	LG-CAP/M16	20

A-5-3.1 Roller Guide RA Series

(6) Specification with highly dustproof V1 seal and V1 bottom seal

RA25, RA30, RA35, RA45, RA55 and RA65 also have the specification with newly developed, highly dustproof V1 seal which is the end seal with enhanced abrasion resistance. Highly dustproof V1 Seal made of new materials and in a new shape for better abrasion resistance prevents foreign matter getting into the roller slide for a long period. RA35, RA45, RA55 and RA65 also have prepared highly dustproof V1 bottom seal. In addition, outstanding lubrication effects by NSK K1 further improves the durability. High dustproof V1 bottom seal and NSK K1 can be selected individually according to the application. The bolt hole caps whose shape is partly changed eliminate building up of foreign matter in and around the rail mounting holes and prevent foreign matter from entering into the roller slide. Otherwise, the rail cover with higher dustproofness can be selected. See A256 for the details of the rail cover.

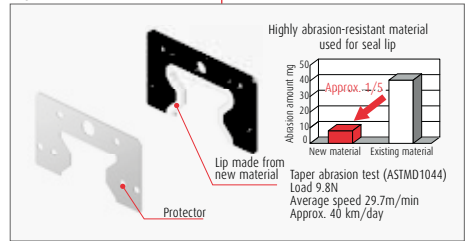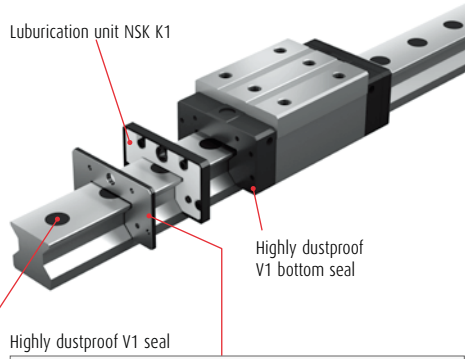

- > Durability test under extreme conditions - no
- With this new material, even if lubrication is poor, damage such as roughening of surfaces will not occur.
- Test sample: RA35
- Operation without lubrication on the seal
- Feed speed: 500 mm/sec


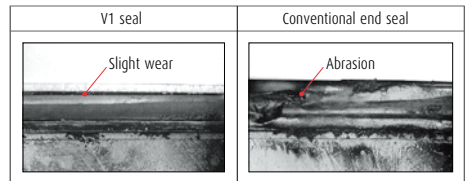


Table 17 shows the dimension for roller slide with V1 seal.

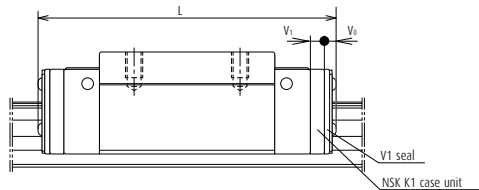

Since the sealing property (resistance to foreign matter) is affected by usage or the lubrication environment, please conduct an evaluation test for your particular application.

Table 17

Unit: mm

Modell No.	Roller slide length	Roller slide type	Standard roller slide length L	Roller slide length equipped with V1 seal and NSK K1 L	Slide bottom face height equipped with V1 bottom seal E_{V1}	Thickness of V1 seal V_0	Thickness of K1 case unit V_1
RA25	Standard	AN, AL, EM	97.5	111.3	—	5.1	5
	Long	BN, BL, GM	115.5	129.3			
RA30	Standard	AN, AL, EM	110.8	126.8	—	5.4	6
	Long	BN, BL, GM	135.4	151.4			
RA35	Standard	AN, AL, EM	123.8	140.8	min 3.7	5.4	6.5
	Long	BN, BL, GM	152	169			
RA45	Standard	AN, AL, EM	154	173.2	min 5.2	6.6	7
	Long	BN, BL, GM	190	209.2			
RA55	Standard	AN, AL, EM	184	203.2	min 6.2	6.6	7
	Long	BN, BL, GM	234	253.2			
RA65	Standard	AN, EM	228.4	251.2	min 10.2	8.9	7.5
	Long	BN, GM	302.5	325.3			

Design Precautions

Because the product is used under severe operating conditions that require highly dustproof VI seals, please inform NSK about your service conditions using the technical data sheet on page A152.

(7) Dynamic friction

- › Dynamic friction indications per roller slide are shown in table 18.
- › These values are assumed under actual condition with standard specification (two end seals, inner seal and bottom seal equipped) packed with standard grease (NSK Grease AS2)
- › Dynamic friction varies with grease.

Table 18 Dynamic friction

Unit: N

Modell No.	High-load type	Super-high-load type
RA15	21	24
RA20	22	28
RA25	27	34
RA30	33	42
RA35	42	53
RA45	56	69
RA55	80	95
RA65	120	138

Note Values in Table 18 are indications. Please refer to them.

A-5-3.1 Roller Guide RA Series

9. Reference number

Reference numbers shall be set to individual NSK linear guide when its specifications are finalized, and it is indicated on its specification drawing.

Please specify the reference number, except design serial number, to identify the product when ordering, requiring estimates, or inquiring about specifications from NSK.

(1) Reference number for preloaded assembly

	RA	35	1000	AN	C	2	-**	P6	3	
Series name									Preload code (See page A247)	
Size									1: Z1, 3: Z3	
Rail length (mm)									Accuracy code (See Table 20)	
Roller slide shape code (See page A246)									Design serial number	
Material/surface treatment code (See Table 19)									Added to the reference number.	
C: Special high carbon steel (NSK standard)									Number of roller slides per rail	

(2) Reference number for random-matching type

Roller slide	RAA	35	AN	PH	H	-F	
Random-matching roller slide series code							Option code
RAA: RA Series random-matching roller slide							No code: No surface treatment
Size							-F: Fluoride low temperature chrome plating
Roller slide shape code (See page A246)							-C: No surface treatment + Rail cover
							-CF: Fluoride low temperature chrome plating + Rail cover
							Preload code: Z
							Z: Slight preload, H: Medium preload
							Accuracy code
							PH, KH: High-precision grade random-matching type (See Table 18)

Rail	R1A	35	1000	L	C	N	-**	PH	Z	
Random-matching rail series code									Preload code: Z	
R1A: RA Series random-matching rail									Z: Common for slight and medium preload (See page A247)	
Size									Accuracy code (See Table 18)	
Rail length (mm)									PH: High-precision grade random-matching type	
Rail shape code: L									Design serial number	
L: Standard									Added to the reference number.	
Material/surface treatment code (See Table 19)									*Butting rail specification	
									N: Non-butting, L: Butting specification	
									*Please consult with NSK for butting rail specification.	

The reference number coding for the assembly of random-matching type is the same as that of the preloaded assembly. However, the applicable preload codes are "slight preload Z" and "medium preload H". (See page A247.)

Click!Speedy™ NSK Linear Guide Quick Delivery System uses a new numbering system. For details, please refer to the Click!Speedy general catalog CAT. No. E3191.

Table 19 Material/surface treatment code

Code	Description
C	Special high carbon steel (NSK standard)
D	Special high carbon steel with surface treatment
P	Special high carbon steel with V1 seal
R	Special high carbon steel with surface treatment and V1 seal
Z	Other, special

Note P and R are not available for randommatching slides and rails.

Table 20 Accuracy code

Accuracy	Standard (Without NSK K1)	With NSK K1
Ultra precision grade	P3	K3
Super precision grade	P4	K4
High precision grade	P5	K5
Precision grade	P6	K6
High precision grade (random-matching type)	PH	KH


Note Refer to pages A38 for NSK K1 lubrication unit.

A-5-3.1 Roller Guide RA Series


10. Dimensions

RA-AN (High-load type / Standard)


RA-BN (Super-high-load type / Long)

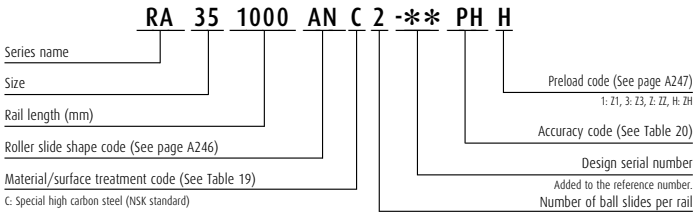

Front view of EM and GM types




RA15, 20, 25, 30




RA35, 45, 55, 65

Top view of AN and BN

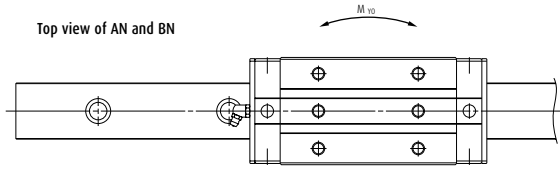

Side view of AN type

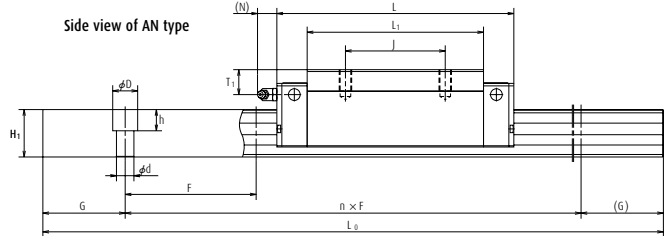

Model No.	Assembly			Ball slide											Width	Height	
	Height		Width	Length	Mounting hole			L ₁	K	T	Grease fitting			W ₁			H ₁
	H	E			W ₂	B	J				M × pitch × ℓ	Hole size	T ₁				
RA15AN	28	4	9.5	34	70	26	26	M4×0.7×6	44.8	24	8	φ 3	8	3	15	16.3	
RA15BN	28	4	9.5	34	85.4	26	26	M4×0.7×6	60.2	24	8	φ 3	8	3	15	16.3	
RA20AN	30	5	12	44	86.5	32	36	M5×0.8×6	57.5	25	12	φ 3	4	3	20	20.8	
RA20BN	30	5	12	44	106.3	32	50	M5×0.8×6	77.3	25	12	φ 3	4	3	20	20.8	
RA25AN	40	5	12.5	48	97.5	35	35	M6×1×9	65.5	35	12	M6×0.75	10	11	23	24	
RA25BN	40	5	12.5	48	115.5	35	50	M6×1×9	83.5	35	12	M6×0.75	10	11	23	24	
RA30AN	45	6.5	16	60	110.8	40	40	M8×1.25×11	74	38.5	14	M6×0.75	10	11	28	28	
RA30BN	45	6.5	16	60	135.4	40	60	M8×1.25×11	98.6	38.5	14	M6×0.75	10	11	28	28	
RA35AN	55	6.5	18	70	123.8	50	50	M8×1.25×12	83.2	48.5	15	M6×0.75	15	11	34	31	
RA35BN	55	6.5	18	70	152	50	72	M8×1.25×12	111.4	48.5	15	M6×0.75	15	11	34	31	
RA45AN	70	8	20.5	86	154	60	60	M10×1.5×17	105.4	62	17	Rc1/8	20	14	45	38	
RA45BN	70	8	20.5	86	190	60	80	M10×1.5×17	141.4	62	17	Rc1/8	20	14	45	38	
RA55AN	80	9	23.5	100	184	75	75	M12×1.75×18	128	71	18	Rc1/8	21	14	53	43.5	
RA55BN	80	9	23.5	100	234	75	95	M12×1.75×18	178	71	18	Rc1/8	21	14	53	43.5	
RA65AN	90	13	31.5	126	228.4	76	70	M16×2×20	155.4	77	22	Rc1/8	19	14	63	55	
RA65BN	90	13	31.5	126	302.5	76	120	M16×2×20	229.5	77	22	Rc1/8	19	14	63	55	

Notes 1) Select either one of two F dimensions, the standard or the parenthesized semi-standard dimension, for the pitch of rail fixing bolt holes. If not specified, the standard dimension of F is applied.

Reference number for roller slide of random-matching type

Ball slide

RAA 35 AN PH H -F

Random-matching roller slide series code

RAA: RA Series random-matching roller slide

Size

Roller slide shape code (See page A246)

Option code

No code: No surface treatment

-F: Fluoride low temperature chrome plating

-C: No surface treatment + Rail cover

-CF: Fluoride low temperature chrome plating + Rail cover


Preload code: Z

Z: Slight preload, H: Medium preload


Accuracy code

PH, KH: High-precision grade random-matching type (See Table 18)


AN and BN types



AN type



BN type



Reference number for rail of random-matching type

R1A 35 1000 L C N - PH Z**

Rail

Random-matching rail series code

R1A: RA Series random-matching rail

Size

Rail length (mm)

Rail shape code: L

L: Standard

Material/surface treatment code (See Table 19)

Preload code: Z

Z: Common for slight and medium preload (See A247)

Accuracy code

PH: High-precision grade random-matching type



Design serial number

Added to the reference number.

*Butting rail specification

N: Non-butting, L: Butting specification

*Please consult with NSK for butting rail specification.

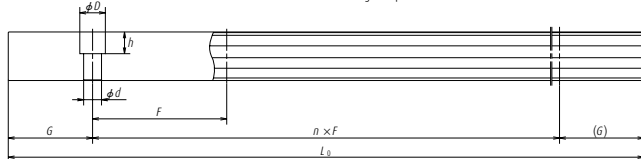

Unit: mm

Rail			Basic load rating								Weight		
Pitch F	Mounting bolt hole d × D × h	G (reference)	Maximum length L _{0max}	3) Dynamic		Static	M _{RD}	Static moment (N·m)				Ball slide (kg)	Rail (kg/m)
				[50km] C ₅₀ (N)	[100km] C ₁₀₀ (N)			M _{PO}		M _{YO}			
									One slide	Two slides	One slide		
60	4.5×7.5×5.3	20	2 000	12 600	10 300	27 500	260	210	1 320	210	1 320	0.21	1.6
(30)	4.5×7.5×5.3	20	2 000	16 000	13 000	37 000	350	375	2 130	375	2 130	0.30	1.6
60	6×9.5×8.5	20	3 000	23 600	19 200	52 500	665	505	3 100	505	3 100	0.38	2.6
(30)	6×9.5×8.5	20	3 000	29 500	24 000	70 000	890	900	5 000	900	5 000	0.50	2.6
30	7×11×9	20	3 900	36 000	29 200	72 700	970	760	4 850	760	4 850	0.60	3.4
(60)	7×11×9	20	3 900	43 500	35 400	92 900	1 240	1 240	7 200	1 240	7 200	0.91	3.4
40	9×14×12	20	3 900	47 800	38 900	93 500	1 670	1 140	7 100	1 140	7 100	1.0	4.9
(80)	9×14×12	20	3 900	58 500	47 600	121 000	2 170	1 950	11 500	1 950	11 500	1.3	4.9
40	9×14×12	20	3 900	65 500	53 300	129 000	2 810	1 800	11 000	1 800	11 000	1.6	6.8
(80)	9×14×12	20	3 900	82 900	67 400	175 000	3 810	3 250	17 800	3 250	17 800	2.1	6.8
52.5	14×20×17	22.5	3 650	114 000	92 800	229 000	6 180	4 080	24 000	4 080	24 000	3.0	10.9
(105)	14×20×17	22.5	3 650	143 000	116 000	305 000	8 240	7 150	39 000	7 150	39 000	4.1	10.9
60	16×23×20	30	3 600	159 000	129 000	330 000	10 200	7 060	41 000	7 060	41 000	4.9	14.6
(120)	16×23×20	30	3 600	207 000	168 000	462 000	14 300	13 600	72 000	13 600	72 000	6.7	14.6
75	18×26×22	35	3 600	259 000	210 000	504 000	19 200	12 700	78 500	12 700	78 500	9.3	22.0
(150)	18×26×22	35	3 600	355 000	288 000	756 000	28 700	28 600	153 000	28 600	153 000	12.2	22.0

2) The random-matching type is available for the models of RA25 to RA65.



3) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)

C₅₀: the basic dynamic load rating for 50 km rated fatigue life

C₁₀₀: the basic dynamic load rating for 100 km rated fatigue life

A-5-3.1 Roller Guide RA Series

RA-AL (High-load type / Standard)
RA-BL (Super-high-load type / Long)

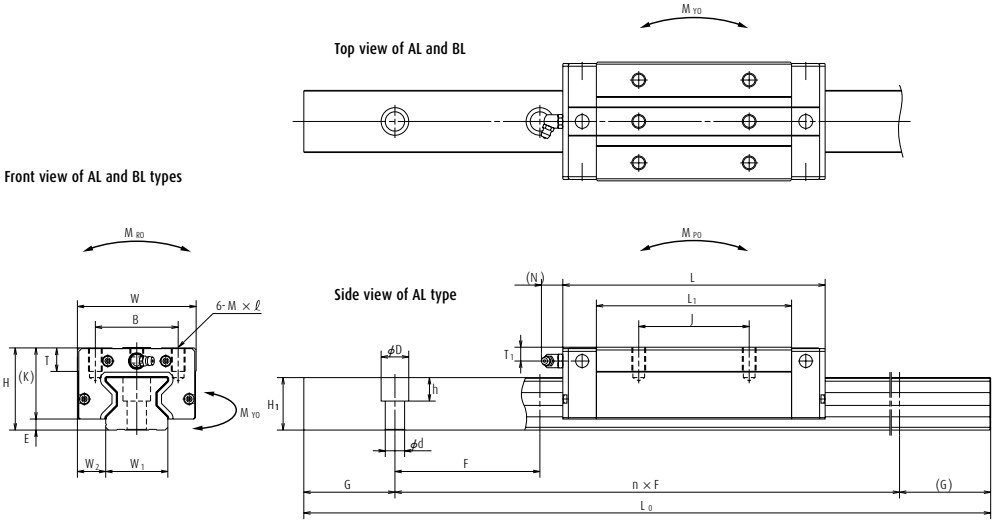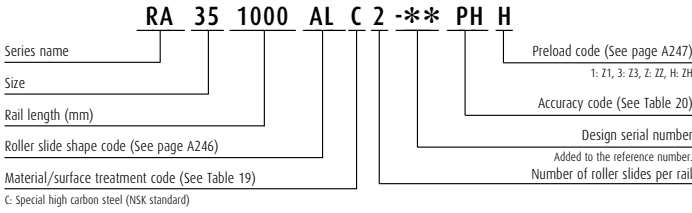


Model No.	Assembly			Ball slide										Width	Height	
	Height	E	W ₂	Width	Length	Mounting hole			L ₁	K	T	Grease fitting				
						B	J	M × pitch × ℓ				Hole size	T ₁			N
RA15AL	24	4	9.5	34	70	26	26	M4×0.7×5.5	44.8	20	8	φ 3	4	3	15	16.3
RA15BL	24	4	9.5	34	85.4	26	26	M4×0.7×5.5	60.2	20	8	φ 3	4	3	15	16.3
RA25AL	36	5	12.5	48	97.5	35	35	M6×1×8	65.5	31	12	M6×0.75	6	11	23	24
RA25BL	36	5	12.5	48	115.5	35	50	M6×1×8	83.5	31	12	M6×0.75	6	11	23	24
RA30AL	42	6.5	16	60	110.8	40	40	M8×1.25×11	74	35.5	14	M6×0.75	7	11	28	28
RA30BL	42	6.5	16	60	135.4	40	60	M8×1.25×11	98.6	35.5	14	M6×0.75	7	11	28	28
RA35AL	48	6.5	18	70	123.8	50	50	M8×1.25×12	83.2	41.5	15	M6×0.75	8	11	34	31
RA35BL	48	6.5	18	70	152	50	72	M8×1.25×12	111.4	41.5	15	M6×0.75	8	11	34	31
RA45AL	60	8	20.5	86	154	60	60	M10×1.5×16	105.4	52	17	Rc1/8	10	14	45	38
RA45BL	60	8	20.5	86	190	60	80	M10×1.5×16	141.4	52	17	Rc1/8	10	14	45	38
RA55AL	70	9	23.5	100	184	75	75	M12×1.75×18	128	61	18	Rc1/8	11	14	53	43.5
RA55BL	70	9	23.5	100	234	75	95	M12×1.75×18	178	61	18	Rc1/8	11	14	53	43.5


Notes 1) Select either one of two F dimensions, the standard or the parenthesized semi-standard dimension, for the pitch of rail fixing bolt holes. If not specified, the standard dimension of F is applied.

Reference number for roller slide of random-matching type


Ball slide

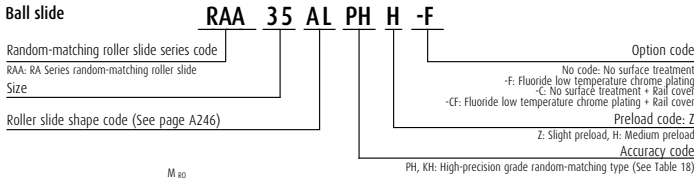


AL and BL types






AL type



BL type

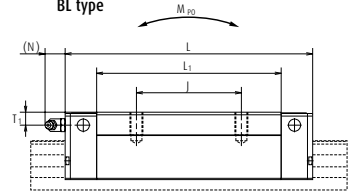

Reference number for rail of random-matching type

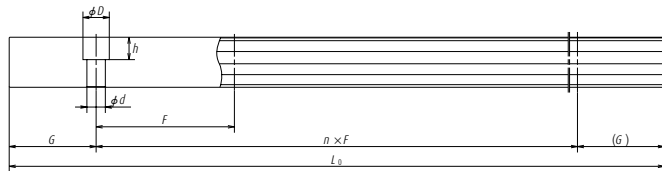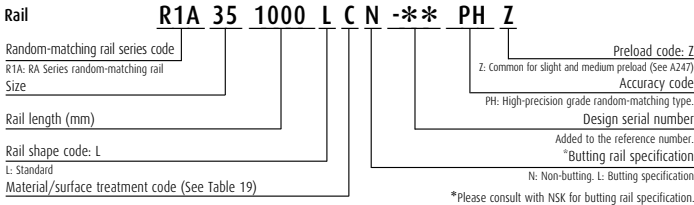

Unit: mm

Rail				Basic load rating						Weight			
Pitch F	Mounting bolt hole d × D × h	G (reference)	Maximum length L _{0max}	3) Dynamic		C ₀ (N)	M _{R0}	Static moment (N-m)				Ball slide (kg)	Rail (kg/m)
				[50km] C ₅₀ (N)	[100km] C ₁₀₀ (N)			M _{P0}		M _{Y0}			
						One slide	Two slides	One slide	Two slides				
60	4.5×7.5×5.3	20	2 000	12 600	10 300	27 500	260	210	1 320	210	1 320	0.17	1.6
30	4.5×7.5×5.3	20	2 000	16 000	13 000	37 000	350	375	2 130	375	2 130	0.25	1.6
(30)	7×11×9	20	3 900	36 000	29 200	72 700	970	760	4 850	760	4 850	0.45	3.4
(60)	7×11×9	20	3 900	43 500	35 400	92 900	1 240	1 240	7 200	1 240	7 200	0.80	3.4
40	9×14×12	20	3 900	47 800	38 900	93 500	1 670	1 140	7 100	1 140	7 100	0.85	4.9
(80)	9×14×12	20	3 900	58 500	47 600	121 000	2 170	1 950	11 500	1 950	11 500	1.1	4.9
40	9×14×12	20	3 900	65 500	53 300	129 000	2 810	1 800	11 000	1 800	11 000	1.2	6.8
(80)	9×14×12	20	3 900	82 900	67 400	175 000	3 810	3 250	17 800	3 250	17 800	1.7	6.8
52.5	14×20×17	22.5	3 650	114 000	92 800	229 000	6 180	4 080	24 000	4 080	24 000	2.5	10.9
(105)	14×20×17	22.5	3 650	143 000	116 000	305 000	8 240	7 150	39 000	7 150	39 000	3.4	10.9
60	16×23×20	30	3 600	159 000	129 000	330 000	10 200	7 060	41 000	7 060	41 000	4.1	14.6
(120)	16×23×20	30	3 600	207 000	168 000	462 000	14 300	13 600	72 000	13 600	72 000	5.7	14.6

2) The random-matching type is available for the models of RA25 to RA55.



3) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)

C₅₀: the basic dynamic load rating for 50 km rated fatigue life

C₁₀₀: the basic dynamic load rating for 100 km rated fatigue life

A-5-3.1 Roller Guide RA Series

RA-EM (High-load type / Standard)
RA-GM (Super-high-load type / Long)

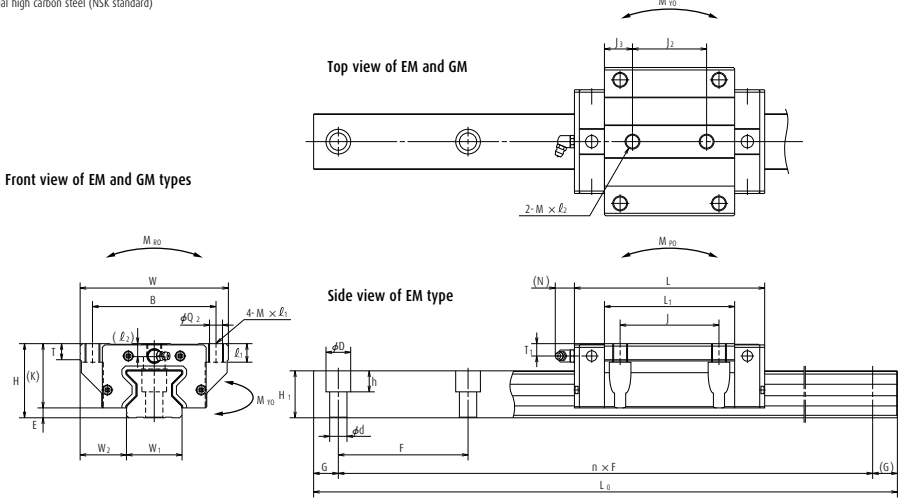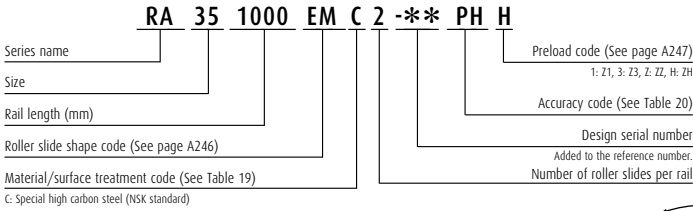

Model No.	Assembly					Ball slide										
	Height	E	W ₂	Width	Length	Mounting hole					L ₁	K	T	Grease fitting		
						B	J	J ₂	M × pitch × l ₁ (l ₂)	O ₂				Hole size	T ₁	N
RA15EM	24	4	16	47	70	38	30	26	M5×0.8×8.5 (6.5)	4.4	44.8	20	8	φ 3	4	3
RA15GM	24	4	16	47	85.4	38	30	26	M5×0.8×8.5 (6.5)	4.4	60.2	20	8	φ 3	4	3
RA20EM	30	5	21.5	63	86.5	53	40	35	M6×1×9.5 (8)	5.3	57.5	25	10	φ 3	4	3
RA20GM	30	5	21.5	63	106.3	53	40	35	M6×1×9.5 (8)	5.3	77.3	25	10	φ 3	4	3
RA25EM	36	5	23.5	70	97.5	57	45	40	M8×1.25×10 (11)	6.8	65.5	31	11	M6×0.75	6	11
RA25GM	36	5	23.5	70	115.5	57	45	40	M8×1.25×10 (11)	6.8	83.5	31	11	M6×0.75	6	11
RA30EM	42	6.5	31	90	110.8	72	52	44	M10×1.5×12 (12.5)	8.6	74	35.5	11	M6×0.75	7	11
RA30GM	42	6.5	31	90	135.4	72	52	44	M10×1.5×12 (12.5)	8.6	98.6	35.5	11	M6×0.75	7	11
RA35EM	48	6.5	33	100	123.8	82	62	52	M10×1.5×13 (7)	8.6	83.2	41.5	12	M6×0.75	8	11
RA35GM	48	6.5	33	100	152	82	62	52	M10×1.5×13 (7)	8.6	111.4	41.5	12	M6×0.75	8	11
RA45EM	60	8	37.5	120	154	100	80	60	M12×1.75×15 (10.5)	10.5	105.4	52	13	Rc1/8	10	14
RA45GM	60	8	37.5	120	190	100	80	60	M12×1.75×15 (10.5)	10.5	141.4	52	13	Rc1/8	10	14
RA55EM	70	9	43.5	140	184	116	95	70	M14×2×18 (13)	12.5	128	61	15	Rc1/8	11	14
RA55GM	70	9	43.5	140	234	116	95	70	M14×2×18 (13)	12.5	178	61	15	Rc1/8	11	14
RA65EM	90	13	53.5	170	228.4	142	110	82	M16×2×24 (18.5)	14.6	155.4	77	22	Rc1/8	19	14
RA65GM	90	13	53.5	170	302.5	142	110	82	M16×2×24 (18.5)	14.6	229.5	77	22	Rc1/8	19	14

Notes 1) Select either one of two F dimensions, the standard or the parenthesized semi-standard dimension, for the pitch of rail fixing bolt holes. If not specified, the standard dimension of F is applied.

Reference number for roller slide of random-matching type

Ball slide

RAA 35 EM PH H -F

Random-matching roller slide series code

RAA: RA Series random-matching roller slide

Size

Roller slide shape code (See page A246)

Option code

No code: No surface treatment
 -F: Fluoride low temperature chrome plating
 -C: No surface treatment + Rail cover
 -CF: Fluoride low temperature chrome plating + Rail cover


Preload code: Z

Z: Slight preload, H: Medium preload.


Accuracy code

PH, KH: High-precision grade random-matching type (See Table 18)


EM and GM types



EM type



GM type



Reference number for rail of random-matching type

Rail

R1A 35 1000 L C N - PH Z**

Random-matching rail series code

R1A: RA Series random-matching rail

Size

Rail length (mm)

Rail shape code: L

L: Standard

Material/surface treatment code (See Table 19)

Preload code: Z

Z: Common for slight and medium preload (See A247)

Accuracy code

PH: High-precision grade random-matching type.



Design serial number

Added to the reference number.

*Butting rail specification

N: Non-butting, L: Butting specification

*Please consult with NSK for butting rail specification.

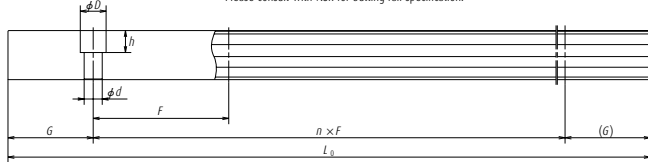

Unit: mm

Rail				Basic load rating										Weight	
Width W ₁	Height H ₁	Pitch F	Mounting bolt hole d × D × h	G (reference)	Maximum length L _{0max}	Dynamic			M _{RO}	Static moment (N·m)				Ball slide (kg)	Rail (kg/m)
						[50km] C ₅₀ (N)	[100km] C ₁₀₀ (N)	C ₀ (N)		M _{P0}		M _{Y0}			
										One slide	Two slides	One slide	Two slides		
15	16.3	60	4.5×7.5×5.3	20	2 000	12 600	10 300	27 500	260	210	1 320	210	1 320	0.21	1.6
15	16.3	(30)	4.5×7.5×5.3	20	2 000	16 000	13 000	37 000	350	375	2 130	375	2 130	0.28	1.6
20	20.8	60	6×9.5×8.5	20	3 000	23 600	19 200	52 500	665	505	3 100	505	3 100	0.45	2.6
20	20.8	(30)	6×9.5×8.5	20	3 000	29 500	24 000	70 000	890	900	5 000	900	5 000	0.65	2.6
23	24	30	7×11×9	20	3 900	36 000	29 200	72 700	970	760	4 850	760	4 850	0.80	3.4
23	24	(60)	7×11×9	20	3 900	43 500	35 400	92 900	1 240	1 240	7 200	1 240	7 200	1.1	3.4
28	28	40	9×14×12	20	3 900	47 800	38 900	93 500	1 670	1 140	7 100	1 140	7 100	1.3	4.9
28	28	(80)	9×14×12	20	3 900	58 500	47 600	121 000	2 170	1 950	11 500	1 950	11 500	1.7	4.9
34	31	40	9×14×12	20	3 900	65 500	53 300	129 000	2 810	1 800	11 000	1 800	11 000	1.7	6.8
34	31	(80)	9×14×12	20	3 900	82 900	67 400	175 000	3 810	3 250	17 800	3 250	17 800	2.3	6.8
45	38	52.5	14×20×17	22.5	3 650	114 000	92 800	229 000	6 180	4 080	24 000	4 080	24 000	3.2	10.9
45	38	(105)	14×20×17	22.5	3 650	143 000	116 000	305 000	8 240	7 150	39 000	7 150	39 000	4.3	10.9
53	43.5	60	16×23×20	30	3 600	159 000	129 000	330 000	10 200	7 060	41 000	7 060	41 000	5.4	14.6
53	43.5	(120)	16×23×20	30	3 600	207 000	168 000	462 000	14 300	13 600	72 000	13 600	72 000	7.5	14.6
63	55	75	18×26×22	35	3 600	259 000	210 000	504 000	19 200	12 700	78 500	12 700	78 500	12.2	22.0
63	55	(150)	18×26×22	35	3 600	355 000	288 000	756 000	28 700	28 600	153 000	28 600	153 000	16.5	22.0

2) The random-matching type is available for the models of RA25 to RA65.

3) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)

C₅₀: the basic dynamic load rating for 50 km rated fatigue life

C₁₀₀: the basic dynamic load rating for 100 km rated fatigue life

A-5-3.2 Roller Guide RB Series




Fig. 1 RB Series

1. Features

(1) Super-low type

With low mounting height, the RB series is effective for compact machine design.

(2) Super-high load capacity

The RB series can contribute to lower center of gravity of machines, while maintaining the load capacity of the RA series.

(3) Super-high rigidity

Using NSK's advanced analysis technology, we pursued a complete, optimal design, down to the detailed shape of roller slides and rails, thereby realizing super-high rigidity superior to that of competitor's roller guides.

(4) Super-high motion accuracy

NSK has developed its own unique method of simulating rolling element passage vibration and method of designing optimal roller slide specifications for damping roller passage vibration. These developments have dramatically enhanced roller slide motion accuracy for the RB series.

(5) Smooth motion

Installation of a retaining piece between rollers restrains the roller skew peculiar to roller slides, thereby achieving smooth motion.

(6) Low friction

Using rollers for rolling elements helps minimize dynamic friction.

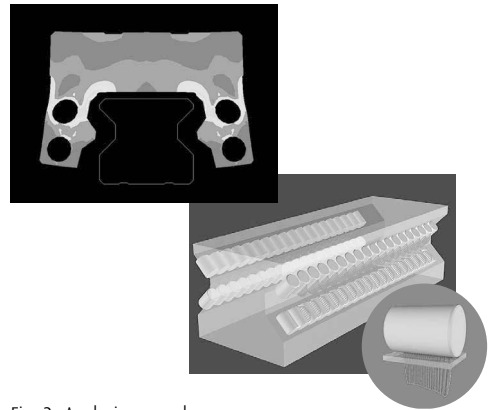


Fig. 2 Analysis example

2. Roller slide shape

Roller slide Model	Shape/installation method	Type (Upper row, Rating: Lower row, Roller slide length)	
		High-load type	Super-high-load type
		Standard	Long
AL TL BL UL		AL-TL (excluding RB55AL)	BL (excluding RB55 and RB65)
		 RB55AL 	 UL RB55BL · RB65BL
EM GM		EM 	GM

3. Accuracy and preload

(1) Running parallelism of roller slide

Table 1

Unit: μm

Rail length (mm)		Preloaded assembly (not random matching)			
		Ultra precision P3	Super precision P4	High precision P5	Precision grade P6
over	or less				
-	50	2	2	2	4.5
50	80	2	2	3	5
80	125	2	2	3.5	5.5
125	200	2	2	4	6
200	250	2	2.5	5	7
250	315	2	2.5	5	8
315	400	2	3	6	9
400	500	2	3	6	10
500	630	2	3.5	7	12
630	800	2	4.5	8	14
800	1 000	2.5	5	9	16
1 000	1 250	3	6	10	17
1 250	1 600	4	7	11	19
1 600	2 000	4.5	8	13	21
2 000	2 500	5	10	15	22
2 500	3 150	6	11	17	25
3 150	3 900	9	16	23	30

A-5-3.2 Roller Guide RB Series

(2) Accuracy standard

The preloaded assembly has four accuracy grades; Ultra precision P3, Super precision P4, High precision P5, and Precision P6 grades.

> Tolerance of preloaded assembly

Table 2

Unit: μm

Characteristics	Accuracy grade	Ultra precision P3	Super precision P4	High precision P5	Precision grade P6
Mounting height H		± 8	± 10	± 20	± 40
Variation of H (All roller slides on a set of rails)		3	5	7	15
Mounting width W_2 or W_3		± 10	± 15	± 25	± 50
Variation of W_2 or W_3 (All roller slides on reference rail)		3	7	10	20
Running parallelism of surface C to surface A		Shown in Table 1 and Fig. 4			
Running parallelism of surface D to surface B					

(3) Assembled accuracy

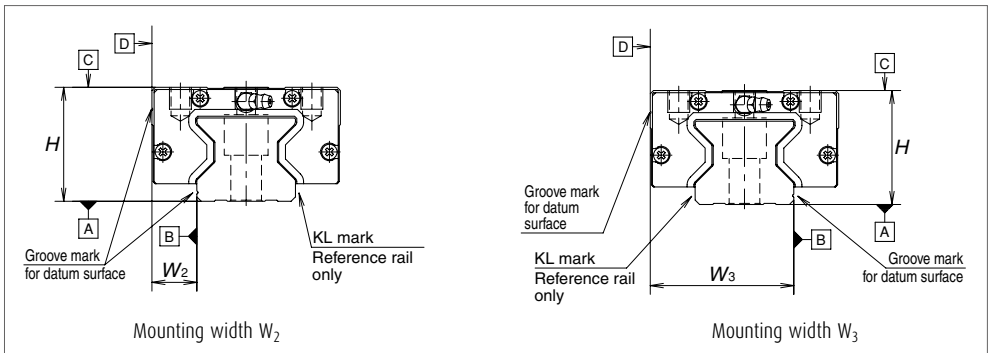


Fig. 3

(4) Preload and rigidity

One type of preload is available: Medium preload Z3 for preloaded assembly.

> Preload of preloaded assembly

Table 3

Model No.		Preload (N)
		Medium preload (Z3)
High-load type	RB30 AL, EM	3 890
	RB35 AL, EM	5 330
	RB45 AL, EM	9 280
	RB55 AL, TL, EM	12 900
	RB65 AN, EM	21 000
Super-high-load type	RB30 BL, GM	4 760
	RB35 BL, GM	6 740
	RB45 BL, GM	11 600
	RB55 BL, UL, GM	16 800
	RB65 BL, UL, GM	28 800

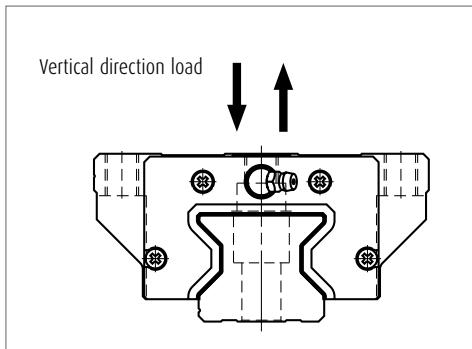


Fig. 4 Direction of load

A-5-3.2 Roller Guide RB Series

› Rigidity of medium preload

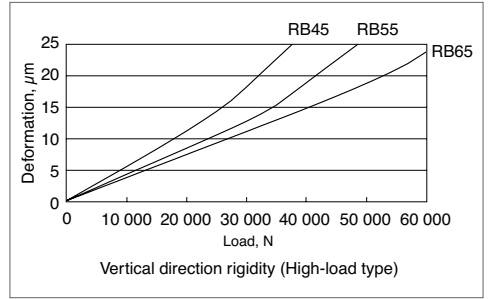
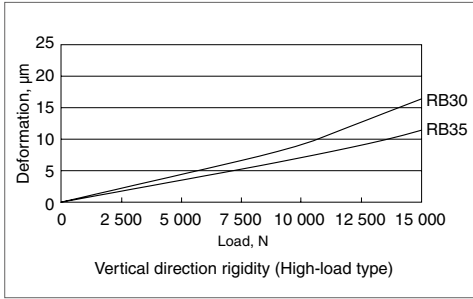


Fig. 5 Vertical direction theoretical rigidity line: High-load type (Roller slide shape: AN, TL, EM)

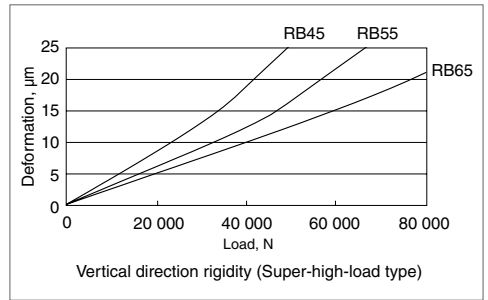
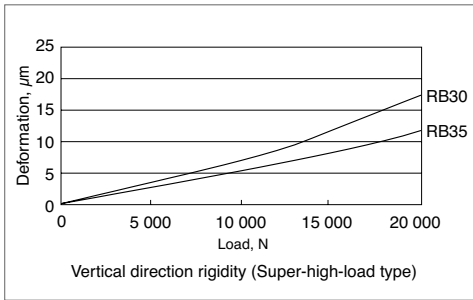


Fig. 6 Vertical direction theoretical rigidity line: Super-high-load type (Roller slide shape: BL, UL, GM)

4. Maximum rail length

Table 5 shows the limitations of rail length (maximum length). However, the limitations vary by accuracy grades.

Table 5 Length limitation of rails

		Unit: mm				
Series	Size	30	35	45	55	65
RB		3 900	3 900	3 650	3 600	3 600

Note Rails can be butted if user requirement exceeds the rail length shown in the table. Please consult NSK.

5. Installation

(1) Permissible values of mounting error

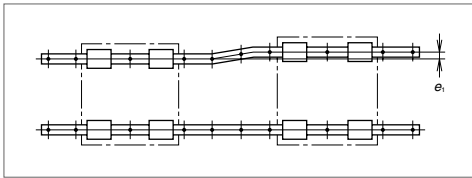


Fig. 7

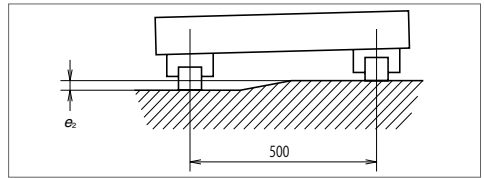


Fig. 8

Table 6

Value	Unit : μm				
	RB30	RB35	RB45	RB55	RB65
Permissible values of parallelism in two rails e_1	11	13	17	19	30
Permissible values of parallelism (height) in two rails e_2	150 μm / 500 mm				

(2) Shoulder height of the mounting surface and corner radius




Fig. 9 Shoulder for the roller datum surface




Fig. 10 Shoulder for the roller slide datum surface

Table 7

Model No.	Corner radius (maximum)		Shoulder height	
	r_a	r_b	H'	H''
RB30	1	1	5	6
RB35	1	1	5	6
RB45	1.5	1	6	8
RB55	1.5	1.5	7	10
RB65	1.5	1.5	11	11

A-5-3.2 Roller Guide RB Series

6. Lubrication components

Refer to pages A38 and D13 for the lubrication of linear guides.

(1) Types of lubrication accessories

Fig. 13 and Table 9 show grease fittings and tube fittings.

(2) Mounting position of lubrication accessories

- > The standard position of grease fittings and tube fittings is the end face of roller slide. We can mount them on a side of end cap for an option. (Fig. 11) Please consult NSK for installation of grease or tube fittings to the roller slide body or the side of end cap.
- > A lubrication hole can also be provided on the top of the end cap. Fig.12, and Table 8 show the mounting position. A spacer is required for AN and BN shape roller slides. The spacers are available from NSK.
- > When using a piping unit with thread of M6 × 1, you require a connector to connect it to a grease fitting mounting hole with M6 × 0.75. The connectors are available from NSK.

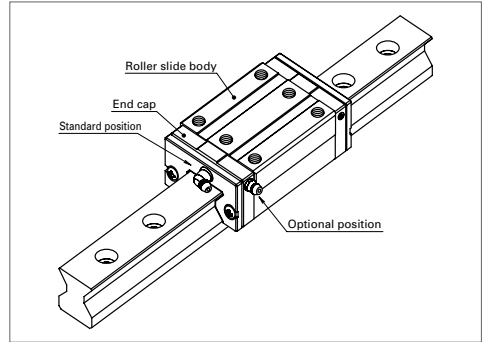


Fig. 11 Mounting position of lubrication accessories

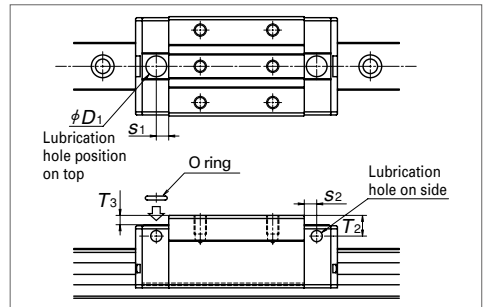


Fig.12 Top and side lubrication hole positions

Table 10 Top and side lubrication hole positions

Unit : mm

Model No.	Grease fitting size	s_2	T_2	O ring (JIS)	D_1	s_1	T_3
RA30	M6×0.75	5	6.5	P7	10.4	6	0.5
RA35	M6×0.75	5.5	6.5	P7	10.4	7	0.4
RA45	Rc 1/8	7.2	6.5	P7	10.4	7.2	0.4
RA55	Rc 1/8	7.2	8	P7	10.4	7.2	0.4
RA65	Rc 1/8	7.2	10	P7	10.4	7.2	0.4

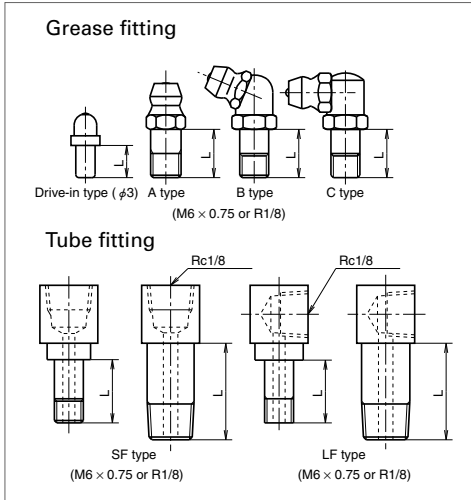


Fig. 13 Grease fitting and tube fitting

7. Dust-proof components

(1) Standard specification

The RB series is equipped with end, inner and bottom seals to prevent foreign matter from entering the inside of the roller slide. Under normal applications, the RB series can be used without modification.

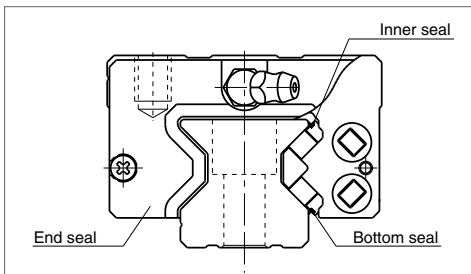


Fig. 14

Table 9

Model No.	Dust proof specification	Dimension L		
		Grease fitting/ Drive-in fitting	Tube fitting SF Type	LF Type
RB30	Standard	5	-	-
RB30	With NSK K1	10	-	-
RB30	Double seal	8	-	-
RB30	Protector	8	-	-
RB35	Standard	5	5	5
RB35	With NSK K1	14	15	16
RB35	Double seal	12	12	12
RB35	Protector	12	12	12
RB45	Standard	5	5	5
RB45	With NSK K1	14	15	16
RB45	Double seal	12	12	12
RB45	Protector	12	12	12
RB55	Standard	8	13.5	17
RB55	With NSK K1	18	20	21.5
RB55	Double seal	14	16	17
RB55	Protector	14	16	17
RB65	Standard	8	13.5	17
RB65	With NSK K1	20	20	20
RB65	Double seal	14	18	17
RB65	Protector	14	16	17

Table 10 Seal friction per roller side (maximum value)

Unit: mm

Series	Size	30	35	45	55	65
RB		5	6	8	8	14

A-5-3.2 Roller Guide RB Series

(2) NSK K1 lubrication unit

Table 11 shows the dimension of linear guides equipped with the NSK K1 lubrication unit.

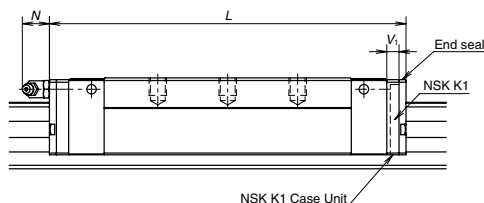


Table 11

Unit: mm

Model No.	Roller slide length	Roller slide model	Standard roller slide length	With two NSK K1	Thickness of NSK K1 V1	Protruding area of the grease fitting N
RB30	Standard	AL, EM	110.8	122.8	6	(11)
RB30	Long	BL, GM	135.4	147.4	6	(11)
RB35	Standard	AL, EM	123.8	136.8	6.5	(11)
RB35	Long	BL, GM	152	165	6.5	(11)
RB45	Standard	AL, EM	154	168	7	(14)
RB45	Long	BL, GM	190	204	7	(14)
RB55	Standard	AL, TL, EM	184	198	7	(14)
RB55	Long	BL, UL, GM	234	248	7	(14)
RB65	Standard	AL, EM	228.4	243.4	7.5	(14)
RB65	Long	BL, UL, GM	302.5	317.5	7.5	(14)

Note Roller slide length equipped with NSK K1 = (Standard roller slide length) + (Thickness of NSK K1 Case Unit × Number of NSK K1 Case Unit)

(3) Double seal and protector

For RB Series, double seal and protector can be installed only before shipping from the factory.

Table 12 shows the increased thickness when end seal and protector are installed.

Table 12

Unit: mm

Modell No.	Thickness of end seal V ₃	Thickness of protector V ₄
RB30	3.4	3.6
RB35	3.4	3.6
RB45	4	4.2
RB55	4	4.2
RB65	5	5.5

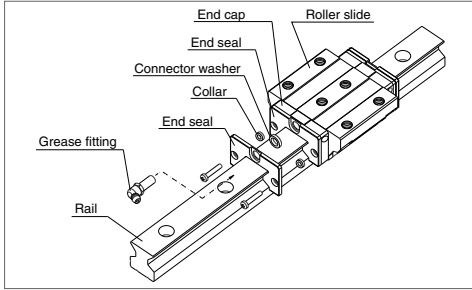


Fig. 15 Double seal

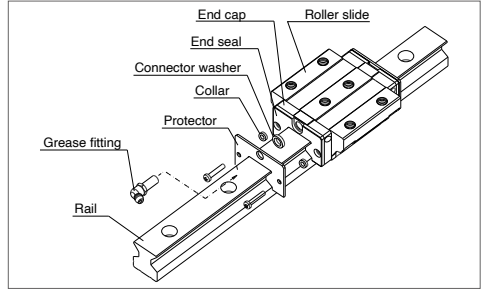


Fig. 16 Protector

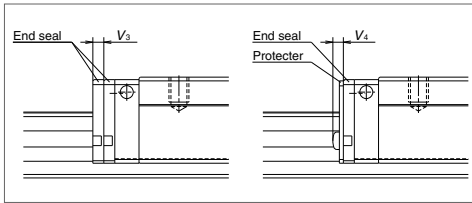


Fig. 17

(4) Cap to plug the rail mounting bolt hole

Table 13 Caps to plug rail bolt hole

Modell No.	Bolt to secure rail	Cap reference No.	Quantity /case
RB30, RB35	M8	LG-CAP/M8	20
RB45	M12	LG-CAP/M12	20
RB55	M14	LG-CAP/M14	20
RB65	M16	LG-CAP/M16	20

A-5-3.2 Roller Guide RB Series

(8) Dynamic friction

- > Dynamic friction indications per roller slide are shown in table 14.
- > These values are assumed under actual condition with standard specification (two end seals, inner seal and bottom seal equipped) packed with standard grease (NSK Grease AS2)
- > Dynamic friction varies with grease.

Table 14 Dynamic friction

Unit: N

Modell No.	High-load type	Super-high-load type
RA30	33	42
RA35	42	53
RA45	56	69
RA55	80	95
RA65	120	138

Note Values in Table 14 are indications. Please refer to them.

9. Reference number

Reference numbers shall be set to individual NSK linear guide when its specifications are finalized, and it is indicated on its specification drawing.

Please specify the reference number, except design serial number, to identify the product when ordering, requiring estimates, or inquiring about specifications from NSK.

	RB	35	1000	AL	C	2	-**	P5	3	
Series name										
Size										
Rail length (mm)										Preload code
Roller slide shape code (See page A266)										3: Z3
Material/surface treatment code (See Table 15)										Accuracy code (See Table 16)
C: Special high carbon steel (NSK standard)										Design serial number
										Added to the reference number.
										Number of roller slides per rail

Table 15 Material/surface treatment code

Code	Description
C	Special high carbon steel (NSK standard)
D	Special high carbon steel with surface treatment
Z	Other, special

Table 16 Accuracy code

Accuracy	Standard (Without NSK K1)	With NSK K1
Ultra precision grade	P3	K3
Super precision grade	P4	K4
High precision grade	P5	K5
Precision grade	P6	K6

Note Refer to pages A38 for NSK K1 lubrication unit.


A-5-3.2 Roller Guide RB Series

(10) Dimensions


RB-AL-TL (High-load type / Standard)

RB-BL-UL (Super-high-load type / Long)


RB 35 1000 AL C 2 - P5 3**

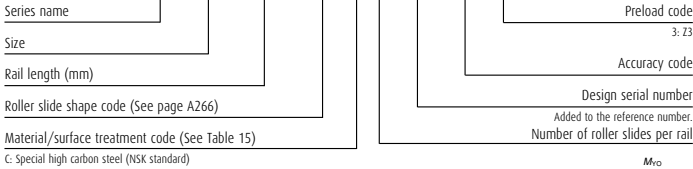


Top view of RB55AL




Top view of AL and TL types (excluding RB55AL)

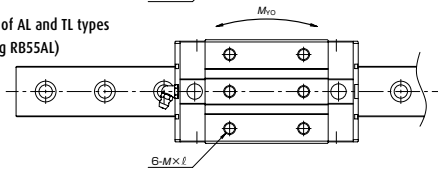

Front view




Side view of AL and TL types

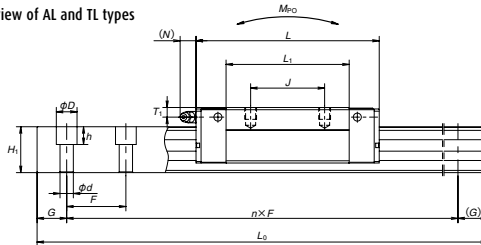


Model No.	Assembly					Roller slide											Width	Height
	Height		Width	Length	Mounting hole				L ₁	K	T	Grease fitting			W ₁	H ₁		
	H	E			B	J	Number of holes	M × pitch × l				Hole size	T ₁	N				
RB30AL	38	6.5	16	60	110.8	40	40	6	M8×1.25×7	74	31.5	14	φ 3	5	2.6	28	28	
RB30BL	38	6.5	16	60	135.4	40	60	8	M8×1.25×7	98.6	31.5	14	φ 3	5	2.6	28	28	
RB35AL	44	6.5	18	70	123.8	50	50	6	M8×1.25×8	83.2	37.5	15	M6×0.75	6,5	11	34	31	
RB35BL	44	6.5	18	70	152	50	72	8	M8×1.25×8	111.4	37.5	15	M6×0.75	6,5	11	34	31	
RB45AL	52	8	20.5	86	154	60	60	6	M10×1.5×10	105.4	44	17	M6×0.75	6,5	14	45	38	
RB45BL	52	8	20.5	86	190	60	80	8	M10×1.5×10	141.4	44	17	M6×0.75	6,5	14	45	38	
RB55AL	63	9	23.5	100	184	65	75	4	M12×1.75×12	128	54	18	Rc1/8	8,5	14	53	43.5	
RB55TL	63	9	23.5	100	184	75	75	6	M12×1.75×12	128	54	18	Rc1/8	8,5	14	53	43.5	
RB55BL	63	9	23.5	100	234	65	95	6	M12×1.75×12	178	54	18	Rc1/8	8,5	14	53	43.5	
RB55UL	63	9	23.5	100	234	75	95	6	M12×1.75×12	178	54	18	Rc1/8	8,5	14	53	43.5	
RB65AL	75	10	31.5	126	228.4	76	70	6	M16×2×16	155.4	65	22	Rc1/8	10	14	63	52	
RB65BL	75	10	31.5	126	302.5	76	110	6	M16×2×16	229.5	65	22	Rc1/8	10	14	63	52	
RB65UL	75	10	31.5	126	302.5	76	120	6	M16×2×16	229.5	65	22	Rc1/8	10	14	63	52	

Notes 1) Select either one of two F dimensions, the standard or the parenthesized semi-standard dimension, for the pitch of rail fixing bolt holes. If not specified, the standard dimension of F is applied.


Top view of RB55BL and RB65BL

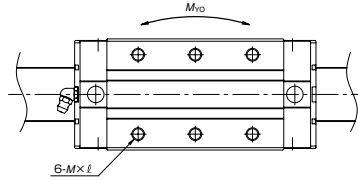


Top view of UL type

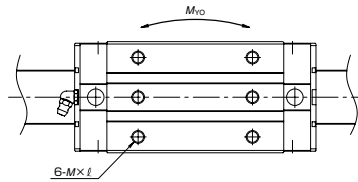

Top view of BL type (excluding RB55 and RB65)

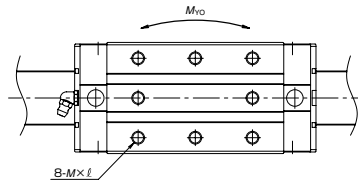

Side view of BL type



Unit: mm

Rail				Basic load rating								Weight	
Pitch F	Mounting bolt hole d × D × h	G (reference)	Maximum length L _{0max}	3) Dynamic		Static	M _{R0}	Static moment (N-m)				Roller slide (kg)	Rail (kg/m)
				[50km] C ₅₀ (N)	[100km] C ₁₀₀ (N)	C ₀ (N)		M _{P0}		M _{Y0}			
								One slide	Two slides	One slide	Two slides		
40	9×14×12	20	3 900	47 800	38 900	93 500	1 670	1 140	7 100	1 140	7 100	0.71	4.9
(80)	9×14×12	20	3 900	58 500	47 600	121 000	2 170	1 950	11 500	1 950	11 500	0.91	4.9
40	9×14×12	20	3 900	65 500	53 300	129 000	2 810	1 800	11 000	1 800	11 000	1.0	6.8
(80)	9×14×12	20	3 900	82 900	67 400	175 000	3 810	3 250	17 800	3 250	17 800	1.5	6.8
52.5	14×20×17	22.5	3 650	114 000	92 800	229 000	6 180	4 080	24 000	4 080	24 000	1.9	10.9
(105)	14×20×17	22.5	3 650	143 000	116 000	305 000	8 240	7 150	39 000	7 150	39 000	2.6	10.9
	16×23×20	30	3 600	159 000	129 000	330 000	10 200	7 060	41 000	7 060	41 000	3.4	14.6
60	16×23×20	30	3 600	159 000	129 000	330 000	10 200	7 060	41 000	7 060	41 000	3.4	14.6
(120)	16×23×20	30	3 600	207 000	168 000	462 000	14 300	13 600	72 000	13 600	72 000	4.7	14.6
	16×23×20	30	3 600	207 000	168 000	462 000	14 300	13 600	72 000	13 600	72 000	4.7	14.6
75	18×26×22	35	3 600	259 000	210 000	504 000	19 200	12 700	78 500	12 700	78 500	7.2	20.5
(150)	18×26×22	35	3 600	355 000	288 000	756 000	28 700	28 600	153 000	28 600	153 000	9.5	20.5
	18×26×22	35	3 600	355 000	288 000	756 000	28 700	28 600	153 000	28 600	153 000	9.5	20.5



2) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)

C₅₀: the basic dynamic load rating for 50 km rated fatigue life

C₁₀₀: the basic dynamic load rating for 100 km rated fatigue life

A-5-3.2 Roller Guide RB Series


RB-EM (High-load type / Standard)
 RB-GM (Super-high-load type / Long)

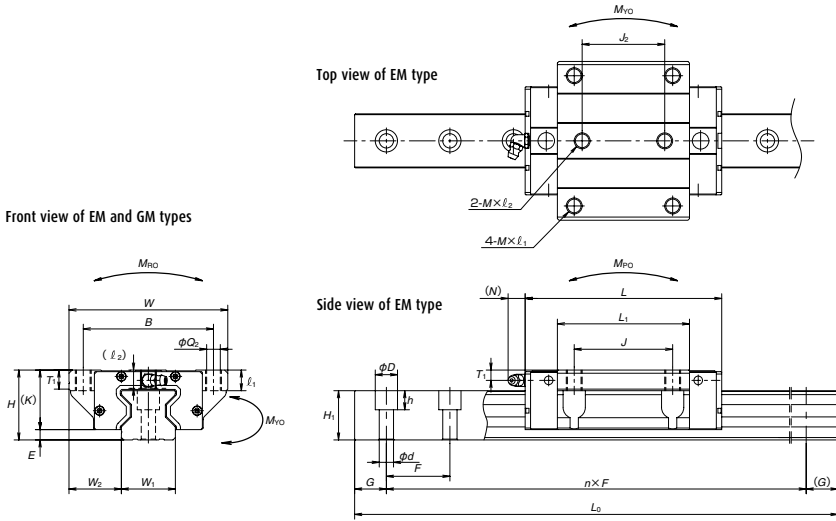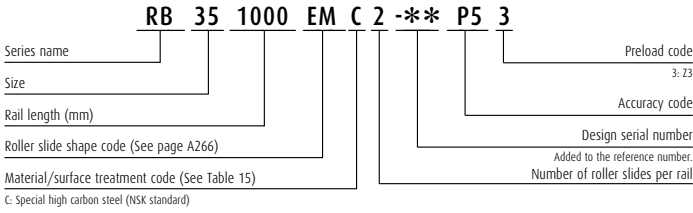


Model No.	Assembly				Roller slide											Width		
	Height	E	W ₂	Width	Length	Mounting hole						Grease fitting						
						B	J	J ₁	Number of holes	M × pitch × L ₂	Q	L ₁	K	T	Hole size		T ₁	N
RB30EM	38	6.5	31	90	110.8	72	52	44	6	M10×1.5×12 (8.5)	8.6	74	31.5	11	φ 3	5	2.6	28
RB30GM	38	6.5	31	90	135.4	72	52	44	8	M10×1.5×12 (8.5)	8.6	98.6	31.5	11	φ 3	5	2.6	28
RB35EM	44	6.5	33	100	123.8	82	62	52	6	M10×1.5×13 (11.5)	8.6	83.2	37.5	12	M6×0.75	6.5	11	34
RB35GM	44	6.5	33	100	152	82	62	52	8	M10×1.5×13 (11.5)	8.6	111.4	37.5	12	M6×0.75	6.5	11	34
RB45EM	52	8	37.5	120	154	100	80	60	6	M12×1.75×15 (12.5)	10.5	105.4	44	13	M6×0.75	6.5	14	45
RB45GM	52	8	37.5	120	190	100	80	60	8	M12×1.75×15 (12.5)	10.5	141.4	44	13	M6×0.75	6.5	14	45
RB55EM	63	9	43.5	140	184	116	95	70	6	M14×2×18 (18)	12.5	128	54	15	Rc1/8	8.5	14	53
RB55GM	63	9	43.5	140	234	116	95	70	8	M14×2×18 (18)	12.5	178	54	15	Rc1/8	8.5	14	53
RB65EM	75	10	53.5	170	228.4	142	110	82	6	M16×2×24 (21)	14.6	155.4	65	15	Rc1/8	10	14	63
RB65GM	75	10	53.5	170	302.5	142	110	82	8	M16×2×24 (21)	14.6	229.5	65	15	Rc1/8	10	14	63

Notes 1) Select either one of two F dimensions, the standard or the parenthesized semi-standard dimension, for the pitch of rail fixing bolt holes. If not specified, the standard dimension of F is applied.

Top view of GM type

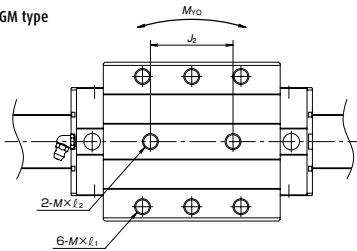

Side view of GM type



Unit: mm

Rail					Basic load rating								Weight	
Height H ₁	Pitch F	Mounting bolt hole d × D × h	G (reference)	Maximum length L _{0max}	3) Dynamic		Static C ₀ (N)	M _{R0}	Static moment (N·m)				Roller slide (kg)	Rail (kg/m)
					[50km] C ₅₀ (N)	[100km] C ₁₀₀ (N)			M _{P0}		M _{V0}			
					One slide	Two slides	One slide	Two slides						
28	40	9×14×12	20	3 900	47 800	38 900	93 500	1 670	1 140	7 100	1 140	7 100	1.1	4.9
28	(80)	9×14×12	20	3 900	58 500	47 600	121 000	2 170	1 950	11 500	1 950	11 500	1.5	4.9
31	40	9×14×12	20	3 900	65 500	53 300	129 000	2 810	1 800	11 000	1 800	11 000	1.5	6.8
31	(80)	9×14×12	20	3 900	82 900	67 400	175 000	3 810	3 250	17 800	3 250	17 800	2.0	6.8
38	52.5	14×20×17	22.5	3 650	114 000	92 800	229 000	6 180	4 080	24 000	4 080	24 000	2.5	10.9
38	(105)	14×20×17	22.5	3 650	143 000	116 000	305 000	8 240	7 150	39 000	7 150	39 000	3.4	10.9
43.5	60	16×23×20	30	3 600	159 000	129 000	330 000	10 200	7 060	41 000	7 060	41 000	4.7	14.6
43.5	(120)	16×23×20	30	3 600	207 000	168 000	462 000	14 300	13 600	72 000	13 060	72 000	6.6	14.6
52	75	18×26×22	35	3 600	259 000	210 000	504 000	19 200	12 700	78 500	12 700	78 500	9.7	20.5
52	(150)	18×26×22	35	3 600	355 000	288 000	756 000	28 700	28 600	153 000	28 600	153 000	13.2	20.5

2) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)

C₅₀: the basic dynamic load rating for 50 km rated fatigue life

C₁₀₀: the basic dynamic load rating for 100 km rated fatigue life

A-5-3.3 LA Series

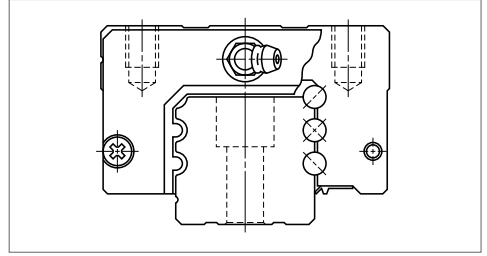
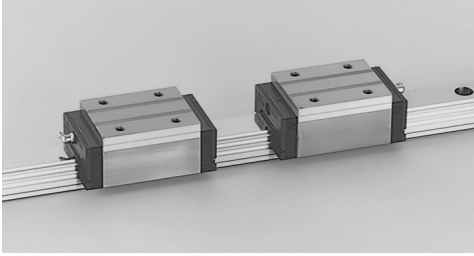


Fig. 1 LA Series

1. Features

(1) High rigidity and high load carrying capacity

A set of three ball grooves is made on both sides of ball slide and a rail. This contributes to the increased rigidity and load carrying capacity. The top and bottom groove are formed in the circular arc with a closer radius of ball, which ensures great rigidity and load carrying capacity. With the Gothic arch center groove, rigidity and load carrying capacity are further increased.

(2) Moderate friction

A well-balanced combination of 2-point contacts at the top and bottom grooves and 4 points contact at the center groove provides moderate friction while ensuring rigidity by appropriate preload.

(3) Four-way equal load distribution

The contact angle of balls is set at 45 degrees in all grooves, thereby dispersing the load equally to four rows irrespective of load direction. This realizes equal rigidity and load carrying capacity in vertical and lateral directions and provides well-balanced design.

(4) Strong against shock load

Load from any direction, vertical and lateral, is received by four ball rows at all times. The number of the ball rows which receive the load is larger than in other linear guides, making this series stronger against shock load.

(5) High accuracy

As showing in Fig. 4, fixing the measuring rollers is easy thanks to the Gothic arch groove of the central ball groove. This benefits an accurate and measuring of ball groove for a highly precise and stable manufacturing.

(6) The dust protection design

The rail's cross section is designed as simple as possible, thereby improving the sealing efficiency combined with the enhanced sealing function. In addition, optional inner seals are available.

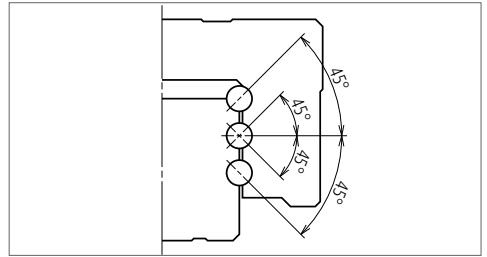


Fig. 2 Super rigidity design

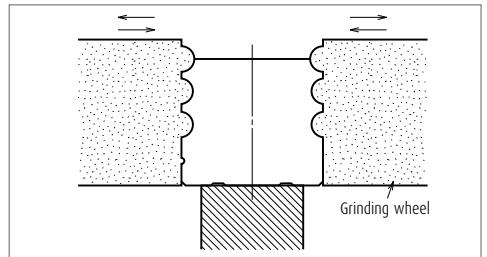


Fig. 3 Rail grinding

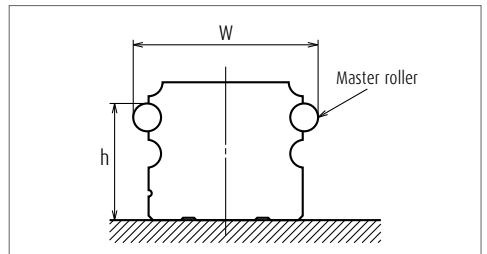


Fig. 4 Measuring groove accuracy

2. Ball slide shape

Ball slide Model	Shape/installation method	Type (Upper row, Rating: Lower row, Roller slide length)	
		High-load type	Super-high-load type
		Standard	Long
AN BN		AN 	BN
AL BL		AL 	BL
EL GL		EL 	GL
FL HL		FL 	HL

3. Accuracy and preload

(1) Running parallelism of ball slide

Table 1

Unit: μm

Rail length (mm)	Preloaded assembly (not random matching)					
	over	or less	Ultra precision P3	Super precision P4	High precision P5	Precision grade P6
	-	50	2	2	2	4.5
	50	80	2	2	3	5
	80	125	2	2	3.5	5.5
	125	200	2	2	4	6
	200	250	2	2.5	5	7
	250	315	2	2.5	5	8
	315	400	2	3	6	9
	400	500	2	3	6	10
	500	630	2	3.5	7	12
	630	800	2	4.5	8	14
	800	1 000	2.5	5	9	16
	1 000	1 250	3	6	10	17
	1 250	1 600	4	7	11	19
	1 600	2 000	4.5	8	13	21
	2 000	2 500	5	10	15	22
	2 500	3 150	6	11	17	25
	3 150	4 000	9	16	23	30

A-5-3.3 LA Series

(2) Accuracy standard

The LA Series has four accuracy grades: Ultra precision P3, Super precision P4, High precision P5, and Precision grade P6.

Table 2

Characteristics	Accuracy grade	Unit: μm			
		Ultra precision P3	Super precision P4	High precision P5	Precision grade P6
Mounting height H		± 10	± 10	± 20	± 40
Variation of H (All ball slides on a set of rails)		3	5	7	15
Mounting width W_2 or W_3		± 15	± 15	± 25	± 50
Variation of W_2 or W_3 (All ball slides on reference rail)		3	7	10	20
Running parallelism of surface C to surface A Running parallelism of surface D to surface B		Shown in Table 1 and Fig. 5			

(3) Assembled accuracy

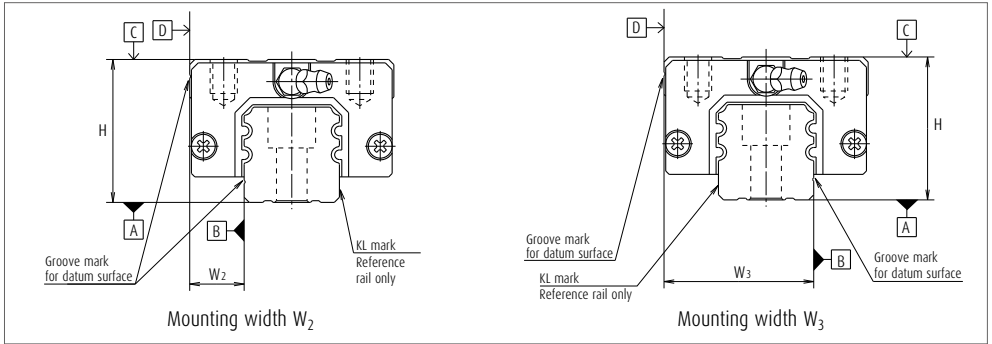


Fig. 5

(4) Preload and rigidity

Table 3 shows preload and rigidity of LA Series.

The LA Series has two types of preload specification: Medium preload Z3 and Heavy preload Z4.

Table 3

Model No.		Preload (N)		Rigidity (N/ μm)	
		Medium preload Z3	Heavy preload Z4	Medium preload Z3	Heavy preload Z4
High-load type	LA25 AL, AN, EL, FL	1 670	2 110	475	550
	LA30 AL, AN, EL, FL	2 450	3 150	705	835
	LA35 AL, AN, EL, FL	3 450	4 300	825	970
	LA45 AL, AN, EL, FL	5 050	6 350	1 100	1 240
	LA55 AL, AN, EL, FL	8 100	10 200	1 400	1 540
	LA65 AN, EL, FL	13 800	18 800	1 730	2 030
Super-high-load type	LA25 BL, BN, GL, HL	2 260	2 840	700	820
	LA30 BL, BN, GL, HL	3 250	4 050	1 000	1 180
	LA35 BL, BN, GL, HL	4 450	5 650	1 200	1 400
	LA45 BL, BN, GL, HL	6 150	7 750	1 450	1 640
	LA55 BL, BN, GL, HL	9 550	12 100	1 840	2 020
	LA65 BN, GL, HL	18 000	24 400	2 450	2 840

4. Maximum rail length

Table 4 shows the limitations of rail length. However, the limitations vary by accuracy grades.

Table 4 Length limitation of rails

Unit: mm

Series	Size	25	30	35	45	55	65
LA		3 960	4 000	4 000	3 990	3 960	3 900

Note Rails can be butted if user requirement exceeds the rail length shown in the table. Please consult NSK.

5. Installation

(1) Permissible values of mounting error

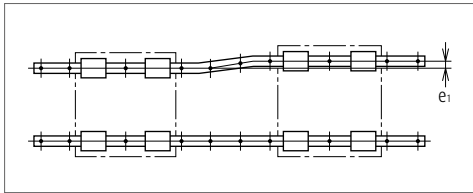


Fig. 6

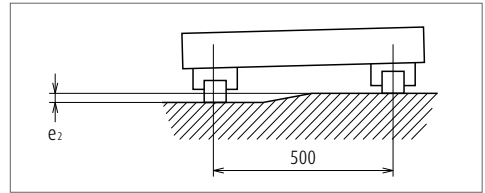


Fig. 7

Table 5

Unit: μm

Value	Preload	Model No.					
		LA25	LA30	LA35	LA45	LA55	LA65
Permissible values of parallelism in two rails e_1	Z3	15	17	20	25	30	40
	Z4	13	15	17	20	25	30
Permissible values of parallelism (height) in two rails e_2	Z3, Z4	185 $\mu\text{m}/500\text{ mm}$					

(2) Shoulder height of the mounting surface and corner radius




Fig. 8 Shoulder for the rail datum surface




Fig. 9 Shoulder for the ball slide datum surface

Table 6

Unit: mm

Model No.	Corner radius (maximum)		Shoulder height	
	r_a	r_b	H'	H''
LA25	0.5	0.5	5	5
LA30	0.5	0.5	6	6
LA35	0.5	0.5	6	6
LA45	0.7	0.7	8	8
LA55	0.7	0.7	10	10
LA65	1	1	11	11

A-5-3.3 LA Series

6. Lubrication components

Refer to pages A38 and D13 for the lubrication of linear guides.

(1) Types of lubrication accessories

Fig. 10 and Table 7 show grease fittings and tube fittings.

(2) Mounting position of lubrication accessories

- > The standard position of grease fittings is the end face of ball slide. We mount them on a side of end cap for an option. (Fig. 11) .
- > Please consult NSK for installation of grease or tube fittings to the ball slide body or side of end cap.
- > When using a piping unit with thread of $M6 \times 1$, you require a connector to connect to a grease fitting mounting hole with $M6 \times 0.75$. The connector is available from NSK.

Table 7

Unit: mm

Model No.	Dust proof specification	Dimension L		
		Grease fitting	Tube fitting	
			SF Type	LF Type
LA25	Standard	5	5	5
LA25	With NSK K1	14	12	12
LA25	Double seal	10	9	9
LA25	Protector	10	9	9
LA30	Standard	5	6	6
LA30	With NSK K1	14	12	13
LA30	Double seal	12	10	11
LA30	Protector	12	11	11
LA35	Standard	5	6	6
LA35	With NSK K1	14	12	13
LA35	Double seal	12	10	11
LA35	Protector	12	11	11
LA45	Standard	8	13.5	17
LA45	With NSK K1	18	22	21.5
LA45	Double seal	14	18	17
LA45	Protector	14	16	17
LA55	Standard	8	13.5	17
LA55	With NSK K1	18	22	21.5
LA55	Double seal	14	18	17
LA55	Protector	14	16	17
LA65	Standard	8	13.5	17
LA65	With NSK K1	22	24	25.5
LA65	Double seal	16	20	19
LA65	Protector	16	16	17

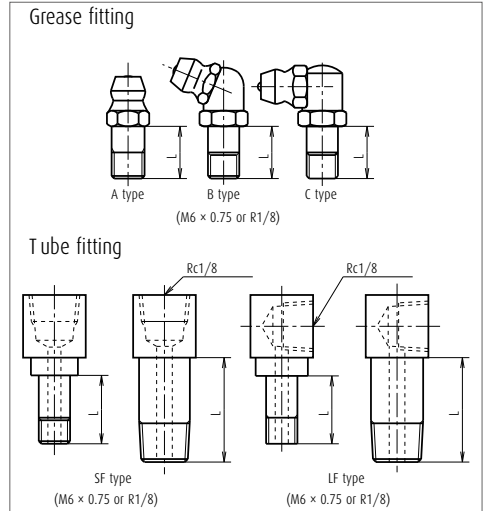


Fig. 10 Grease fitting and tube fitting

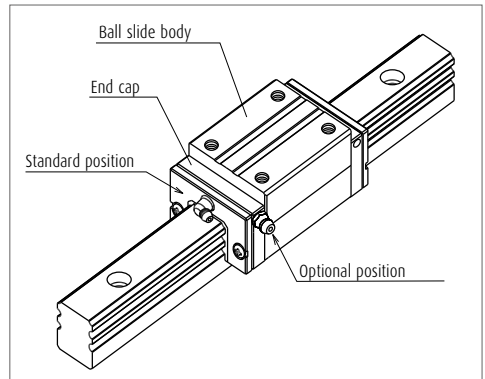


Fig. 11 Mounting position of lubrication accessories

7. Dust-proof components

(1) Standard Specification

The LA Series can be readily used as they have a dust protection means for normal conditions. As the standard equipment, the ball slides have an end seal on both ends, and bottom seals at the bottom.

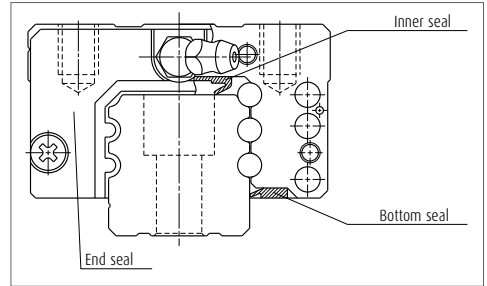


Fig. 12

Table 8 Seal friction per ball slide (maximum value)

Series	Size	Unit: N					
		25	30	35	45	55	65
LA		11	11	12	17	17	23

(2) NSK K1 lubrication unit

Table 9 shows the dimension of linear guides equipped with the NSK K1 lubrication unit.

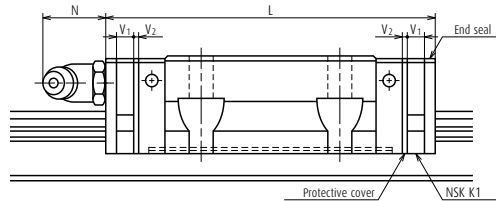


Table 9

Model No.	Ball slide length	Ball slide model	Standard ball slide length	Ball slide length installed with two NSK K1 L	Per NSK K1 thickness V1	Protective cover thickness V2	Unit: mm
							Protruding area of the grease fitting N
LA25	Standard	AL, AN, EL, FL	79.8	91.8	5.0	1.0	(14)
LA25	Long	BL, BN, GL, HL	107.8	119.8	5.0	1.0	(14)
LA30	Standard	AL, AN, EL, FL	100.2	113.2	5.5	1.0	(14)
LA30	Long	BL, BN, GL, HL	126.2	139.2	5.5	1.0	(14)
LA35	Standard	AL, AN, EL, FL	110.6	123.6	5.5	1.0	(14)
LA35	Long	BL, BN, GL, HL	144.6	157.6	5.5	1.0	(14)
LA45	Standard	AL, AN, EL, FL	141.4	156.4	6.5	1.0	(15)
LA45	Long	BL, BN, GL, HL	173.4	188.4	6.5	1.0	(15)
LA55	Standard	AL, AN, EL, FL	165.4	180.4	6.5	1.0	(15)
LA55	Long	BL, BN, GL, HL	203.4	218.4	6.5	1.0	(15)
LA65	Standard	AN, EL, FL	196.2	214.2	8.0	1.0	(16)
LA65	Long	BN, GL, HL	256.2	274.2	8.0	1.0	(16)

Note Ball slide length equipped with NSK K1 = (Standard ball slide length) + (Thickness of NSK K1, $V_1 \times$ Number of NSK K1) + (Thickness of the protective cover $V_2 \times 2$)

A-5-3.3 LA Series

(3) Double seal and protector

For the LA Series, a double seal and a protector can be installed only before shipping from the factory. Please consult with NSK when the double seal and the protectors are required.

Table 10 shows the increased thickness of V3 and V4 when end seals and protectors are installed (Fig. 15).

Table 10

Unit: mm

Modell No.	Thickness of end seal: V ₃	Thickness of protector: V ₄
LA25	3.2	3.6
LA30	4.4	4.2
LA35	4.4	4.2
LA45	5.5	4.9
LA55	5.5	4.9
LA65	6.5	5.5

(4) Cap to plug the rail mounting bolt hole

Table 11

Unit: mm

Modell No.	Bolt to secure rail	Cap reference No.	Quantity /case
LA25	M6	LG-CAP/M6	20
LA30, LA35	M8	LG-CAP/M8	20
LA45	M12	LG-CAP/M12	20
LA55	M14	LG-CAP/M14	20
LA65	M16	LG-CAP/M16	20

(5) Bellows

Make tap holes to the rail end face to fix the bellows mounting plate.

NSK processes tap holes to the rail end face when ordered with a linear guide.

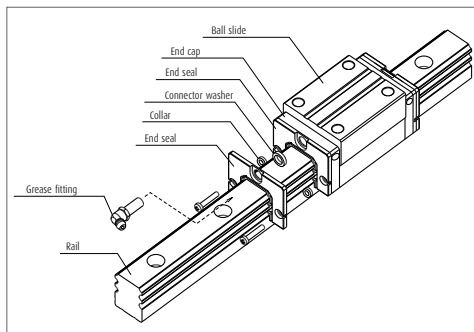


Fig. 13 Double seal

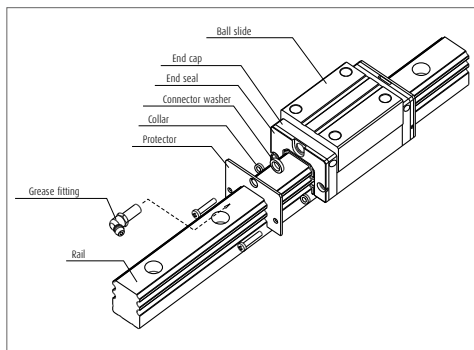


Fig. 14 Protector

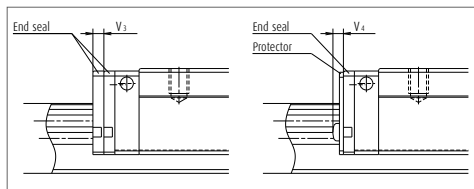


Fig. 15

Dimension tables of bellows LA Series

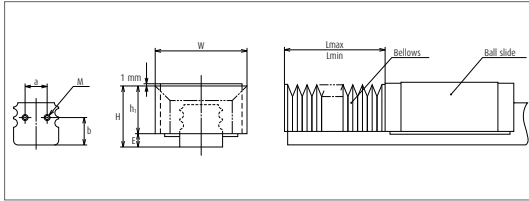


Fig. 16 Dimensions of bellows

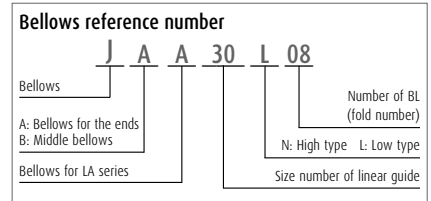


Table 12 Dimensions of bellows

Model No.	H	h ₁	E	W	P	a	b	Length of BL	Tap (M) × depth
JAA25L	35	29.5	5.5	55	12	12	13.8	17	M3 × 5
JAA25N	39	33.5	5.5	61	15	12	13.8	17	M3 × 5
JAA30L	41	33.5	7.5	60	12	14	17.5	17	M4 × 6
JAA30N	44	36.5	7.5	66	15	14	17.5	17	M4 × 6
JAA35L	47	39.5	7.5	72	15	15	18.8	17	M4 × 6
JAA35N	54	46.5	7.5	82	20	15	18.8	17	M4 × 6
JAA45L	59	49	10	93	20	25	22.5	17	M5 × 8
JAA45N	69	59	10	113	30	25	22.5	17	M5 × 8
JAA55L	69	57	12	101	20	35	27.1	17	M5 × 8
JAA55N	79	67	12	121	30	35	27.1	17	M5 × 8
JAA65N	89	75	14	131	30	40	33.3	17	M6 × 12

Unit: mm

Table 13 Numbers of folds (BL) and length of bellows

Type	Model No.	Length of BL	2	4	6	8	10	12	14	16	18	20
			Lmin	34	68	102	136	170	204	238	272	306
Low type	JAA25L	Stroke	134	268	402	536	670	804	938	1 072	1 206	1 340
Low type	JAA25L	Lmax	168	336	504	672	840	1 008	1 176	1 344	1 512	1 680
High type	JAA25N	Stroke	176	352	528	704	880	1 056	1 232	1 408	1 584	1 760
High type	JAA25N	Lmax	210	420	630	840	1 050	1 260	1 470	1 680	1 890	2 100
Low type	JAA30L	Stroke	134	268	402	536	670	804	938	1 072	1 206	1 340
Low type	JAA30L	Lmax	168	336	504	672	840	1 008	1 176	1 344	1 512	1 680
High type	JAA30N	Stroke	176	352	528	704	880	1 056	1 232	1 408	1 584	1 760
High type	JAA30N	Lmax	210	420	630	840	1 050	1 260	1 470	1 680	1 890	2 100
Low type	JAA35L	Stroke	176	352	528	704	880	1 056	1 232	1 408	1 584	1 760
Low type	JAA35L	Lmax	210	420	630	840	1 050	1 260	1 470	1 680	1 890	2 100
High type	JAA35N	Stroke	246	492	738	984	1 230	1 476	1 722	1 968	2 214	2 460
High type	JAA35N	Lmax	280	560	840	1 120	1 400	1 680	1 960	2 240	2 520	2 800
Low type	JAA45L	Stroke	246	492	738	984	1 230	1 476	1 722	1 968	2 214	2 460
Low type	JAA45L	Lmax	280	560	840	1 120	1 400	1 680	1 960	2 240	2 520	2 800
High type	JAA45N	Stroke	386	772	1 158	1 544	1 930	2 316	2 702	3 088	3 474	3 860
High type	JAA45N	Lmax	420	840	1 260	1 680	2 100	2 520	2 940	3 360	3 780	4 200
Low type	JAA55L	Stroke	246	492	738	984	1 230	1 476	1 722	1 968	2 214	2 460
Low type	JAA55L	Lmax	280	560	840	1 120	1 400	1 680	1 960	2 240	2 520	2 800
High type	JAA55N	Stroke	386	772	1 158	1 544	1 930	2 316	2 702	3 088	3 474	3 860
High type	JAA55N	Lmax	420	840	1 260	1 680	2 100	2 520	2 940	3 360	3 780	4 200
Low/high	JAA65N*	Stroke	386	772	1 158	1 544	1 930	2 316	2 702	3 088	3 474	3 860
Low type	JAA65N*	Lmax	420	840	1 260	1 680	2 100	2 520	2 940	3 360	3 780	4 200

Unit: mm

*) Bellows for LA65 is for both low and high types.

Note The values of an odd number BL quantity (3, 5, 7, ...) can be obtained by adding two values of the even number BL on the both sides, then by dividing the sum by 2.

A-5-3.3 LA Series

8. Reference number

Reference numbers shall be set to individual NSK linear guide when its specifications are finalized, and it is indicated on its specification drawing.

Please specify the reference number, except design serial number, to identify the product when ordering, requiring estimates, or inquiring about specifications from NSK.

	LA	35	0840	AL	C	2	-**	P6	3	
Series name										
Size										Preload code (See page A283)
Rail length (mm)										3: Z3, 4: Z4
Ball slide shape code (See page A282)										Accuracy code (See Table 15)
Material/surface treatment code (See Table 14)										Design serial number
										Added to the reference number.
										Number of ball slides per rail

Table 14 Material/surface treatment code

Code	Description
C	Special high carbon steel (NSK standard)
D	Special high carbon steel with surface treatment
Z	Other, special

Table 15 Accuracy code

Accuracy	Standard (Without NSK K1)	With NSK K1
Ultra precision grade	P3	K3
Super precision grade	P4	K4
High precision grade	P5	K5
Precision grade	P6	K6

Note Refer to pages A38 for NSK K1 lubrication unit.




A-5-3.3 LA Series


9. Dimensions

LA-AL (High-load type / Standard)

LA-BL (Super-high-load type / Long)

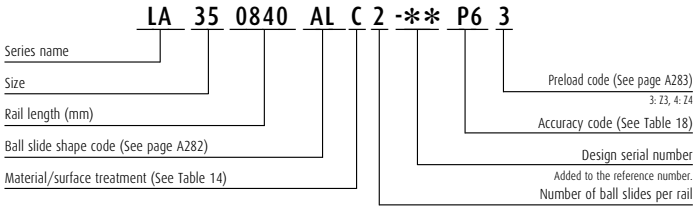

Front view of AL and BL types




Model No.	Assembly			Ball slide											Width	Height	
	Height		W ₂	Width	Length		Mounting hole			L ₁	K	T	Grease fitting				
	H	E			L	B	J	M × pitch × l	Hole size				T ₁	N			W ₁
LA25AL	36	5.5	12.5	48	79.8	35	35	M6×1×7	58	30.5	8	M6×0.75	6	11	23	22	
LA25BL	36	5.5	12.5	48	107.8	35	50	M6×1×7	86	30.5	8	M6×0.75	6	11	23	22	
LA30AL	42	7.5	16	60	100.2	40	40	M8×1.25×10	72	34.5	11	M6×0.75	6.5	11	28	28	
LA30BL	42	7.5	16	60	126.2	40	60	M8×1.25×10	98	34.5	11	M6×0.75	6.5	11	28	28	
LA35AL	48	7.5	18	70	110.6	50	50	M8×1.25×10	80	40.5	15	M6×0.75	8	11	34	30.8	
LA35BL	48	7.5	18	70	144.6	50	72	M8×1.25×10	114	40.5	15	M6×0.75	8	11	34	30.8	
LA45AL	60	10	20.5	86	141.4	60	60	M10×1.5×16	105	50	17	Rc1/8	10	13	45	36	
LA45BL	60	10	20.5	86	173.4	60	80	M10×1.5×16	137	50	17	Rc1/8	10	13	45	36	
LA55AL	70	12	23.5	100	165.4	75	75	M12×1.75×16	126	58	18	Rc1/8	11	13	53	43.2	
LA55BL	70	12	23.5	100	203.4	75	95	M12×1.75×16	164	58	18	Rc1/8	11	13	53	43.2	


Notes

1) LA Series does not have a ball retainer. Be aware that balls fall out when the ball slide is withdrawn from the rail.

Side view of AL type



Side view of BL type

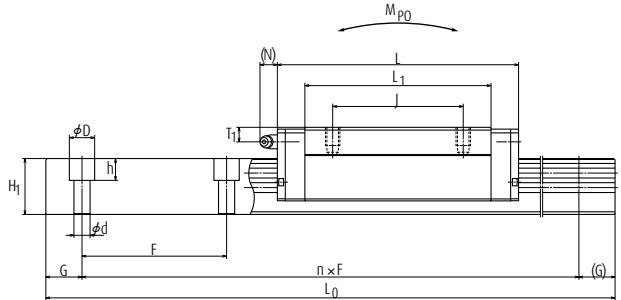

Unit: mm

Rail				Basic load rating								Weight	
Pitch F	Mounting bolt hole d x D x h	G (reference)	Maximum length L _{0max}	2) Dynamic		Static	M _{RO}	Static moment (N-m)				Ball slide (kg)	Rail (kg/m)
				[50km] C ₅₀ (N)	[100km] C ₁₀₀ (N)	C ₀ (N)		M _{PO}		M _{YO}			
								One slide	Two slides	One slide	Two slides		
60	7x11x9	20	3 960	30 000	23 900	50 000	290	410	2 490	410	2 490	0.5	3.7
60	7x11x9	20	3 960	40 500	32 500	77 000	445	935	5 000	935	5 000	0.8	3.7
80	9x14x12	20	4 000	47 000	37 000	77 500	535	820	4 800	820	4 800	0.8	5.8
80	9x14x12	20	4 000	58 000	46 000	105 000	725	1 470	8 050	1 470	8 050	1.2	5.8
80	9x14x12	20	4 000	61 500	49 000	98 000	845	1 130	6 750	1 130	6 750	1.3	7.7
80	9x14x12	20	4 000	80 500	64 000	143 000	1 240	2 330	12 500	2 330	12 500	1.6	7.7
105	14x20x17	22.5	3 990	91 000	72 000	148 000	1 840	2 210	12 900	2 210	12 900	2.5	12.0
105	14x20x17	22.5	3 990	111 000	88 000	197 000	2 460	3 850	20 600	3 850	20 600	3.2	12.0
120	16x23x20	30	3 960	139 000	111 000	215 000	3 150	3 800	22 000	3 800	22 000	3.9	17.2
120	16x23x20	30	3 960	172 000	137 000	292 000	4 250	6 800	36 000	6 800	36 000	5.1	17.2


2) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)

C₅₀: the basic dynamic load rating for 50 km rated fatigue life


C₁₀₀: the basic dynamic load rating for 100 km rated fatigue life

A-5-3.3 LA Series

LA-AN (High-load type / Standard)
 LA-BN (Super-high-load type / Long)

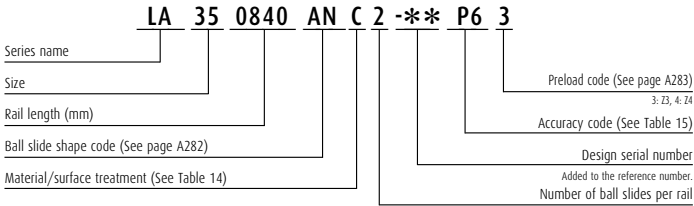


Front view of AN and BN types




Model No.	Assembly			Ball slide											Width	Height
	Height	E	W ₂	Width	Length	Mounting hole			L ₁	K	T	Grease fitting				
						B	J	M × pitch × ℓ				Hole size	T ₁	N		
LA25AN	40	5.5	12.5	48	79.8	35	35	M6×1×10	58	34.5	12	M6×0.75	10	11	23	22
LA25BN	40	5.5	12.5	48	107.8	35	50	M6×1×10	86	34.5	12	M6×0.75	10	11	23	22
LA30AN	45	7.5	16	60	100.2	40	40	M8×1.25×11	72	37.5	14	M6×0.75	9.5	11	28	28
LA30BN	45	7.5	16	60	126.2	40	60	M8×1.25×11	98	37.5	14	M6×0.75	9.5	11	28	28
LA35AN	55	7.5	18	70	110.6	50	50	M8×1.25×12	80	47.5	15	M6×0.75	15	11	34	30.8
LA35BN	55	7.5	18	70	144.6	50	72	M8×1.25×12	114	47.5	15	M6×0.75	15	11	34	30.8
LA45AN	70	10	20.5	86	141.4	60	60	M10×1.5×16	105	60	17	Rc1/8	20	13	45	36
LA45BN	70	10	20.5	86	173.4	60	80	M10×1.5×16	137	60	17	Rc1/8	20	13	45	36
LA55AN	80	12	23.5	100	165.4	75	75	M12×1.75×18	126	68	18	Rc1/8	21	13	53	43.2
LA55BN	80	12	23.5	100	203.4	75	95	M12×1.75×18	164	68	18	Rc1/8	21	13	53	43.2
LA65AN	90	14	31.5	126	196.2	76	70	M16×2×19	147	76	22	Rc1/8	19	13	63	55
LA65BN	90	14	31.5	126	256.2	76	120	M16×2×19	207	76	22	Rc1/8	19	13	63	55

Notes 1) LA Series does not have a ball retainer. Be aware that balls fall out when the ball slide is withdrawn from the rail.

Side view of AN type



Side view of BN type

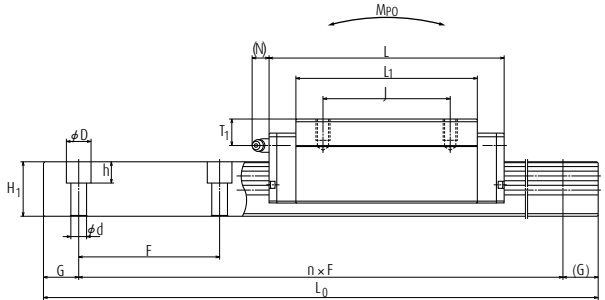

Unit: mm

Rail				Basic load rating								Weight	
Pitch F	Mounting bolt hole d × D × h	G (reference)	Maximum length L _{0max}	2) Dynamic		Static C ₀ (N)	M _{R0}	Static moment (N-m)				Ball slide (kg)	Rail (kg/m)
				[50km] C ₅₀ (N)	[100km] C ₁₀₀ (N)			M _{P0}		M _{Y0}			
								One slide	Two slides	One slide	Two slides		
60	7×11×9	20	3 960	30 000	23 900	50 000	290	410	2 490	410	2 490	0.6	3.7
60	7×11×9	20	3 960	40 500	32 500	77 000	445	935	5 000	935	5 000	0.9	3.7
80	9×14×12	20	4 000	47 000	37 000	77 500	535	820	4 800	820	4 800	0.9	5.8
80	9×14×12	20	4 000	58 000	46 000	105 000	725	1 470	8 050	1 470	8 050	1.3	5.8
80	9×14×12	20	4 000	61 500	49 000	98 000	845	1 130	6 750	1 130	6 750	1.5	7.7
80	9×14×12	20	4 000	80 500	64 000	143 000	1 240	2 330	12 500	2 330	12 500	2.1	7.7
105	14×20×17	22.5	3 990	91 000	72 000	148 000	1 840	2 210	12 900	2 210	12 900	3.0	12.0
105	14×20×17	22.5	3 990	111 000	88 000	197 000	2 460	3 850	20 600	3 850	20 600	3.9	12.0
120	16×23×20	30	3 960	139 000	111 000	215 000	3 150	3 800	22 000	3 800	22 000	4.7	17.2
120	16×23×20	30	3 960	172 000	137 000	292 000	4 250	6 800	36 000	6 800	36 000	6.1	17.2
150	18×26×22	35	3 900	260 000	206 000	420 000	7 300	9 050	51 000	9 050	51 000	7.7	25.9
150	18×26×22	35	3 900	340 000	269 000	615 000	10 700	18 700	95 000	18 700	95 000	10.8	25.9


2) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)

C₅₀: the basic dynamic load rating for 50 km rated fatigue life


C₁₀₀: the basic dynamic load rating for 100 km rated fatigue life

A-5-3.3 LA Series

LA-EL (High-load type / Standard)
LA-GL (Super-high-load type / Long)

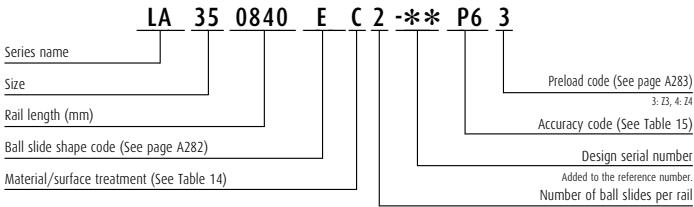


Front view of EL and GL types




Model No.	Assembly			Ball slide											Width	Height		
	Height	E	W ₂	Width	Length	Mounting hole			L ₁	K	T	Grease fitting					W ₁	H ₁
						B	J	M × pitch × l				Hole size	T ₁	N				
LA25EL	36	5.5	23.5	70	79.8	57	45	M8×1.25×12	58	30.5	11	M6×0.75	6	11	23	22		
LA25GL	36	5.5	23.5	70	107.8	57	45	M8×1.25×12	86	30.5	11	M6×0.75	6	11	23	22		
LA30EL	42	7.5	31	90	100.2	72	52	M10×1.5×16	72	34.5	11	M6×0.75	6.5	11	28	28		
LA30GL	42	7.5	31	90	126.2	72	52	M10×1.5×16	98	34.5	11	M6×0.75	6.5	11	28	28		
LA35EL	48	7.5	33	100	110.6	82	62	M10×1.5×15	80	40.5	12	M6×0.75	8	11	34	30.8		
LA35GL	48	7.5	33	100	144.6	82	62	M10×1.5×15	114	40.5	12	M6×0.75	8	11	34	30.8		
LA45EL	60	10	37.5	120	141.4	100	80	M12×1.75×18	105	50	13	Rc1/8	10	13	45	36		
LA45GL	60	10	37.5	120	173.4	100	80	M12×1.75×18	137	50	13	Rc1/8	10	13	45	36		
LA55EL	70	12	43.5	140	165.4	116	95	M14×2×21	126	58	15	Rc1/8	11	13	53	43.2		
LA55GL	70	12	43.5	140	203.4	116	95	M14×2×21	164	58	15	Rc1/8	11	13	53	43.2		
LA65EL	90	14	53.5	170	196.2	142	110	M16×2×24	147	76	22	Rc1/8	19	13	63	55		
LA65GL	90	14	53.5	170	256.2	142	110	M16×2×24	207	76	22	Rc1/8	19	13	63	55		

Notes 1) LA Series does not have a ball retainer. Be aware that balls fall out when the ball slide is withdrawn from the rail.

Side view of EL type



Side view of GL type

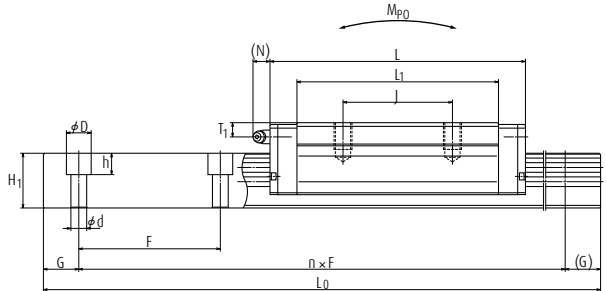

Unit: mm


Rail				Basic load rating								Weight	
Pitch F	Mounting bolt hole d × D × h	G (reference)	Maximum length L _{0max}	2) Dynamic		Static C ₀ (N)	M _{RO}	Static moment (N-m)				Ball slide (kg)	Rail (kg/m)
				[50km] C ₅₀ (N)	[100km] C ₁₀₀ (N)			M _{PO}		M _{YO}			
								One slide	Two slides	One slide	Two slides		
60	7×11×9	20	3 960	30 000	23 900	50 000	290	410	2 490	410	2 490	0.8	3.7
60	7×11×9	20	3 960	40 500	32 500	77 000	445	935	5 000	935	5 000	1.1	3.7
80	9×14×12	20	4 000	47 000	37 000	77 500	535	820	4 800	820	4 800	1.3	5.8
80	9×14×12	20	4 000	58 000	46 000	105 000	725	1 470	8 050	1 470	8 050	1.8	5.8
80	9×14×12	20	4 000	61 500	49 000	98 000	845	1 130	6 750	1 130	6 750	1.9	7.7
80	9×14×12	20	4 000	80 500	64 000	143 000	1 240	2 330	12 500	2 330	12 500	2.6	7.7
105	14×20×17	22.5	3 990	91 000	72 000	148 000	1 840	2 210	12 900	2 210	12 900	3.3	12.0
105	14×20×17	22.5	3 990	111 000	88 000	197 000	2 460	3 850	20 600	3 850	20 600	4.3	12.0
120	16×23×20	30	3 960	139 000	111 000	215 000	3 150	3 800	22 000	3 800	22 000	5.5	17.2
120	16×23×20	30	3 960	172 000	137 000	292 000	4 250	6 800	36 000	6 800	36 000	7.2	17.2
150	18×26×22	35	3 900	260 000	206 000	420 000	7 300	9 050	51 000	9 050	51 000	11.0	25.9
150	18×26×22	35	3 900	340 000	269 000	615 000	10 700	18 700	95 000	18 700	95 000	15.5	25.9

2) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)


C₅₀: the basic dynamic load rating for 50 km rated fatigue lifeC₁₀₀: the basic dynamic load rating for 100 km rated fatigue life

A-5-3.3 LA Series

LA-FL (High-load type / Standard)
 LA-HL (Super-high-load type / Long)

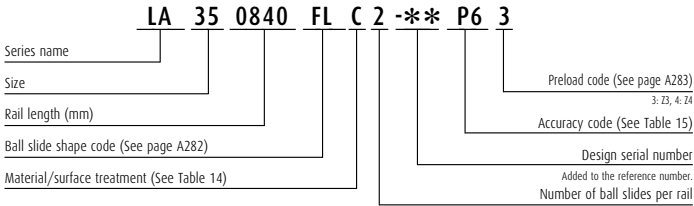


Front view of FL and HL types




Model No.	Assembly			Ball slide											Width	Height
	Height	E	W ₂	Width	Length	Mounting hole			L ₁	K	T	Grease fitting				
						B	J	M × pitch × ℓ				Hole size	T ₁	N		
LA25FL	36	5.5	23.5	70	79.8	57	45	7×10	58	30.5	11	M6×0.75	6	11	23	22
LA25HL	36	5.5	23.5	70	107.8	57	45	7×10	86	30.5	11	M6×0.75	6	11	23	22
LA30FL	42	7.5	31	90	100.2	72	52	9×12	72	34.5	11	M6×0.75	6.5	11	28	28
LA30HL	42	7.5	31	90	126.2	72	52	9×12	98	34.5	11	M6×0.75	6.5	11	28	28
LA35FL	48	7.5	33	100	110.6	82	62	9×13	80	40.5	12	M6×0.75	8	11	34	30.8
LA35HL	48	7.5	33	100	144.6	82	62	9×13	114	40.5	12	M6×0.75	8	11	34	30.8
LA45FL	60	10	37.5	120	141.4	100	80	11×15	105	50	13	Rc1/8	10	13	45	36
LA45HL	60	10	37.5	120	173.4	100	80	11×15	137	50	13	Rc1/8	10	13	45	36
LA55FL	70	12	43.5	140	165.4	116	95	14×18	126	58	15	Rc1/8	11	13	53	43.2
LA55HL	70	12	43.5	140	203.4	116	95	14×18	164	58	15	Rc1/8	11	13	53	43.2
LA65FL	90	14	53.5	170	196.2	142	110	16×23	147	76	22	Rc1/8	19	13	63	55
LA65HL	90	14	53.5	170	256.2	142	110	16×23	207	76	22	Rc1/8	19	13	63	55

Notes 1) LA Series does not have a ball retainer. Be aware that balls fall out when the ball slide is withdrawn from the rail.

Side view of FL type



Side view of HL type

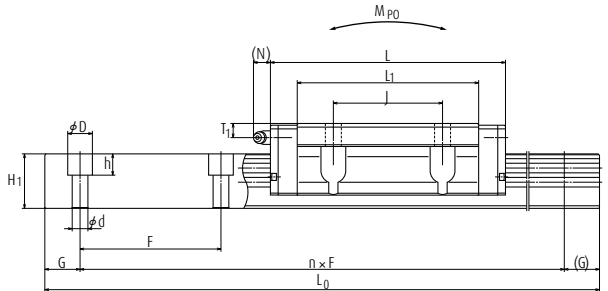

Unit: mm

Rail				Basic load rating								Weight	
Pitch F	Mounting bolt hole d × D × h	G (reference)	Maximum length L _{0max}	2) Dynamic		Static C ₀ (N)	M _{R0}	Static moment (N-m)				Ball slide (kg)	Rail (kg/m)
				[50km] C ₅₀ (N)	[100km] C ₁₀₀ (N)			M _{P0}		M _{Y0}			
								One slide	Two slides	One slide	Two slides		
60	7×11×9	20	3 960	30 000	23 900	50 000	290	410	2 490	410	2 490	0.8	3.7
60	7×11×9	20	3 960	40 500	32 500	77 000	445	935	5 000	935	5 000	1.1	3.7
80	9×14×12	20	4 000	47 000	37 000	77 500	535	820	4 800	820	4 800	1.3	5.8
80	9×14×12	20	4 000	58 000	46 000	105 000	725	1 470	8 050	1 470	8 050	1.8	5.8
80	9×14×12	20	4 000	61 500	49 000	98 000	845	1 130	6 750	1 130	6 750	1.9	7.7
80	9×14×12	20	4 000	80 500	64 000	143 000	1 240	2 330	12 500	2 330	12 500	2.6	7.7
105	14×20×17	22.5	3 990	91 000	72 000	148 000	1 840	2 210	12 900	2 210	12 900	3.3	12.0
105	14×20×17	22.5	3 990	111 000	88 000	197 000	2 460	3 850	20 600	3 850	20 600	4.3	12.0
120	16×23×20	30	3 960	139 000	111 000	215 000	3 150	3 800	22 000	3 800	22 000	5.5	17.2
120	16×23×20	30	3 960	172 000	137 000	292 000	4 250	6 800	36 000	6 800	36 000	7.2	17.2
150	18×26×22	35	3 900	260 000	206 000	420 000	7 300	9 050	51 000	9 050	51 000	11.0	25.9
150	18×26×22	35	3 900	340 000	269 000	615 000	10 700	18 700	95 000	18 700	95 000	15.5	25.9

2) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)

C₅₀: the basic dynamic load rating for 50 km rated fatigue life

C₁₀₀: the basic dynamic load rating for 100 km rated fatigue life

A-5-4 High-Accuracy Series



1. HA Series.....	Page A301
2. HS Series.....	A315

HA Series

A-5-4.1 HA Series



1. Features

(1) High motion accuracy

High motion accuracy is achieved in both narrow and wide ranges by the adoption of ultra-long ball slides and the optimum design of the ball recirculation component.

(2) Ball passage vibration reduced to one-third of our conventional models

Our extensive performance tests show ball passage vibration has been reduced to one-third of our conventional models, dramatically improving straightness in table unit.

(3) Installation of rail with greater accuracy

Increased counterbore depth of the rail mounting hole reduces rail deflection, which is caused by bolt tightening when fixing the rail to the mounting base to 50% or less. This feature restrains the pitching motion of ball slide whose frequency matches to the mounting hole pitch. In addition, the length of mounting hole pitch has been reduced by one-half of the conventional models, so the rail can be more accurately installed in position.

(4) High rigidity and load capacity with lower friction

High rigidity, high load capacity and low friction are achieved by increasing the number of balls.

(5) Compact design

Reduced body size enables more compact machinery.

(6) Four-way equal load distribution

Contact angle is set at 45 degrees in all grooves, dispersing the load to four ball rows irrespective of load direction. This realizes equal rigidity and load carrying capacity in vertical and lateral directions and provides well-balanced design.

(7) Strong against shock load

Load from any direction, vertical and lateral, is received by four ball rows at all times. The number of the ball row which receives the load is larger than in other linear guides, making this series stronger against shock load.

(8) High accuracy at manufacturing

Fixing the measuring rollers to the ball grooves is easy thanks to the Gothic arch groove. Ball-groove measuring is accurate and simple. This benefits a highly precise and stable manufacturing.

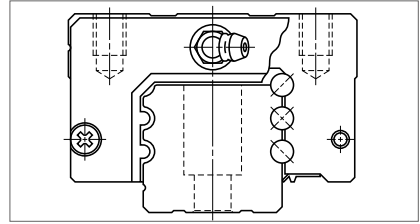


Fig. 1 HA Series

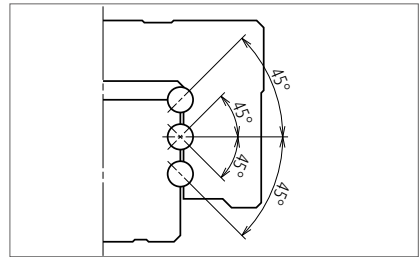


Fig. 2 Super rigidity design

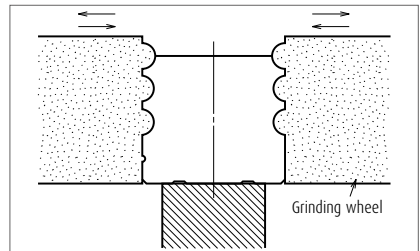


Fig. 3 Rail grinding

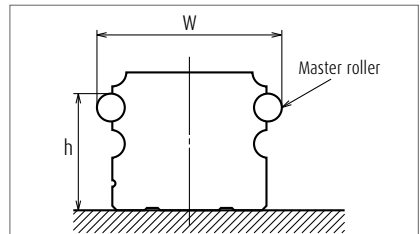


Fig. 4 Measuring groove accuracy

Measurement results of ball passage vibration

Ball passage vibration can translate into posture changes in the ball slide which result from ball passage (circulation). In the HA Series, this vibration has been substantially reduced to one-third of conventional models.


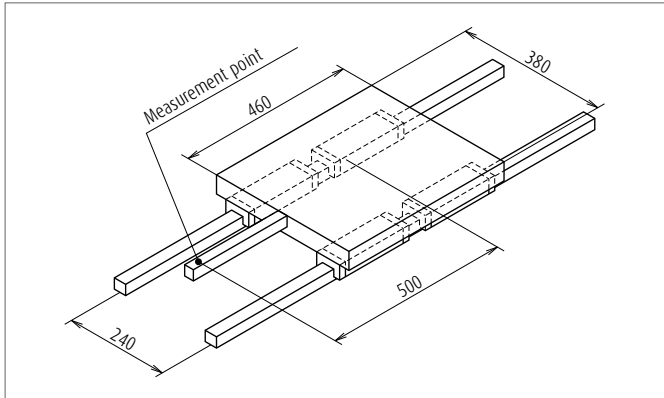



Fig. 5 Schematic view of measurement of ball passage vibration

HA Series

Model No.: HA30
Preload: Z3
Table dimensions: 460 mm × 380 mm



The same table is used.

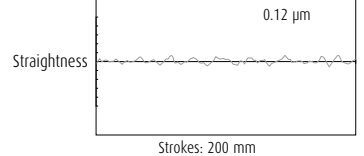

Conventional Series

Model No.: LA30
Preload: Z3
Table dimensions: 460 mm × 380 mm

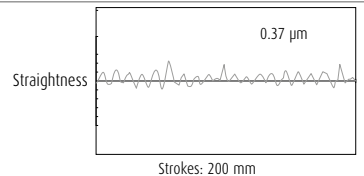



Fig. 6 Measurement results of HA Series and conventional Series

HA Series

2. Ball slide shape

Ball slide Model	Shape/installation method	Type
AN		AN
AL		AL
EM		EM

3. Accuracy and preload

(1) Running parallelism of ball slide

Table 1

Unit: μm

Rail length (mm)		Preloaded assembly		
		Ultra precision P3	Super precision P4	High precision P5
over	or less			
-	200	2	2	4
200	- 250	2	2.5	5
250	- 315	2	2.5	5
315	- 400	2	3	6
400	- 500	2	3	6
500	- 630	2	3.5	7
630	- 800	2	4.5	8
800	- 1 000	2.5	5	9
1 000	- 1 250	3	6	10
1 250	- 1 600	4	7	11
1 600	- 2 000	4.5	8	13
2 000	- 2 500	5	10	15
2 500	- 3 150	6	11	17
3 150	- 4 000	9	16	23

(2) Accuracy Standard

Three accuracy grades are available: Ultra precision P3, Super precision P4 and High precision P5.

Table 2

Unit: μm

Accuracy grade	Ultra precision P3	Super precision P4	High precision P5
Characteristics			
Mounting height H	± 10	± 10	± 20
Variation of H (All ball slides on a set of rails)	3	5	7
Mounting width W2 or W3	± 15	± 15	± 25
Variation of W2 or W3 (All ball slides on reference rail)	3	7	10
Running parallelism of surface C to surface A	Refer to Table 1 and Fig. 7		
Running parallelism of surface D to surface B			

(3) Assembled accuracy

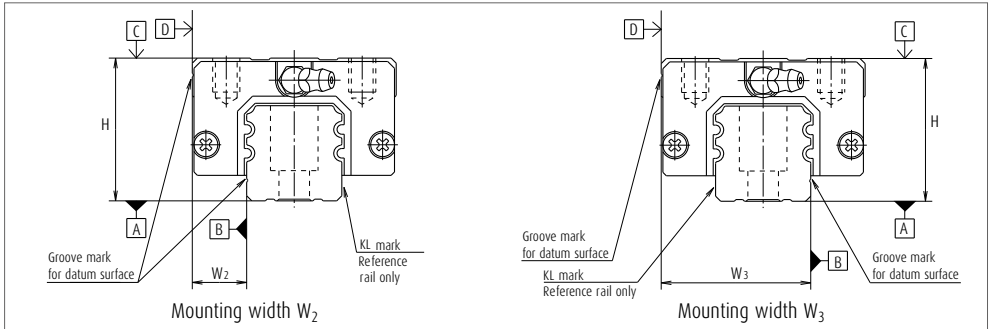


Fig. 7

(4) Preload and rigidity

Slight preload Z1 and Medium preload Z3 are available for preload, which can be selected for specific applications.

Table 3

Model No.	Preload (N)		Rigidity (N/ μm)	
	Slight preload (Z1)	Medium preload (Z3)	Slight preload (Z1)	Medium preload (Z3)
HA25	735	2 990	635	1 030
HA30	1 030	4 400	880	1 270
HA35	1 470	6 100	1 030	1 620
HA45	1 960	8 150	1 230	2 060
HA55	3 150	13 100	1 520	2 450

4. Maximum rail length

Table 4 shows the limitation. The dimension in parenthesis is for stainless steel products. However, the limitations vary by accuracy grades.

Table 4 Length limitations of rails

Unit: mm

Size	25	30	35	45	55
Series					
HA	3 960	4 000	4 000	3 990	3 960

Note: Rails can be butted if user requirement exceeds the rail length shown in the table. Please consult NSK.

5. Installation

(1) Permissible values of mounting error

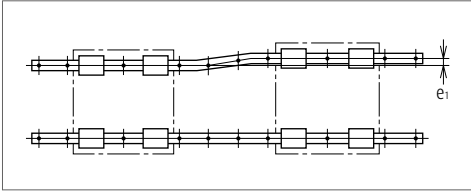


Fig. 8

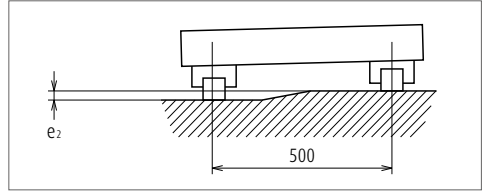


Fig. 9

Table 5

Unit: μm

Value	Preload	Model No.				
		HA25	HA30	HA35	HA45	HA55
Permissible values of parallelism in two rails e_1	Z1	20	20	23	26	34
	Z3	15	14	17	19	25
Permissible values of parallelism (height) in two rails e_2	Z1, Z3	250 $\mu\text{m}/500 \text{ mm}$				

(2) Shoulder height of the mounting surface and corner radius r

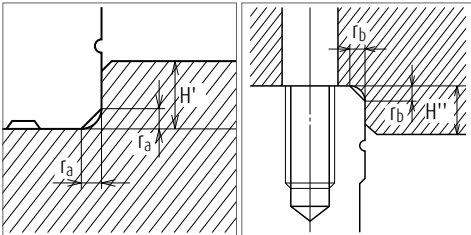


Fig. 10 Shoulder for the rail datum surface




Fig. 11 Shoulder for the ball slide datum surface

Table 6

Unit: mm

Model No.	Corner radius (maximum)		Shoulder height	
	r_a	r_b	H'	H''
HA25	0.5	0.5	5	5
HA30	0.5	0.5	6	6
HA35	0.5	0.5	6	6
HA45	0.7	0.7	8	8
HA55	0.7	0.7	10	10

6. Lubrication components

Refer to pages A38 and D13 for linear guide lubrication.

(1) Types of lubrication accessories

Fig. 12 and **Table 7** show grease fittings and tube fittings. We provide lubrication accessories with extended thread body length (L) for the addition of dust-proof accessories such as NSK K1 lubrication unit, double seal and protector. We provide a suitable lubrication accessory for the special requirement on dust-proof accessories.

Consult NSK for a lubrication accessory with extended length of thread body for your convenience of replenishing lubricant. When you require stainless lubrication accessories, please ask NSK.

(2) Mounting position of lubrication accessories

The standard position of grease fittings is the end face of ball slide. We mount them on the side of end cap for an option.

(Fig. 13)

Please consult NSK for installation of grease or tube fittings to the ball slide body or the side of end cap.

When using a piping unit with thread of $M6 \times 1$, you require a connector to connect to a grease fitting mounting hole with $M6 \times 0.75$. The connector is available from NSK.

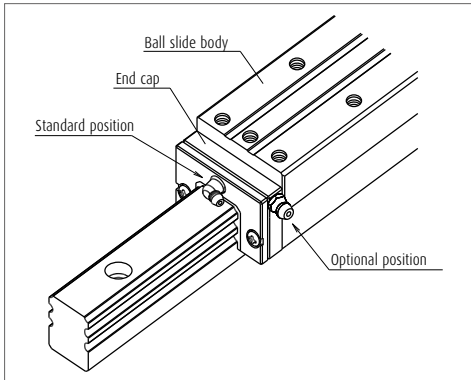


Fig. 13 Mounting position of lubrication accessories

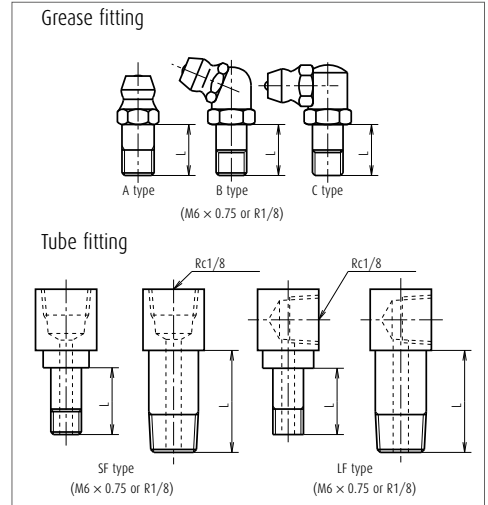


Fig. 12 Grease fitting and tube fitting

Table 7

Unit: mm

Model No.	Dust-proof specification	Dimension L		
		Grease fitting	Tube fitting	
			SF Type	LF Type
HA25	Standard	5	5	5
HA25	With NSK K1	14	12	12
HA25	Double seal	10	9	9
HA25	Protector	10	9	9
HA30	Standard	5	6	6
HA30	With NSK K1	14	12	13
HA30	Double seal	12	10	11
HA30	Protector	12	11	11
HA35	Standard	5	6	6
HA35	With NSK K1	14	12	13
HA35	Double seal	12	10	11
HA35	Protector	12	11	11
HA45	Standard	8	13.5	17
HA45	With NSK K1	18	22	21.5
HA45	Double seal	14	18	17
HA45	Protector	14	16	17
HA55	Standard	8	13.5	17
HA55	With NSK K1	18	22	21.5
HA55	Double seal	14	18	17
HA55	Protector	14	16	17

HA Series

7. Dust-proof components

(1) Standard Specification

The HA Series can be readily used as they have a dust protection means for normal conditions. As the standard equipment, the ball slides have an end seal on both ends, bottom seals at the bottom, and an inner seal in inside.

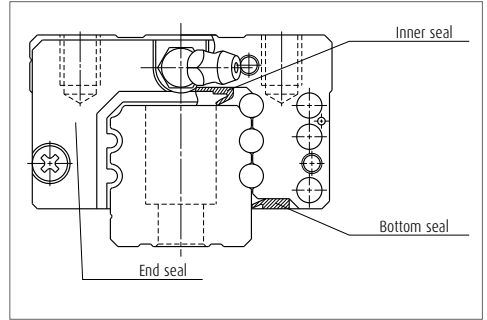


Fig. 14

Table 8 Seal friction per ball slide (maximum value)

		Unit: N				
Series	Size	25	30	35	45	55
HA		17	17	19	21	22

(2) NSK K1 lubrication unit

Table 9 shows the dimensions of linear guides equipped with the NSK K1 lubrication unit.

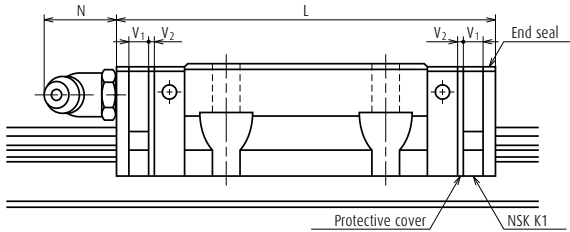


Table 9

							Unit: mm
Model No.	Ball slide model	Standard ball slide length	Ball slide length installed with two NSK K1 L	Per NSK K1 thickness V_1	Protective cover thickness V_2	Protruding area of the grease fitting N	
HA25	AN, EM	147.8	159.8	5.0	1.0	(14)	
HA30	AN, EM	177.2	190.2	5.5	1.0	(14)	
HA35	AN, AL, EM	203.6	216.6	5.5	1.0	(14)	
HA45	AN, AL, EM	233.4	248.4	6.5	1.0	(15)	
HA55	AN, AL, EM	284.4	299.4	6.5	1.0	(15)	

Note Ball slide length equipped with NSK K1 = (Standard ball slide length) + (Thickness of NSK K1, $V_1 \times$ Number of NSK K1) + (Thickness of the protective cover $V_2 \times 2$)

(3) Double seal and protector

For the HA Series, double seal and protectors can be installed only before shipping from the factory. Please consult with NSK when you require dust tight protection.

Table 10 shows the increased thickness of V_3 and V_4 when the end seal and the protector are installed.

Table 10

Unit: mm

Model No.	Thickness of end seal: V_3	Thickness of protector: V_4
HA25	3.2	3.6
HA30	4.4	4.2
HA35	4.4	4.2
HA45	5.5	4.9
HA55	5.5	4.9

(4) Caps to plug the rail mounting bolt hole

Table 11 Caps to plug rail bolt hole

Model No.	Bolt to secure rail	Cap reference No.	Quantity /case
HA25	M6	LG-CAP/M6	20
HA30, HA35	M8	LG-CAP/M8	20
HA45	M12	LG-CAP/M12	20
HA55	M14	LG-CAP/M14	20

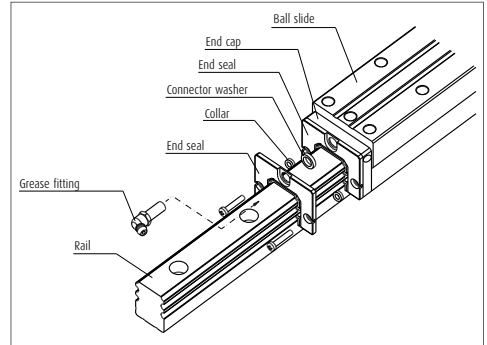


Fig. 15 Double seal

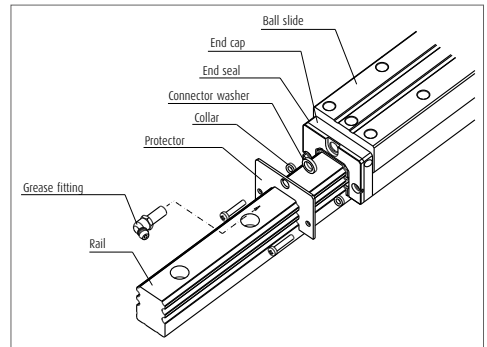


Fig. 16 Protector

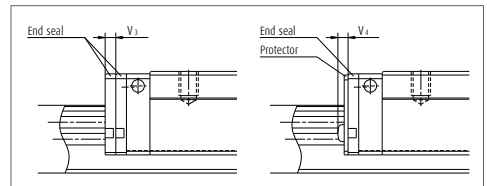


Fig. 17

HA Series

8. Reference number

Reference numbers shall be set to individual NSK linear guide when its specifications are finalized, and it is indicated on its specification drawing.

Please specify the reference number, except design serial number, to identify the product when ordering, requiring estimates, or inquiring about specifications from NSK.

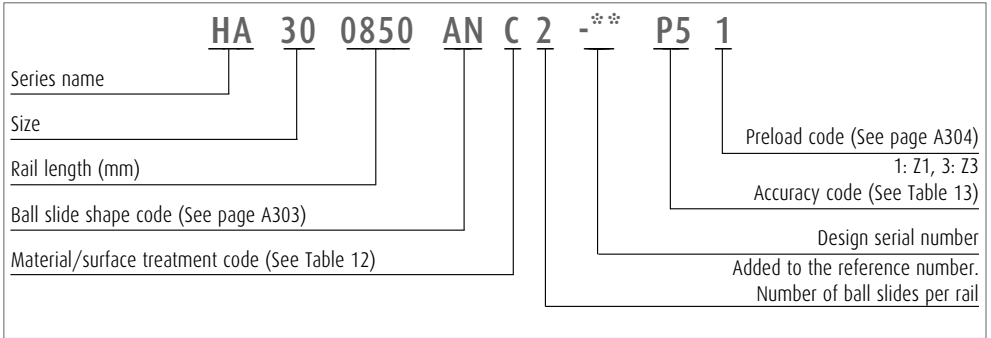


Table 12 Material/surface treatment code

Code	Description
C	Special high carbon steel (NSK standard)
D	Special high carbon steel with surface treatment
Z	Other, special

Table 13 Accuracy code

Accuracy	Standard (Without NSK K1)	With NSK K1
Ultra precision grade	P3	K3
Super precision grade	P4	K4
High precision grade	P5	K5

Note Refer to page A38 for NSK K1 lubrication unit.




HA Series

9. Dimensions


HA-AN

HA-AL

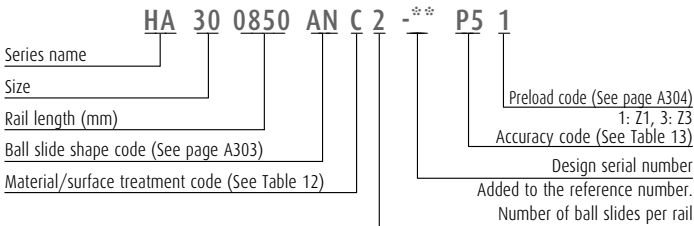

Front view of AL type


Side view of AL type

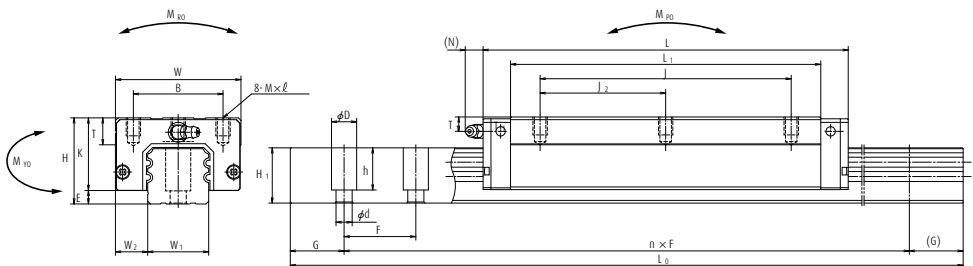


Model No.	Assembly			Ball slide											Rail		
	Height H	E	W ₂	Width W	Length L	Mounting hole				L ₁	K	T	Grease fitting			W ₁	H ₁
						B	J	J ₂	M × pitch × ℓ				Hole size	T ₁	N		
HA25AN	40	5.5	12.5	48	147.8	35	100	50	M6×1.0×10	126	34.5	12	M6×0.75	10	11	23	22
HA30AN	45	7.5	16	60	177.2	40	120	60	M8×1.25×11	149	37.5	14	M6×0.75	9.5	11	28	28
HA35AN	55	7.5	18	70	203.6	50	140	70	M8×1.25×12	173	47.5	15	M6×0.75	15	11	34	30.8
HA35AL	48	7.5	18	70	203.6	50	140	70	M8×1.25×10	173	40.5	15	M6×0.75	8	11	34	30.8
HA45AN	70	10	20.5	86	233.4	60	160	80	M10×1.5×16	197	60	17	Rc1/8	20	13	45	36
HA45AL	60	10	20.5	86	233.4	60	160	80	M10×1.5×16	197	50	17	Rc1/8	10	13	45	36
HA55AN	80	12	23.5	100	284.4	75	206	103	M12×1.75×18	245	68	18	Rc1/8	21	13	53	43.2
HA55AL	70	12	23.5	100	284.4	75	206	103	M12×1.75×16	245	58	18	Rc1/8	11	13	53	43.2

Notes 1) The HA Series does not have a ball retainer. Be aware that the balls fall out when a ball slide is withdrawn from the rail.

Front view of AN type



Side view of AN type

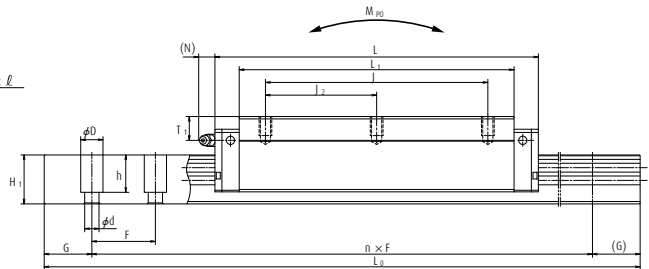

Unit: mm


Rail				Basic load rating								Weight	
Pitch F	Mounting bolt hole $d \times D \times h$	G (reference)	Maximum length L_{0max}	Dynamic		Static	M_{R0}	Static moment (N·m)				Ball slide (kg)	Rail (kg/m)
				[50km] $C_{50}(N)$	[100km] $C_{100}(N)$	C_0 (N)		M_{P0}		M_{Y0}			
								One slide	Two slides	One slide	Two slides		
30	7×11×16.5	20	3 960	54 000	43 000	115 000	670	2 060	10 100	2 060	10 100	1.2	3.7
40	9×14×21	20	4 000	79 500	63 500	166 000	1 140	3 550	17 400	3 550	17 400	1.8	5.8
40	9×14×23.5	20	4 000	111 000	88 000	226 000	1 950	5 650	27 100	5 650	27 100	3.0	7.7
40	9×14×23.5	20	4 000	111 000	88 000	226 000	1 950	5 650	27 100	5 650	27 100	2.6	7.7
52.5	14×20×27	22.5	3 990	147 000	117 000	295 000	3 700	8 450	40 500	8 450	40 500	6.0	12.0
52.5	14×20×27	22.5	3 990	147 000	117 000	295 000	3 700	8 450	40 500	8 450	40 500	5.0	12.0
60	16×23×32.5	30	3 960	232 000	184 000	445 000	6 500	15 400	75 000	15 400	75 000	9.4	17.2
60	16×23×32.5	30	3 960	232 000	184 000	445 000	6 500	15 400	75 000	15 400	75 000	7.8	17.2

2) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)


C_{50} : the basic dynamic load rating for 50 km rated fatigue life C_{100} ; the basic dynamic load rating for 100 km rated fatigue life

HA Series

HA-EM

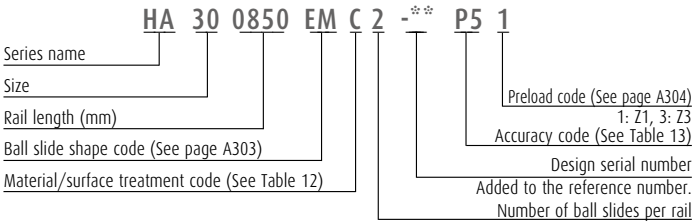


Front view of EM type

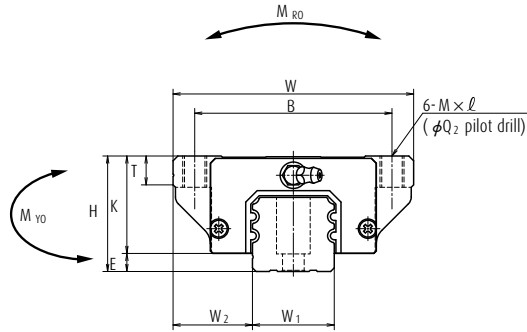

Model No.	Assembly			Ball slide											Rail			
	Height H	E	W ₂	Width W	Length L	Mounting hole					L ₁	K	T	Grease fitting			Width W ₁	Height H ₁
						B	J	J ₂	M × pitch × l	Q ₁				Hole size	T ₁	N		
HA25EM	36	5.5	23.5	70	147.8	57	100	50	M8×1.25×10	6.8	126	30.5	11	M6×0.75	6	11	23	22
HA30EM	42	7.5	31	90	177.2	72	120	60	M10×1.5×12	8.6	149	34.5	11	M6×0.75	6.5	11	28	28
HA35EM	48	7.5	33	100	203.6	82	140	70	M10×1.5×13	8.6	173	40.5	12	M6×0.75	8	11	34	30.8
HA45EM	60	10	37.5	120	233.4	100	160	80	M12×1.75×15	10.5	197	50	13	Rc1/8	10	13	45	36
HA55EM	70	12	43.5	140	284.4	116	206	103	M14×2×18	12.5	245	58	15	Rc1/8	11	13	53	43.2

Notes 1) The HA Series does not have a ball retainer. Be aware that the balls fall out when a ball slide is withdrawn from the rail.

Side view of EM type

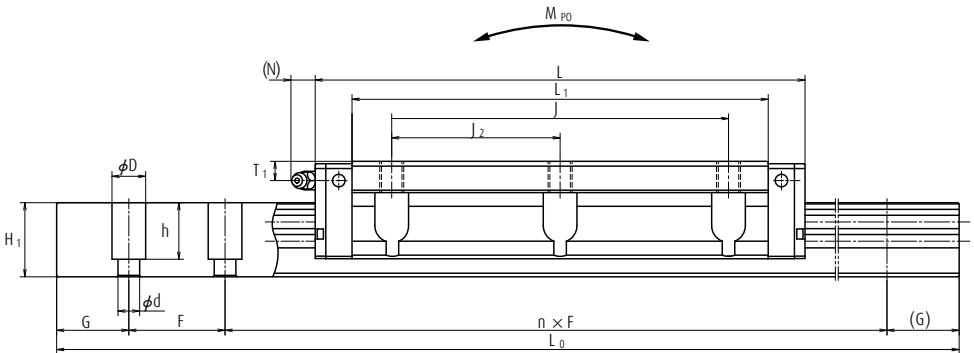

Unit: mm

Rail				Basic load rating								Weight	
Pitch F	Mounting bolt hole d × D × h	G (reference)	Maximum length L _{0max}	2)Dynamic		Static	M _{R0}	Static moment (N·m)				Ball slide (kg)	Rail (kg/m)
				[50km] C ₅₀ (N)	[100km] C ₁₀₀ (N)	C ₀ (N)		M _{PO}		M _{YO}			
								One slide	Two slides	One slide	Two slides		
30	7×11×16.5	20	3 960	54 000	43 000	115 000	670	2 060	10 100	2 060	10 100	1.6	3.7
40	9×14×21	20	4 000	79 500	63 500	166 000	1 140	3 550	17 400	3 550	17 400	2.6	5.8
52.5	9×14×23.5	20	4 000	111 000	88 000	226 000	1 950	5 650	27 100	5 650	27 100	3.8	7.7
60	14×20×27	22.5	3 990	147 000	117 000	295 000	3 700	8 450	40 500	8 450	40 500	6.6	12.0
60	16×23×32.5	30	3 960	232 000	184 000	445 000	6 500	15 400	75 000	15 400	75 000	11	17.2

2) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)

C₅₀: the basic dynamic load rating for 50 km rated fatigue life C₁₀₀; the basic dynamic load rating for 100 km rated fatigue life

HS Series

A-5-4.2 HS Series



1. Features

(1) High motion accuracy

High motion accuracy is achieved in both narrow and wide ranges by adopting ultra-long ball slides and optimum design features for the ball recirculation component.

(2) Ball passage vibration reduced to one-third of our conventional models

Tests show ball passage vibration has been reduced to one-third of our conventional models, dramatically improving straightness in table unit.

(3) Installation of rail with greater accuracy

Increased counterbore depth of the rail mounting hole reduces rail deflection, which is caused by bolt tightening when fixing the rail to the mounting base, to 50% or less. This feature restrains the pitching motion of ball slide whose frequency matches to the mounting hole pitch.

In addition, the mounting hole pitch has been reduced by one-half of the conventional models, so the rail can be more accurately installed in position.

(4) High rigidity and load capacity with lower friction

High rigidity, high load capacity and low friction are achieved by increasing the number of balls.

(5) Compact design

Reduced body size enables more compact machinery.

(6) High load carrying capacity to vertical direction

The contact angle is set at 50 degrees, increasing load carrying capacity as well as rigidity against the load in vertical direction.

(7) High resistance against impact load

The bottom ball groove is formed in Gothic arch and the center of the top and bottom grooves are offset as shown in Fig. 2. The vertical load is usually carried by top two ball rows at where balls are contacting at two points. Because of this design, the bottom ball rows will carry the load when a large impact load is applied as shown in Fig. 3. This assures high resistance to the impact load.

(8) High accuracy at manufacturing

As showing in Fig. 4, fixing the measuring rollers to the ball groove is easy thanks to the Gothic arch groove. This makes easy and accurate measuring of ball grooves.

(9) Improve rating life dramatically

New ball groove geometry is introduced, which has been developed by utilizing NSK's state-of-the-art tribological and analytical technologies. Due to the optimized distribution of contact surface pressures, the rating life has dramatically increased.

As compared with the conventional products, the load rating capacity has increased to 1.3 times, while the life span has increased to twice*1.

*1: Representative values of series.

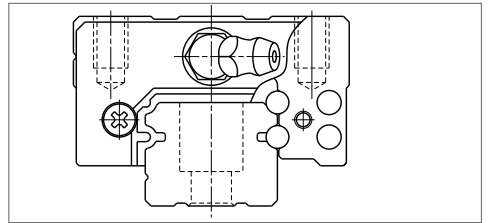


Fig. 1 HS Series

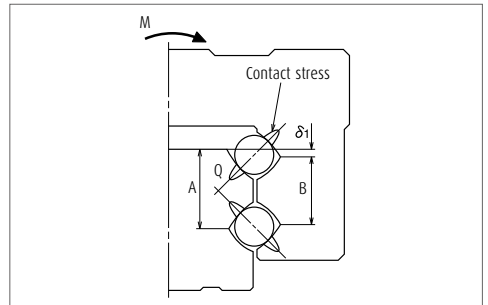


Fig. 2 Enlarged illustration: Offset Gothic arch

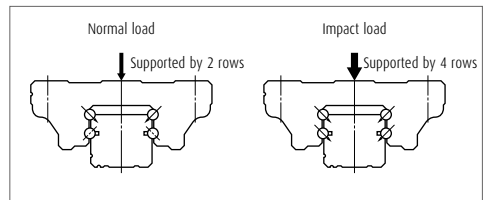


Fig. 3 When load is applied

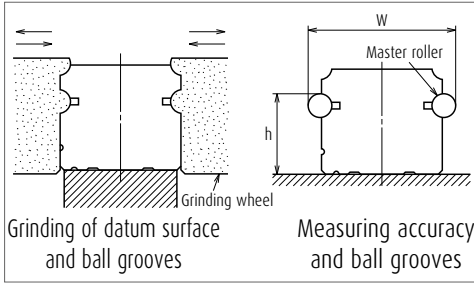


Fig. 4 Rail-grinding and measuring

Measurement results of ball passage vibration

Ball passage vibration can translate into posture changes in the ball slide which result from ball passage (circulation). In the HS Series, this vibration has been substantially reduced to one-third of conventional models.

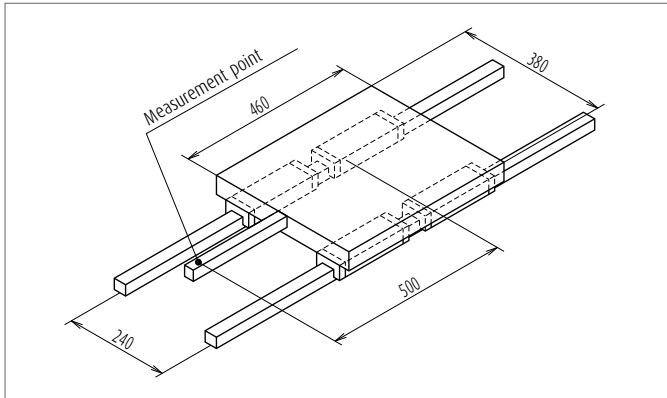


Fig. 5 Schematic view of measurement of ball passage vibration

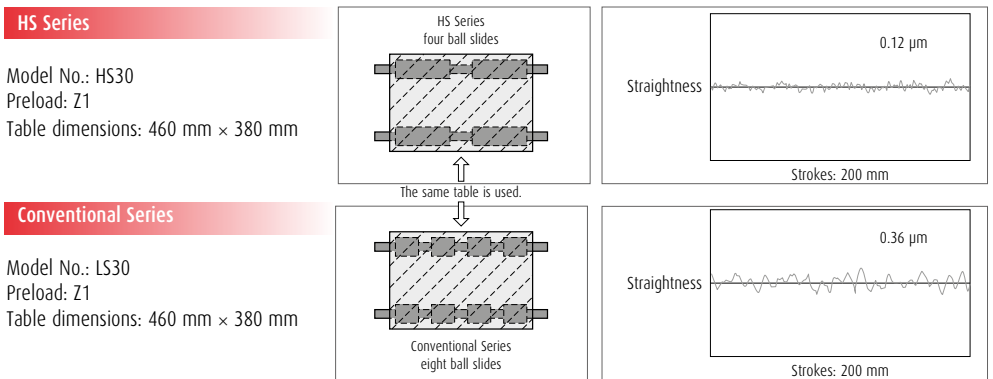
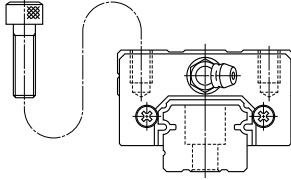
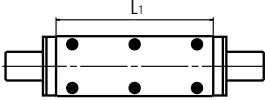
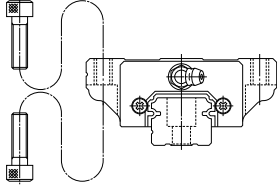
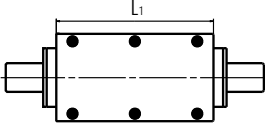


Fig. 6 Measurement results of HS Series and conventional Series

HS Series

2. Ball slide shape

Ball slide Model	Shape/installation method	Type
AL		AL 
EM		EM 

3. Accuracy and preload

(1) Running parallelism of ball slide

Table 1

Unit: μm

Rail length (mm)		Preloaded assembly		
		Ultra precision P3	Super precision P4	High precision P5
over	or less			
-	200	2	2	4
200	- 250	2	2.5	5
250	- 315	2	2.5	5
315	- 400	2	3	6
400	- 500	2	3	6
500	- 630	2	3.5	7
630	- 800	2	4.5	8
800	- 1 000	2.5	5	9
1 000	- 1 250	3	6	10
1 250	- 1 600	4	7	11
1 600	- 2 000	4.5	8	13
2 000	- 2 500	5	10	15
2 500	- 3 150	6	11	17
3 150	- 4 000	9	16	23

(2) Accuracy Standard

Three accuracy grades are available: Ultra precision P3, Super precision P4 and High precision P5.

Table 2

Unit: μm

Characteristics	Ultra precision P3	Super precision P4	High precision P5
Mounting height H	± 10	± 10	± 20
Variation of H (All ball slides on a set of rails)	3	5	7
Mounting width W2 or W3	± 15	± 15	± 25
Variation of W2 or W3 (All ball slides on reference rail)	3	7	10
Running parallelism of surface C to surface A	Refer to Table 1 and Fig. 7		
Running parallelism of surface D to surface B			

(3) Assembled accuracy

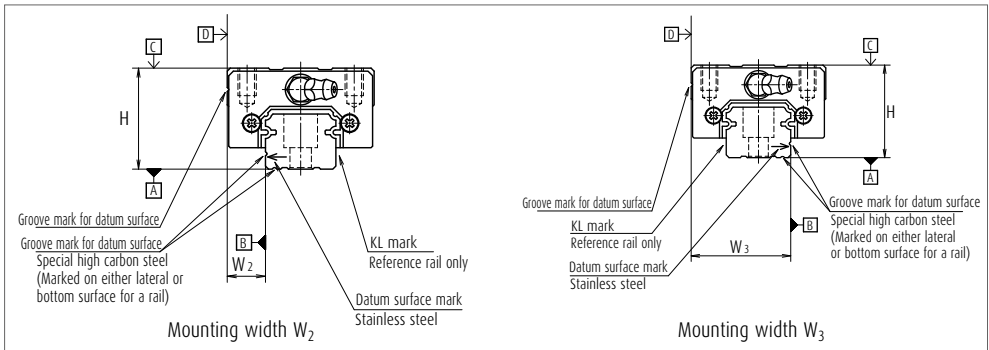


Fig. 7

(4) Preload and rigidity

Slight preload Z1 and Medium preload Z3 are available for preload, which can be selected for specific applications.

Table 3

Model No.	Preload (N)		Rigidity (N/ μm)			
			Vertical direction		Lateral direction	
	Slight preload (Z1)	Medium preload (Z3)	Slight preload (Z1)	Medium preload (Z3)	Slight preload (Z1)	Medium preload (Z3)
HS15	98	785	260	530	173	355
HS20	147	1 030	305	600	212	415
HS25	245	1 620	385	735	263	505
HS30	390	2 550	505	965	345	665
HS35	590	3 550	610	1 140	415	780

4. Maximum rail length

Table 4 shows the limitation. The dimension in parenthesis is for stainless steel products. However, the limitations vary by accuracy grades.

Table 2

Unit: mm

Series	Size	15	20	25	30	35
HS		2 000 (1 300)	3 960 (3 500)	3 960 (3 500)	4 000 (3 500)	4 000 (3 500)

Note Rails can be butted if user requirement exceeds the rail length shown in the table. Please consult NSK.

5. Installation

(1) Permissible values of mounting error

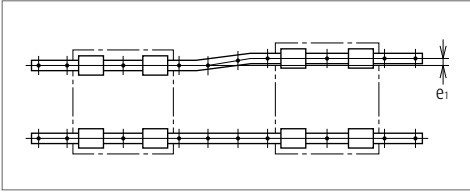


Fig. 8

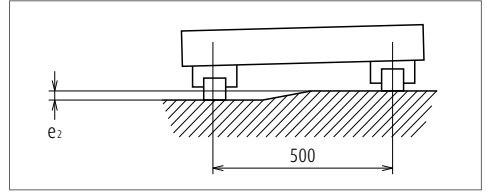


Fig. 9

Table 5

Unit: μm

Value	Preload	Model No.				
		HS15	HS20	HS25	HS30	HS35
Permissible values of parallelism in two rails e_1	Z1	18	20	26	31	37
	Z3	12	14	18	22	26
Permissible values of parallelism (height) in two rails e_2	Z1, Z3	330 $\mu\text{m}/500 \text{ mm}$				

(2) Shoulder height of the mounting surface and corner radius

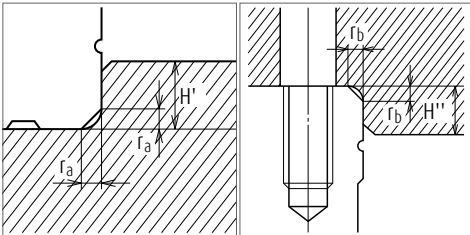


Fig. 10 Shoulder for the rail datum surface

Fig. 11 Shoulder for the ball slide datum surface

Table 6

Unit: mm

Model No.	Corner radius (maximum)		Shoulder height	
	r_a	r_b	H'	H''
HS15	0.5	0.5	4	4
HS20	0.5	0.5	4.5	5
HS25	0.5	0.5	5	5
HS30	0.5	0.5	6	6
HS35	0.5	0.5	6	6

6. Lubrication components

Refer to pages A38 and D13 for linear guide lubrication.

(1) Types of lubrication accessories

Fig. 12 and **Table 7** show grease fittings and tube fittings. We provide lubrication accessories with extended thread body length (L) for the addition of dust-proof accessories such as NSK K1 lubrication unit, double seal and protector. We provide a suitable lubrication accessory for the special requirement on dust-proof accessories.

Consult NSK for a lubrication accessory with extended length of thread body for your convenience of replenishing lubricant. When you require stainless lubrication accessories, please ask NSK.

(2) Mounting position of lubrication accessories

The standard position of grease fittings is the end face of ball slide. We mount them on the side of end cap for an option.

(Fig. 13)

Please consult NSK for installation of grease or tube fittings to the ball slide body or the side of end cap.

When using a piping unit with thread of M6 × 1, you require a connector to connect to a grease fitting mounting hole with M6 × 0.75. The connector is available from NSK.

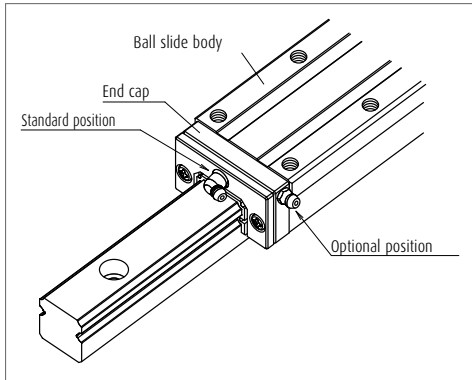


Fig. 13 Mounting position of lubrication accessories

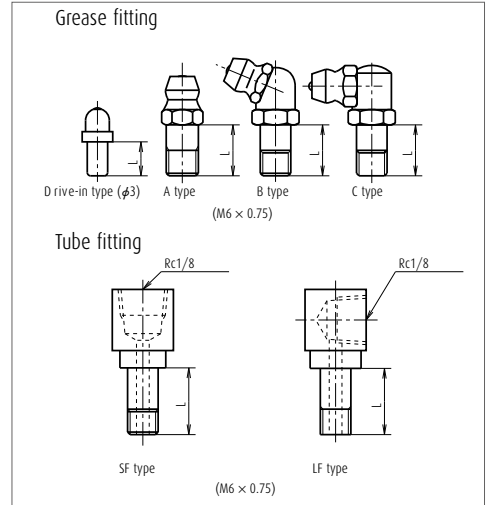


Fig. 12 Grease fitting and tube fitting

Table 7

Unit: mm

Model No.	Dust-proof specification	Dimension L		
		Grease fitting / Drive-in type	Tube fitting	
			SF Type	LF Type
HS15	Standard	5	-	-
HS15	With NSK K1	10	-	-
HS15	Double seal	*	-	-
HS15	Protector	*	-	-
HS20	Standard	5	-	-
HS20	With NSK K1	10	-	-
HS20	Double seal	8	-	-
HS20	Protector	8	-	-
HS25	Standard	5	6	6
HS25	With NSK K1	12	11	11
HS25	Double seal	10	9	9
HS25	Protector	10	9	9
HS30	Standard	5	6	6
HS30	With NSK K1	14	12	13
HS30	Double seal	12	10	11
HS30	Protector	12	10	11
HS35	Standard	5	6	6
HS35	With NSK K1	14	12	13
HS35	Double seal	12	10	11
HS35	Protector	12	10	11

*) A connector is required for this model. Please contact NSK.

HS Series

7. Dust-proof components

(1) Standard Specification

The HS Series can be readily used as they have a dust protection means for normal conditions. As the standard equipment, the ball slides have an end seal on both ends. Bottom seal is equipped on bottom as an option.

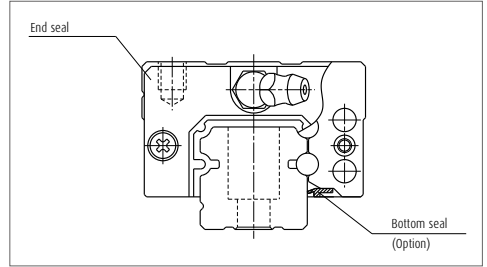


Fig. 14

Table 8 Seal friction per ball slide (maximum): end seal only

		Unit: N				
Series	Size	15	20	25	30	35
HS		3	3	3	3	4

(2) NSK K1 lubrication unit

Refer to **Table 9** for dimension of linear guides equipped with the NSK K1 lubrication unit.

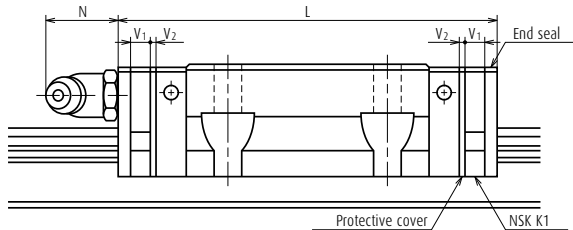


Table 9

							Unit: mm
Model No.	Ball slide model	Standard ball slide length	Ball slide length installed with two NSK K1 L	Per NSK K1 thickness V ₁	Protective cover thickness V ₂	Protruding area of the grease fitting N	
HS15	AL, EM	106	115.6	4.0	0.8	(5)	
HS20	AL, EM	119.7	130.3	4.5	0.8	(14)	
HS25	AL, EM	148	158.6	4.5	0.8	(14)	
HS30	AL, EM	176.1	188.1	5.0	1.0	(14)	
HS35	AL, EM	203.6	216.6	5.5	1.0	(14)	

Note Ball slide length equipped with NSK K1 = (Standard ball slide length) + (Thickness of NSK K1, V₁ × Number of NSK K1) + (Thickness of the protective cover V₂ × 2)

(3) Double seal and protector

For the HS Series, double seal and protectors can be installed only before shipping from the factory. Please consult with NSK when you require dust tight protection.

Table 10 shows the increased thickness of V_3 and V_4 when the end seal and the protector are installed.

Table 10

Unit: mm

Model No.	Thickness of end seal: V_3	Thickness of protector: V_4
HS15	2.8	3
HS20	2.5	2.7
HS25	2.8	3.2
HS30	3.6	4.2
HS35	3.6	4.2

(4) Caps to plug the rail mounting bolt hole

Table 11 Caps to plug rail bolt hole

Model No.	Bolt to secure rail	Cap reference No.	Quantity /case
HS15	M3	LG-CAP/M3	20
HS15	M4	LG-CAP/M4	20
HS20	M5	LG-CAP/M5	20
HS25, HS30	M6	LG-CAP/M6	20
HS35	M8	LG-CAP/M8	20

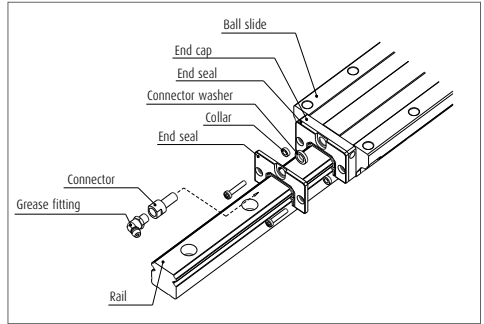


Fig. 15 Double seal

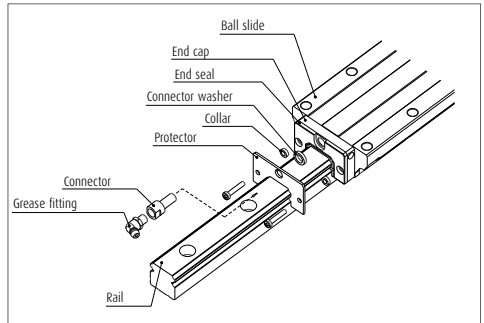


Fig. 16 Protector

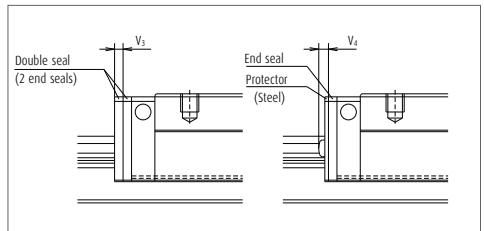


Fig. 17

HS Series

8. Reference number

Reference numbers shall be set to individual NSK linear guide when its specifications are finalized, and it is indicated on its specification drawing.

Please specify the reference number, except design serial number, to identify the product when ordering, requiring estimates, or inquiring about specifications from NSK.

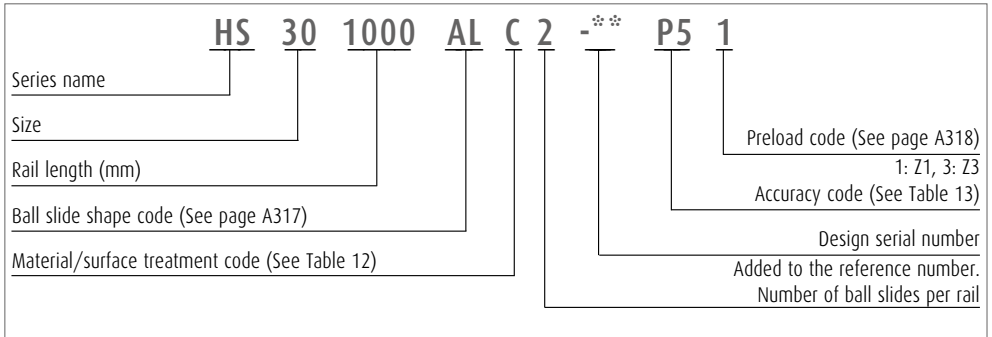


Table 12 Material/surface treatment code

Code	Description
C	Special high carbon steel (NSK standard)
K	Stainless steel
D	Special high carbon steel with surface treatment
H	Stainless steel with surface treatment
Z	Other, special

Table 13 Accuracy code

Accuracy	Standard (Without NSK K1)	With NSK K1
Ultra precision grade	P3	K3
Super precision grade	P4	K4
High precision grade	P5	K5


Note Refer to page A38 for NSK K1 lubrication unit.




HS Series

9. Dimensions

HS-AL

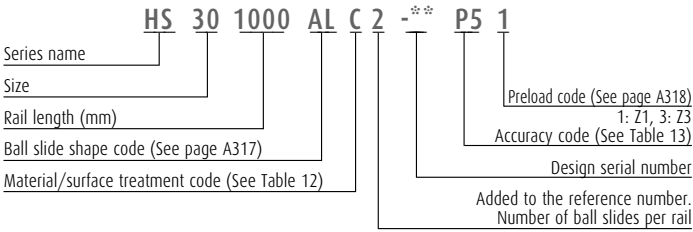


Front view of AL types

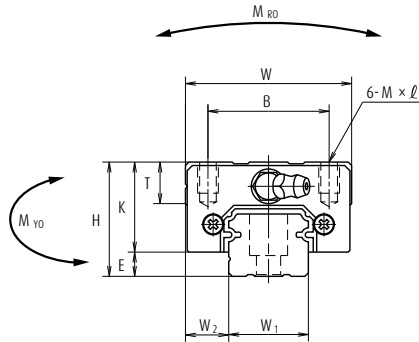

Model No.	Assembly			Ball slide											Width	Height		
	Height		W ₂	Width	Length	Mounting hole					L ₁	K	T	Grease fitting				
	H	E				B	J	J ₂	M × pitch × ℓ	Hole size				T ₁			N	W ₁
HS15AL	24	4.6	9.5	34	106	26	60	30	M4×0.7×6	89.2	19.4	10	φ 3	6	3	15	12.5	
HS20AL	28	6	11	42	119.7	32	80	40	M5×0.8×7	102.5	22	12	M6×0.75	5.5	11	20	15.5	
HS25AL	33	7	12.5	48	148	35	100	50	M6×1×9	126.4	26	12	M6×0.75	7	11	23	18	
HS30AL	42	9	16	60	176.1	40	120	60	M8×1.25×12	150.7	33	13	M6×0.75	8	11	28	23	
HS35AL	48	10.5	18	70	203.6	50	140	70	M8×1.25×12	175.6	37.5	14	M6×0.75	8.5	11	34	27.5	

- Note**
- 1) The HS Series does not have a ball retainer. Be aware that balls fall out when the ball slide is withdrawn from the rail.
 - 2) External appearance of stainless steel ball slides differ from those of carbon steel ball slide.

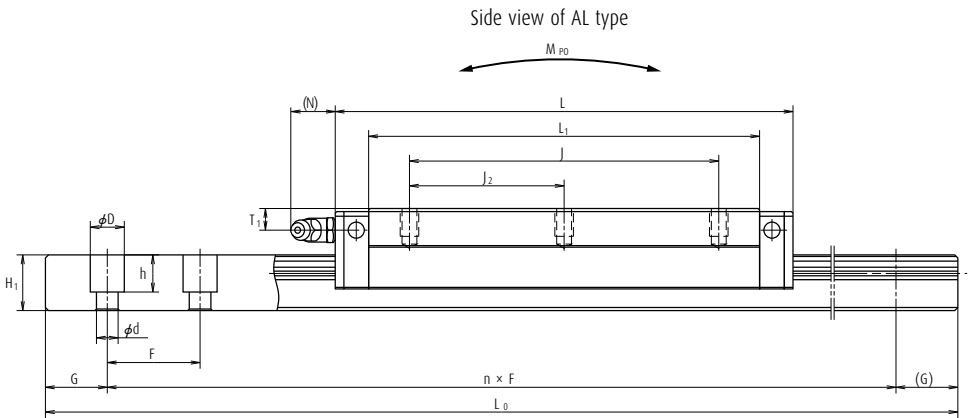

Unit: mm

Rail		Basic load rating								Weight			
Pitch F	Mounting bolt hole d × D × h	G (reference)	Max. length L _{0max.} () for stainless	3)Dynamic		Static	M _{RO}	Static moment (N·m)				Ball slide (kg)	Rail (kg/m)
				[50km] C ₅₀ (N)	[100km] C ₁₀₀ (N)	C ₀ (N)		M _{PO}		M _{YO}			
								One slide	Two slides	One slide	Two slides		
30	^{a)} 3.5×6×8.5 4.5×7.5×8.5	20	2 000 (1 300)	20 500	16 300	40 000	199	395	1 990	335	1 670	0.34	1.4
30	6×9.5×10.5	20	3 960 (3 500)	27 300	21 600	52 000	350	590	2 930	495	2 460	0.52	2.3
30	7×11×12	20	3 960 (3 500)	44 500	35 000	78 000	605	1 090	5 450	910	4 600	0.85	3.1
40	7×11×16	20	4 000 (3 500)	68 000	54 000	127 000	1 190	2 120	10 600	1 780	8 850	1.7	4.8
40	9×14×20	20	4 000 (3 500)	94 500	75 000	172 000	1 980	3 350	16 600	2 820	13 900	2.5	7.0

3) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)

C₅₀: the basic dynamic load rating for 50 km rated fatigue life C₁₀₀: the basic dynamic load rating for 100 km rated fatigue life


The basic static load rating shows static permissible load.

4) Parenthesized dimensions are applicable to stainless steel products.


^{a)} Standard rail mounting bolt hole for HS15 is specified as hole for M4 (4.5 × 7.5 × 8.5). Please contact us to request a different hole for M3 (3.5 × 6 × 8.5).

HS Series

HS-EM

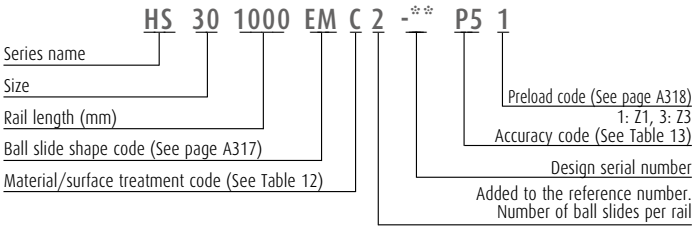


Front view of EM type

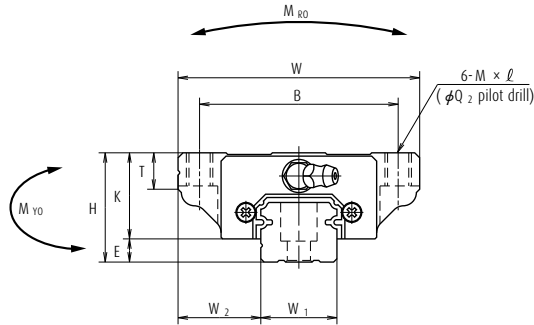

Model No.	Assembly			Ball slide															
	Height H	E	W ₂	Width W	Length L	Mounting hole						L ₁	K	T	Grease fitting			Width W ₁	Height H ₁
						B	J	J ₂	M × pitch × ℓ	Q ₂	Hole size				T ₁	N			
HS15EM	24	4.6	18.5	52	106	41	60	30	M5×0.8×7	4.4	89.2	19.4	8	φ 3	6	3	15	12.5	
HS20EM	28	6	19.5	59	119.7	49	80	40	M6×1×9 (M6×1×9.5)	5.3	102.5	22	10	M6×0.75	5.5	11	20	15.5	
HS25EM	33	7	25	73	148	60	100	50	M8×1.25×10 (M8×1.25×11.5)	6.8	126.4	26	11 (12)	M6×0.75	7	11	23	18	
HS30EM	42	9	31	90	176.1	72	120	60	M10×1.5×12 (M10×1.5×14.5)	8.6	150.7	33	11 (15)	M6×0.75	8	11	28	23	
HS35EM	48	10.5	33	100	203.6	82	140	70	M10×1.5×13 (M10×1.5×14.5)	8.6	175.6	37.5	12 (15)	M6×0.75	8.5	11	34	27.5	

- Note**
- 1) The HS Series does not have a ball retainer. Be aware that balls fall out when the ball slide is withdrawn from the rail.
 - 2) External appearance of stainless steel ball slides differ from those of carbon steel ball slide.

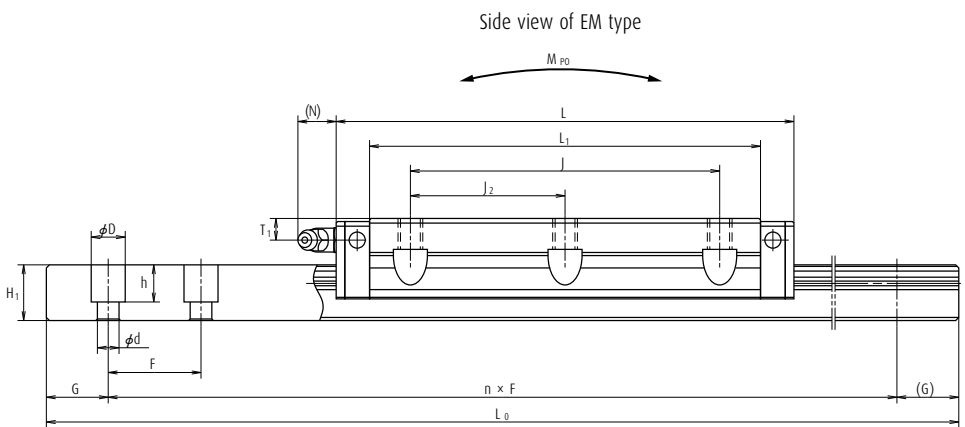

Unit: mm

Rail		Basic load rating								Weight			
Pitch F	Mounting bolt hole d × D × h	G (reference)	Max. length L _{0max.} () for stainless	3)Dynamic		Static C ₀ (N)	M _{RO}	Static moment (N-m)				Ball slide (kg)	Rail (kg/m)
				[50km] C ₅₀ (N)	[100km] C ₁₀₀ (N)			M _{PO}		M _{YO}			
								One slide	Two slides	One slide	Two slides		
30	^{a)} 3.5×6×8.5 4.5×7.5×8.5	20	2 000 (1 300)	20 500	16 300	40 000	199	395	1 990	335	1 670	0.45	1.4
30	6×9.5×10.5	20	3 960 (3 500)	27 300	21 600	52 000	350	590	2 930	495	2 460	0.67	2.3
30	7×11×12	20	3 960 (3 500)	44 500	35 000	78 000	605	1 090	5 450	910	4 600	1.3	3.1
40	7×11×16	20	4 000 (3 500)	68 000	54 000	127 000	1 190	2 120	10 600	1 780	8 850	2.4	4.8
40	9×14×20	20	4 000 (3 500)	94 500	75 000	172 000	1 980	3 350	16 600	2 820	13 900	3.4	7.0

3) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)

C₅₀: the basic dynamic load rating for 50 km rated fatigue life C₁₀₀: the basic dynamic load rating for 100 km rated fatigue life
The basic static load rating shows static permissible load.

4) Parenthesized dimensions are applicable to stainless steel products.

^{a)} Standard rail mounting bolt hole for HS15 is specified as hole for M4 (4.5 × 7.5 × 8.5). Please contact us to request a different hole for M3 (3.5 × 6 × 8.5).

5. The Comparative Table of Old and New Series

New Series			Former series					
Model No.	Ball slide mounting hole dimension M×pitch×ℓ <Q ₂ > [mm]	Dynamic load rating C ₅₀ [N]	Model No.	Ball slide mounting hole dimension M×pitch×ℓ <Q ₂ > Q ₁ ×ℓ [mm]	Dynamic load rating C ₅₀ [N]	Model No.	Ball slide mounting hole dimension M×pitch×ℓ <Q ₂ > Q ₁ ×ℓ [mm]	Dynamic load rating C ₅₀ [N]
NH15AN	M4×0.7×6	14 200	LH15AN	M4×0.7×6	10 800	SH15AN	M4×0.7×6	10 100
NH15BN	M4×0.7×6	18 100	LH15BN	M4×0.7×6	14 600	SH15BN	M4×0.7×6	13 400
NH15EM	M5×0.8×7 <4.4>	14 200	LH15EL	M5×0.8×8	10 800	SH15EL	M5×0.8×8	10 100
			LH15EM	M5×0.8×7 <4.4>	10 800	SH15EM	M5×0.8×7 <4.4>	10 100
NH15GM	M5×0.8×7 <4.4>	18 100	LH15FL	4.5×7	10 800	SH15FL	4.5×7	10 100
			LH15GL	M5×0.8×8	14 600	SH15GL	M5×0.8×8	13 400
			LH15GM	M5×0.8×7 <4.4>	14 600	SH15GM	M5×0.8×7 <4.4>	13 400
NH20AN	M5×0.8×6	23 700	LH15HL	4.5×7	14 600	SH15HL	4.5×7	13 400
			LH20AN	M5×0.8×6	17 400	SH20AN	M5×0.8×6	16 300
			LH20BN	M5×0.8×6	23 700	SH20BN	M5×0.8×6	21 600
NH20EM	M6×1×9.5 <5.3>	23 700	LH20EL	M6×1×10	17 400	SH20EL	M6×1×10	16 300
			LH20EM	M6×1×9.5 <5.3>	17 400	SH20EM	M6×1×9.5 <5.3>	16 300
			LH20FL	6×9.5	17 400	SH20FL	6×9.5	16 300
NH20GM	M6×1×9.5 <5.3>	30 000	LH20GL	M6×1×10	23 500	SH20GL	M6×1×10	21 600
			LH20GM	M6×1×9.5 <5.3>	23 500	SH20GM	M6×1×9.5 <5.3>	21 600
			LH20HL	6×9.5	23 500	SH20HL	6×9.5	21 600
NH25AL	M6×1×6	33 500	LH25AL	M6×1×6	25 600	SH25AL	M6×1×6	22 400
NH25AN	M6×1×9	33 500	LH25AN	M6×1×9	25 600	SH25AN	M6×1×9	22 400
NH25BL	M6×1×6	45 500	LH25BL	M6×1×6	34 500	SH25BL	M6×1×6	32 000
NH25BN	M6×1×9	45 500	LH25BN	M6×1×9	34 500	SH25BN	M6×1×9	32 000
NH25EM	M8×1.25×10(11.5) <6.8>	33 500	LH25EL	M8×1.25×16(12)	25 600	SH25EL	M8×1.25×16(12)	22 400
			LH25EM	M8×1.25×10(11.5) <6.8>	25 600	SH25EM	M8×1.25×10(11.5) <6.8>	22 400
NH25GM	M8×1.25×10(11.5) <6.8>	45 500	LH25FL	7×10(11.5)	25 600	SH25FL	7×10(11.5)	22 400
			LH25GL	M8×1.25×16(12)	34 500	SH25GL	M8×1.25×16(12)	32 000
NH30AL	M8×1.25×8	41 000	LH25GM	M8×1.25×10(11.5) <6.8>	34 500	SH25GM	M8×1.25×10(11.5) <6.8>	32 000
NH30AN	M8×1.25×10	41 000	LH25HL	7×10(11.5)	34 500	SH25HL	7×10(11.5)	32 000
NH30BL	M8×1.25×8	61 000	LH30AL	M8×1.25×8	31 000	SH30AL	M8×1.25×8	31 000
NH30BN	M8×1.25×10	61 000	LH30AN	M8×1.25×10	31 000	SH30AN	M8×1.25×10	31 000
NH30EM	M10×1.5×12(14.5) <8.6>	47 000	LH30BL	M8×1.25×8	46 000	SH30BL	M8×1.25×8	46 000
			LH30BN	M8×1.25×10	46 000	SH30BN	M8×1.25×10	46 000
NH30GM	M10×1.5×12(14.5) <8.6>	61 000	LH30EL	M10×1.5×18(15)	35 500	SH30EL	M10×1.5×18(15)	35 500
			LH30EM	M10×1.5×12(14.5) <8.6>	35 500	SH30EM	M10×1.5×12(14.5) <8.6>	35 500
NH35AL	M8×1.25×8	62 500	LH30FL	9×12(14.5)	35 500	SH30FL	9×12(14.5)	35 500
			LH30GL	M10×1.5×18(15)	46 000	SH30GL	M10×1.5×18(15)	46 000
NH35AN	M8×1.25×12	62 500	LH30GM	M10×1.5×12(14.5) <8.6>	46 000	SH30GM	M10×1.5×12(14.5) <8.6>	46 000
NH35BL	M8×1.25×8	81 000	LH30HL	9×12(14.5)	46 000	SH30HL	9×12(14.5)	46 000
NH35BN	M8×1.25×12	81 000	LH35AL	M8×1.25×8	47 500	SH35AL	M8×1.25×8	47 500
NH35EM	M10×1.5×13 <8.6>	62 500	LH35AN	M8×1.25×12	47 500	SH35AN	M8×1.25×12	47 500
			LH35BL	M8×1.25×8	61 500	SH35BL	M8×1.25×8	61 500
NH35GM	M10×1.5×13 <8.6>	81 000	LH35BN	M8×1.25×12	61 500	SH35BN	M8×1.25×12	61 500
			LH35EL	M10×1.5×20	47 500	SH35EL	M10×1.5×20	47 500
NH35GM	M10×1.5×13 <8.6>	81 000	LH35EM	M10×1.5×13 <8.6>	47 500	SH35EM	M10×1.5×13 <8.6>	47 500
			LH35FL	9×13	47 500	SH35FL	9×13	47 500
NH35GM	M10×1.5×13 <8.6>	81 000	LH35GL	M10×1.5×20	61 500	SH35GL	M10×1.5×20	61 500
			LH35GM	M10×1.5×13 <8.6>	61 500	SH35GM	M10×1.5×13 <8.6>	61 500
NH45AL	M10×1.5×10	107 000	LH35HL	9×13	61 500	SH35HL	9×13	61 500
NH45AN	M10×1.5×17	107 000	LH45AL	M10×1.5×10	81 000	SH45AL	M10×1.5×10	76 500
NH45BL	M10×1.5×10	131 000	LH45AN	M10×1.5×17	81 000	SH45AN	M10×1.5×17	76 500
NH45BN	M10×1.5×17	131 000	LH45BL	M10×1.5×10	99 000	SH45BL	M10×1.5×10	94 500
NH45EM	M12×1.75×15 <10.5>	107 000	LH45BN	M10×1.5×17	99 000	SH45BN	M10×1.5×17	94 500
			LH45EL	M12×1.75×24	81 000	SH45EL	M12×1.75×24	76 500
NH45GM	M12×1.75×15 <10.5>	131 000	LH45EM	M12×1.75×15 <10.5>	81 000	SH45EM	M12×1.75×15 <10.5>	76 500
			LH45FL	11×15	81 000	SH45FL	11×15	76 500
NH55AL	M12×1.75×13	158 000	LH45GL	M12×1.75×24	99 000	SH45GL	M12×1.75×24	94 500
			LH45GM	M12×1.75×15 <10.5>	99 000	SH45GM	M12×1.75×15 <10.5>	94 500
NH55AN	M12×1.75×18	158 000	LH45HL	11×15	99 000	SH45HL	11×15	94 500
NH55BL	M12×1.75×13	193 000	LH55AL	M12×1.75×13	119 000	SH55AL	M12×1.75×13	113 000
NH55BN	M12×1.75×18	193 000	LH55AN	M12×1.75×18	119 000	SH55AN	M12×1.75×18	113 000
NH55EM	M14×2×18 <12.5>	158 000	LH55BL	M12×1.75×13	146 000	SH55BL	M12×1.75×13	140 000
			LH55BN	M12×1.75×18	146 000	SH55BN	M12×1.75×18	140 000
NH55GM	M14×2×18 <12.5>	193 000	LH55EL	M14×2×18	119 000	SH55EL	M14×2×18	113 000
			LH55EM	M14×2×18 <12.5>	119 000	SH55EM	M14×2×18 <12.5>	113 000
NH55GM	M14×2×18 <12.5>	193 000	LH55FL	14×18	119 000	SH55FL	14×18	113 000
			LH55GL	M14×2×18	146 000	SH55GL	M14×2×18	140 000
NH65AN	M16×2×20	239 000	LH55GM	M14×2×18 <12.5>	146 000	SH55GM	M14×2×18 <12.5>	140 000
NH65BN	M16×2×20	310 000	LH55HL	14×18	146 000	SH55HL	14×18	140 000
NH65EM	M16×2×24 <14.6>	239 000	LH65AN	M16×2×20	181 000	SH65AN	M16×2×20	181 000
			LH65BN	M16×2×20	235 000	SH65BN	M16×2×20	235 000
NH65GM	M16×2×24 <14.6>	310 000	LH65EL	M16×2×24	181 000	SH65EL	M16×2×24	181 000
			LH65EM	M16×2×24 <14.6>	181 000	SH65EM	M16×2×24 <14.6>	181 000
NH65GM	M16×2×24 <14.6>	310 000	LH65FL	16×24	181 000	SH65FL	16×24	181 000
			LH65GL	M16×2×24	235 000	SH65GL	M16×2×24	235 000
NH65GM	M16×2×24 <14.6>	310 000	LH65GM	M16×2×24 <14.6>	235 000	SH65GM	M16×2×24 <14.6>	235 000
			LH65GM	M16×24	235 000	SH65GM	M16×24	235 000

Notes 1) Parenthesized dimensions are for items made of stainless steel.

2) Basic dynamic load rating is a load that allows for a 50-km rating fatigue life and is a vertical and constant load on the ball slide mounting surface.

New Series			Former series					
Model No.	Ball slide mounting hole dimension M×pitch×ℓ <Q ₂ > [mm]	Dynamic load rating C ₅₀ [N]	Model No.	Ball slide mounting hole dimension M×pitch×ℓ <Q ₂ > Q ₁ ×ℓ [mm]	Dynamic load rating C ₅₀ [N]	Model No.	Ball slide mounting hole dimension M×pitch×ℓ <Q ₂ > Q ₁ ×ℓ [mm]	Dynamic load rating C ₅₀ [N]
NS15CL	M4×0.7×6	7 250	LS15CL	M4×0.7×6	5 400	SS15CL	M4×0.7×6	4 900
NS15AL	M4×0.7×6	11 200	LS15AL	M4×0.7×6	8 350	SS15AL	M4×0.7×6	7 900
NS15JM	M5×0.8×7 <4.4>	7 250	LS15JL	M5×0.8×8	5 400	SS15JL	M5×0.8×8	4 900
			LS15JM	M5×0.8×7 <4.4>	5 400	SS15JM	M5×0.8×7 <4.4>	4 900
NS15EM	M5×0.8×7 <4.4>	11 200	LS15EL	M5×0.8×8	8 350	SS15EL	M5×0.8×8	7 900
			LS15EM	M5×0.8×7 <4.4>	8 350	SS15EM	M5×0.8×7 <4.4>	7 900
NS20CL	M5×0.8×7	10 600	LS20CL	M5×0.8×7	7 900	SS20CL	M5×0.8×7	7 250
NS20AL	M5×0.8×7	15 600	LS20AL	M5×0.8×7	11 700	SS20AL	M5×0.8×7	11 100
NS20JM	M6×1.9(9.5) <5.3>	10 600	LS20JL	M6×1×10	7 900	SS20JL	M6×1×10	7 250
			LS20JM	M6×1.9(9.5) <5.3>	7 900	SS20JM	M6×1.9(9.5) <5.3>	7 250
NS20EM	M6×1.9(9.5) <5.3>	15 600	LS20EL	M6×1×10	11 700	SS20EL	M6×1×10	11 100
			LS20EM	M6×1.9(9.5) <5.3>	11 700	SS20EM	M6×1.9(9.5) <5.3>	11 100
NS25CL	M6×1×9	17 700	LS25CL	M6×1×9	12 700	SS25CL	M6×1×9	12 700
NS25AL	M6×1×9	26 100	LS25AL	M6×1×9	18 800	SS25AL	M6×1×9	17 900
NS25JM	M8×1.25×10(11.5) <6.8>	17 700	LS25JL	M8×1.25×12	12 700	SS25JL	M8×1.25×12	12 700
			LS25JM	M8×1.25×10(11.5) <6.8>	12 700	SS25JM	M8×1.25×10(11.5) <6.8>	12 700
NS25EM	M8×1.25×10(11.5) <6.8>	26 100	LS25EL	M8×1.25×12	18 800	SS25EL	M8×1.25×12	17 900
			LS25EM	M8×1.25×10(11.5) <6.8>	18 800	SS25EM	M8×1.25×10(11.5) <6.8>	17 900
NS30CL	M8×1.25×12	24 700	LS30CL	M8×1.25×12	18 700	SS30CL	M8×1.25×12	18 700
NS30AL	M8×1.25×12	38 000	LS30AL	M8×1.25×12	28 800	SS30AL	M8×1.25×12	27 300
NS30JM	M10×1.5×12(14.5) <8.6>	24 700	LS30JL	M10×1.5×18(15)	18 700	SS30JL	M10×1.5×18(15)	18 700
			LS30JM	M10×1.5×12(14.5) <8.6>	18 700	SS30JM	M10×1.5×12(14.5) <8.6>	18 700
NS30EM	M10×1.5×12(14.5) <8.6>	38 000	LS30EL	M10×1.5×18(15)	28 800	SS30EL	M10×1.5×18(15)	27 300
			LS30EM	M10×1.5×12(14.5) <8.6>	28 800	SS30EM	M10×1.5×12(14.5) <8.6>	27 300
NS35CL	M8×1.25×12	34 500	LS35CL	M8×1.25×12	26 000	SS35CL	M8×1.25×12	26 000
NS35AL	M8×1.25×12	52 500	LS35AL	M8×1.25×12	40 000	SS35AL	M8×1.25×12	38 000
NS35JM	M10×1.5×13(14.5) <8.6>	34 500	LS35JL	M10×1.5×20(15)	26 000	SS35JL	M10×1.5×20(15)	26 000
			LS35JM	M10×1.5×13(14.5) <8.6>	26 000	SS35JM	M10×1.5×13(14.5) <8.6>	26 000
NS35EM	M10×1.5×13(14.5) <8.6>	52 500	LS35EL	M10×1.5×20(15)	40 000	SS35EL	M10×1.5×20(15)	38 000
			LS35EM	M10×1.5×13(14.5) <8.6>	40 000	SS35EM	M10×1.5×13(14.5) <8.6>	38 000
			LS35FL	9×13(14.5)	40 000	SS35FL	9×13(14.5)	38 000

- Notes** 1) Parenthesized dimensions are for items made of stainless steel.
2) Basic dynamic load rating is a load that allows for a 50-km rating fatigue life and is a vertical and constant load on the ball slide mounting surface.
In VH series, the slide types in flange shape are focused.

After focused			Before focused		
Model No.	Ball slide mounting hole dimension M×pitch×ℓ <Q ₂ > [mm]	Dynamic load rating C ₅₀ [N]	Model No.	Ball slide mounting hole dimension M×pitch×ℓ Q ₁ ×ℓ [mm]	Dynamic load rating C ₅₀ [N]
VH15EM	M5×0.8×7 <4.4>	14 200	VH15EL	M5×0.8×8	10 800
VH15EM	M5×0.8×7 <4.4>	14 200	VH15FL	4.5×7	10 800
VH15GM	M5×0.8×7 <4.4>	18 100	VH15HL	M5×0.8×8	14 600
VH15GM	M5×0.8×7 <4.4>	18 100	VH15HL	4.5×7	14 600
VH20EM	M6×1.9×5 <5.3>	23 700	VH20EL	M6×1×10	17 400
VH20EM	M6×1.9×5 <5.3>	23 700	VH20FL	6×9.5	17 400
VH20GM	M6×1.9×5 <5.3>	30 000	VH20GL	M6×1×10	23 500
VH20GM	M6×1.9×5 <5.3>	30 000	VH20HL	6×9.5	23 500
VH25EM	M8×1.25×10(11.5) <6.8>	33 500	VH25EL	M8×1.25×16(12)	25 600
VH25EM	M8×1.25×10(11.5) <6.8>	33 500	VH25FL	7×10(11.5)	25 600
VH25GM	M8×1.25×10(11.5) <6.8>	45 500	VH25GL	M8×1.25×16(12)	34 500
VH25GM	M8×1.25×10(11.5) <6.8>	45 500	VH25HL	7×10(11.5)	34 500
VH30EM	M8×1.25×12(14.5) <8.6>	47 000	VH30EL	M10×1.5×18(15)	35 500
VH30EM	M8×1.25×12(14.5) <8.6>	47 000	VH30FL	9×12(14.5)	35 500
VH30GM	M8×1.25×12(14.5) <8.6>	61 000	VH30GL	M10×1.5×18(15)	46 000
VH30GM	M8×1.25×12(14.5) <8.6>	61 000	VH30HL	9×12(14.5)	46 000
VH35EM	M10×1.5×13 <8.6>	62 500	VH35EL	M10×1.5×20	47 500
VH35EM	M10×1.5×13 <8.6>	62 500	VH35FL	9×13	47 500
VH35GM	M10×1.5×13 <8.6>	81 000	VH35GL	M10×1.5×20	61 500
VH35GM	M10×1.5×13 <8.6>	81 000	VH35HL	9×13	61 500
VH45EM	M12×1.75×15 <10.5>	107 000	VH45EL	M12×1.75×24	81 000
VH45EM	M12×1.75×15 <10.5>	107 000	VH45FL	11×15	81 000
VH45GM	M12×1.75×15 <10.5>	131 000	VH45GL	M12×1.75×24	99 000
VH45GM	M12×1.75×15 <10.5>	131 000	VH45HL	11×15	99 000
VH55EM	M14×2×18 <12.5>	158 000	VH55EL	M14×2×28	119 000
VH55EM	M14×2×18 <12.5>	158 000	VH55FL	14×18	119 000
VH55GM	M14×2×18 <12.5>	193 000	VH55GL	M14×2×28	146 000
VH55GM	M14×2×18 <12.5>	193 000	VH55HL	14×18	146 000

- Notes** 1) Parenthesized dimensions are for items made of stainless steel.
2) Basic dynamic load rating is a load that allows for a 50-km rating fatigue life and is a vertical and constant load on the ball slide mounting surface.

B-1 Selection Guide to NSK Ball Screw

- 1. Features of NSK Ball ScrewsB1
- 2. Structure of a Ball ScrewB3
 - 2.1 Ball Recirculation SystemB4
 - 2.2 Preload System.....B5
- 3. Ball Screw SeriesB7
 - 3.1 Ball Screw ClassificationB7
 - 3.2 Product Externals.....B9
- 4. Procedures to Select Ball Screw B17
 - 4.1 Flow Chart for Selection.....B17
 - 4.2 Accuracy Grades.....B19
 - 4.3 Axial Play.....B20
 - 4.4 Screw Shaft Diameter, Lead, and Stroke B21
 - 4.5 Manufacturing Capability for Screw Shaft B25
 - 4.6 Outside Shapes of Ball Nut B26
 - 4.7 Shaft End Configuration.....B27
- 5. When Placing Orders..... B31
 - 5.1 When Ordering Standard Ball Screws..... B31
 - 5.2 When Ordering Made-to-Order Ball Screws..... B33

B BLOCK

Ball Screw

B-2 Technical Description of Ball Screws

- 1. Accuracy..... B37
 - 1.1 Lead Accuracy..... B37
 - 1.2 Thermal Expansion and Target Value of Specified Travel B40
 - 1.3 Mounting Accuracy and Tolerance of Ball Screws B41
 - 1.4 Automatic Lead Accuracy Measuring System of NSK..... B43
- 2. Static Load Limitation B44
 - 2.1 Buckling Load..... B44
 - 2.2 Yield by Tensional/Compressive Stress..... B46
 - 2.3 Permanent Deformation at the Ball Contact Point..... B46
- 3. Permissible Rotational Speed..... B47
 - 3.1 Critical Speed of the Screw Shaft B47
 - 3.2 $d \cdot n$ Value..... B50
- 4. Supporting Conditions for Calculation of Buckling Load and Critical SpeedB51
- 5. Life (Dynamic Load Limitation)..... B53
 - 5.1 Life of Ball Screw..... B53
 - 5.2 Fatigue Life..... B53
 - 5.3 Ball Screw and Hardness B55
 - 5.4 Wear Life B55
- 6. Preload and Rigidity..... B56
 - 6.1 Elastic Deformation of Preloaded Ball Screw B56
 - 6.2 Rigidity of the Feed Screw System B57
- 7. Friction Torque and Drive Torque B62
 - 7.1 Friction Torque..... B62
 - 7.2 Drive Torque..... B63
- 8. Even Load Distribution in Ball Nut (In Case of Ball Screws for High-Load Drive)..... B65
- 9. Lubrication of Ball Screw B67
- 10. Dust Prevention for Ball Screw..... B68
- 11. Rust Prevention and Surface Treatment of Ball Screws..... B69
- 12. Ball Screw Specifications for Special Environments..... B70

B-3 Ball Screw Dimension Table

12.1 Clean Environments.....	B70
12.2 Measures for Use Under Vacuum.....	B70
13. Noise and Vibration	B71
13.1 Consideration to Lowering Noise.....	B71
13.2 Consideration to Operational Characteristics.....	B72
13.3 Consideration to Ball Screw Support System.....	B72
14. Installation of Ball Screw.....	B73
14.1 Installation Procedure for Machine Tools, Where High Installation Accuracy Is Required.....	B74
14.2 Installation Procedure for General Industrial Machinery.....	B79
15. Precautions for Designing Ball Screw.....	B83
15.1 Safety System.....	B83
15.2 Design Cautions to Assembling Ball Screw.....	B83
15.3 Effective Stroke of Ball Screw.....	B85
15.4 Matching after Delivery.....	B85
15.5 "NSK K1" Lubrication Unit.....	B85
16. Shaft End Machining.....	B86
17. Ball Screw Selection Exercise.....	B87
18. Reference.....	B101
19. Guide to Technical Services.....	B102
20. Precautions When Handling Ball Screws.....	B103
1. Dimension Table and Reference Number of Standard Ball Screws	
1.1 Compact FA Series	B107
1.2 High-Speed SS Series	B147
1.3 Finished Shaft End	
MA Type, Miniature, Fine Lead....	B159
FA Type for Small Equipment	B181
SA Type for Machine Tools.....	B217
1.4 Finished Shaft End	
KA Type Stainless Steel Product ..	B273
1.5 Blank Shaft End	
MS Type, Miniature, Fine Lead ...	B301
FS Type for Small Equipment.....	B309
SS Type for Machine Tools	B321
1.6 Ball Screws for Transfer Equipment....	B349
Precision Rolled Ball Screws.....	B389
Ball Screws Interchangeable.....	B401
1.7 Accessories.....	B411
2. Dimension Table and Reference Number of Standard Nut Ball Screws	
2.1 End Deflector Type.....	B453
2.2 Tube Type	B459
2.3 Deflector (bridge) Type.....	B491
2.4 End Cap Type	B505
3. Dimension Table and Reference Number of Application-Oriented Ball Screws	
3.1 DIN Ball Screws for the Machine Tool Industry.....	B515
3.2 HMD Type for High-Speed Machine Tools	B521
3.3 HMS Type for High-Speed Machine Tools.....	B525
3.4 HMC Type for High-Speed Machine Tools	B529
3.5 BSL Type for Miniature Lathes.....	B535
3.6 For High-Load Drives	
3.6.1 HTF-SRC Type.....	B539
3.6.2 HTF-SRD Type	B543
3.6.3 HTF Type.....	B547
3.7 For Contaminated Environments	
3.7.1 VSS Type.....	B563
3.7.2 Ball Screw with X1 Seals for Contaminated Environments and Grease Retention.....	B567
3.8 TW Series for Twin-Drive Systems ..	B573
3.9 For High Precision Machine Tools	
3.9.1 Hollow Shaft Ball Screws	B574
3.9.2 Nut Cooling Ball Screws	B579
3.10 ND Series for Nut-Rotatable Drives	B583
3.11 Σ Series for Robots	B591
3.12 Ball Screw with L1 Seal designed for Minimal Grease Splatter.....	B603
3.13 Equipped with "NSK K1" Lubrication Unit	B607
3.14 Special Ball Screws.....	B613

B1
-B36

B37
-B104

B105
-B614

B-1 Selection Guide to NSK Ball Screw

B-1-1 Features of NSK Ball Screws

1. Quick delivery

Standard ball screws are for short lead time.

- › Precision ball screws with finished shaft end
Compact FA Series, MA Type, FA Type, SA Type, KA Type
- › Precision ball screws with blank shaft end
MS Type, FS Type, SS Type, HSS Type
- › Ball screws for transfer equipment with finished shaft end
VFA Type, RMA Type
- › Ball screws for transfer equipment with blank shaft end
RMS Type, R Series

2. Competitive prices

NSK reduces cost by well-planned mass production of standardized items. We rank the best in the world production of ordered items. We are able to offer our products at competitive prices by producing similar items in the same production group.

3. Unparalleled accuracy

NSK utilizes its unique grinding technique and measuring equipment for topnotch precision.

4. Superb durability

NSK uses thoroughly purified alloy steel for superb durability.

5. No backlash, and unparalleled rigidity

NSK ball screws use Gothic arch grooves as shown in **Fig. 1.1** to minimize the clearance between the balls and grooves. Further, an application of preload makes no backlash possible. As providing controlled preload is easy, appropriate rigidity is obtained.

As the Gothic arch also minimizes the clearance between the balls and the grooves, the backlash is minimized without applying preload.

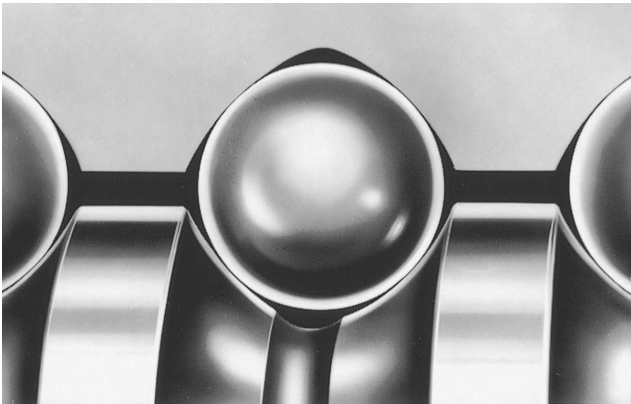


Fig. 1.1 Ball groove profile of NSK ball screw

6. Smooth movement assures high efficiency

When the circular-arc groove is used for the ball screws, balls are wedging into the grooves of ball nut and ball screw shaft. But this phenomenon does not happen in the Gothic arc groove. The Gothic arc groove, along with the low friction that is inherent nature of ball screw, is accountable for a smooth and highly efficient conversion of motion as shown in Fig. 1.2.

7. Optimal units available

Utilizing bearing technology, NSK produces high quality support units (for light load type to be used for small equipment and heavy load type to be used for machine tools) which are exclusive for ball screws. These units are standardized.

NSK also offers quality-assured accessories such as lock nuts to tighten bearings, travel stoppers to prevent overrun, and sealing units to cool hollow shaft ball screws.

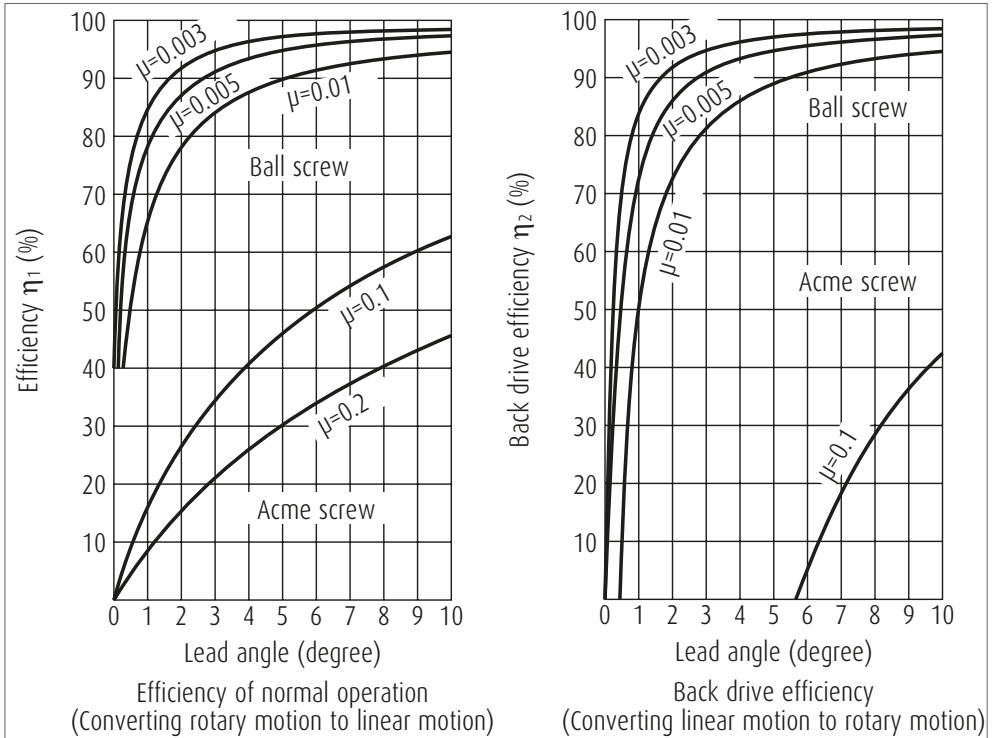




Fig. 1.2 Mechanical efficiency of ball screws

B-1-2 Structure of a Ball Screw

Balls are placed between the screw shaft and nut, and roll. This system is called a "ball screw." To keep the balls recirculating continually, this system requires a screw shaft, a nut, balls, and recirculation components as basic items. A ball screw has the following functions.



1. Converting motion: Changing rotary motion to linear motion (normal operation); Changing linear motion to rotary motion efficiently (back-drive operation).
2. Increasing power: A small torque is converted to a large thrust force.
3. Positioning: Sets accurate position in linear motion.

Table 2.1 Ball screw recirculation system

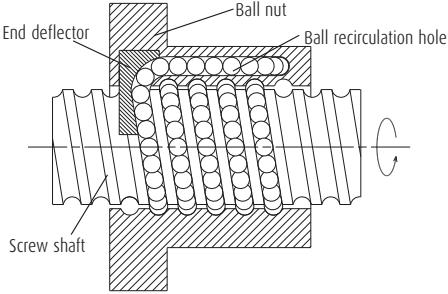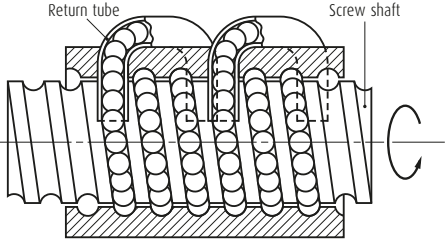End deflector type	Ball return tube type
 <p>[Structure] Balls are smoothly picked up in the tangential direction at the end of nut, and recirculated via a hole in the nut. If the balls are picked up at the middle of the nut, it is called middle deflector type.</p> <p>[Features] <ul style="list-style-type: none"> > Small nut outside diameter allows compact nut design. > Low noise, high speed. </p>	 <p>[Structure] Balls are recirculating through a pipe (ball return tube) of optimized size, bridging the start and end of recirculation.</p> <p>[Features] <ul style="list-style-type: none"> > Adapt to various specifications. (screw shaft diameter, lead) </p>

B-1-2.1 Ball Recirculation System

A ball recirculation system is categorically most important, as well as the preload system, to classify the structure of ball screw. As shown in **Table 2.1**, four types of ball recirculation system are used for the NSK ball screws.

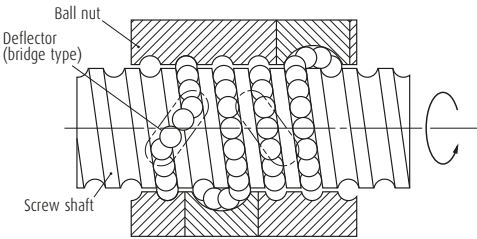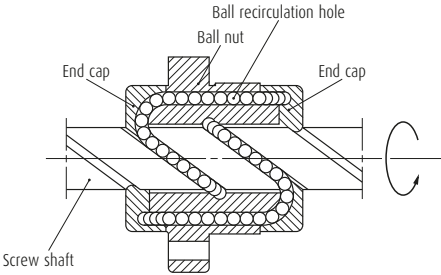Deflector (bridge) type	End cap type
 <p>[Structure] Balls are recirculated by a horseshoe shaped deflector bridging the adjacent ball thread grooves.</p> <p>[Features] > Suitable for fine lead ball screws. > Small nut outside diameter, allows compact nut design.</p>	 <p>[Structure] Balls are picked up by an end cap placed at both ends of the nut, and recirculated via a hole through the nut.</p> <p>[Features] > Suitable for large lead ball screws. > Not universal due to complex recirculation structure.</p>

B-1-2 Structure of a Ball Screw




B-1-2.2 Preload system

There are four systems to apply preload to NSK ball screws depending on the application.

Table 2.2 Preload system for ball screws



Preload system	Double nut preload (D-Preload)	Offset preload (Z-Preload)
Structure	<p>The diagram shows a side view of a screw shaft with two ball nuts, labeled 'Ball nut A' and 'Ball nut B', mounted on it. A 'Spacer' is placed between the two nuts. Arrows indicate the direction of rotation. Below this is a cross-sectional view of the screw shaft with the two nuts. Arrows labeled 'Tension' point outwards from the center, indicating the preload force applied to the nuts. The 'Spacer' is shown between the two nuts.</p>	<p>The diagram shows a side view of a screw shaft with a single ball nut. The nut is offset from the center of the shaft. Below this is a cross-sectional view of the screw shaft with the single nut. The lead of the nut is shown as 'Lead' on both sides of the center, and 'Lead + α' in the center, where α represents the preload offset.</p>
Description	<p>Uses two nuts, and inserts a spacer between them to apply the preload. In general, a spacer is thicker (by the deformation equivalent to the preload) than the actual space between two nuts. However, a thin spacer is inserted in some cases.</p>	<p>To apply preload, the lead near the center of the nut is offset by the volume equivalent to preload (α). This method is like to creating a preload system similar to the double nut preload (D-preload) by a single ball nut, thus enabling a compact nut design.</p>
Nut length	Long	Medium
Torque characteristics	○	○
Rigidity	◎	◎

Oversize ball preload (P-Preload)

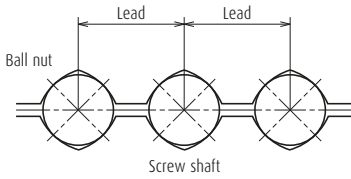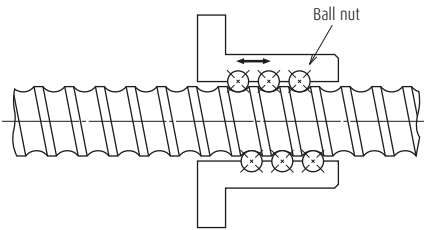

Balls slightly larger than the ball groove space (over-size balls) are inserted to allow them to contact at four points. Provides better torque characteristics in the low torque range.

Spring preloaded double nut (J-Preload)

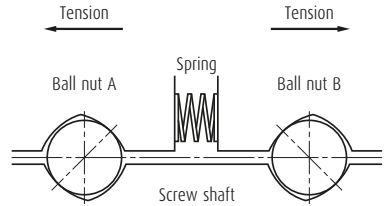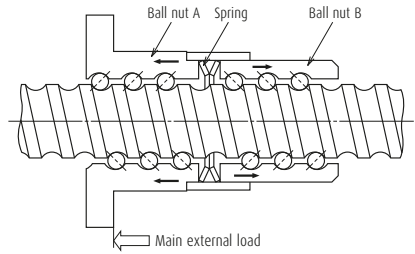

A spring is used as a spacer of D-Preload. Must be used with discretion in its varied rigidity by load direction.

Short





Long



B-1-3 Ball Screw Series

B-1-3.1 Ball Screw Classification

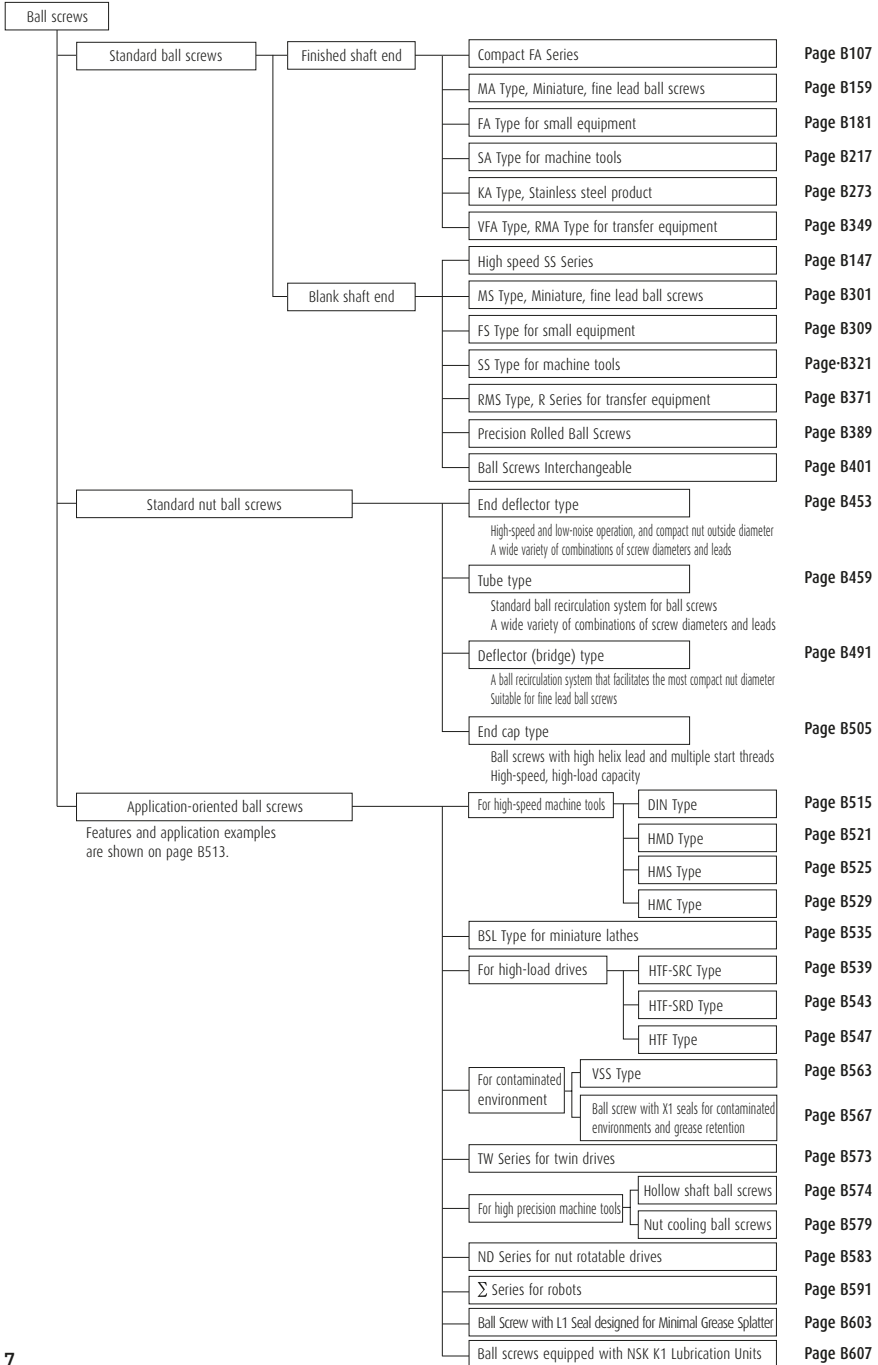

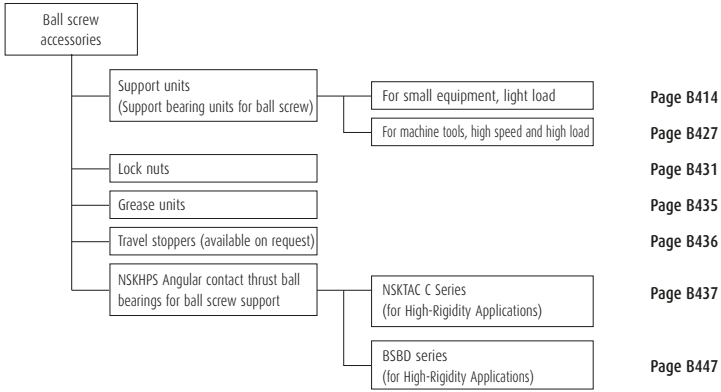

Lead classification

Classification	Lead ratio $K = \text{lead } l / \text{shaft diameter } d$
Fine	$K < 0.5$
Medium	$0.5 \leq K < 1$
High helix	$1 \leq K < 2$
Ultra high helix	$2 \leq K$

B-1-3 Ball Screw Series

B-1-3.2 Product Externals

1. Ball screws

Standard ball screws



Fig. 3.1 Finished shaft end compact FA Series

Page B107

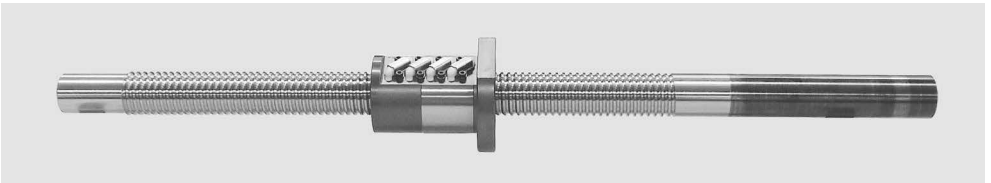


Fig. 3.2 Blank shaft end high-speed SS Series

Page B147

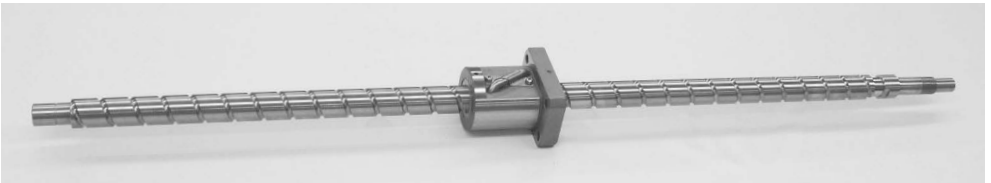


Fig. 3.3 Finished shaft end MA type, FA type and SA type

Page B157

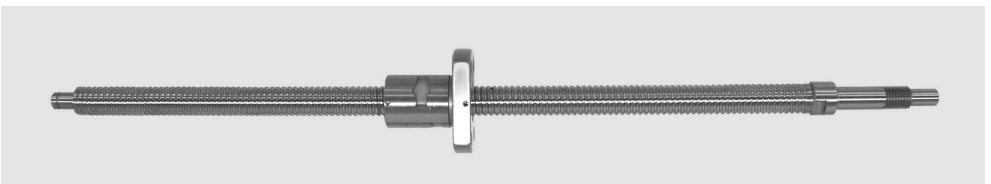


Fig. 3.4 Finished shaft end KA type

Page B273

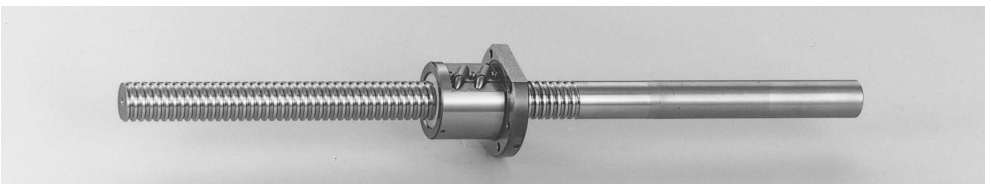


Fig. 3.5 Blank shaft end MS type, FS type and SS type

Page B299

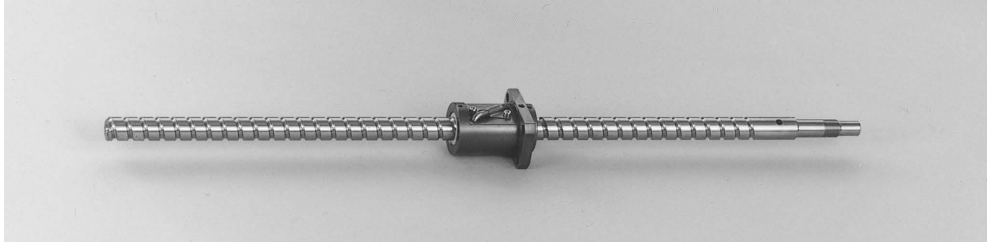


Fig. 3.6 Finished shaft end VFA type for transfer equipment

Page B349

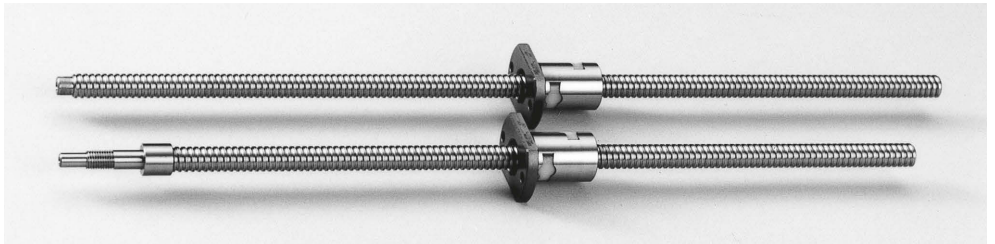


Fig. 3.7 Finished shaft end RMA type and blank shaft end RMS type for transfer equipment

Page B349

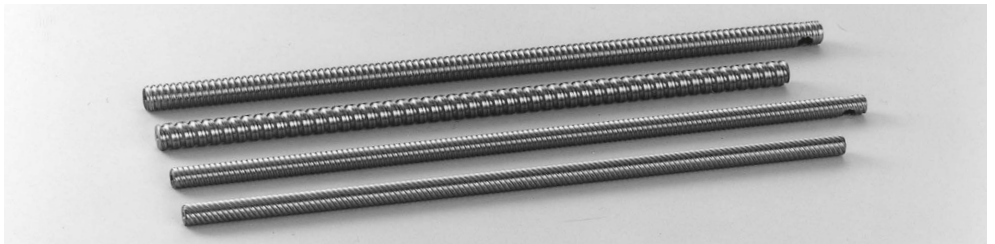


Fig. 3.8 Blank shaft end R series for transfer equipment

Page B349



Fig. 3.9 R series nut assembly for transfer equipment
Page B349




Fig. 3.10 Precision Rolled Ball Screws
Page B389



Fig. 3.11 Ball Screws Interchangeable
Page 401

B-1-3 Ball Screw Series

Standard nut ball screws

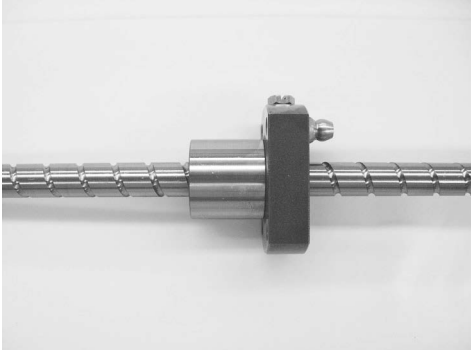


Fig. 3.12 End deflector type

Page B453

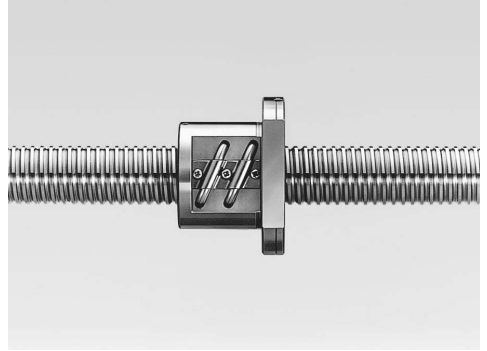


Fig. 3.13 Tube type

Page B459

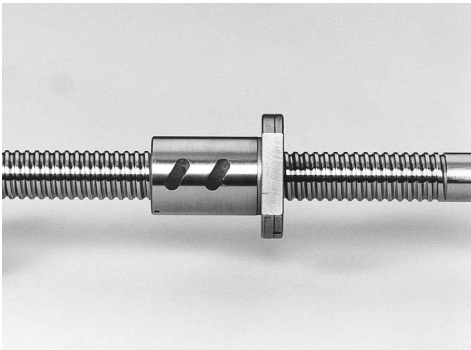


Fig. 3.14 Deflector (bridge) type

Page B491

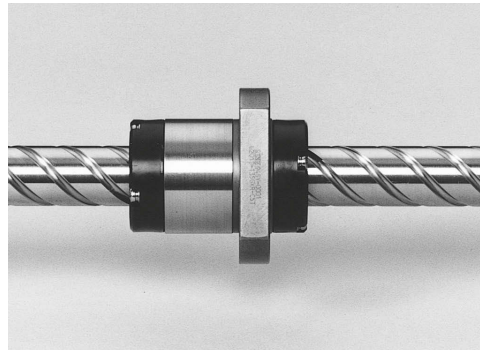


Fig. 3.15 End cap type

Page B505



Fig. 3.16 HMD type for high-speed machine tools

Page B521



Fig. 3.17 HMS type for high-speed machine tools

Page B525

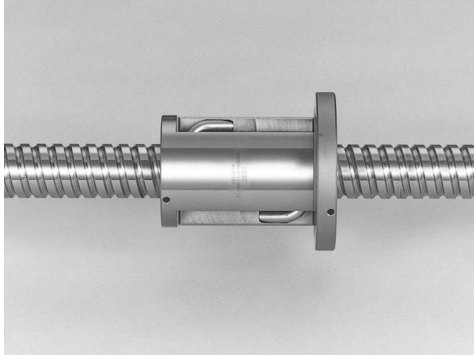


Fig. 3.18 HMC type for high-speed machine tools Page B529



Fig. 3.19 BSL type for miniature lathes Page B535

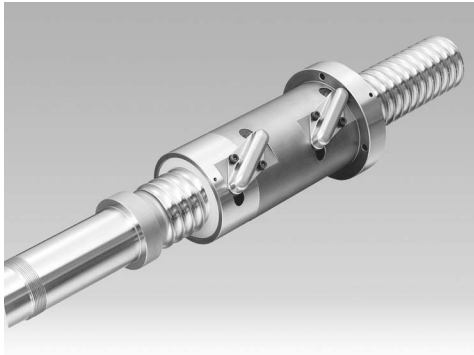


Fig. 3.20 HTF-SRC type for high-load drives Page B539



Fig. 3.21 HTF-SRD type for high-load drives Page B543

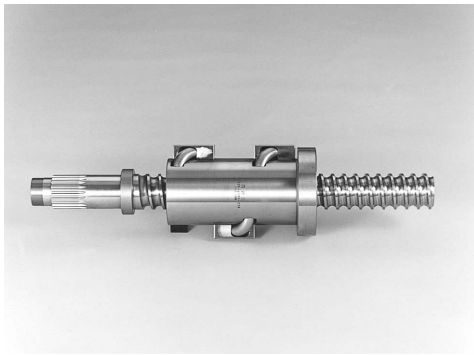


Fig. 3.22 HTF type for high-load drives Page B547



Fig. 3.23 DIN type for high-speed machine tools Page B515

B-1-3 Ball Screw Series

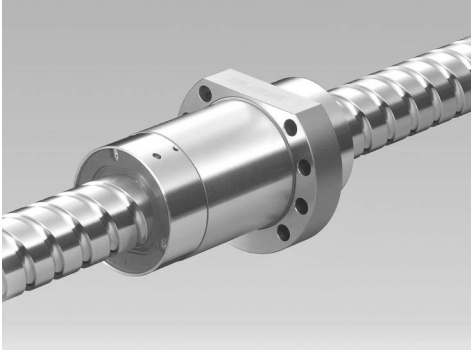


Fig. 3.24 VSS type for contaminated environments Page B563



Fig. 3.25 Ball screw with X1 seals for contaminated environments and grease retention Page B567



Fig. 3.26 TW series for twin-drive systems Page B573



Fig. 3.27 Nut cooling ball screws for high precision machine tools Page B579



Fig. 3.28 Hollow shaft ball screws for high-precision machine tools

Page B574

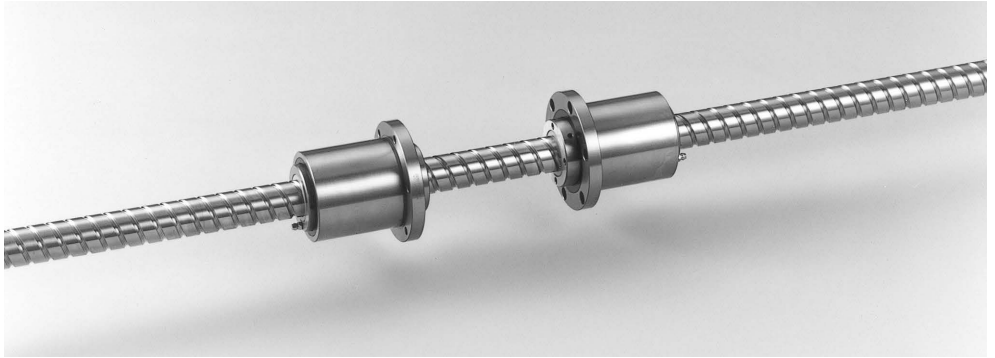


Fig. 3.29 ND series for nut-rotatable drives

Page B583

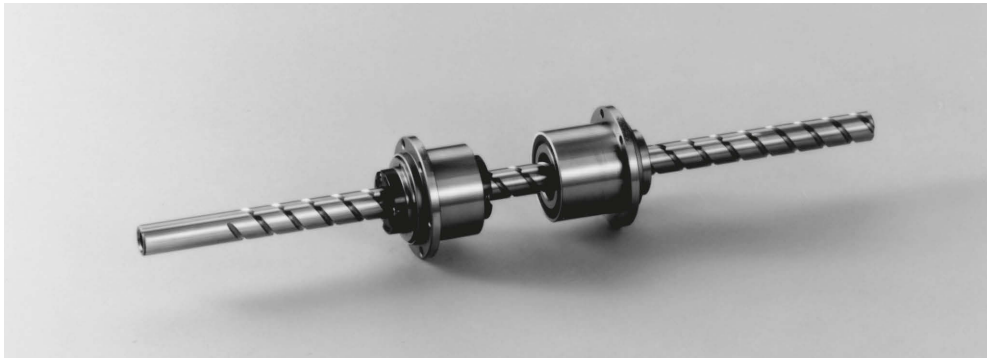


Fig. 3.30 Σ series for robots

Page B591



Fig. 3.31 Ball Screw with L1 Seal designed for Minimal Grease Splatter

Page B603

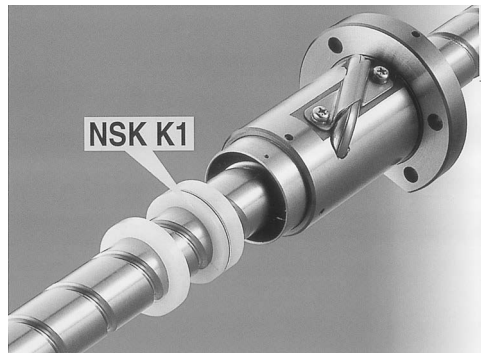


Fig. 3.32 Ball screws equipped with NSK K1 lubrication units

Page B607

B-1-3 Ball Screw Series

2. Standard accessories

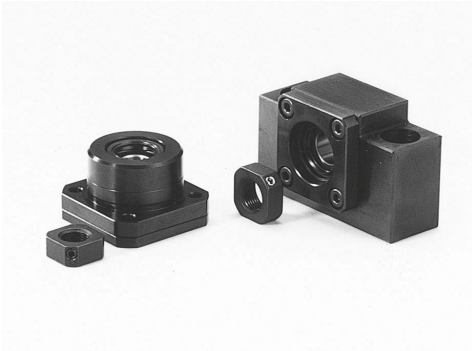


Fig. 3.33 Support units
(for small equipment, light load) Page B414



Fig. 3.34 Support units
(for small equipment, light load, low-profile) Page B414



Fig. 3.35 Support kits for RMA and RMS types Page B423

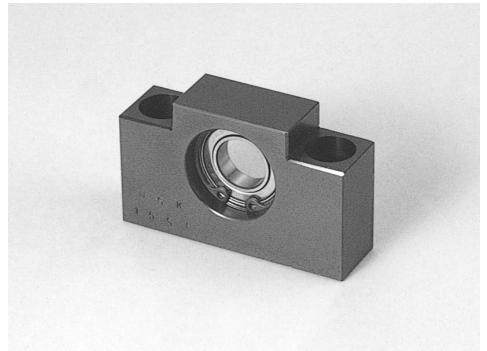


Fig. 3.36 Support unit for VFA type
(simple support side) Page B424



Fig. 3.37 Support units
(for machine tools, high speed, heavy load) Page B428



Fig. 3.38 Lock nuts for light load Page B431



Fig. 3.39 Lock nuts for high load

Page B432

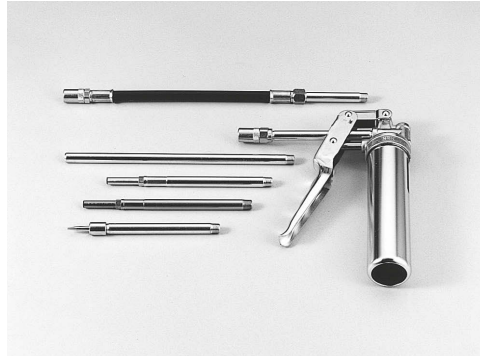


Fig. 3.40 NSK hand grease pump unit

Page D19



Fig. 3.41 NSK grease

Page B435, D19

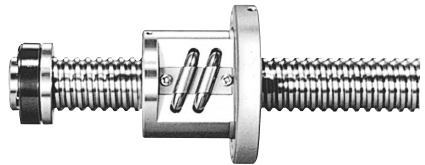


Fig. 3.42 Travel stoppers
(by order)

Page B436



Fig. 3.43 Ball Screw Support Bearings
NSKAC C series

Page B437



Fig. 3.44 Ball Screw Support Bearings
BSBD series

Page B447

B-1-4 Procedures to Select Ball Screw

B-1-4.1 Flow Chart for Selection


When selecting a ball screw, you have to review a variety of use conditions and requirements such as applied loads, speeds, motion strokes, positioning accuracy, required life and operating environment.

You require a multiple inspection because some of these conditions force a ball screw to have conflicting characteristics.

1. Standard ball screw

The chart below is one of the selection procedures. To take advantage of prompt delivery and reasonable prices, this procedure focuses on the standardized ball screws.


NSK offers a ball screw selection program, and also has a service to select appropriate items using data file compiled by our knowledge and experience.

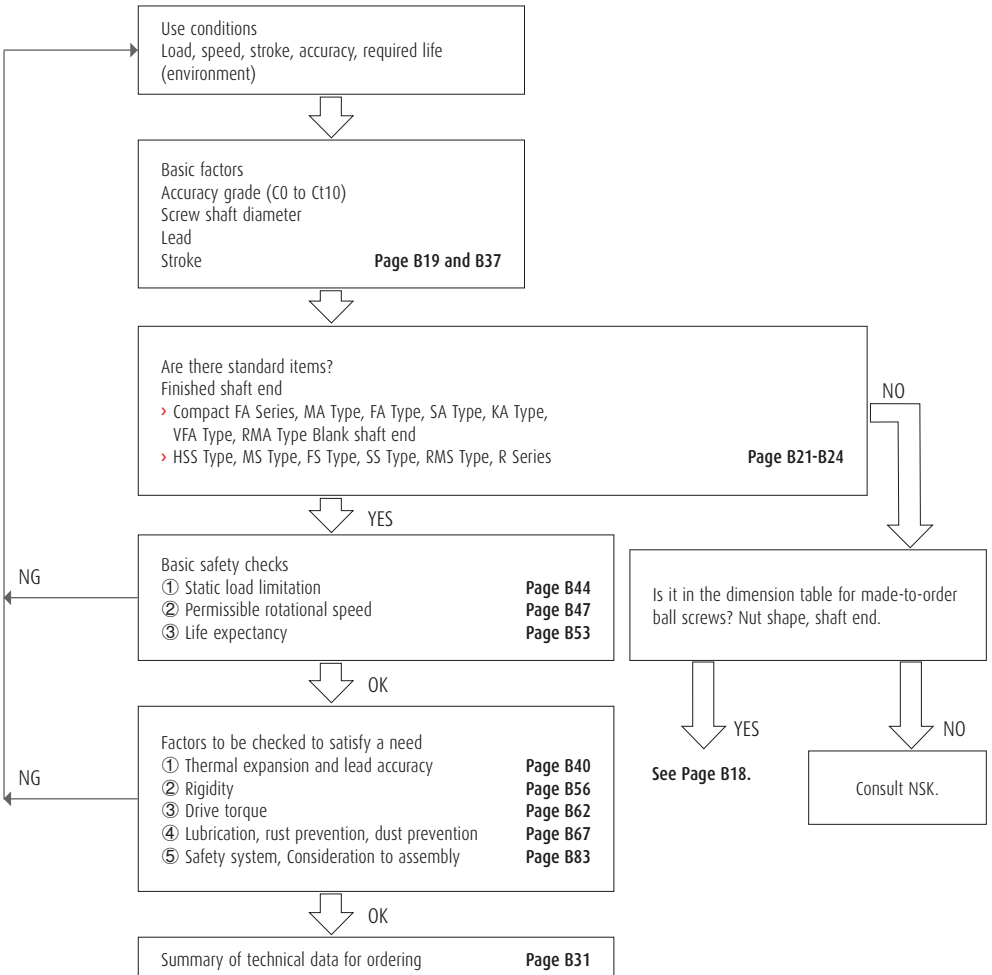

2. Made-to-order ball screws

Dimensions and specifications can be decided individually for the application-oriented ball screws and standard nut ball screws. Procedures are as follows. Refer to the selection exercises on page B87.

Table 4.4 is "Combinations of screw shaft diameter and leads for basic type ball screw." Please consult NSK if you require the types that are not listed in the table.

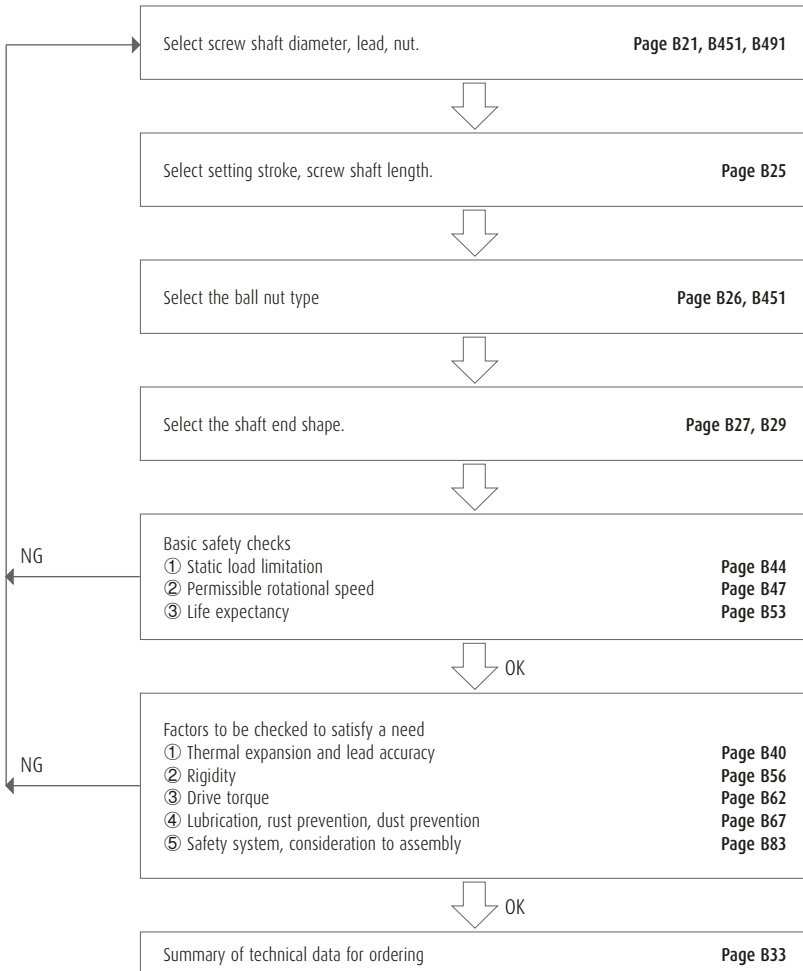

B-1-4 Procedures to Select Ball Screw

B-1-4.2 Accuracy Grades

Table 4.1 shows examples of how to select accuracy grade for a specific use. These practical cases are based on NSK's experience. The circles indicate the range of the accuracy grade in actual use. The double circles indicate accuracy grades most frequently used among the cases marked with

the single circle. These symbols help to select the accuracy grade of ball screws temporarily. To confirm whether a specific ball screw accuracy grade satisfies requirements in positioning accuracy in actual use, refer to "Technical Description" and "Mean travel deviation and travel variation." (page B38)

Table 4.1 Accuracy grades of ball screw and their application

Application		NC machine tools																			
		Lathes		Milling machines Boring machines		Machining centers		Drilling machines		jig boring machines		Grinders		Electric discharge machines		Wire cuttings Electric discharge machines		Punch press	Laser cutting machines		Woodworking machines
		X	Z	XY	Z	XY	Z	XY	Z	XY	Z	XY	Z	XY	Z	XY	Z	XY	Z		
Accuracy grade	C0	○								○	○	○									
	C1	○							◎	◎	◎	◎									
	C2	○		○	○	○	○					○	○	○							
	C3	◎	○	◎	◎	◎	◎	◎					◎	◎	◎	◎	◎		◎	◎	
	C5	◎	◎	◎	◎	◎	◎	◎	◎					◎	◎	◎	◎	◎	◎	◎	◎
	C7							◎	◎												◎
	Ct10																				◎

Application		Semiconductor/associated industry				Industrial robots						Plastic injection molding machines		Three-dimensional coordinate measuring machines		Office machines		Image processing equipment		Nuclear power		
		General industrial machines, Machines for specific use		Lithographic machines	Chemical processing equipment	Wire bonders	Probers	Electric component mounted devices	Printed circuit board drilling machines	Cartesian type	Articulate type	SCARA type	Steel mills equipment	Plastic injection molding machines	Three-dimensional coordinate measuring machines	Office machines	Image processing equipment	Fuel rod controls	Mechanical snubbers	Aircrafts		
		Assembly	other purposes	Assembly	other purposes	Assembly	other purposes	Assembly	other purposes	Fuel rod controls	Mechanical snubbers											
Accuracy grade	C0																					
	C1		◎														◎					
	C2				◎	◎																
	C3	◎			◎	◎	◎	◎														
	C5	◎			◎	◎	◎	◎	◎	◎												
	C7	◎		◎					◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎
	Ct10	○		○					○	○	○	○	○	○	○	○	○	○	○	○	○	○

B-1-4.3 Axial Play

Table 4.2 indicates the combinations of NSK ball screw accuracy grades and axial play. Select an axial play which satisfies the required accuracy in backlash, positioning and repeatability. Ranges of available ball thread effective length in relation to accuracy grade and axial play are shown in

Table 4.3. Please note that if the effective length exceeds the range, the axial play may become partially negative (preloaded condition).

For the axial play of Ct10 grade (ball screws for transfer equipment), refer to the R series dimension tables.

Table 4.2 Combinations of accuracy grades and axial play

Accuracy grade	Axial play	Z	T	S	N	L
		0 mm (Preload)	0.005 mm or less	0.020 mm or less	0.050 mm or less	0.3 mm or less
C0		C0Z	C0T	—	—	—
C1		C1Z	C1T	—	—	—
C2		C2Z	C2T	—	—	—
C3		C3Z	C3T	C3S	—	—
C5		C5Z	C5T	C5S	C5N	—
Ct7		—	—	C7S	C7N	—

Remark The combination codes shown in the table are NSK reference number.

Table 4.3 Maximum effective thread length in combination of accuracy grade and axial play

Unit: mm

Screw shaft diameter	Effective length of the screw thread (maximum)				
	Axial play T (0.005 mm or under)		Axial play S (0.020 mm or under)		
	C0 - C3	C5	C3	C5	Ct7
4 - 6	100	80	100	80	—
8 - 10	250	200	300	250	—
12 - 16	500	400	700	600	500
20 - 25	800	700	1 000	1 000	1 000
28 - 40	1 000	800	2 000	1 500	1 500
45 - 63	1 200	1 000	2 500	2 000	2 000
80 - 125	—	—	4 000	3 000	3 000

Note Refer to **Table 4.8** (page B25) for the available length of screw shaft (maximum length). Also, axial play of code N does not become partial negative play if it is within the available range of effective ball thread length.

B-1-4.4 Screw Shaft Diameter, Lead, and Stroke

Choose a screw shaft diameter and stroke based on the allowable space for ball screw installation. A lead should be set based on the required running speed, and should give

some allowance to the maximum rotational speed of the motor.

Table 4.4 Screw shaft diameter, lead and stroke of standard ball screw

Shaft dia.	Lead	Stroke													
		- 50	- 100	- 150	- 200	- 250	- 300	- 350	- 400	- 450	- 500	- 550	- 600	- 650	
4	1	○	○△												
6	1	○	○	○△■	○△	■□									
6	8		●												
6	12		●												
8	1		○△	○■	○△	■□									
8	1.5		○△	○■	○△	■□									
8	2		○△	○■	○△	■□									
8	10		●												
8	15		●												
10	2		○	○△	○■	○△	■□								
10	2.5		○	○△	○	○△									
10	4		○	○△	○	○△	○	○△							
10	5		●	●					●						
10	10		●	●					●						
12	2		○	○	○△■	○△	○△■□								
12	2.5		○	○	○△	○△	○△								
12	5		●○	●○△	●○	●○△	●○△	●	○	●△	○	●			
12	10			●○	○△	●	○✓	●	○△	●	○✓	●			
12	20				●		●	●	●	●	●	●		●	
12	30			●		●		●	●	●	●	●		●	
14	5		○	○	○	○	○	△	○	○	○	○		△	○
14	8		○	○	○	○	○	○	○	○	○△	○		○	○
15	5			●	●	●	●	●	●	●	●	●		●	●
15	10			●○	●	●○	●○	●○△✓	●○	●○	●○	●○△✓	●○	●○	●○
15	20			●○	●	●○	●○	●○✓	○△	●○	●○	●○✓	○△	●○	●○
15	30				●		●			●		●		●	
16	2		○	○	○	○△		○	△						
16	2.5		○	○	○	○△		○	△						
16	5		○	○	○	○	○	○	○	○	△	○		○	○
16	16		○	○	○	○	○	○	○	○	○	○		○	○
16	32						○	○	○	○	○	○		○	○
20	4						△			△					
20	5			●○	●○△	●○	●○	●○	●○	●○△	●○	●○	●○	●○	●○△
20	10				●○	●○	●○	●○	●○	●○	●○	●○	●○	●○	●○
20	20							●	●	●	●	●	●	●	●
20	30							●	●	●	●	●	●	●	●
20	40									●○	●○	●○	●○	●○	●○
20	60									●	●	●	●	●	●
25	4				○	○	△	○	○	○	○	○		○	○
25	5			●○△	●○△			●○△	●○△	●○△	●○△	●○△		●○△	○
25	6							○△	△						
25	10						○		●		●○	△	●	△	△
25	20										●		●		●
25	25											●		●	●
25	30												●		●
25	50												●		●
28	5				○	○	○	○△	○	○	○	○△	○△		
28	6						○	○△			○	○△			
32	5				○	○	○	○△	○	○	○	○△	○	○	○
32	6						○	○			○	○△			
32	8						○	○			○	○△			
32	10				○		○	△△	○△		○	△△	○△		
32	25										○	△△	○△		
32	32										○	△△	○△		
36	10						○		○		○	△	○△		
40	5						○			○	○	△			
40	8				○					○		△	△	○	○
40	10						○		○	▲	○	△	○△		
40	12										○		○		
40	16												○		
40	20														
45	10												○		
50	10									○	○			△	○
50	12													△	○

Note: See Table 4.5 for KA Type in stainless steel product.

● mark; PSS type, USS type, FSS type: ○ mark; MA type, FA type, SA type:

B-1-4 Procedures to Select Ball Screw

Table 4.5 Screw shaft diameter, lead and stroke of KA type in stainless steel product

Unit: mm

Shaft dia.	Lead	Stroke								
		- 150	- 200	- 250	- 300	- 350	- 450	- 500	- 650	- 1050
6	1	●								
8	1		●							
8	2		●							
10	2			●						
10	4	●				●				
12	2	●			●					
12	5			●				●		
12	10				●			●		
15	10						●		●	●
15	20						●		●	●
16	2	●				●				
20	20						●		●	●

Table 4.6 Screw shaft diameter, lead and standard screw shaft length of R Series

Unit: mm

Screw shaft diameter	Lead	Standard screw shaft length									
		400	500	800	1000	1500	2000	2500	3000	4000	5000
10	3	●		●							
10	6	●		●							
12	8	●		●							
12	12	●		●							
14	4		●		●						
14	5		●		●						
15	20		●		●	●					
16	10		●		●	●					
16	16		●		●	●					
16	32		●		●	●					
18	8		●		●	●					
20	5		●		●		●				
20	10		●		●		●				
20	20		●		●		●				
20	40		●		●	●					
25	5				●		●				
25	10				●		●	●			
25	25				●		●	●			
25	50				●		●	●			
28	6				●			●			
32	10				●		●		●		
32	32				●		●		●		
32	64				●		●		●	●	
36	10				●		●		●		
40	10						●		●	●	
40	40						●		●	●	
40	80						●		●	●	●
45	12						●		●	●	
50	10						●		●	●	
50	16						●		●	●	
50	50						●		●	●	

2. Made-to-order ball screws

Table 4.7 shows the combinations of screw shaft diameter and leads for made-to-order ball screws. For details, refer to the dimension tables from pages B451 and B511.

Table 4.7 Combinations of screw shaft diameter and leads for typical ball screw

Unit: mm

Screw shaft diameter \ Lead	Lead																										
	0.5	1	1.5	2	2.5	3	4	5	6	8	10	12	14	15	16	20	25	30	32	36	40	50	60	64	80	100	
4	D	D																									
6	D	D		D						S		S															
8	D	D	D	D							S			S													
10		D		D	D		T	S			S																
12		D		D	D	D	T	S,T			S,T					S,C		S									
14				D		D		T		T																	
15								S			S,T					S,C		S				C					
16				D	D		T	T	T						T,C			C				C					
20				D			T	S,T D,B	T,D B	T	S,T				T	S,T C		S			S,C		S,C				
25				D			T	S,T D,B	T,D B	T,B	S,T D,B				T	S,T	S,T C	S				S,C				C	
28								T	T		T																
32				D			T	S,T D	T,D	T,D	S,T D,B V,F	S,T B			S,V	S,T V,N	T,N		S,T C,V N						S,C		
36								S,T	T		S,T F	S,F			S,H	S,H											
40				D				T,D	T,D	T,D	S,T D,F	S,T F			S,T H	S,H	S,T H,N	S,H	T,H N	H	H	S,T C,V N				S	
45											S,T F	S,T F			S,H	S,H	S,H	S,H	H	H							
50								T,D	T,D	T,D	S,T D,F	S,T D,F	F		S,T F	S,T D,H	S,T H,N	S,H	T,H N		T,N F	S,T C,V N					S
55											T,F	F	F		F	H	H	H	H								
63									D	D	T,D	D,F	F		F	T,D F	F	F	F			T,F	T				
80											T,D	T,D	F		T,F	T,D F	F						F				
100											D	T,D			T,F	T,D F	F										
120															F	F	F										
125															T	T											
140																	F	F	F								
160																	F	F	F								
200																	F	F	F								

T: Tube type

D: Deflector (bridge) type

C: End cap type

S: End deflector type

H: HMC type, HMD type

F: HTF-SRC, HTF-SRD, HTF type

N: ND Series

B: BSL type

V: VSS type

B-1-4 Procedures to Select Ball Screw

B-1-4.5 Manufacturing Capability for Screw Shaft

Table 4.8 shows the manufacturing capability for the screw shaft overall length for each accuracy grade. The capability of large ball screw whose shaft diameter exceeds 100 mm is limited due to the weight (indicated by * asterisk in the table). Please consult NSK in such a case.

Also consult NSK if the screw shaft size you desire exceeds the size listed in **Table 4.8**.

Table 4.8 Manufacturing capability of screw shaft

Unit: mm

Screw shaft diameter	Accuracy grade						
	C0	C1	C2	C3	C5	Ct7	Ct10
4	90	110	120	140	140	140	—
6	150	180	200	250	250	250	—
8	240	280	340	340	340	340	—
10	350	400	500	500	500	550	800
12	450	500	650	700	750	800	800
14	600	650	750	800	1 000	1 000	1 000
15	600	700	800	900	1 250	1 250	1 500
16	600	750	900	1 000	1 500	1 500	1 500
18	—	—	—	—	—	—	1 500
20	850	1 000	1 200	1 400	1 900	1 900	2 000
25	1 100	1 400	1 600	1 900	2 500	2 500	2 500
28	1 100	1 400	1 600	1 900	2 500	2 500	2 500
32	1 500	1 750	2 250	2 500	3 200	3 200	3 000 (4 000)
36	1 500	1 750	2 250	2 500	3 200	3 500	3 000
40	2 000	2 400	3 000	3 400	3 800	4 300	4 000 (5 000)
45	2 000	2 400	3 000	3 400	4 000	4 500	4 000
50	2 000	3 200	4 000	4 500	5 000	5 750	4 000
55	2 000	4 000	5 000	5 800	6 000	6 000	—
63	2 000	4 000	5 000	6 000	6 800	7 700	—
80	—	4 000	6 300	8 200	9 200	10 000	—
100	—	4 000	6 300	10 000	12 500	13 500	—
*120	—	—	—	—	—	13 500	—
*125	—	—	—	10 000	13 500	13 500	—
*140	—	—	—	—	—	10 000	—
*160	—	—	—	—	—	8 000	—
*200	—	—	—	—	—	5 000	—

- Notes**
1. Values in parentheses of Ct10 are applicable to the ultra high helix lead ($l/d \geq 2$). Refer to dimension tables on B385 and following pages for details.
 2. Please note that the range for small leads (3 mm or under) are also limited by the screw length.

B-1-4.6 Outside Shapes of Ball Nut

1. Flange shape

Fig. 4.1 shows the available flange shape. Select the appropriate shape according to the nut installation condition. (Fig. 4.2)

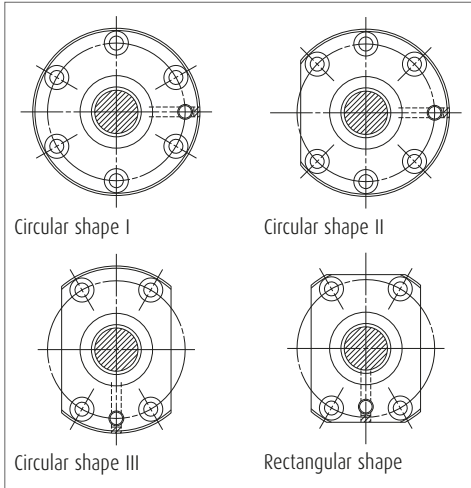


Fig. 4.1 Flange shape

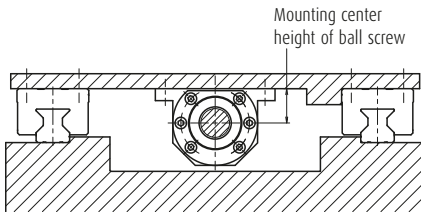


Fig. 4.2 Installation example

2. Shapes of nut cross section

Cross section of nuts are shown in Fig. 4.3. For detailed dimensions, refer to dimension table of nut.

① Circular (round)

The ball recirculation components are contained inside the circumference of the nut. It can be inserted in a round hole.

② Tube-projecting type

This shape is unique to the tube recirculation type. The nut outside diameter is small. However some recess must be given for housing because the ball recirculation tube protrudes from the circumference of the nut.

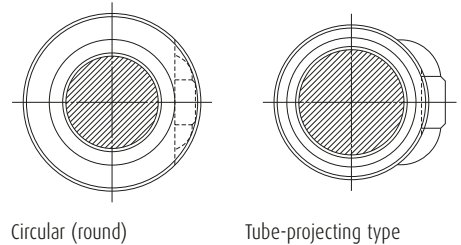


Fig. 4.3 Shape of the cross section of nut

B-1-4 Procedures to Select Ball Screw

B-1-4.7 Shaft End Configuration

1. Standard shaft end dimensions

Tables 4.9 and 4.10 show shaft end types for NSK standard support units.

Refer to the dimension tables below when designing shaft ends of standard ball screw.

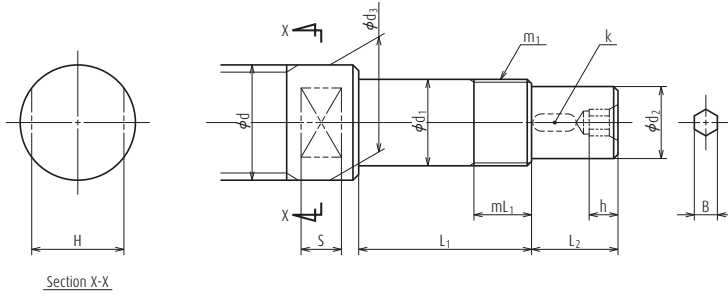


Fig. 4.4 Configuration of standard shaft end (drive side)

Table 4.9 Dimensions of shaft ends (drive side)

Unit: mm

Screw shaft diameter d	Bearing journal		Thread		Drive section			Seal section	Hexagon hole		Wrench flats		Support unit	
	Outside diameter	Length	Nominal spec.	Length	Outside diameter	Length	Key width	Outside diameter	Width across flats	Depth	Width across flats	Length		
	d ₁	L ₁	m ₁	mL ₁	d ₂	L ₂	k	d ₃	B	h	H	S	Reference No.	
4	6	22.5	M6×0.75	7	4.5	7.5	—	9.5	—	—	8	4.5	WBK06-01A	WBK06-11
6	6	22.5	M6×0.75	7	4.5	7.5	—	9.5	—	—	8	4.5	WBK06-01A	WBK06-11
8	8	27	M8×1	9	6	10	—	11.5	—	—	10	5.5	WBK08-01A	WBK08-11
10	8	27	M8×1	9	6	10	—	11.5	—	—	10	5.5	WBK08-01A	WBK08-11
12	10	30	M10×1	10	8	15	—	14	—	—	12	6.5	WBK10-01A	WBK10-11
14	12	30	M12×1	10	10	15	3	15	4	6	12	6.5	WBK12-01A	WBK12-11
15	12	30	M12×1	10	10	15	3	15	4	6	12	6.5	WBK12-01A	WBK12-11
16	12	30	M12×1	10	10	15	3	15	4	6	12	6.5	WBK12-01A	WBK12-11
20	15	40	M15×1	15	12	20	4	19.5	5	7	17	8.5	WBK15-01A	WBK15-11
20	17	81	M17×1	23	12	29	4	20	5	7	22	10	WBK170F-31H	
25	20	53	M20×1	16	15	27	5	25	6	8	22	10	WBK20-01	WBK20-11
25	20	81	M20×1	23	15	39	5	25	6	8	22	10	WBK200F-31H	
28	20	53	M20×1	16	15	27	5	25	6	8	22	10	WBK20-01	WBK20-11
28	20	81	M20×1	23	15	39	5	28	6	8	24	12	WBK200F-31H	
32	25	62	M25×1.5	20	20	33	6	32	8	10	27	12	WBK25-01W	WBK25-11
32	25	89	M25×1.5	26	20	51	6	32	8	10	27	12	WBK250F-31H	
32	25	104	M25×1.5	26	20	51	6	32	8	10	27	12	WBK250FD-31H	
36	30	89	M30×1.5	26	25	61	8	36	10	12	30	13	WBK300F-31H	
36	30	104	M30×1.5	26	25	61	8	36	10	12	30	13	WBK300FD-31H	
40	30	89	M30×1.5	26	25	61	8	40	10	12	—	—	WBK300F-31H	
40	30	104	M30×1.5	26	25	61	8	40	10	12	—	—	WBK300FD-31H	
45	35	92	M35×1.5	30	30	63	8	45	12	14	—	—	WBK350F-31H	
45	35	107	M35×1.5	30	30	63	8	45	12	14	—	—	WBK350FD-31H	
50	40	92	M40×1.5	30	35	78	10	50	14	18	—	—	WBK400F-31H	
50	40	107	M40×1.5	30	35	78	10	50	14	18	—	—	WBK400FD-31H	

Notes Low-profile support unit is available for compact FA Series.

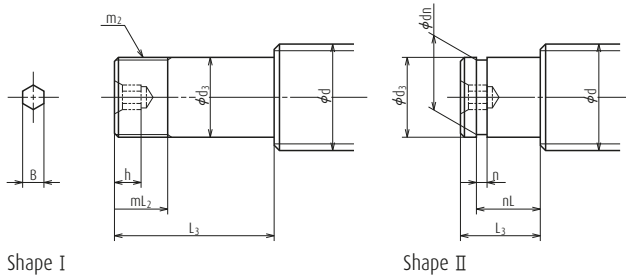


Fig. 4.5 Standard shaft end configuration (opposite to the drive side)

Table 4.10 Dimensions of shaft ends (opposite to the drive side)

Unit: mm

Screw shaft diameter d	Shape	Bearing journal		Thread for lock nut		Retainer ring groove			Hexagonal hole		Support unit Reference No. Numbers in parentheses are bearing reference number.
		Outside diameter	Length	Nominal spec.	Length	Width	Groove diameter	Groove position	Width across flats	Depth	
		d_3	L_3	m_2	mL_2	n	dn	nL	B	h	
8	II	6	9	—	—	0.8	5.7	6.8	—	—	WBK08S-01
10	II	6	9	—	—	0.8	5.7	6.8	—	—	WBK08S-01
12	II	8	10	—	—	0.9	7.6	7.9	—	—	WBK10S-01
14	II	10	22(12)	—	—	1.15	9.6	9.15	4	6	WBK12S-01
15	II	10	22(12)	—	—	1.15	9.6	9.15	4	6	WBK12S-01
16	II	10	22(12)	—	—	1.15	9.6	9.15	4	6	WBK12S-01
20	II	15	25(13)	—	—	1.15	14.3	10.15	5	7	WBK15S-01
25	II	20	19	—	—	1.35	19	15.35	6	8	WBK20S-01
25	I	20	53	M20×1	16	—	—	—	6	8	WBK20-01 WBK20-11
25	I	20	81	M20×1	23	—	—	—	6	8	WBK20DF-31H
28	II	20	19	—	—	1.35	19	15.35	6	8	WBK20S-01
28	I	20	53	M20×1	16	—	—	—	6	8	WBK20-01 WBK20-11
28	I	20	81	M20×1	23	—	—	—	6	8	WBK20DF-31H
32	II	25	20	—	—	1.35	23.9	16.35	8	10	WBK25S-01W
32	I	25	62	M25×1.5	20	—	—	—	8	10	WBK25-01W WBK25-11
32	I	25	89	M25×1.5	26	—	—	—	8	10	WBK25DF-31H
36	II	25	20	—	—	1.35	23.9	16.35	10	12	(6205)
36	I	25	89	M25×1.5	26	—	—	—	10	12	WBK25DF-31H
40	II	30	22	—	—	1.75	28.6	17.75	10	12	(6206)
40	I	30	89	M30×1.5	26	—	—	—	10	12	WBK30DF-31H
45	II	35	25	—	—	1.75	33	18.75	12	14	(6207)
45	I	35	92	M35×1.5	30	—	—	—	12	14	WBK35DF-31H
50	II	40	25	—	—	1.95	38	19.95	14	18	(6208)
50	I	40	92	M40×1.5	30	—	—	—	14	18	WBK40DF-31H

B-1-4 Procedures to Select Ball Screw

2. Shaft end configuration of R series ball screws for transfer equipment

Tables 4.11 and 4.12 show shaft end types for R Series.

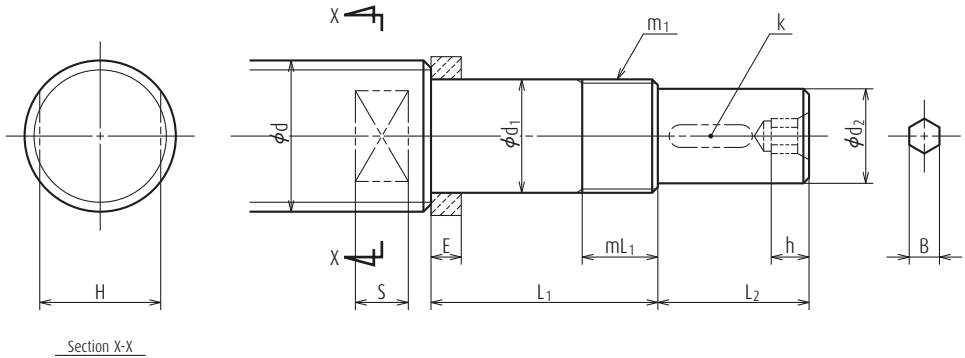


Fig. 4.6 R Series shaft end (drive side)

Table 4.11 Dimensions of R Series shaft ends (drive side)

Unit: mm

Screw shaft diameter	Bearing journal		Thread for lock nut		Spacer	Drive section			Hexagon hole		Wrench flats		Support unit	
	Outside diameter	Length	Nominal spec.	Length	Width	Outside diameter	Length	Key width	Width across flats	Depth	Width across flats	Length		
	d	d ₁	L ₁	m ₁	mL ₁	E	d ₂	L ₂	k	B	h	H	S	Reference No.
10	6	27	M6×0.75	7	5.0	4.5	7.5	—	—	—	8	4.5	WBK06-01A	WBK06-11
12	8	32	M8×1	9	5.5	6	10	—	—	—	10	5.5	WBK08-01A	WBK08-11
14	10	35	M10×1	10	5.5	8	15	—	—	—	12	6.5	WBK10-01A	WBK10-11
15	10	35	M10×1	10	5.5	8	15	—	—	—	12	6.5	WBK10-01A	WBK10-11
16	12	35	M12×1	10	5.6	10	15	3	4	6	12	6.5	WBK12-01A	WBK12-11
18	12	35	M12×1	10	5.6	10	15	3	4	6	12	6.5	WBK12-01A	WBK12-11
20	15	50	M15×1	15	10	12	20	4	5	7	17	8.5	WBK15-01A	WBK15-11
25	17	53	M17×1	17	7	15	27	5	6	8	22	10	WBK17-01A	—
25	20	64	M20×1	16	11	15	27	5	6	8	22	10	WBK20-01	WBK20-11
28	20	64	M20×1	16	11	15	27	5	6	8	22	10	WBK20-01	WBK20-11
32	25	76	M25×1.5	20	14	20	33	6	8	10	27	12	WBK25-01W	WBK25-11
36	25	76	M25×1.5	20	14	20	33	6	8	10	27	12	WBK25-01W	WBK25-11
40	30	89	M30×1.5	26	—	25	61	8	10	12	—	—	WBK30DF-31H	—
45	35	92	M35×1.5	30	—	30	63	8	12	14	—	—	WBK35DF-31H	—
50	35	92	M35×1.5	30	—	30	63	8	12	14	—	—	WBK35DF-31H	—

Note The dimension d₁ shall be smaller enough than the minor diameter of the ball screw thread to provide sufficient shoulder surface for the spacer.
Refer to "Precautions for Designing Ball Screw (page B83)".

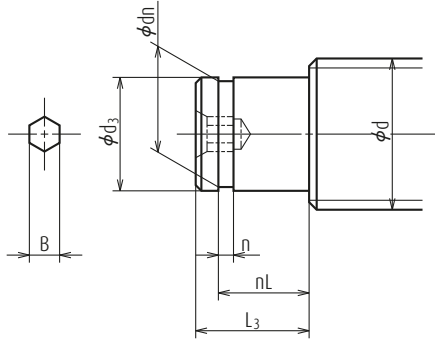


Fig. 4.7 Shaft end configuration of R Series (opposite to the drive side)

Table 4.12 Dimensions of R Series shaft ends (opposite to the drive side)

Unit: mm

Screw shaft diameter d	Bearing journal		Retainer ring groove			Hexagonal hole		Support unit Numbers in parentheses are bearing reference numbers.
	Outside diameter d_3	Length L_3	Width n	Groove diameter dn	Groove position nL	Width across flats B	Depth h	
10	6	9	0.8	5.7	6.8	—	—	WBK08S-01(606)
12	8	10	0.9	7.6	7.9	—	—	WBK10S-01(608)
14	10	12	1.15	9.6	9.15	4	6	WBK12S-01(6000)
15	10	12	1.15	9.6	9.15	4	6	WBK12S-01(6000)
16	10	12	1.15	9.6	9.15	4	6	WBK12S-01(6000)
18	10	12	1.15	9.6	9.15	4	6	WBK12S-01(6000)
20	15	13	1.15	14.3	10.15	5	7	WBK15S-01(6002)
25	17	16	1.15	16.2	13.15	6	8	WBK17S-01(6203)
25	20	19	1.35	19	15.35	6	8	WBK20S-01(6204)
28	20	19	1.35	19	15.35	6	8	WBK20S-01(6204)
32	25	20	1.35	23.9	16.35	8	10	WBK25S-01W(6205)
36	25	20	1.35	23.9	16.35	8	10	WBK25S-01W(6205)
40	30	22	1.75	28.6	17.75	10	12	(6206)
45	35	23	1.75	33	18.75	12	14	(6207)
50	35	23	1.75	33	18.75	12	14	(6207)

B-1-5 When Placing Orders

To avoid confusion, please use "reference number" or "specification number" when inquiring about desired ball screw specifications.

➤ **Reference number:**

Alpha-numeric codes are assigned to each ball screw. When placing order, please use this reference number.

➤ **Specification number:**


Specification factors are identified by alpha-numeric codes. Codes are for easy explanation of your requirements. (If you do not use these numbers, please itemize your requirements.)

B-1-5.1 When Ordering Standard Ball Screws


Find the reference number from the dimension table. Enter the reference number in the "Order Form by Fax" (page B34).

Send the fax to your local NSK agency (branch office, sales office, or your local representative).


The following is the flow chart for ordering standard ball screws.

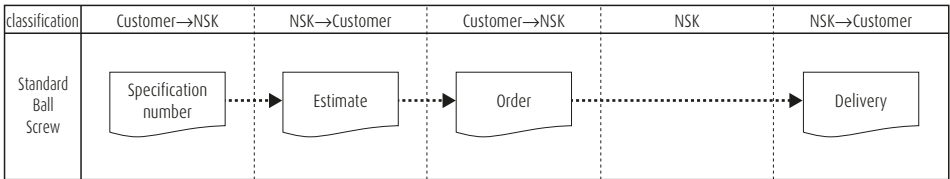


1. Example of reference number for Standard ball screws Compact FA Series and high-speed SS Series

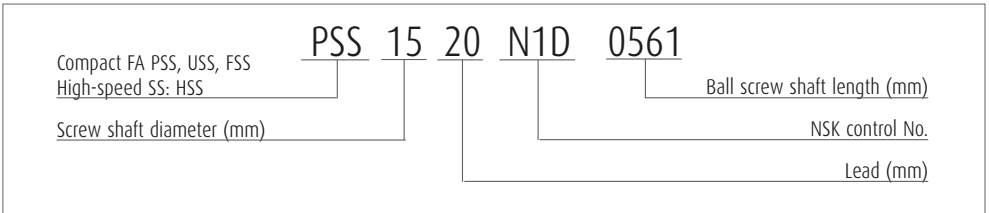


2. Example of reference number of Standard ball screws

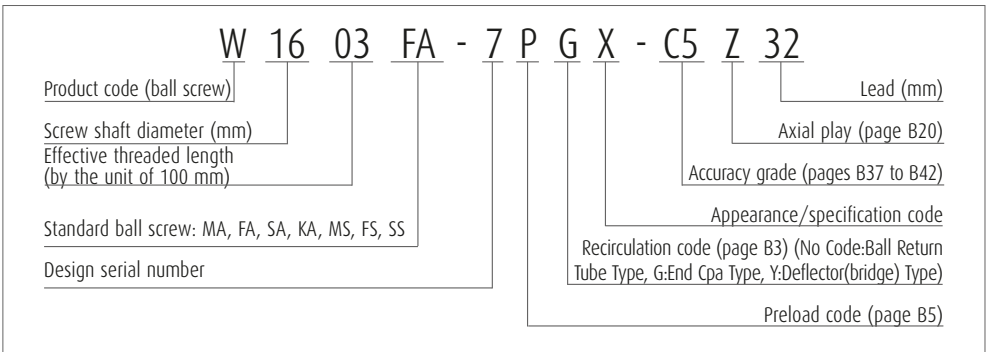

3. Example of reference number of ball screws for transfer equipment with finished shaft end and blank shaft end

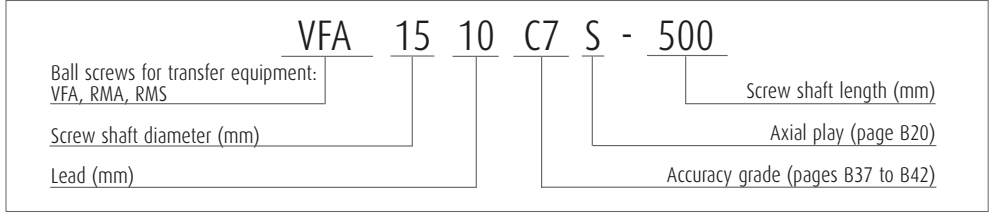

4. Example of reference number of R series ball screws for transfer equipment

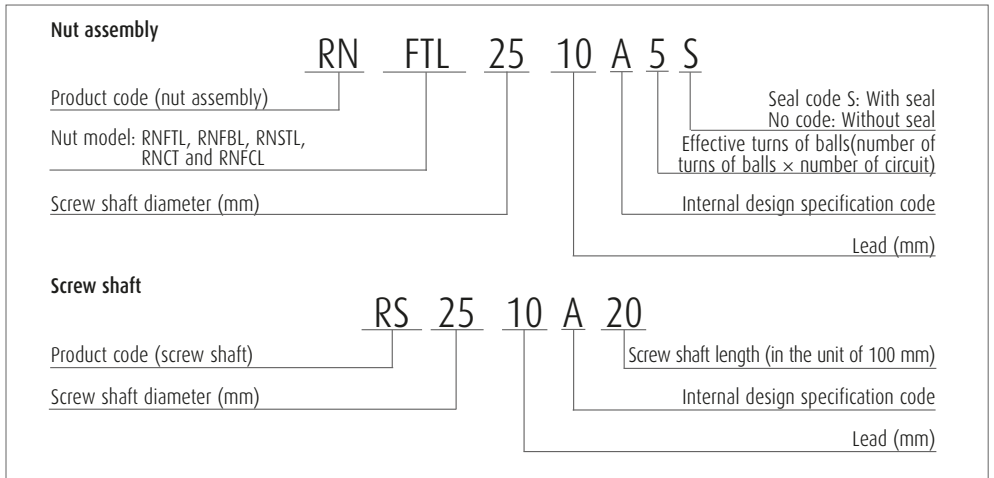


B-1-5 When Placing Orders

B-1-5.2 When Ordering Made-to-Order Ball Screws


If you would like to discuss technical points regarding specifications, use the NSK ball screw technical data sheet as an aid (page B36). For high-load drive ball screws, use the

technical sheet on page B561-562 for NSK high-load drive ball screw.


The following is the flow chart for ordering made-to-order ball screws.

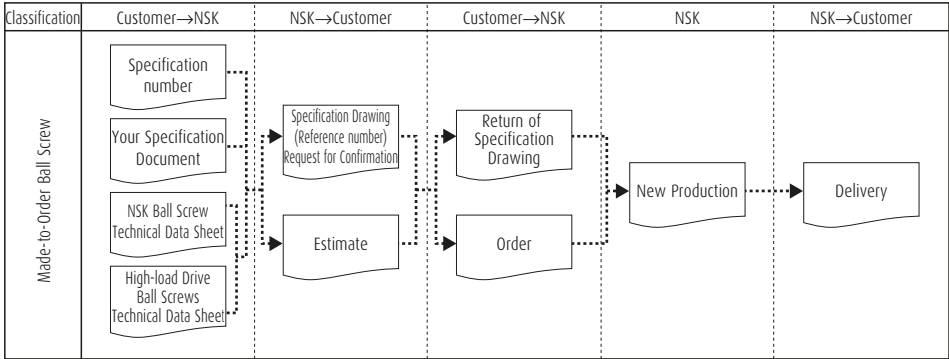

1. Example of specification number of made-to-order ball screw

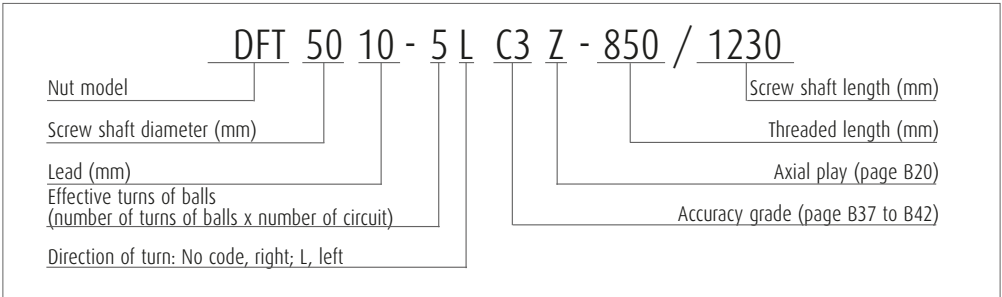

2. Example of reference number of made-to-order ball screw

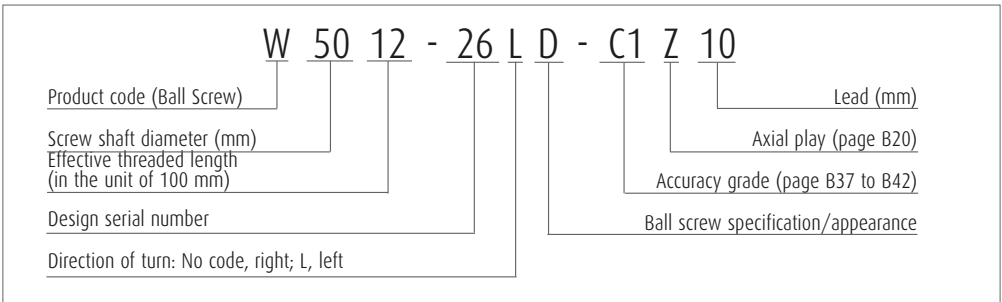

Fax Order Form

(Make copies for future orders)

1. Standard ball screw

Company name: _____

Date: Day Month Year _____

Address: _____

Telephone: _____

Name of person in charge: _____

Section: _____

Product name	Specification number	Quantity	Desired delivery date
Precision ball screw			
R Series ball screw Nut			
R Series ball screw Screw shaft			
Support unit			
Lock nut			
Grease unit			

Describe the shaft end configuration if processing is required (blank shaft end ball screw). In this case, specify which ball screw in the above list the shaft end shall be processed.

Refer to pages B27 to B30 for shaft end configuration. These pages also show the reference number for support units.

Drive side
Opposite of drive side

B-1-5 When Placing Orders

NSK Ball Screw Technical Data Sheet (example)

2. Made-to-order ball screw

Company name _____
 Address _____
 Person in charge _____
 Machine which uses the ball screw Machining center Model MC-
 Drawing/rough sketch attached? Yes No

Date: Day _____ Month _____ Year _____
 Telephone _____
 Section _____
 Application Table left/right movement (X axis)

Use conditions

	Axial load	Rotational speed	Operating hours	Operating conditions	Shaft rotation - Moving nut <input checked="" type="checkbox"/> Normal operation <input checked="" type="checkbox"/>				
Maximum load	9 000 N	20 min ⁻¹	15 %		Shaft rotation - Moving shaft	Back drive operation			
Load in normal use	4 000 N	360 min ⁻¹	60 %		Nut rotation - Moving nut	Nut rotation - Moving shaft			
Minimum load	2 000 N	1 000 min ⁻¹	25 %	Degree of vibration shock	Normal				
Maximum rotational speed	1 000 min ⁻¹			Required life	20000h				
Lubricant	Grease/oil (Brand name: <i>NSK GRS AS2</i>) (Maker: _____)			Motor in use	Company A, Model 1				
Seal	Yes	No		Control system	Company B, Model 2 (resolution: 1µm)				
Support bearing	Drive side <i>35TAC62DF</i>			Opposite to drive side <i>35TAC62DF</i>					
Guide way	<input checked="" type="checkbox"/> Rolling	Sliding (<i>RA451500GM2-P4Z3-II</i>)							
Environment	Temperature (Normal temperature in degrees Celsius)			Dust	Humidity	Gas	Liquid (where?)	Clean room	In vacuum
Schedule for prototype	Day	Month	Year (approx.)	Quantity used	Piece				
Date, going in production/Quantity	/Month	/Year	/Lot	per machine					

Specification factors of the ball screw

Screw shaft diameter	50 mm	Direction of turn	right	Accuracy grade	C2	Screw shaft length	880 mm	Preload	3000 N
Lead	10 mm	Effective turns of balls		Axial play	0 mm	Overall shaft length	1335 mm	Required torque	
Nut model	ZFT5010-10	Flange type	Circular I	Nut orientation		Same as shown in the dimension table			Opposite

Supplemental explanation/requests

NSK Ball Screw Technical Data Sheet (example)

2. Made-to-order ball screw

Company name _____
 Address _____
 Person in charge _____
 Machine which uses the ball screw _____
 Drawing/rough sketch attached? Yes No

Date: Day _____ Month _____ Year _____
 Telephone _____
 Section _____
 Application _____

Use conditions

	Axial load	Rotational speed	Operating hours	Operating conditions	Shaft rotation - Moving nut	Normal operation
Maximum load	N	min ⁻¹	%		Shaft rotation - Moving shaft	Back drive operation
Load in normal use	N	min ⁻¹	%		Nut rotation - Moving nut	Oscillation
Minimum load	N	min ⁻¹	%	Degree of vibration shock		
Maximum rotational speed	min ⁻¹			Required life		
Lubricant	Grease/oil (Brand name: _____) (Maker: _____)			Motor in use		
Seal	Yes	No		Control system	(resolution: _____)	
Support bearing	Drive side			Opposite to drive side		
Guide way	Rolling Sliding (_____)					
Environment	Temperature (Normal temperature in degrees Celsius)			Dust	Humidity	Gas Liquid (where?) Clean room In vacuum
Schedule for prototype	Day	Month	Year (approx.)	Quantity used	Piece	
Date, going in production/Quantity	/Month	/Year	/Lot	per machine		

Specification factors of the ball screw

Screw shaft diameter	Direction of turn	Accuracy grade	Screw shaft length	Preload
Lead	Effective turns of balls	Axial play	Overall shaft length	Required torque
Nut model	Flange type	Nut orientation	Same as shown in the dimension table	
				Opposite

Supplemental explanation/requests

B-2 Technical Description of Ball Screws

B-2-1 Accuracy

B-2-1.1 Lead Accuracy

The lead accuracy of NSK precision ball screws (C0 to C5 grades) conforms to the four characteristics specified in JIS Standards. These characteristics are expressed by codes ep, v_u , v_{300} , and $v_{2\pi}$.

Fig. 1.1 explains the definition of each characteristic, and shows allowable value of each. Leads are classified into two categories: C system for positioning; Ct system for transportation. Tables 1.2, 1.3 and 1.4 show tolerance of each characteristic.

JIS B1192 sets C type and Cp type standards for positioning ball screws. NSK uses the specification of C type only. JIS B1192 specifies Ct1, 3, and 5 grade. NSK standards are integrated by C type only. Refer to Table 1.2 for C type standard tolerance.

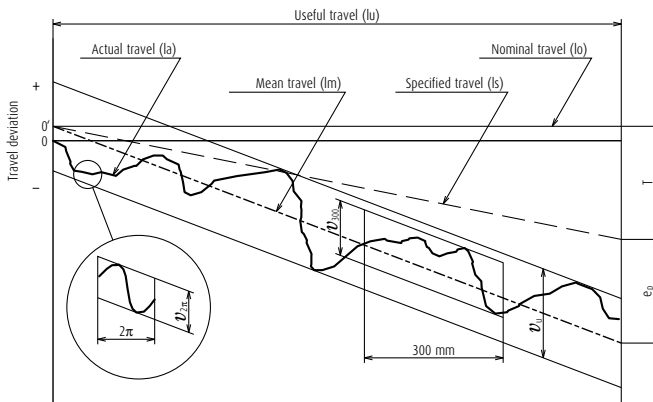


Fig. 1.1 Definition of lead accuracy

Table 1.1 Terminology in lead accuracy

Term	Code	Description	Tolerance
Specified travel	ls	The travel compensates the nominal travel for an elongation caused by an increase of temperature or load.	
Travel compensation	T	Value obtained by subtracting the specified travel from the nominal travel based on the useful travel. The value is to compensate for the errors caused by thermal deformation or deformation by load. This value is determined by tests and experience (see page B39).	
Actual travel	la	Actually measured travel	
Actual mean travel	lm	A straight line that demonstrates the direction of actual travel. This straight line is obtained from the curve that shows actual travel volume by least-squares method or by resembling approximation.	
Tolerance on specified travel	ep	Obtained by subtracting the specified travel from the actual mean travel.	Table 1.2
Travel variation	v_u	Maximum range of the actual travel which is between the two straight lines drawn parallel to the actual mean travel. There are three categories as shown below. > Maximum range relative to the effective length of thread.	Table 1.2
	v_{300}	> Maximum range relative to the length of 300 mm anywhere within the effective length of thread.	Table 1.3, 1.4
	$v_{2\pi}$	> Maximum range which corresponds to any single rotation (2π rad.) within the effective length of thread.	Table 1.3

Table 1.2 Tolerance on specified travel ($\pm ep$) and travel variation (v_u) of the positioning (C type) ball screws

Unit: μm

Accuracy grade	C0		C1		C2		C3		C5			
	over	or less	$\pm ep$	v_u	$\pm ep$	v_u	$\pm ep$	v_u	$\pm ep$	v_u	$\pm ep$	v_u
-	100		3	3	3.5	5	5	7	8	8	18	18
100	200		3.5	3	4.5	5	7	7	10	8	20	18
200	315		4	3.5	6	5	8	7	12	8	23	18
315	400		5	3.5	7	5	9	7	13	10	25	20
400	500		6	4	8	5	10	7	15	10	27	20
500	630		6	4	9	6	11	8	16	12	30	23
630	800		7	5	10	7	13	9	18	13	35	25
800	1 000		8	6	11	8	15	10	21	15	40	27
1 000	1 250		9	6	13	9	18	11	24	16	46	30
1 250	1 600		11	7	15	10	21	13	29	18	54	35
1 600	2 000				18	11	25	15	35	21	65	40
2 000	2 500				22	13	30	18	41	24	77	46
2 500	3 150				26	15	36	21	50	29	93	54
3 150	4 000				30	18	44	25	60	35	115	65
4 000	5 000						52	30	72	41	140	77
5 000	6 300						65	36	90	50	170	93
6 300	8 000								110	60	210	115
8 000	10 000										260	140
10 000	12 500										320	170

Table 1.3 Tolerance of travel variation relative to 300 mm (v_{300}) and one revolution ($v_{2\pi}$) of the positioning (C type) ball screws

Unit: μm

Accuracy grade	C0	C1	C2	C3	C5
v_{300}	3.5	5	7	8	18
$v_{2\pi}$	2.5	4	5	6	8

Note:  to JIS B1192 standards. Values in other areas are NSK standards.

Table 1.4 Travel variation (v_{300}) relative to 300 mm of the transportation (Ct type) ball screws

Unit: μm

Accuracy grade	Ct7	Ct10
v_{300}	52	210

Note: Tolerance on specified travel (ep) of the transportation (Ct type) ball screws is calculated as follows.

$$ep = \pm \frac{lu}{300} \times v_{300}$$

lu: Effective length of the screw thread

B-2-1 Accuracy

Example of specifying lead accuracy

<Use Conditions>

Nut model: DFT4010-5

Stroke: 1 000 mm

Positioning accuracy: ± 0.035 mm/1 000 mm

<Calculation>

Obtain required lead accuracy of a ball screw under these conditions.

1. Calculate the length of the thread

$$\begin{aligned}\text{Stroke} + \text{nut length} + \text{margin} &= 1\,000 + 193 + 100 \\ &= 1\,293 \text{ (mm)} \cdots \rightarrow 1\,300 \text{ mm}\end{aligned}$$

2. Calculate lead accuracy

From **Table 1.2**, obtain the tolerance on specified travel relative to the length of thread (1 300 mm).

C5 ... $\pm 0.054/1\,250 - 1\,600$

C3 ... $\pm 0.029/1\,250 - 1\,600$

3. Determine lead accuracy

Positioning accuracy is: $\pm ep < \pm 0.035/1\,000$ mm

$$\begin{aligned}\text{Accuracy grade: C3 grade } \pm ep &= 0.029/\text{length of thread (1 300 mm)} \\ \nu_{\mu} &= 0.018\end{aligned}$$

B-2-1.2 Thermal Expansion and Target Value of Specified Travel

1. Thermal expansion

Thermal expansion of screw shaft induces the degradation of positioning accuracy of the ball screws. Thermal expansion of a screw shaft is calculated as follows.

$$\Delta L_{\theta} = \rho \cdot \theta \cdot L \text{ (mm)} \quad (\text{II-1})$$

In this formula:

- ΔL_{θ} : Thermal expansion (mm)
- ρ : Thermal expansion coefficient ($12.0 \times 10^{-6} \text{ }^{\circ}\text{C}^{-1}$)
- θ : Average temperature rise of screw shaft (Celsius)
- L : Length of screw shaft (mm)

The above formula indicates that when the temperature rises one degree Celsius, the screw shaft stretches $12 \mu\text{m}$ per meter. Ball screw generates more heat when it is used at high speed. This causes elongation of the screw shaft. Although the ball screw lead is ground into high precision, an elongated screw shaft due to high temperature rise may not satisfy required highly accurate positioning.

2. Countermeasures against temperature rise

Countermeasures against temperature rise of the ball screw are: Hollow shaft cooling or nut cooling ball screws are recommended for operation under high-speed and high-precision conditions.

① Suppress heat generation.

- > Do not apply excessive preload to the ball screw and support bearing.
- > Select appropriate lubricant and use it properly.
- > Use higher helix ball screw lead to lower rotational speed.

② Use forced cooling.

- > Feed liquid coolant into the hollow shaft cooling or nut cooling ball screws. - Refer to the information on hollow shaft ball screw for high accuracy machine tools in the section for application-oriented ball screws (pages B574 to 582).
- > Cool screw shaft surface with lubricant oil or air.

③ Avoid effects of temperature rise on positioning.

- > Warm up the machine by high speed until the temperature rise of ball screw shaft saturates, then maintain it properly.
- > Set pre-tension. (Fig. 1.2)
- > Set the negative (minus) target value of specified travel.
- > Employ the closed loop control system.

3. How to determine specified travel

In general, the specified travel of ball screw is the same as the nominal travel. However, the specified lead of ball screw is sometimes set to negative (minus) or positive (plus) to adjust expansion by temperature rise during operation, or the elongation/contraction of the screw shaft by external load. For such occasion, specify travel compensation (T) when ordering the ball screw.

As an example, **Table 1.5** shows the travel compensation (T) for typical NC machine tools.

Table 1.5 Travel compensation (T) of specified travel for typical NC machine tools

Unit: mm

Type of machine	Axis	Travel compensation (per 1 m)
NC lathes	X	- 0.02 — - 0.05
	Z	- 0.02 — - 0.03
Machining centers	X, Y	- 0.03 — - 0.04
	Z	Differs by structure

4. How to determine pre-tension force

In order to absorb thermal expansion, pre-tension can be provided to the screw shaft at the time of installation. In this case, the pre-tension is usually equivalent to the expansion brought about by the temperature rise of 2 to 3°C.

Fig. 1.2 shows the bearing support structure in such occasion.

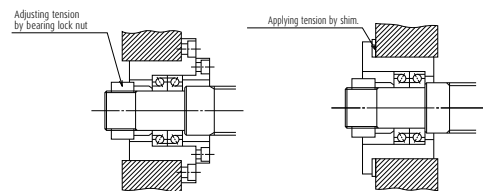


Fig. 1.2 Bearing structure to provide pre-tension

B-2-1 Accuracy

B-2-1.3 Mounting Accuracy and Tolerance of Ball Screws

The accuracy related to mount the ball screws is specified in the following seven characteristics (Fig. 1.3).

The tolerance is indicated in the specification drawing.

Detailed tolerances are specified by JIS B1192. For reference, **Table 1.6** shows standard values of "(7) Total run-out of the screw shaft axis (straightness of the screw shaft)". NSK sets stricter tolerance standards than JIS standards. For accuracy of the ball screw installation, refer to "Installation of Ball Screw (1) Centering of the units" (page B73).

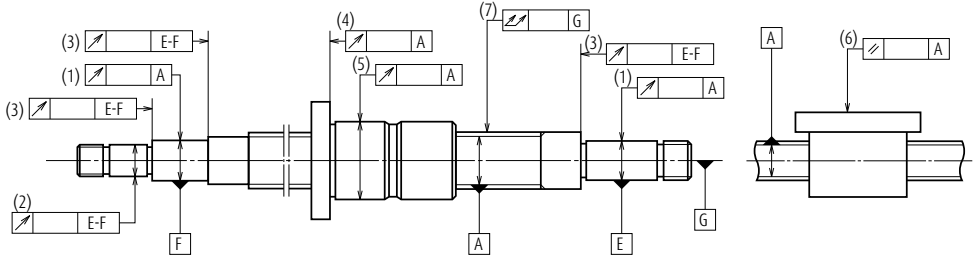


Fig. 1.3 Mounting accuracy of ball screw

1. Radial run-out of the support bearing seat relative to the axis of the ball thread of screw shaft.
2. Radial run-out of the other shaft ends section relative to the axis of the support bearing seat.
3. Radial run-out of the shoulder of support bearing seat relative to the axis of support bearing seat.
4. Radial run-out of the nut flange surface, or of the nut end datum surface, relative to the axis of screw shaft.
5. Radial run-out of the nut outside surface (cylindrical shape) to the axis of screw shaft.
6. Parallelism of the nut mounting surface to the screw shaft axis. (in case of flat mounting surface)
7. Total run-out of the screw shaft axis.

Table 1.6 Total run-out of the screw shaft axis

Unit: μm

Accuracy grade		C0							C1						
Nominal diameter (mm)	over	-	8	12	20	32	50	-	8	12	20	32	50	80	
	or less	8	12	20	32	50	80	8	12	20	32	50	80	125	
Overall length of screw shaft (mm)	-	125	15	15	15				20	20	15				
	125	200	25	20	20	15			30	25	20				
	200	315	35	25	20	20			40	30	25	20			
	315	400		35	25	20	15		45	40	30	25	20		
	400	500		45	35	25	20			50	40	30	25		
	500	630		50	40	30	20	15		60	45	35	25	20	
	630	800			50	35	25	20			60	40	30	25	
	800	1 000			65	45	30	25			75	55	40	30	25
	1 000	1 250			85	55	40	30			95	65	45	35	30
	1 250	1 600			110	70	50	40			130	85	60	45	35
	1 600	2 000				95	65	45				120	80	55	40
	2 000	2 500											100	70	50
	2 500	3 150												130	90
	3 150	4 000													120

Unit: μm

Accuracy grade		C3								C5						
Nominal diameter (mm)	over	-	8	12	20	32	50	80	-	8	12	20	32	50	80	
	or less	8	12	20	32	50	80	125	8	12	20	32	50	80	125	
Overall length of screw shaft (mm)	-	125	25	25	20					35	35	35				
	125	200	35	35	25	20				50	40	40	35			
	200	315	50	40	30	30				65	55	45	40			
	315	400	60	50	40	35	25			75	65	55	45	35		
	400	500		65	50	40	30			80	60	50	45			
	500	630		70	55	45	35	30		90	75	60	50	40		
	630	800			70	55	40	35			90	70	55	45		
	800	1 000			95	65	50	40	30		120	85	65	50	45	
	1 000	1 250			120	85	60	45	35		150	100	75	60	50	
	1 250	1 600			160	110	75	55	40		190	130	95	70	55	
	1 600	2 000				140	95	70	50			170	120	85	65	
	2 000	2 500					120	85	60				150	110	80	
	2 500	3 150					160	110	75					200	140	95
	3 150	4 000					220	150	100					260	180	120
	4 000	5 000						200	130						240	160
	5 000	6 300													310	210
6 300	8 000														280	
8 000	10 000														370	

B-2-1 Accuracy

B-2-1.4 Automatic Lead Accuracy Measuring System of NSK

In response to the demand for high precision in production technology, NSK is the first in the world that developed and uses "Lead Accuracy Measuring System (LAMS)." Lead accuracy is measured by the system that employs a laser interferometer measuring instrument and a personal computer.

Fig. 1.4 shows the lead accuracy measuring system. The inspection date of the ball screw is shown in Fig. 1.5. The laser interferometer measures either ball nut travel accuracy or lead accuracy of the ball thread. The data which are input into a computer are processed into four characteristics readings regarding lead accuracy. (See page B37.)

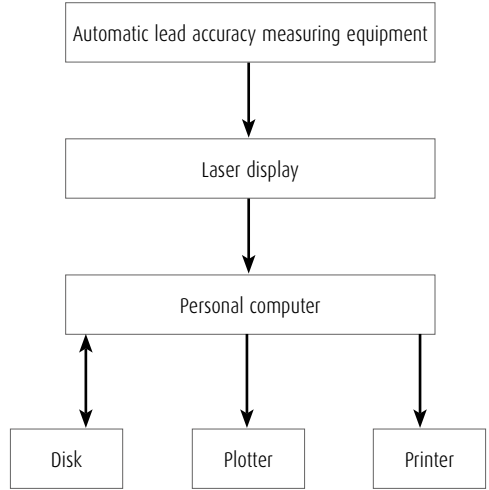


Fig. 1.4 Lead accuracy measuring system



BALL SCREW INSPECTION DATA


NSK REF. NO. _____

CUSTOMER'S PART NO. _____

SERIAL NO. _____


SHAFT NO. _____

MEASURING INSTRUMENT: _____
 TEMPERATURE: 20 ± 0.2°C



Laser beam type automatic lead measuring instrument.

Nominal lead	: \bar{L}		mm
Specified travel deviation for compensation	: ΔT		μm
Accuracy	Permissible value	Measured result	
Mean travel deviation	: $\overline{\Delta T}$ ±	μm	μm
		T-avg	μm
Variation over the travel length	: $\Delta T_{1/2}$	μm	μm
Variation within 300mm travel	: ΔT_{300}	μm	μm
		μm	μm
Preload drag torque	Norm	Norm	
Axial play	μm	μm	

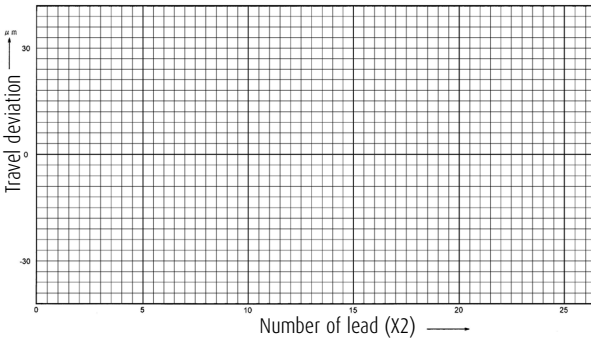

All dimensions are within specifications.

INSPECTOR: _____

DATE: - - _____

NSK Ltd. TOKYO. JAPAN

Fig. 1.5 Ball screw Inspection data

B-2-2 Static Load Limitation

Ball screw, based on its function, will generally receive axial load only. Ball screw shaft in general is long, so it is necessary to consider 3 items below:

- > Buckling load of the screw shaft
- > Yielding of the screw shaft by tensional or compressive stress
- > Permanent deformation at the ball contact points

B-2-2.1 Buckling Load

It is necessary to calculate whether the ball screw shaft is safe against buckling.

Buckling load, i.e. permissible compressive load "P" to axial direction, is calculated as follows.

$$P = \alpha \times \frac{N \cdot \pi^2 \cdot E \cdot I}{L^2} = m \frac{d_r^4}{L^2} \times 10^4 \text{ (N)} \quad (\text{II-2})$$

In this formula:

α : Safety factor ($\alpha = 0.5$)

E : Elastic modulus ($E = 2.06 \times 10^5 \text{ MPa}$)

I : Moment of inertia

$$I = \frac{\pi}{64} d_r^4 \quad (\text{mm}^4) \quad (\text{II-3})$$

d_r : Screw shaft root diameter (mm) (See the dimension table.)

L : Unsupported length (mm) (See **Figs. 4.1** and **4.2** 'Supporting conditions of screw shaft and nut' on page B51.)

m, N : Factors determined by the supporting condition of the ball screw shaft

Table 2.1 Factors of buckling load

Supporting condition	m	N
Fixed - Fixed support	19.9	4
Fixed - Simple support	10.0	2
Fixed support - Free	1.2	0.25
Simple - Simple support	5.0	1

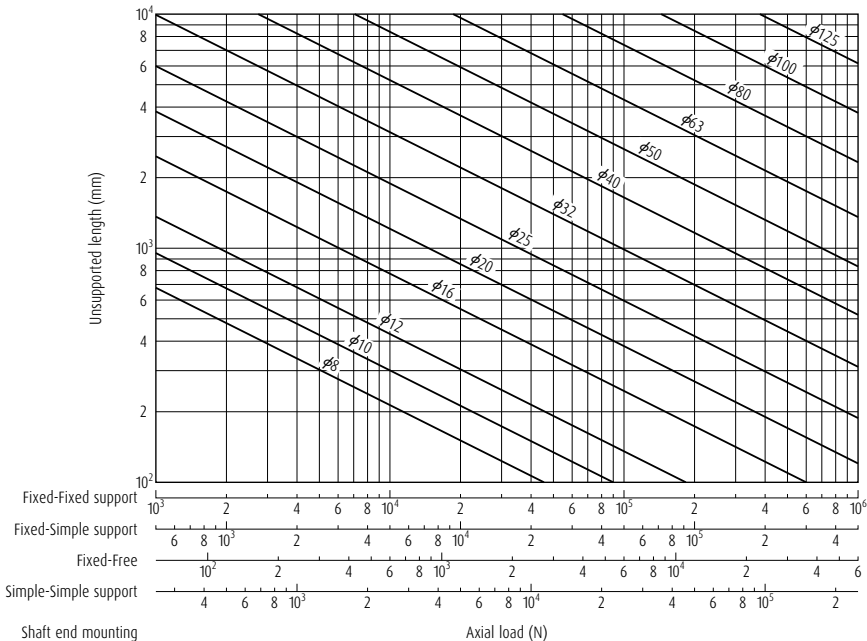


Fig. 2.1 Buckling load

B-2-2 Static Load Limitation

<<Calculation example of buckling load>>

Calculate buckling load under the conditions in **Fig. 2.2**.

<Use conditions>

Nut model: DFT4010-5

Supporting condition is Fixed - Fixed support (From the supporting condition (ii) in **Fig. 4.1** 'Supporting conditions of screw shaft and nut' on page B51.)

Unsupported length $L = 2\,000$ mm

Screw shaft root diameter $d_r = 34.4$ mm (From the dimension table)

<Calculation>

Support condition is Fixed - Fixed support, from **Table 2.1** on page B44

$N = 4$

$m = 19.9$

By Formula 2) in Page B44

$$P = m \frac{d_r^4}{L^2} \cdot 10^4 = 19.9 \times \frac{34.4^4}{2\,000^2} \times 10^4 = 69\,667 \text{ (N)}$$

Therefore,

Permissible buckling load $P = 69\,600$ N

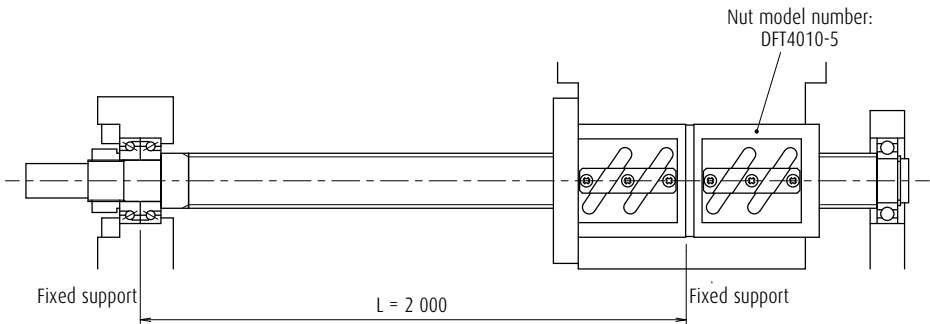


Fig. 2.2 Calculation example of buckling load

B-2-2.2 Yield by Tensional/Compressive Stress

It is necessary to consider permissible load in regards to the yield stress.

Permissible load "P" by tensional or compressive stress to screw shaft is

$$P = \sigma \cdot A = 1.15d_r^2 \times 10^2 \text{ (N)} \quad (\text{II-4})$$

In this formula:

σ : Allowable stress (= 147 MPa)

A : Cross section area of a screw shaft using root diameter (mm²)

$$A = \frac{\pi}{4} \cdot d_r^2 \text{ (mm}^2\text{)} \quad (\text{II-5})$$

d_r : Screw shaft root diameter (mm)

<<Calculation example of yield load>>

Obtain load in respect to the allowable stress under the conditions in **Fig. 2.2**.

<Use conditions>

Nut model: DFT4010-5

Screw shaft root diameter $d_r = 34.4$ (mm)

(From the dimension table)

<Calculation>

By formula 4)

$$P = 1.15d_r^2 \times 10^2 = 1.15 \times 34.4^2 \times 10^2 \\ = 136\,086 \text{ (N)}$$

Therefore,

Permissible load $P = 136\,000$ N

B-2-2.3 Permanent Deformation at the Ball Contact Point

Exposed to an excessively heavy load in axial direction, the balls are squashed, and the ball rolling surface is dented. The deformations on these points do not perfectly restore to original shape after the load is removed. They are permanently disfigured. It is necessary to determine the limitation of this disfigurement to containing it within a certain range.

1. Basic static load rating C_{0a}

Basic static load rating C_{0a} is a load to axial direction that results in the combined permanent deformation equal to 0.01% of the ball diameter at the contact points of ball and ball grooves of the screw shaft and nut.

2. Calculation of permissible load by C_{0a}

P_0 (allowable axial direction load to limit the permanent deformation) is calculated using C_{0a} .

$$P_0 = \frac{C_{0a}}{f_s} \text{ (N)} \quad (\text{II-6})$$

In this formula, f_s : Static permissible load factor

Table 2.2 Static permissible load factor

At time of normal operation	1 - 2
With vibration impact	1.5 - 3

<<Calculation example of the maximum allowable load>>

Obtain the maximum allowable load to the ball groove section under conditions in **Fig. 2.2**.

<Use conditions>

Nut model: DFT4010-5

Basic static load rating $C_{0a}=137\,000$ (N)

(From the dimension table)

Static permissible load factor $f_s = 2$
(normal operation, no vibration impact)

<Calculation>

By Formula 6), maximum allowable load of the ball groove section

$$P_0 = \frac{C_{0a}}{f_s} = \frac{137\,000}{2} = 68\,500 \text{ (N)}$$

B-2-3 Permissible Rotational Speed

Permissible rotational speed is determined by the feeding speed and ball screw lead. When selecting a ball screw, it is important to know the permissible rotational speed.

It is necessary to calculate two items below, and whichever smaller is the permissible rotational speed.

The lower of the following two factors, d-n and critical speed, will determine the overall permissible rotational speed of the ball screw.

- > Critical speed which is the resonance vibration of the shaft.
- > d-n value which is involved in damaging the ball recirculation components.

* Please consult NSK if the maximum rotational speed exceeds the criteria of maximum rotational speed on page B50, even both the critical speed of screw shaft rotation and the d-n value are in range of the allowable limit.

B-2-3.1 Critical Speed of the Screw Shaft

Calculate the critical speed which is the matching value of the ball screw rotational speed and the natural frequency of the screw shaft. The 80% of the critical speed is defined as the permissible rotational speed.

Calculate the critical speed of the screw shaft whether you use shaft rotation or nut rotation. Critical speed varies by the nut traveling position. Please consult NSK for detailed calculation.

If using a ball screw exceeding the critical speed, it is necessary to increase the natural frequency by using an intermediate support, etc. If using with nut rotation, it is possible to operate exceeding critical speed by installing a vibration energy absorbing system (optional, vibration control damper: patented by NSK) to the screw shaft. (Refer to "Nut rotatable drive ND Series" on page B583.)

Calculate the permissible rotational speed based on critical speed n_c as follows, taking in account "B-2-4 Supporting Conditions for Calculation of Buckling Load and Critical Speed" on page B51.

Fig. 3.1 shows the permissible rotational speeds against critical speed for each shaft diameter.

$$n_c = \alpha \times \frac{60\lambda^2}{2\pi L^2} \sqrt{\frac{E \cdot I \cdot g}{\gamma \cdot A}}$$

$$= f \frac{d_r}{L^2} \times 10^7 \text{ (min}^{-1}\text{)} \quad (\text{II- 7})$$

In this formula:

α : Safety factor ($\alpha = 0.8$)

E : Elastic modulus ($E = 2.06 \times 10^5$ MPa)

I : Moment of inertia of area of screw shaft

$$I = \frac{\pi}{64} d_r^4 \text{ (mm}^4\text{)} \quad (\text{II- 3})$$

d_r : Screw shaft root diameter (mm) (See the dimension table.)

g : Acceleration of gravity ($= 9.8 \times 10^3$ mm/s²)

γ : Specific weight ($\gamma = 7.65 \times 10^{-5}$ N/mm³)

A : Cross section area of the screw shaft root diameter (mm²)

$$A = \frac{\pi}{4} d_r^2 \text{ (mm}^2\text{)} \quad (\text{II- 5})$$

L : Unsupported length (mm) (See Figs. 4.1, and 4.2 "Supporting conditions of screw shaft and ball nut" on page B51)

f, λ : Factors determined by the supporting condition

Table 3.1 Coefficients of critical speed

Supporting condition	f	λ
Fixed - Simple support	15.1	3.927
Fixed - Fixed support	21.9	4.730
Fixed support - Free	3.4	1.875
Simple - Simple support	9.7	π

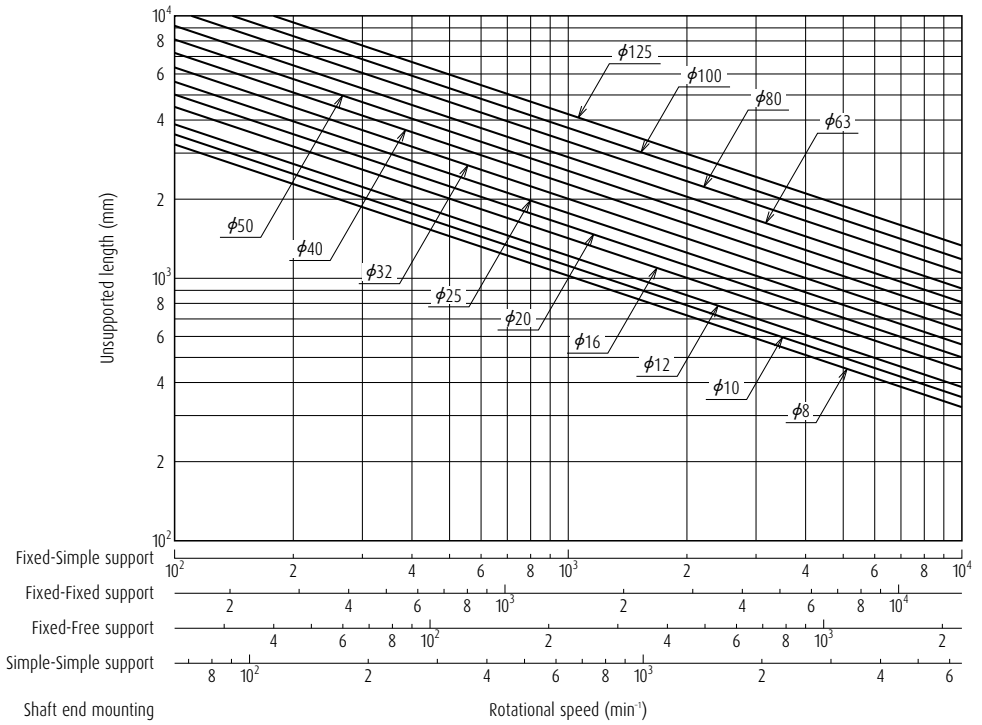


Fig. 3.1 Permissible rotational speeds vs. critical speeds

B-2-2 Static Load Limitation

<<Calculation example of permissible rotational speed to the critical speed>>

Calculate the permissible rotational speed to the critical speed under conditions in **Fig. 3.2**.

<Use conditions>

Nut model: DFT4010-5

Supporting condition is Fixed - Simple support (From the supporting condition (ii) in **Fig. 4.1** "Supporting conditions of screw shaft and ball nut" on page B51.)

Unsupported length $L = 2\,000$ mm

Screw shaft root diameter $d_r = 34.4$ mm (From the dimension table)

<Calculation>

Supporting condition is Fixed-Simple support, from **Table 3.1** on page B47

$\lambda = 3.927$

$f = 15.1$

By Formula (7) on page B47, permissible rotational speed to critical speed is

$$n_c = f \frac{d_r}{L^2} \times 10^7 = 15.1 \times \frac{34.4}{2\,000^2} \times 10^7 = 1298.6 \text{ (min}^{-1}\text{)}$$

$n_c = 1\,290 \text{ min}^{-1}$ or under

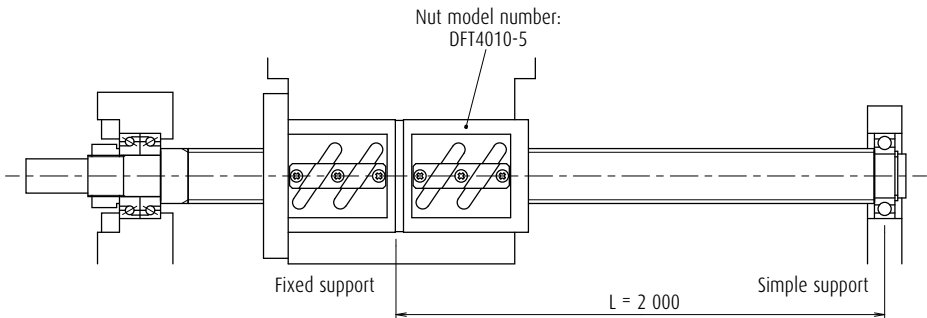


Fig. 3.2 Calculation example of permissible rotational speed to the critical speed

B-2-3.2 d-n Value

An increase of ball orbital speed increases the collision impact of balls to ball recirculation parts, and thus resulting in damage to them. For this reason, the permissible rotational speed is also limited by the d-n value (d, shaft diameter in millimeters; n, rotational speed per minutes). **Table 3.2** shows the allowable d-n value and the maximum rotational speed of ball screws.

- Notes:**
1. Special measure must be taken for high-speed specification products. Please consult NSK.
 2. Please consult NSK if the maximum rotational speed or the d-n value exceed the values on the table below, even both the critical speed of screw shaft and the d-n value are in ranges of the allowable limit.

Table 3.2 Criteria of allowable d-n value and maximum rotational speed

Ball screw recirculation system, Series/Type		Allowable d-n value		Criterion of permissible rotational speed [min ⁻¹]
		Standard	High-speed	
Standard ball screw	Ball screw for transfer equipment R series	50 000 or less	-	3 000
Standard nut ball screws	End-deflector type	180 000 or less	-	5 000
	Return tube type	70 000 or less	100 000 or less	3 000
	Deflector(bridge) type	84 000 or less	100 000 or less	3 000
	End cap type	80 000 or less	100 000 or less	3 000
Application-oriented ball screws	HMD type for high-speed machine tools	160 000 or less	-	4 000
	HMS type for high-speed machine tools	160 000 or less	-	5 000
	HMC type for high-speed machine tools	100 000 or less, 135 000 or less ^{*1}	-	3 750
	BSL type for miniature lathes	(180 000 or less)	-	4 000
	HTF-SRC type for high-load drives	140 000 or less, 160 000 or less ^{*1}	-	3 225
	HTF-SRD type for high-load drives	120 000 or less	-	2 400
	HTF type for high-load drives	50 000 or less, 70 000 or less ^{*1}	100 000 or less	3 125
	VSS type for contaminated environment	150 000 or less	-	3 000
	ND series nut-rotatable ball screws	70 000 or less	100 000 or less	3 000
	Σseries for robots	70 000 or less	-	3 000
	R series for transfer equipment	50 000 or less	-	3 000

*1) Please refer to the explanation of each ball screw for which two allowable d-n values are listed

- › HMC type for high-speed machine tools: page B529
- › HTF-SRC type for high-load drives: page B539
- › HTF type for high-load drives: page B547

B-2-4 Supporting Conditions for Calculation of Buckling Load and Critical Speed

Figs. 4.1 and 4.2 are typical conditions in supporting ball screws. Use them as reference to calculate the buckling load and the critical speed.

Please consult NSK if it is necessary to scrutinize calculation due to use conditions, or if boundary conditions are not clear due to special installation.

[How to read the tables]

Example ii: A buckling load generates between the nut and the left bearings, indicating that the critical speed appears between the nut and the right bearing. Therefore, set L at the maximum stroke for each side. Calculate by applying support bearing conditions.

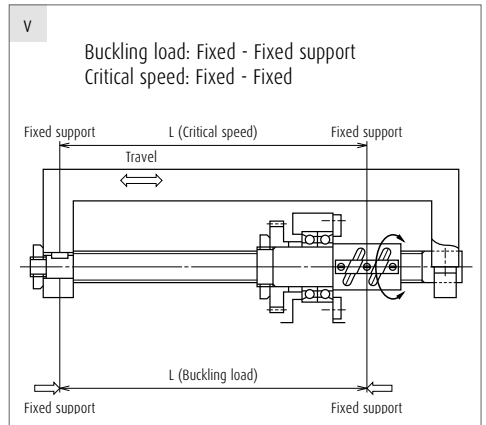
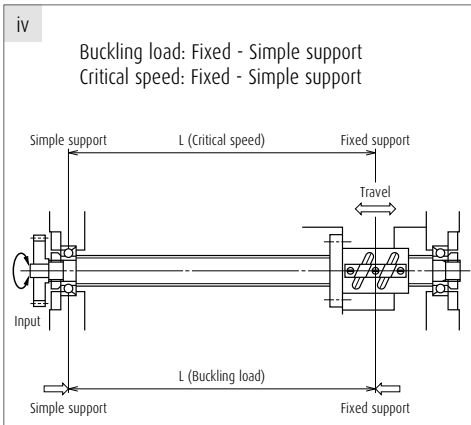
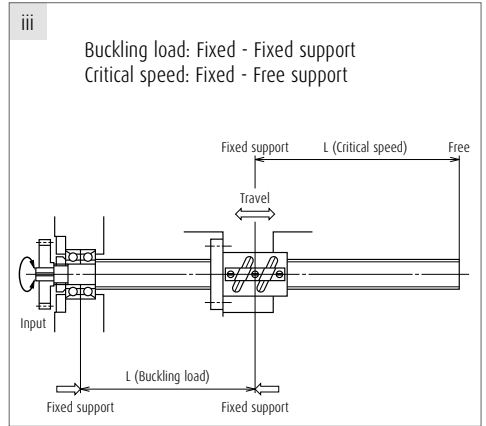
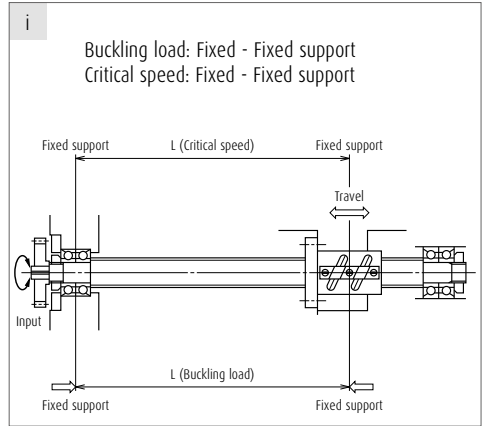
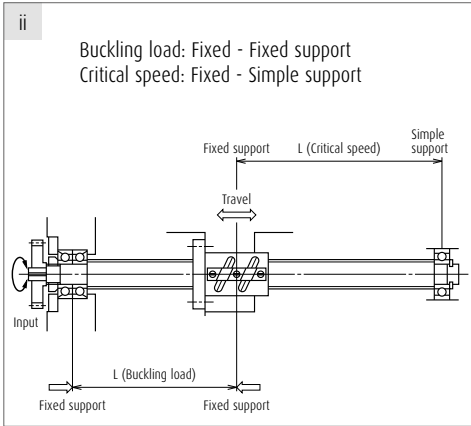


Fig. 4.1 Supporting conditions for screw shaft and ball nut

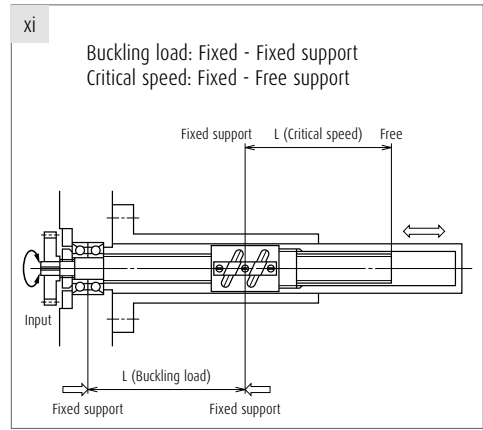
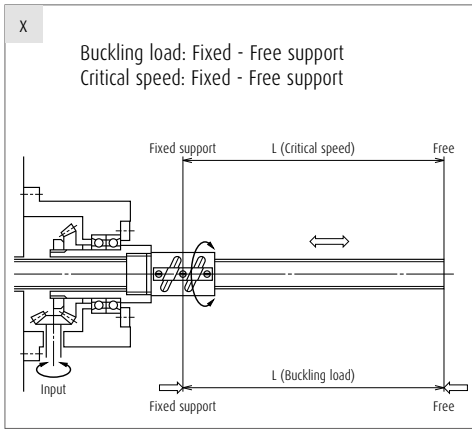
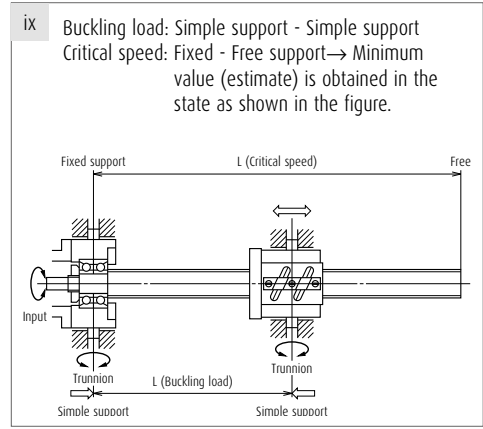
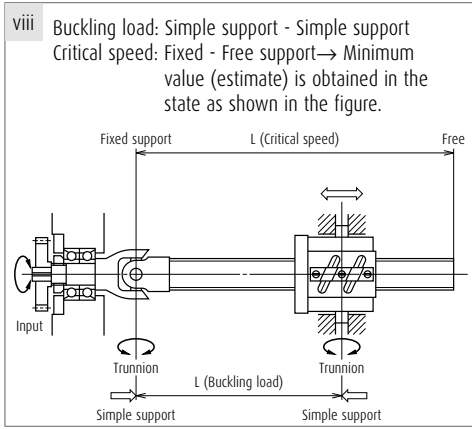
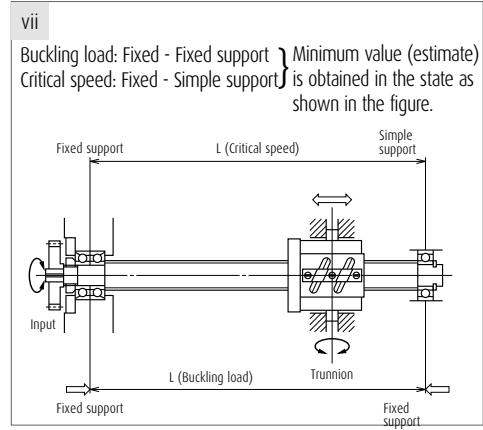
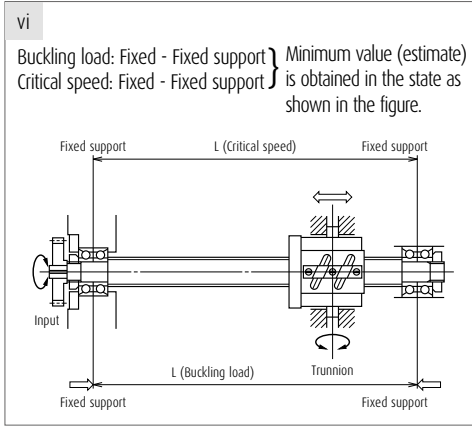


Fig. 4.2 Supporting conditions of screw shaft and ball nut

B-2-5 Life (Dynamic Load Limitation)

B-2-5.1 Life of Ball Screw

Although used in appropriate conditions and is ideally designed, the ball screw deteriorates after a certain operation period, and eventually becomes unusable. The period in this situation is the life of the ball screw. There are two life categories, "fatigue life" caused by flaking, and "life of accuracy" caused by deterioration in precision because of wear.

B-2-5.2 Fatigue Life

Fatigue life of a ball screw can be estimated by basic dynamic load rating (C_a) as is for the rolling bearings.

1. Basic dynamic load rating C_a

Basic dynamic load rating is the axial load that allows a 90% of the group of the same ball screws to rotate 1 million times (10^6 rev) under the same condition without causing flaking by rolling contact fatigue.

2. Fatigue life calculation

Fatigue life is defined as a total rotation number in general. It is sometimes indicated by total rolling hours or total running distance. Fatigue life is obtained by the following formula.

$$L = \left(\frac{C_a}{F_a \cdot f_w} \right)^3 \cdot 10^6 \quad (\text{II- 8})$$

$$L_t = \frac{L}{60n} \quad (\text{II- 9})$$

$$L_s = \frac{L \cdot l}{10^6} = \quad (\text{II- 10})$$

In this formula:

- L : Rating fatigue life (rev)
- L_t : Life in hours (h)
- L_s : Life by running distance (km)
- C_a : Basic dynamic load rating (N)
- F_a : Axial load (N)
- n : Rotational speed (min^{-1})
- l : Lead (mm)
- f_w : Load factor (Coefficient by operating condition)

Load factor f_w for operating conditions is shown in **Table 5.1**.

Table 5.1 Load coefficient f_w

Smooth operation without impact	1.0 - 1.2
Normal operation	1.2 - 1.5
Operation associated with impact or vibration	1.5 - 3.0

Setting too long fatigue life requires larger ball screw, and is not economical. Below are the general target values of operating life for machines. (reference)

Table 5.2 General target values of fatigue life

Machine tools	20 000 hours
Industrial machines	10 000 hours
Automatic control system	15 000 hours
Measuring equipment	15 000 hours

3. Mean load

If the axial load often varies, calculate life by obtaining the mean load, which gives the equivalent fatigue life under this varying load conditions.

- ① When the load and the rotational speed shift stepwise
Obtain the mean load F_m by the formula below. Obtain mean rotational speed N_m by the formula below as **Table 5.3** and **Fig. 5.1**.

$$F_m = \left(\frac{F_1^3 \cdot n_1 \cdot t_1 + F_2^3 \cdot n_2 \cdot t_2 + \dots + F_n^3 \cdot n_n \cdot t_n}{n_1 \cdot t_1 + n_2 \cdot t_2 + \dots + n_n \cdot t_n} \right)^{\frac{1}{3}} \quad (\text{II- 11})$$

$$N_m = \frac{n_1 \cdot t_1 + n_2 \cdot t_2 + \dots + n_n \cdot t_n}{t_1 + t_2 + \dots + t_n} \quad (\text{II- 12})$$

Table 5.3 Stepwise operation condition

Axial load (N)	Rotational speed (min^{-1})	Hours of use, or ratio of hours of use
F_1	n_1	t_1
F_2	n_2	t_2
:	:	:
F_n	n_n	t_n




Fig. 5.1 Stepwise load variation

② When the rotational speed is constant, and the load changes linearly, obtain approximate value of the mean load F_m by the formula below.

$$F_m = \frac{1}{3} (F_{\min} + 2F_{\max}) \quad (\text{II- 13})$$




Fig. 5.2 Linear load change

③ When the rotational speed is constant, and the load changes in a sinusoidal pattern, obtain approximate value of the mean load F_m by the formula below.

When the sine curve is Fig. (a)

$$F_m \doteq 0.65 F_{\max} \quad (\text{II- 14})$$

When the sine curve is Fig. (b)

$$F_m \doteq 0.75 F_{\max} \quad (\text{II- 15})$$

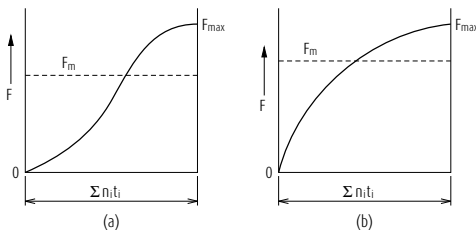


Fig. 5.3 Load changes in sinusoidal pattern

4. Affect of mounting misalignment

If moment load or radial load is applied to the ball screw, it adversely affects ball screw function, and shortens life. Watch for eccentric load that induces moment or radial load.

Fig. 5.4 shows a calculation example of fatigue life when moment load is applied to the ball screw. In this figure, the value of the rigidity of mounting ball screw sections (screw shaft, support bearing, guide, etc.) is set at infinity. In actual use, deformation is absorbing the moment load in various areas, and the moment load that generates between the screw shaft and nut is abated.

In general, the following values are recommended as control values for precision grade.

Misalignment in inclination	1/2 000 or less
Eccentricity	20 μm or less

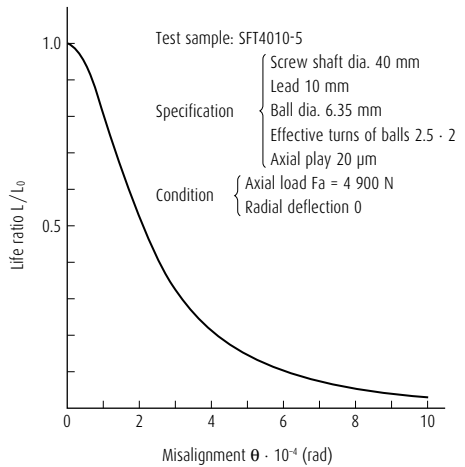


Fig. 5.4 Affects of misalignment

B-2-5 Life (Dynamic Load Limitation)

5. Effects of heavy load and short stroke

If the ball screw is used under heavy load and short strokes, such as for the drive of plastic injection molding machine and of press machines, the fatigue life may become significantly shorter than the rated fatigue life which is calculated in B-2-5.2.

This decreased life occurs because the heavy load generates large stress (surface pressure) in the contact points of balls and ball grooves of the screw shaft and the nut, adversely affecting the life.

The axial load F_{amax}^{*1} during operation and the size of strokes, which affect fatigue life, can be obtained by the following formula.

In such case, the life calculation should take into account the size of the surface pressure as well as the size of the stroke. Please consult with NSK.

$$F_{amax} \geq 0.10C_{0a} \quad (\text{II-16})$$

$$S \leq 4$$

In this formula:

F_{amax} : Maximum load to axial direction during drive (N)

C_{0a} : Basic static load rating (N)

S : Stroke (rev)

$$S = \frac{L_s}{l}$$

L_s : Stroke distance (mm)

l : Lead (mm)

*1) Axial load : The load is applied to the axial direction when screw shaft and the nut of ball screw are rotating relatively each other. The rotational speed is irrelevant.

B-2-5.3 Ball Screw and Hardness

Table 5.4 indicates the hardness of NSK standard ball screw.

Table 5.4 Ball screw materials and their hardness

Component	Heat treatment method	Hardness (HRC)
Screw shaft	Carburizing	58 or over
Screw shaft	Induction hardening	58 or over
Nut	Carburizing	58 or over

Note: NSK manufactures special material ball screws for special environments (stainless steel: SUS440C, SUS630). NSK also furnishes protective surface treatment (refer to page D5). Please consult NSK for such request.

B-2-5.4 Wear Life

Wear of materials, as is the case for other mechanical components, is significantly affected by use conditions, lubrication conditions and other factors. It is difficult to estimate its volume, and measuring requires various tests and field data.

NSK has the data of wear accumulated through abundant experience. Please contact NSK for inquiry pertaining to the wear.

B-2-6 Preload and Rigidity

B-2-6.1 Elastic Deformation of Preloaded Ball Screw

1. Position preload (D, Z, and P preload)

The concept of double nut preload ball screw is shown in Fig. 6.1.

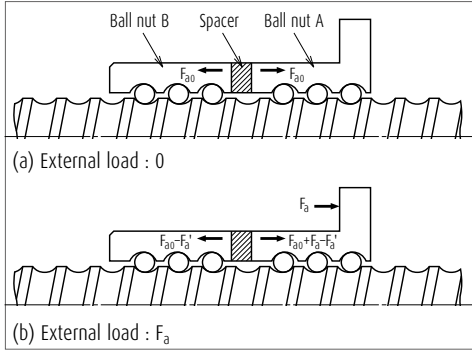


Fig. 6.1 Position preload (double-nut)

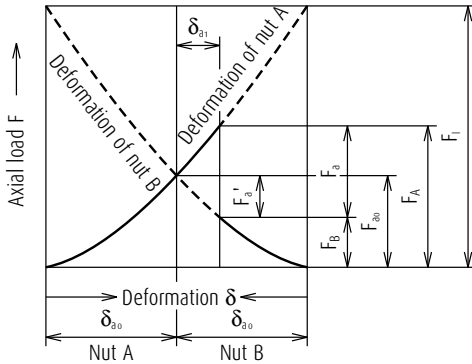


Fig. 6.2 Deformation of A and B nut (position preload)

Elastic deformation of Nut A and B is already given at time of assembly by the amount of δ_{a0} by preload F_{a0} . When the external load F_a is added to Nut A, the elastic deformation δ_a and δ_b of each Nut A and B change as shown in Fig. 6.2,

$$\delta_a = \delta_{a0} + \delta_{a1} \quad \delta_b = \delta_{a0} - \delta_{a1}$$

At this time, the load to each Nut A and B are:

$$F_A = F_{a0} + F_a - F_a'$$

$$F_B = F_{a0} - F_a'$$

It shows that the load applied to Nut A is affected by Nut B and reduced by the amount of F_a' . Thereby, the elastic deformation of Nut A becomes smaller. This effect continues until the elastic deformation by the external load becomes δ_{a0} , and the preload by Nut B disappears.

Assuming that the load when the preload is absorbed is F_1 , the relationship between the axial load and the elastic deformation is as follows (refer to Fig. 6.2).

$$\delta_{a0} = K \cdot F_{a0}^{2/3} \quad 2\delta_{a0} = K \cdot F_1^{2/3}$$

(K: Invariable number)

$$\left(\frac{F_1}{F_{a0}}\right)^{2/3} = \frac{2\delta_{a0}}{\delta_{a0}} = 2$$

$$F_1 = 2^{3/2} \times F_{a0} \doteq 3F_{a0}$$

For this reason, the preload should be about 1/3 of the maximum axial load. However, please note that if the preload of about 1/3 of the maximum axial load exceeds 8% of C_r , which is the criterion of the maximum preload, the ball screw may adversely increase heat generation and/or may shorten its lifetime.

Fig. 6.3 shows two types of elastic deformation curves: one is by the ball screw with preload, the other without preload. When an axial load which is about three times as large as the preload is applied, the deformation of the preloaded ball screw is 1/2 of the deformation of the ball screw without preload.

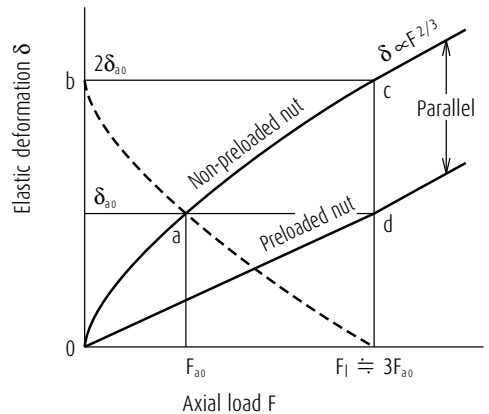


Fig. 6.3 Deformation of preloaded ball nut (position preload)

B-2-6 Preload and Rigidity

2. Constant pressure preload (J preload: preloaded by spring)

Fig. 6.5 shows an elastic deformation of a ball screw which is preloaded with "constant pressure." The rigidity of the preload spring is sufficiently smaller than the nut rigidity. Therefore, the deformation of the spring becomes nearly parallel to the abscissa axis. For this reason, the elastic deformation by the preload with constant pressure changes along the deformation curve by Nut A.

In order to take advantage of the characteristics of the preload with constant pressure, the major external load should be applied in the directions shown by an arrow in Fig. 6.4.

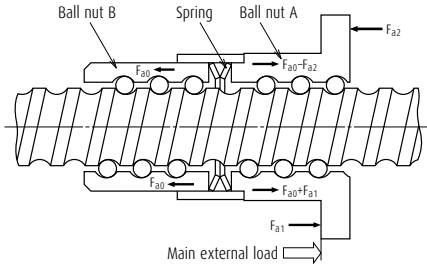


Fig. 6.4 Constant pressure preload (double nut)

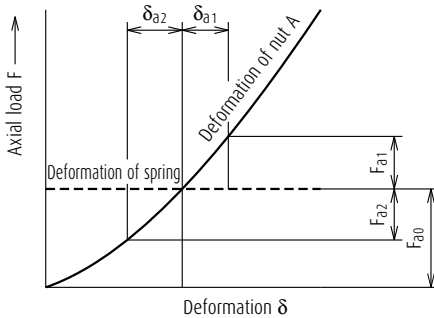


Fig. 6.5 Deformation curve of constant pressure preloaded nut

B-2-6.2 Rigidity of the Feed Screw System

A low rigidity around the feed screw mounting area causes lost motion. To improve the positioning accuracy of precision machines such as NC machine tools, it requires a good balance in axial rigidities of composing parts of the feed screw system.

Also should examine torsional rigidities of the feed screw system.

1. Axial rigidity of the feed screw system K_T

Elastic deformation and rigidity of the feed screw system can be obtained by the following formula.

$$\delta = \frac{F_a}{K_T} \quad (\text{II-17})$$

$$\frac{1}{K_T} = \frac{1}{K_S} + \frac{1}{K_N} + \frac{1}{K_B} + \frac{1}{K_H} \quad (\text{II-18})$$

In this formula:

δ : Volume of axial elastic deformation of the feed screw system (μm)

F_a : Axial load to the feed screw system (N)

K_T : Axial rigidity of the feed system ($\text{N}/\mu\text{m}$)

K_S : Axial rigidity of the screw shaft ($\text{N}/\mu\text{m}$)

K_N : Axial rigidity of the nut ($\text{N}/\mu\text{m}$)

K_B : Axial rigidity of the support bearing ($\text{N}/\mu\text{m}$)

K_H : Axial rigidity of the nut and bearing mounting section ($\text{N}/\mu\text{m}$)

2. Axial rigidity of the screw shaft: K_S

2.1 In case of: Fixed support - Free (axial direction)

$$K_S = \frac{A \cdot E}{x} \times 10^{-3} \quad (\text{II-19})$$

In this formula:

K_S : Axial rigidity of the screw shaft ($\text{N}/\mu\text{m}$)

A : Cross section area of the screw shaft (mm^2)

$$A = \frac{\pi}{4} d_r^2$$

d_r : Screw shaft root diameter (mm)

E : Elastic modulus ($E = 2.06 \times 10^5 \text{ MPa}$)

x : Distance between points of load application (mm)

2.2 In case of: Fixed – Fixed support (axial direction)

$$K_S = \frac{A \cdot E \cdot L}{x(L-x)} \times 10^{-3} \quad (\text{II- 20})$$

In this formula:

K_S : Axial rigidity of the screw shaft (N/ μm)

L : Unsupported length (mm)

x : Axial deformation is maximum at position $x = L/2$.

Axial rigidity of the screw shaft can be obtained by the following formula.

$$K_S = \frac{4A \cdot E}{L} \times 10^{-3} \quad (\text{II- 21})$$

<<Calculation example of axial rigidity (1)>>

Obtain axial rigidity of the screw shaft under the condition in **Fig. 6.6**.

<Use conditions>

Nut model: DFT 4010-5

From **Fig. 6.6**: Supporting condition ;

Fixed support --Free (axial direction)

Distance between points of load application

$$x = 1\,200 \text{ mm}$$

Screw shaft root diameter (From the dimension table)

$$d_r = 34.4 \text{ mm}$$

<Calculation>

By Formula **II-19**, axial rigidity K_S is :

$$A = \frac{\pi}{4} d_r^2 = \frac{3.14}{4} \times 34.4^2 = 929.4 \text{ (mm}^2\text{)}$$

$$K_S = \frac{A \cdot E}{x} \times 10^{-3} = \frac{929.4 \times 2.06 \times 10^5}{1\,200} \times 10^{-3} = 159 \text{ (N}/\mu\text{m}\text{)}$$

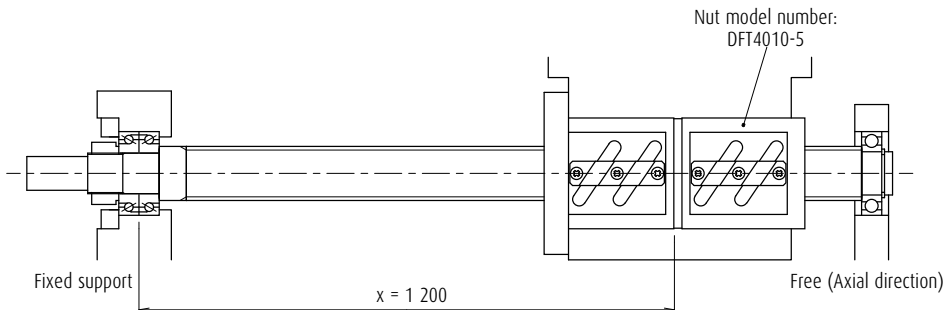


Fig. 6.6 Calculation example of axial rigidity of the screw shaft (1)

B-2-6 Preload and Rigidity

<<Calculation example of axial rigidity (2)>>

Obtain axial rigidity of the screw shaft under the conditions in **Fig. 6.7**.

<Use conditions>

Nut model: DFT 4010-5

From **Fig. 6.7**: Supporting condition:

Fixed - Fixed support (axial direction)

$$L = 1\,200 \text{ mm}$$

Distance between points of load application:

Screw shaft root diameter (From the dimension table)

$$d_r = 34.4 \text{ mm}$$

<Calculation>

By formula **II-21**, axial rigidity K_S is :

$$A = \frac{\pi}{4} d_r^2 = \frac{3.14}{4} \times 34.4^2 = 929.4 \text{ (mm}^2\text{)}$$

$$K_S = \frac{4A \cdot E}{L} \times 10^{-3} = \frac{4 \times 929.4 \times 2.06 \times 10^5}{1\,200} \times 10^{-3} = 638 \text{ (N/}\mu\text{m)}$$

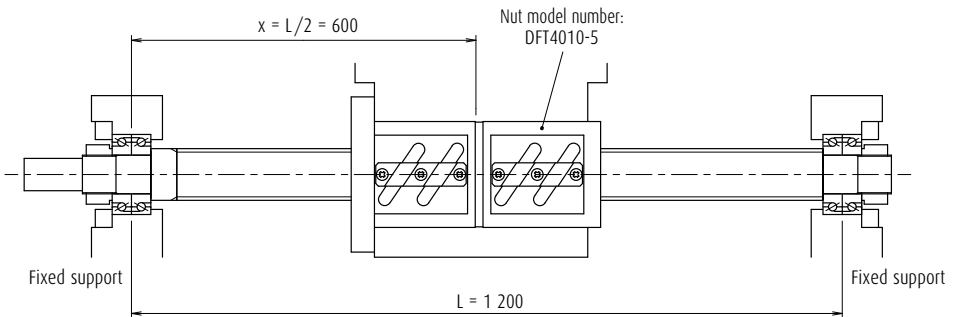


Fig. 6.7 Calculation example of axial rigidity of the screw shaft (2)

3. Axial rigidity of the ball nut : K_N

3.1 Rigidity of the nut with axial load

Theoretical rigidity value K is shown in the dimension table. The value K is obtained from the elastic deformation between screw grooves and balls when an axial load equivalent to 30% of the basic dynamic load rating C_a is applied. The criterion for the ball nut rigidity is 80% of the value listed in the table taking into consideration of deformation of the ball nut, etc.

The rigidity value K_N is obtained by the following formula when the axial load " F_a " is not 30% of " C_a ."

$$K_N = 0.8 \times K \left(\frac{F_a}{0.3 C_a} \right)^{1/3} \quad (\text{II- 22})$$

In this formula:

K : Rigidity value in dimension tables ($N/\mu m$)

F_a : Axial load (N)

C_a : Basic dynamic load rating (N)

3.2 Rigidity of preloaded ball nut

Theoretical rigidity K of preloaded ball nut under an axial load is shown in each dimension table. The K is obtained from the elastic deformation of the ball rolling surface and the balls when: a preload which is equivalent to 10% of the basic dynamic load rating C_a (5% in case of the P-preload [single-nut oversize ball preload system]) is applied. The criterion for calculation of nut rigidity is 80% of the value listed in the table taking into consideration of deformation of the ball nut, etc.

Rigidity K_N is obtained by the following formula when preload " F_{a0} " is not 10% (or 5%) of " C_a ".

$$K_N = 0.8 \times K \left(\frac{F_{a0}}{\epsilon \cdot C_a} \right)^{1/3} \quad (\text{II- 23})$$

In this formula:

K : Rigidity in the dimension tables ($N/\mu m$)

F_{a0} : Preload (N)

ϵ : Basic factor to calculate rigidity ($\epsilon = 0.1$. For P-preload use percentage of the preload to basic dynamic load rating. e.g. 0.03 for BSS and 0.015 for VSS.)

<<Calculation example of axial rigidity (3)>>

Obtain axial rigidity of the nut under the following conditions.

<Use conditions>

Nut model: SFT 4010-5

Axial load: $F_a = 6\,000$ N

F_a = Rigidity at 0.3 C_a $K = 741$ N/ μm
(From the dimension table)

<Calculation>

By formula II-22, axial rigidity K_N is :

$$\begin{aligned} K_N &= 0.8 \times K \left(\frac{F_a}{0.3 \times C_a} \right)^{1/3} \\ &= 0.8 \times 741 \times \left(\frac{6\,000}{0.3 \times 61\,200} \right)^{1/3} \\ &= 408 \text{ (N}/\mu\text{m)} \end{aligned}$$

<<Calculation example of axial rigidity of the screw shaft (4)>>

Obtain axial rigidity of the nut under the following conditions.

<Use conditions>

Nut model : DFT 4010-5

Preload : $F_{a0} = 4\,000$ N

Rigidity K when $F_{a0} = \epsilon C_a$: $K = 1\,454$ N/ μm
(from the dimension table on page B479)

Basic factor to calculate rigidity when D
Preload: $\epsilon = 0.1$

<Calculation>

By Formula II-23

$$\begin{aligned} K_N &= 0.8 \times K \left(\frac{F_{a0}}{\epsilon \times C_a} \right)^{1/3} \\ &= 0.8 \times 1\,454 \times \left(\frac{4\,000}{0.1 \times 61\,200} \right)^{1/3} \\ &= 1\,009 \text{ (N}/\mu\text{m)} \end{aligned}$$

B-2-6 Preload and Rigidity

The criterion of the preload to ball screw

Nut rigidity increases by a larger preload volume. But an excessive preload shortens life, and generates heat. Set the maximum preload about at 0.08 C_a (0.03 for P-Preload). Table 6.1 shows the criteria for preload for different applications.

Table 6.1 Criteria of preload

Ball screw application	Preload (relative to dynamic load rating C_a)
Robots, material handling systems, etc.	Axial play or under 0.01 C_a
Semiconductor manufacturing systems, etc. That require highly accurate positioning	0.01 C_a - 0.03 C_a
Medium- high-speed machine tools for cutting	0.03 C_a - 0.05 C_a
Low to medium-speed systems that require especially high rigidity	0.05 C_a - 0.07 C_a

4. Axial rigidity of support bearing: K_B

The rigidity (K_B) of the bearing used for ball screw support is shown in the dimension table of bearing. See page B437 for ball screw support bearings, NSK TAC C series and B447 for BSBD series.

$$K_B \doteq \frac{3F_{a0}}{\delta_{a0}} \text{ (N/}\mu\text{m)} \quad (\text{II- 24})$$

In this formula:

K_B : Rigidity of the combined thrust angular contact ball bearings (N/ μ m)

F_{a0} : Preload of the bearings (N)

δ_{a0} : Axial elastic deformation by preload (μ m)

$$\delta_{a0} \doteq \frac{0.44}{\sin \alpha} \left(\frac{Q^2}{D_w} \right)^{1/3} \text{ (}\mu\text{m)} \quad (\text{II- 25})$$

$$Q = \frac{F_{a0}}{Z} \cdot \sin \alpha$$

α : Contact angle

D_w : Ball diameter (mm)

Z : Number of balls

Refer to page B437 for data regarding thrust angular contact ball bearings which support high-precision ball screws (TAC Series).

5. Axial rigidity of the ball nut and bearing mounting section: K_H

As the rigidity of mounting section has a profound effect on positioning accuracy, we recommend incorporating high rigidity of the mounting sections of ball nut and support bearings into the design at the early stage of designing the machine.

a) Torsional rigidity of the feed screw system

Major torsion factors in the rotating system that bring about error in positioning accuracy are given three points below.

- > Torsional deformation of the screw shaft
- > Torsional deformation of the joint section
- > Torsional deformation of the motor

The value of the effect of torsional strain to positioning accuracy is smaller than axial deformation. However, check the effect when designing equipment that requires high positioning accuracy.

b) Suppress thermal error

It is necessary to minimize the thermal error for ever increasing demand for positioning accuracy give three points below.

- > Suppress heat
- > Forced cooling
- > Avoid effect of temperature rise

Refer to "Measures against thermal expansion" on page B40.

B-2-7 Friction Torque and Drive Torque

Operations that use ball screw drives require a motor torque which is equivalent to the total of following two:

- › Friction torque, i.e. the friction of the ball screw itself
- › Drive torque which is required for operation

B-2-7.1 Friction Torque

1. Starting friction torque (Break away torque)

A large torque is necessary to start ball screw. This is called "starting friction torque" or "brakeaway torque." This torque is 2 to 2.5 times larger than preloaded dynamic (friction) torque which is described below. Starting friction torque quickly diminishes once the ball screw begins to move.

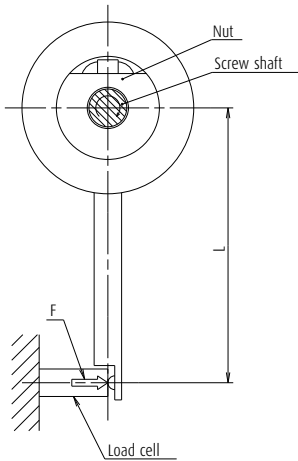


Fig. 7.1 Preload dynamic torque measuring method

2. Dynamic friction torque (dynamic friction torque due to preload)

When a ball screw is moving, two types of torque generate: the dynamic friction torque due to preload and the friction torque associated with ball recirculation. JIS B1192 sets the standard of dynamic friction torque due to preload, which is the total of these two torque types. They are defined in **Fig. 7.2**.

The dynamic friction torque due to preload is calculated by the following formula. When the screw shaft is rotated as **Fig. 7.1** in the following measuring conditions, measure the nut holding power F and then multiple the distance of action line L which is perpendicular to the direction of the power F .

$$T_p = F \cdot L \quad (\text{II-26})$$

- › Measuring rotational speed 100 min⁻¹
- › Viscosity of lubrication is ISO VG 68 as prescribed in JIS K 2009.
- › Remove Seals.

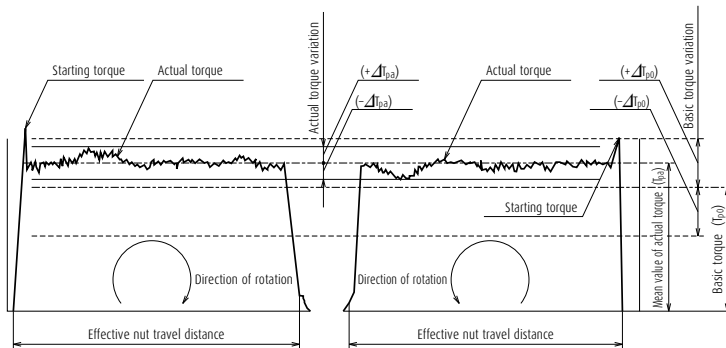


Fig. 7.2 Definitions of dynamic preloaded drag torque

B-2-7 Friction Torque and Drive Torque

3. Calculation of basic torque

The basic torque of preloaded ball screw T_{p0} can be obtained by the following formula.

$$T_{p0} = K \frac{F_{a0} \cdot l}{2\pi} \doteq 0.014F_{a0} \sqrt{d_m \cdot l} \quad (\text{N} \cdot \text{cm}) \quad (\text{II-27})$$

In this formula:

F_{a0} : Preload (N)

l : Lead (cm)

K : Torque coefficient of ball screw

$$K = \frac{0.05}{\sqrt{\tan\beta}}$$

β : Lead angle (deg.)

d_m : Ball pitch circle diameter (cm)

Allowable values of torque variation rate relative to basic torque are regulated as shown in **Table 7.1**.

B-2-7.2 Drive Torque

1. Operating torque of a ball screw

① Normal drive

The torque when converting rotational motion to linear motion (normal operation) is obtained by the following formula.

$$T_a = \frac{F_a \cdot l}{2\pi \cdot \eta_1} \quad (\text{N} \cdot \text{cm}) \quad (\text{II-28})$$

In this formula:

T_a : Normal operation torque (N · cm)

F_a : Axial load (N)

l : Lead (cm)

η_1 : Normal efficiency ($\eta_1 = 0.9$ to 0.95)

② Back-drive operation

The torque when converting linear motion to rotational motion (back-drive operation) is obtained by the following formula.

$$T_b = \frac{F_a \cdot l \cdot \eta_2}{2\pi} \quad (\text{N} \cdot \text{cm}) \quad (\text{II-29})$$

In this formula:

T_b : Reverse operation torque (N · cm)

η_2 : Reverse efficiency ($\eta_2 = 0.9$ to 0.95)

③ Dynamic drag torque of the preloaded ball screw

The operation torque of preloaded ball screw can be obtained by Formula II-27.

Table 7.1 Range of allowable values of torque variation rates (Source: JIS B 1192)

Basic torque (N · cm)		Effective length of the screw thread (mm)										
		4000 or under								Over 4 000 and 10 000 or under		
		Slenderness ratio ⁽¹⁾ : 40 or less				Slenderness ratio ⁽¹⁾ : More than 40 and 60 or less				—		
		Accuracy grade				Accuracy grade				Accuracy grade		
Over	Incl.	C0	C1	C2, 3	C5	C0	C1	C2, 3	C5	C1	C2, 3	C5
20	40	±30%	±35%	±40%	±50%	±40%	±40%	±50%	±60%	—	—	—
40	60	±25%	±30%	±35%	±40%	±35%	±35%	±40%	±45%	—	—	—
60	100	±20%	±25%	±30%	±35%	±30%	±30%	±35%	±40%	—	±40%	±45%
100	250	±15%	±20%	±25%	±30%	±25%	±25%	±30%	±35%	—	±35%	±40%
250	630	±10%	±15%	±20%	±25%	±20%	±20%	±25%	±30%	—	±30%	±35%
630	1 000	—	±15%	±15%	±20%	—	—	±20%	±25%	—	±25%	±30%

Remarks

- Slenderness ratio: The value obtained by dividing the length of the screw thread section of screw shaft (mm) by diameter of the screw shaft (mm).
- NSK independently sets torque standards which are under $20 \text{ N} \cdot \text{cm}$.

2. Drive torque of the motor

2.1 Drive torque at constant speed

The torque which is necessary to drive a ball screw at constant speed resisting to external loads can be obtained by the following formula.

$$T_1 = (T_a + T_{pmax} + T_u) \times \frac{N_1}{N_2} \quad (\text{II-30})$$

In this formula:

T_a : Drive torque at constant speed

$$T_a = \frac{F_a \cdot l}{2\pi \cdot \eta_1} \quad (\text{II-28})$$

F_a : Axial load (N)

The value of F_a in Fig. 7.3 is:

$$F_a = F + \mu \cdot m \cdot g$$

F : Such as cutting force to axial direction (N)

μ : Friction coefficient of the guide way

m : Volume of the traveling section (table mass plus work mass kg)

g : Gravitational acceleration (9.80665 m/s²)

T_{pmax} : Upper limit of the dynamic friction torque of ball screw (N · cm)

T_u : Friction torque of the support bearing (N · cm)

N_1 : Number of teeth in Gear 1

N_2 : Number of teeth in Gear 2

Generally, though it depends on the type of motor, T_1 shall be kept under 30% of the motor rating torque.

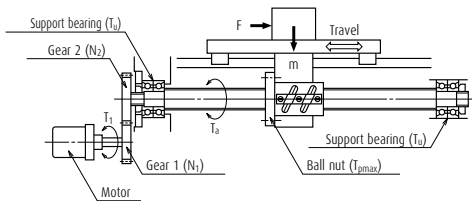


Fig. 7.3 Driving mechanism of ball screw

2.2 Drive torque at acceleration

Accelerating the ball screw resisting axial load requires the maximum torque in an operation. Drive torque necessary for this occasion can be obtained by the following formula.

$$T_2 = T_1 + J \cdot \dot{\omega} \quad (\text{II-31})$$

$$J = J_M + J_{G1} \left(\frac{N_1}{N_2} \right)^2 \left(J_{G2} + J_S + m \left(\frac{l}{2\pi} \right)^2 \right) (\text{kg} \cdot \text{m}^2) \quad (\text{II-32})$$

In this formula:

T_2 : Maximum drive torque at time of acceleration (N · m)

$\dot{\omega}$: Motor's angular acceleration (rad/s²)

J : Moment of inertia applied to the motor (kg · m²)

J_M : Moment of inertia of the motor (kg · m²)

J_{G1} : Moment of inertia of Gear 1 (kg · m²)

J_{G2} : Moment of inertia of Gear 2 (kg · m²)

J_S : Moment of inertia of the screw shaft (kg · m²)

When selecting a motor, it is necessary to examine the maximum torque of the motor relative to the drive torque T_2 at the time of acceleration of ball screw.

For the calculation of the moment of inertia of a cylindrical object (ball screw, gear, etc.), please refer to the formula below.

Formula for the moment of inertia of a cylindrical object

$$J = \frac{\pi \cdot \gamma}{32} D^4 \cdot L (\text{kg} \cdot \text{cm}^2) \quad (\text{II-33})$$

In this formula:

γ : Material density (kg/cm³)

D : Diameter of the cylindrical object (cm)

L : Length of the cylindrical object (cm)









B-2-8 Even Load Distribution in Ball Nut (In Case of Ball Screws for High-Load Drive)

Generally, the distribution of loaded balls in a ball nut is three-dimensionally asymmetric, thus resulting in uneven load distribution to the balls and ball nut. NSK has taken the measures for even load distribution to the balls by an optimal arrangement of the position of ball recirculation circuits.

Additionally, a heavier load results in a measurable axial deformation of the screw shaft and the ball nut, thus further

increasing the unevenness of load distribution. We have lessened the unevenness of load distribution to the balls by arranging the load acting point of the ball nut and the screw shaft opposite to each other. The relation between loading points and load distribution is shown in Fig. 8.1, while Table. 8.1 shows the result of load distribution analysis.

Table. 8.1 The result of equalization of load distribution

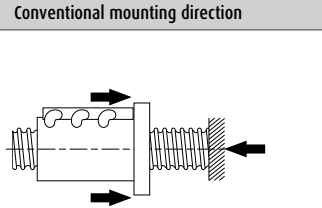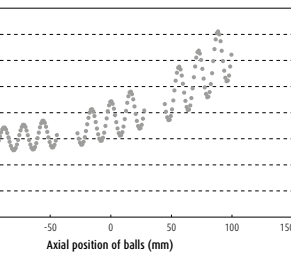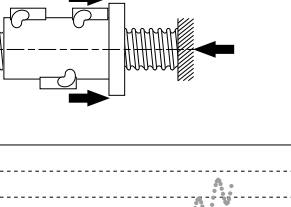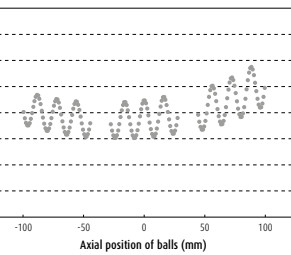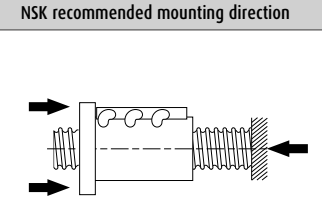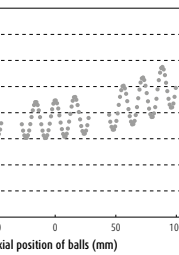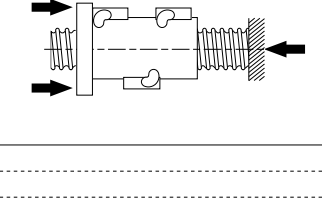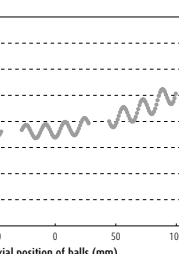	Conventional mounting direction	NSK recommended mounting direction
Conventional design	 	 
HTF design	 	 

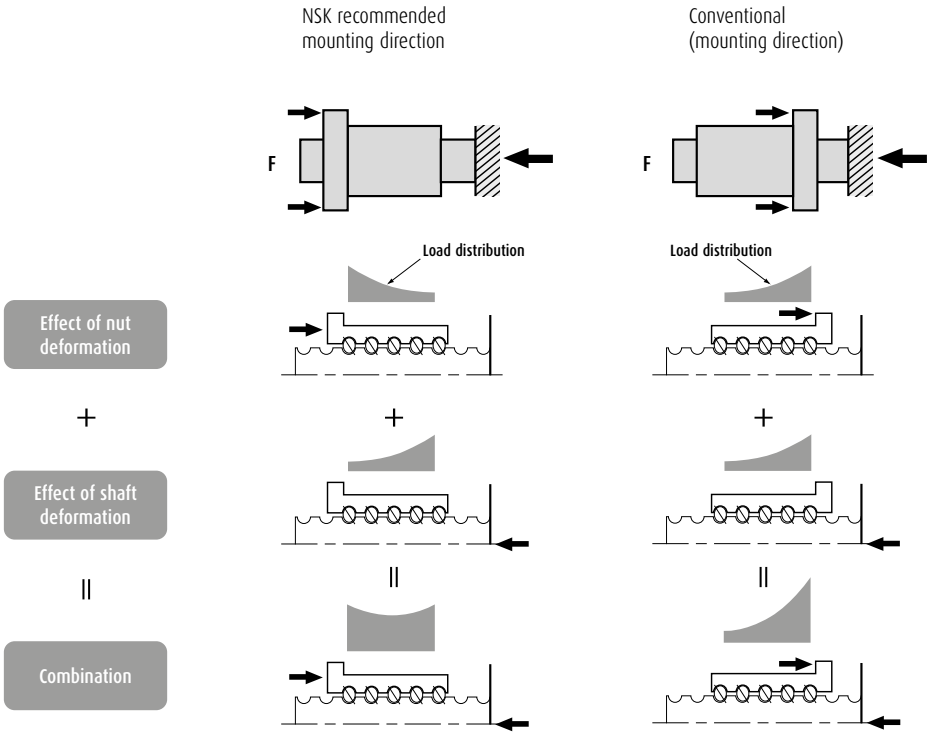


Fig. 8.1 The relationship between acting point of load and load distribution

B-2-9 Lubrication of Ball Screw

Lithium soap-based grease with base oil viscosity of 30 to 140 mm²/s (40°C) is recommended for grease lubrication and oil of ISO VG 32 to 100 for oil lubrication.

In general, a lubricant with low base oil viscosity is recommended where a ball screw is used for high-speed operation, and thus requires reducing thermal elongation of the screw shaft. On the other hand, a lubricant with high base oil viscosity is recommended for a low-speed, high-temperature operation, or a high-load and oscillating operation.

Please consult NSK about greases for high-load drives and high-temperature applications.

NSK markets "NSK Grease Unit" as the standard series products for a variety of applications. NSK Grease Unit for ball screw lubrication includes:

- 1) Various types of grease in the bellows-tube which can be instantly attached to the grease pump
- 2) Hand grease pump which is compact and easy to use
- 3) Nozzles

Table 9.1 shows NSK greases, and names of other ball screw greases.

Table 9.2 explains checking points in lubrication and standard intervals between replenishments. It is important to wipe off old grease from the screw shaft prior to applying new grease. Page D16 also explains in detail concerning the replenishing methods.

Table 9.1 Grease for ball screw

Product name	Thickener	Base oil	Base oil viscosity mm ² /s (40°C)	Range of temperature for use (°C)	Application
NSK Grease AS2	Lithium type	Mineral oil	130	-10 - 110	For general use at high load
NSK Grease PS2	Lithium type	Synthetic oil combined with Synthetic hydrocarbon oil	15.9	-50 - 110	For light load
NSK Grease LR3	Lithium type	Synthetic oil	30	-30 - 130	For high-speed medium load
NSK Grease LG2	Lithium type	Synthetic oil combined with Synthetic hydrocarbon oil	32	-20 - 70	For clean environment
NSK Grease NF2	Urea composite type	Synthetic hydrocarbon oil	26	-40 - 100	For fretting resistant

*Refer to Page D13 for the nature of NSK greases.

Table 9.2 Checking lubricant and intervals of replenishment

Lubricating method	Checking intervals	Check points	Replenish/replacing interval
Intermittent automatic oil supply	Once a week	Remaining volume, contamination	Supply oil when checking (depending on the tank volume)
Grease	2 - 3 months after start of use	Clean, foreign matters	Generally once a year (replenish when necessary)
Oil bath	Every day, when start to work	Oil level	Specify according to oil consumption

B-2-10 Dust Prevention for Ball Screw

If foreign matters enter inside the ball nut, all screw grooves and balls wear rapidly, or the ball screw may malfunction due to the damage of groove and/or ball recirculation system. Use bellows or telescopic pipes (Fig. 10.1) to keep foreign matters from entering into the feed screw system. Install

these items so as to shut foreign matters completely from the ball screw.

Also it is even more effective to add seals on the ball nut as shown in Figs. 10.2 to 10.7. We provide seals in Table 10.1.

Table 10.1 Seal

	Sealing capability	Torque	Heat	grease retention	Application
Thin plastic seal	○	○	○	○	End deflector type, HMD type, BSL type
Plastic seal	x	◎	◎	x	Tube type, Deflector (bridge) type (Seal is not put on the lead of 1mm or smaller.)
Wiper seal	○	x	x	○	Tube type, Deflector type (Seal is not put on the lead of 1mm or smaller.)
X1 seal	◎	○	○	◎	HMS type, HMD type
High performance seal	◎	○	○	○	VSS type
Brush-seal	△	○	○	△	For R Series (Seal for those with the shaft diameter of 14 mm or less is plastic seal.)

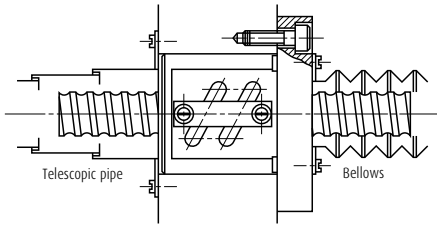


Fig. 10.1 Dust prevention by telescopic pipe and bellows




Fig. 10.2 Thin plastic seal




Fig. 10.3 Plastic seal




Fig. 10.4 Wiper seal

B-2-11 Rust Prevention and Surface Treatment of Ball Screws




Fig. 10.5 X1 seal

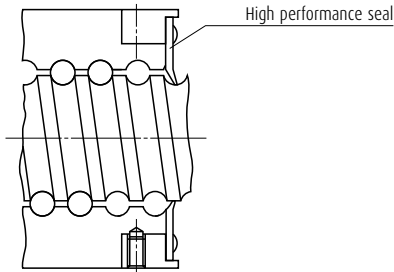


Fig. 10.6 High performance seal




Fig. 10.7 Brush-seal for R Series

1. Stainless steel ball screw

KA type ball screws made of stainless steel are available. Please consult NSK for a custom made stainless steel ball screw.

2. Types of surface treatment

The following are common types of treatment.

Low temperature chrome plating

Used to prevent corrosion and light reflection, and for cosmetic purpose.

Fluoride low temperature chrome plating

Fluoroplastic coating is provided following the low temperature chrome plating.

Resistance to corrosion is higher than low temperature chrome plating.

Hard chrome plating

Very hard coating provides high resistance to both wear and corrosion.

Electroless nickel plating

Creates a film of consistent thickness on complex shaped items.

For corrosion prevention.

3. Recommended surface treatment

Among the surface treatments mentioned above, we recommend "Low temperature chrome plating" and "fluoride low temperature chrome plating" for rust prevention because of the result of humidity chamber test for antirust characteristics.

However, never apply any organic solvent for degreasing because it has adverse effect on antirust characteristics.

Table 11.1 Surface treatment length

	Applicable length
Low temperature chrome plating	5 m or less
Fluoride low temperature chrome plating	4 m or less

Refer to "1.3 Rust Prevention and Surface Treatment" (page D5) for the results of humidity chamber test.

B-2-12 Ball Screw Specifications for Special Environments

B-2-12.1 Clean Environments

NSK manufactures NSK Clean Grease "LG2" and "LGU" for NSK linear guides, ball screws, and Monocarriers which are used under normal temperature and pressure in a clean room.

The LG2 and LGU grease are far more superior in stable torque characteristics than the vacuum grease which has been used as a countermeasure against dust generation. The LG2 and LGU also have a sufficient durability and dust prevention capability.

Features of "LG2" and "LGU"

- ① Generates less dust than prevailing vacuum greases and general greases. Cleanliness is enhanced by simply switching the grease to the LG2 or the LGU.
- ② Has extremely low and stable torque characteristics. It is ideal for high-speeds operation.
- ③ Unlike prevailing vacuum greases, the LG2 and LGU have a nature similar to general grease. Its effect is long-lasting, and sufficiently durable. They greatly contribute to minimize the frequency of maintenance.
- ④ They have an equal capability in rust prevention as general grease, and also are reliable.

When using NSK linear guides, ball screws, or Monocarriers in a clean environment, request the LG2 or LGU as a packed lubricant prior to delivery. NSK also makes bellows-tubes which contain 80 grams of the LG2 or LGU. The tube is easy to use, and is ideal for maintenance (refer to pages B435 and D19). Wash to remove adipose substances prior to use.

Refer to page D8 for their detailed nature, functions and characteristics of LG2 and LGU.

B-2-12.2 Measures for Use Under Vacuum

NSK developed MoS₂ / WS₂ spattering and dry-film ball screws for equipment to be used in space. NSK also makes soft-metal film (gold and silver) ball screws to be used in a vacuum environment for semiconductor and liquid crystal display processing equipment.

Lubricants widely used for ball screws in a high vacuum are:

- > Vacuum grease which uses base oil of low vapor pressure.
- > Solid lubricants such as MoS₂, WS₂ used mainly for equipment in space.
- > Solid lubricants by soft-metal such as gold, silver, or lead film.

When used for semiconductor and liquid crystal display manufacturing equipment, the oil of the vacuum grease evaporates and causes environmental contamination. Also, it hinders creation of a super high vacuum. MoS₂ in the state of solid lubricant generates a large volume of dust, and Mo is unsuitable for semiconductors and reformed surface. Therefore, it is not suitable for the processing machines for semiconductor and liquid crystal display.

NSK recommends solid lubricant ball screws with a long life. These ball screws are treated with special silver film by NSK's unique processing technology, and can be used in a super-high vacuum. However, because of a solid lubricant, the film may peel off and stick to surface of ball grooves repeatedly, causing the torque to rise momentarily on some occasions. The drive motor should be of large capacity to handle this drastic variation of torque.

Refer to page D7 for the test data of ball screws for vacuum.

For ball screw specifications for special environments, refer to page D2.

B-2-13 Noise and Vibration

B-2-13.1 Consideration to Lowering Noise

As the machine operates at higher speeds, noise levels tend to increase. Covering the nut section is insufficient to lower noise. NSK has abundant data (NSK Motion & Control Technical Journal No.4, etc.), and offers advice to users regarding selecting ball screw.

To lower noise level in general, the following points should be taken into consideration.

- ① Use as a large lead as possible to reduce rotational speed.
- ② Use a ball screw with smaller outer diameter as possible.

(It often requires designing for critical dimensions, mandating special specification. Please consult NSK.)

For reference, noise levels by ball screws alone are plotted below. The formula for calculation is also shown below.

- ① Average value at measuring distance of 400 mm

$$dB(A) = 25.2 \{ \log_{10} (D_w \cdot d_m \cdot n \times 10^{-5}) \} + 63.9 \quad (\text{II-34})$$

- ② Upper limit at measuring distance of 400 mm

Average value + 6 dB (A)

D_w : Ball diameter (mm)

d_m : Ball pitch circle dia. (mm)

n : Rotational speed (min^{-1})

If measuring distance is 1 m, the average noise level is: Various noise levels minus 8 dB (A).

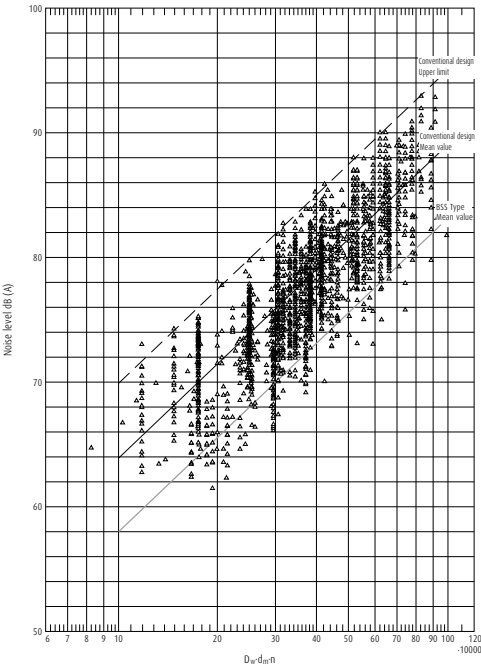


Fig. 13.1 Noise levels of ball screws

<<Example of calculation of noise levels>>

<Use conditions>

Nut model: DFT4010-5

From the dimension table: $D_w = 6.350$

$d_m = 41$

Maximum rotational speed: $2\,000 \text{ min}^{-1}$

<Calculation>

By formula 34):


$$\begin{aligned} dB(A) &= 25.2 \{ \log_{10} (D_w \cdot d_m \cdot n \times 10^{-5}) \} + 63.9 \\ &= 25.2 \{ \log_{10} (6.350 \times 41 \times 2\,000 \times 10^{-5}) \} + 63.9 \\ &= 82 \text{ dB (A)} \end{aligned}$$

The average value of noise level by ball screws alone at maximum rotational speed (measuring distance 400 mm) is 82 dB (A). Upper limit is: 82 dB (A) + 6 dB (A) = 88 dB (A)

If the measuring distance is 1 m, the average value of noise level is 74 dB (A), and upper limit is 80 dB (A).

When installed, the noise of ball screw becomes higher by the noise of the machine and characteristics of machine vibration.

By using NSK S1, the noise is reduced and softened compared to conventional ball screws. The BSS type will furthermore reduce and soften the noise.

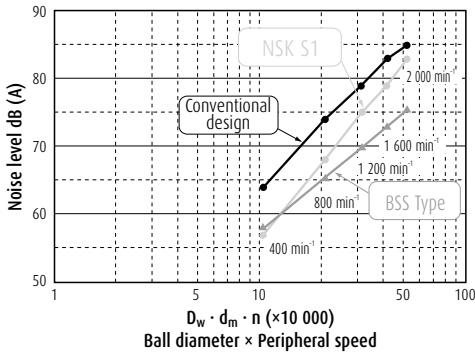

B-2-13.2 Consideration to Operational Characteristics

Smooth motion is achieved by using spacer balls on conventional ball return tube type ball screws. By using NSK S1 the smoothness is further improved. The BSS type will achieve the smoothness equivalent to ball screws with NSK S1.

B-2-13.3 Consideration to Ball Screw Support System

A ball screw has low radial rigidity because its support span is longer compare to its shaft diameter. It has only small damping capacity, requiring as much support rigidity as possible through design.

A simplified support bearing system to cut costs invites noise and vibration problems. Therefore, the necessity of consideration to the ball screw support system of both shaft ends is increasingly becoming important as the speed of machines is ever-increasing.

If one shaft end must be left unfixed without support bearing due to structural reasons, noise and vibration problems may occur. These problems are related to the natural vibration frequency of the screw shaft on the unsecured end. This problem can be averted by installing an impact damper to the shaft end (Fig. 13.2). Please consult NSK for details.


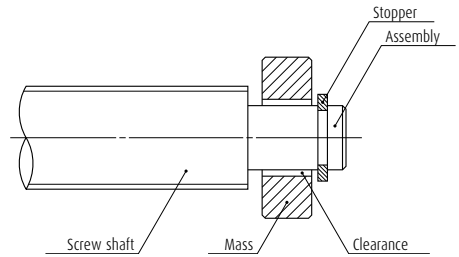



Fig. 13.2 Impact damper (Applied for patent)

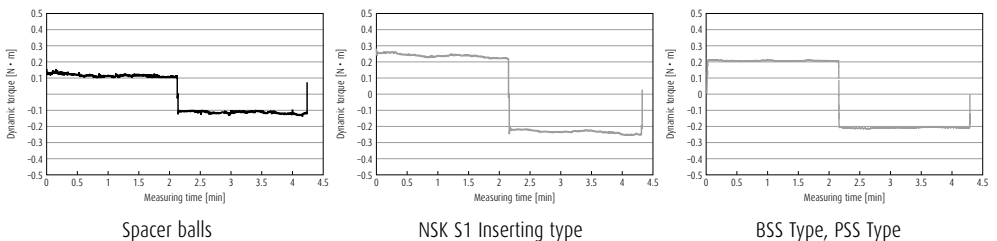

B-2-14 Installation of Ball Screw

B-2-14.1 Installation

The following simplified component drawing shows a representative example of a single-axis table.

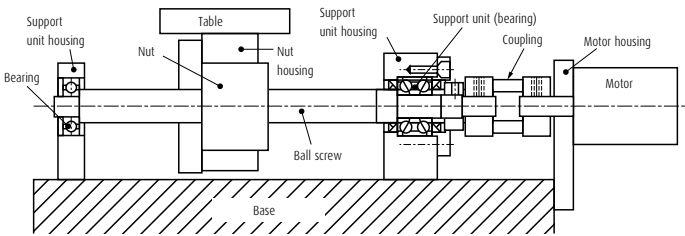

The screw shaft of the ball screw is supported by a nut and bearings, and it is driven by a motor.

It is critically important to complete the centering work to ensure the predetermined operation life, functionality and accuracy of the ball screw. In general, the following accuracy is recommended for precision-class applications.


Inclination of center line: 1/2 000 or less (Target: 1/5 000 or less)

Eccentricity: 0.020 mm or less


The following problems could occur if an installation error negatively affected the ball screw:

- (1) Effects on durability:
 - Lowered flaking life or wearing life.
- (2) Effects on torque characteristics:
 - Increased friction torque or torque variations.
- (3) Effects on feed rate:
 - Decreased accuracy in motion.

<Inclination of center line>




<Eccentricity>



Overall View of Assembled Body


Explanations of the assembling procedure are given below, using the single-axis table as an example:

In this explanation, two different installation procedures are provided: one for machine tools, where high installation accuracy is required, and another for general industrial machinery.

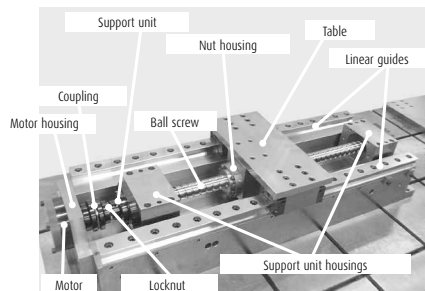

B-2-14.1 Installation Procedure for Machine Tools, Where High Installation Accuracy Is Required

The single-axis table shall be installed according to the following procedure:

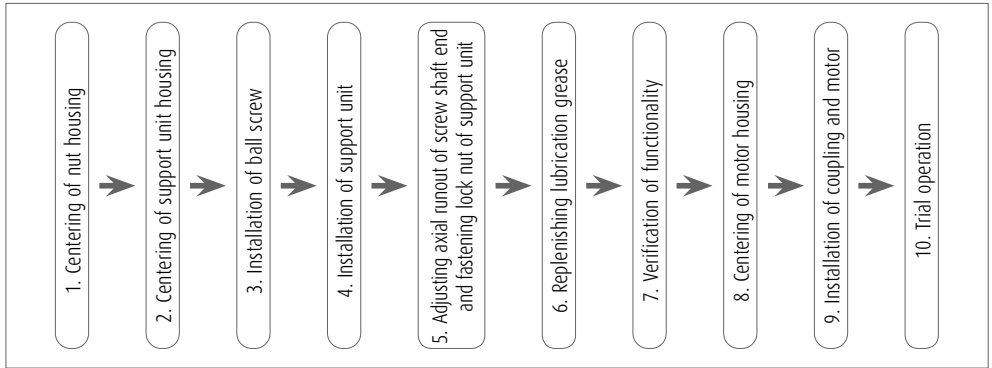


I. Jigs required for installation

Test bars:

(For the nut: one piece; for the support units: two pieces)

⇒ For centering and measurement of axial runout. The portions onto which the housing is installed (marked with the solid line) and the portions subject to measurement (a, b, c and d, marked with the broken line) shall be finished to high precision.

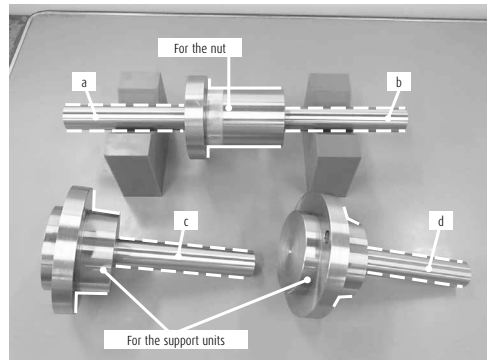

II. Installation of assembled body



1. Centering of nut housing

1-1

Turn the table over and mount the nut housing and test bar for the nut onto it.



Set up a magnet stand with a dial gauge attached, taking the rear side of the table as reference. Measure two spots at the top of the test bar for the nut by moving the magnetic stand around to check the inclination in the vertical direction.

If inclination of center line is observed, adjust the surfaces on which the nut housing is installed.



1-2

Fix the magnetic stand, with the dial gauge attached, onto a block. While pressing the block toward the reference surface of the table, move the magnet stand around. Measure the side surface of the test bar for the nut, check the inclination in the horizontal direction. If inclination of center line is observed, adjust the portion where the nut housing is installed onto the table.




2. Centering of support unit housing

Install the linear guides onto a machine base, and then install the table, which has already been centered. (For installation of linear guides, please refer to A67 of CAT. No. 9008.)


2-1

Install the test bar for the support unit onto the support unit housing.




2-2

Install the magnet stand, with the dial gauge attached, using the table as reference. While moving the table, measure the two spots at the top of the test bar for the motor-side support unit to check the inclination in the vertical direction. If inclination of center line is observed, adjust the mounting surfaces of the support unit housing.



Follow the same procedure for the opposite side of the motor.





2-3

Fix the magnet stand, with the dial gauge attached, onto a block, and install the block onto the top surface of the linear guide rail. Measure the top points of the test bar for the nut and the support unit to check for eccentricity in the vertical direction.

If eccentricity is observed, adjust the mounting surface of the support unit housing.



Follow the same procedure for the opposite side of the motor.



2-4

Fix the magnet stand, with the dial gauge attached, onto a block. While pressing the block toward the top surface of the linear guide rail as reference and moving it, take measurements of the side surfaces of the test bars for the nut and support unit to check for eccentricity in the horizontal direction. If eccentricity is observed, adjust the mounting surface of the support unit housing.

Follow the same procedure for the opposite side of the motor.




3. Installation of ball screw

Remove all test bars from the housing.

Clean the outside diameter surface of the nut and the inside diameter surface of the housing using a cloth, and install the ball screw.


Apply grease to spots with metal-to-metal contact to avoid any scratches or dents. While doing this, be careful not to drop the ball screw or hit it with anything, which might cause malfunction. If the housing must be removed in order to mount the ball screw, use a positioning pin so that the housing can be mounted back in its original position.



4. Installation of support unit

Insert the screw shaft into the support unit housing and mount the support units on both shaft ends. Fix the motor-side support unit to the housing. Fasten the locknut temporarily.


Follow the same procedure for the opposite side of the motor.



5. Adjusting axial runout of screw shaft end and fastening lock nut of support unit

Bring the dial gauge into contact with the top of the shaft end. Then, while rotating the screw shaft, measure the runout of the shaft end. While adjusting the shaft end runout, fasten the locknut to attain the required fastening torque.

Follow the same procedure for the opposite side of the motor.



6. Replenishing lubrication grease

Wipe away the antirust oil from the empty ball screw, to which grease has not been applied, and supply grease through the grease hole to fill the inside. (Supply the grease while rotating the ball screw in the direction that moves grease toward the inside of the nut. This will lubricate the ball screw evenly.)


If you use a ball screw already filled with grease, it is not necessary to add more.



7. Verification of functionality

To check whether the ball screw has been installed accurately, verify its functionality. Measure the driving torque with a torque meter over the entire movable range of the screw.


Confirm (including by touch) that there are no abnormalities.



8. Centering of motor housing


8-1

Install the motor housing, and mount the dial gauge onto the shaft end of the ball screw. Rotate the screw shaft to check the inclination of the motor housing, with the stylus of the dial gauge in contact with the end face of the motor housing. If inclination of the end surface of the motor housing is observed, adjust the mounting surface of the motor housing.



8-2


Set up the dial gauge onto the end face of the ball screw. Rotate the screw shaft to check eccentricity, with the stylus touching the inside diameter surface of the motor housing. If eccentricity is observed, adjust it by installing the motor housing appropriately.



9. Installation of coupling and motor

Mount the coupling onto the shaft end of screw, and install motor.

Fasten the bolts of the coupling to connect the shaft end with motor shaft.




10. Trial operation

At the beginning, run the assembly at low speed to check for vibrations and noise. Then, run it at moderate speed, and finally at high speed and check for abnormalities. Then run it continuously for approximately two hours, carry out a running-in operation and at the same time check for any abnormalities. During this running-in operation, the excessive grease inside of the nut is pushed out of the nut. Wipe it away.

B-2-14.2 Installation Procedure for General Industrial Machinery

In this procedure, the ball screw is installed with the accuracy required for the linear guide. The centering of nut and table are adjusted by installing the nut housing appropriately. Since no test bars are required and the inside diameter of the nut housing does not need to be fit with the nut, the ball screw can be installed relatively easily and cheaply.

The installation procedure used for the single-axis table is shown below:

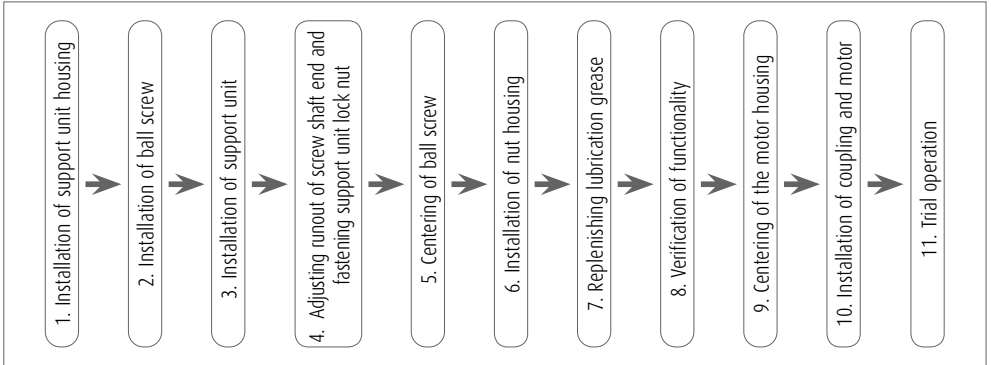


I. Installation of assembled body

1. Installation of support unit housing

Install the linear guide onto the machine base.

(For installation procedure for linear guide, please refer to A67, CAT. No. 9908.)


Place the support unit housing at the predetermined position and fasten it temporarily.



2. Installation of ball screw

While doing this, be careful not to drop the ball screw or hit it with anything, which might cause malfunction.

Conduct this task using a V-block to prevent scratches and dents.



3. Installation of support unit


Insert the screw shaft into support unit housing and mount support units on both shaft ends. Fix the motor-side support unit to the housing. Fasten the locknut temporarily.

Follow the same procedure for the opposite side of the motor.

4. Adjusting runout of screw shaft end and fastening support unit locknut

Bring the dial gauge into contact with the top of the shaft end. Then, while rotating the screw shaft, measure the runout of the shaft end. While adjusting the shaft end runout, fasten the locknut to attain the required fastening torque.


Follow the same procedure for the opposite side of the motor.



5. Centering of ball screw

5-1


Set up a magnet stand with a dial gauge attached, using the ball slide of the linear guide as reference. Measure the top of the screw shaft in the vicinity of the support unit housing both on the motor and opposite sides to check the inclination in the vertical direction. If inclination of center line is observed, adjust the mounting surface of the support unit housing.



5-2

Fix the magnet stand, with the dial gauge attached, onto a block. While pressing the block toward the ball slide of the linear guide, move the block. Measure the side surface of the screw shaft in the vicinity of the support unit housing both on the motor and opposite sides to check the inclination in the horizontal direction. If inclination of center line is observed, adjust by installing support unit housing appropriately.

After the adjustment, fix the support unit housings of the motor side and the opposite side.




6. Installation of nut housing

6-1

Temporarily fasten the nut housing onto the table, and fasten the table, using the ball slide of the linear guide as reference surface.

To minimize the bending of the screw shaft caused by the self-weight of the nut, move the nut toward the support unit housing at the shaft end.




6-2

Move the table toward the nut, and fasten the nut to the nut housing.

Loosen the bolts that fasten the table to the nut housing, and re-fasten them.

Loosen the bolts that fasten the nut housing and the nut, and re-fasten them.



7. Replenishing lubrication grease

Wipe away the antirust oil from the empty ball screw, to which grease has not been applied, and supply grease through the grease hole to fill the inside. (Supply grease while rotating the ball screw in the direction that moves grease toward the inside of the nut. This will lubricate the ball screw evenly.)


If you use a ball screw already filled with grease, it is not necessary to add more.



8. Verification of functionality

To check whether the ball screw has been installed accurately, verify its functionality. Measure the driving torque with a torque meter over the entire movable range of the screw.


Confirm (including by touch) that there are no abnormalities. Follow the same procedure for the opposite side of the motor.



9. Installation of nut housing


9-1

Install the motor housing, and mount the dial gauge onto the end face of the ball screw. Rotate the screw shaft to check the inclination of the motor housing, with the stylus of the dial gauge in contact with the end face of the motor housing. If inclination of center line is observed, adjust the mounting surface of the motor housing.




9-2

Set up the dial gauge onto the end face of the screw shaft. Rotate the screw shaft to check eccentricity, with the stylus touching the inside-diameter surface of the motor housing. If eccentricity is observed, adjust it by installing the motor housing appropriately.



10. Installation of coupling and motor

Mount the coupling onto the shaft end, and install the motor. Fasten the bolts of the coupling to connect the shaft end with the motor shaft.



11. Trial operation

At the beginning, run the assembly at low speed to check for vibrations and noise. Then, run it at moderate speed, and finally at high speed and check for abnormalities. Then run it continuously for approximately two hours, carry out a running-in operation and at the same time check for any abnormalities. During this running-in operation, the excessive grease inside of the nut is pushed out of the nut. Wipe it away.

B-2-15 Precautions for Designing Ball Screw

B-2-15.1 Safety System

As shown in the illustration on page B352, a stopper is installed in some cases to prevent the nut from overrunning due to malfunction of the safety system of the machine itself, or human error during operation.

The travel stopper should be installed at a place where it will not come into contact with the nut when the nut reaches the designed stroke end.

An impact absorbing travel stopper (NSK patent, refer to page B436) is available at NSK.

B-2-15.2 Design Cautions to Assembling Ball Screw

1. Cutting through the thread screw to the end

For some recirculation system, such as the deflector type, end cap type, S1 specification (High-Load drive ball screws etc.) and a part of end deflector type, one end of the thread screw should be cut through to the end of the major diameter. This is necessary to assemble the ball nut to the screw shaft (Fig. 15.1).

In this case, the shaft end diameter, to where this "cut-through thread" is made, should be 0.2 mm or smaller than the ball groove root diameter " d_r ". (See the dimension table.) A similar precaution is required when it is absolutely necessary to remove the nut from the screw shaft in order to install the ball screw to the machine. Also, in case using the cut-through end as the shoulder of the support bearing, make certain that a sufficient amount of the effective flat surface is left from the root diameter. If it is insufficient, the bearing cannot be installed perpendicularly to the bearing seat. (Fig. 15.2)

2. Designing the screw shaft end and the nut mounting area

When installing a ball screw to the machine, avoid a design which makes it necessary to separate the nut from the screw shaft as shown in Fig. 15.3. If separated, the balls may fall out. The separation may also deteriorate the ball screw accuracy, or may damage the ball screw. If separating them is unavoidable, please furnish NSK with the component which is to be installed between the nut and screw shaft. NSK will install the component prior to delivery.

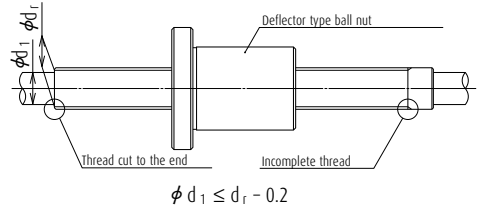


Fig. 15.1 Shaft end of a deflector recirculation system ball screw

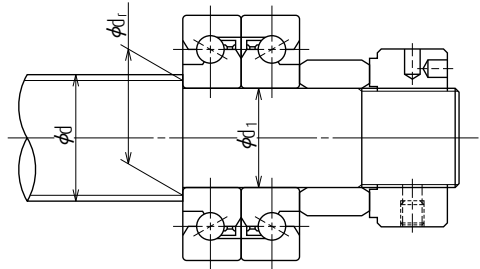


Fig. 15.2 Support bearing and end face (shoulder) for installation

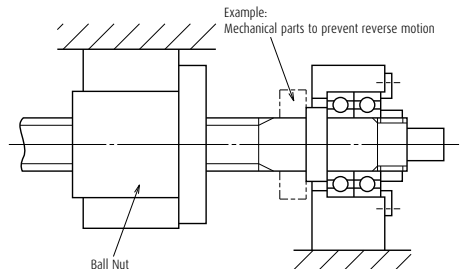


Fig. 15.3 Nut and ball screw are required to be separated when installing in this structure.

3. Removing the nut from the screw shaft at the time of assembly

If it is unavoidable, use an arbor (Fig. 15.4), keeping the balls in the nut. In this case, the outside diameter of the arbor should be approximately 0.2 mm to 0.4 mm smaller than the ball groove root diameter "d_r."

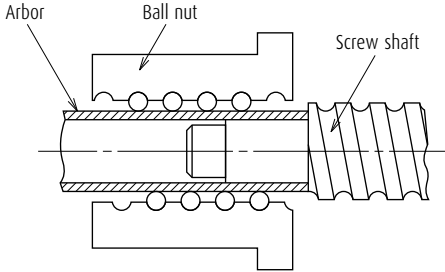


Fig. 15.4 Arbor to install and remove nut

4. Centering of the ball nut when installing

When installing the nut as shown in Fig. 15.5, provide a space between the housing and the nut body diameter, allowing the centering to be performed.

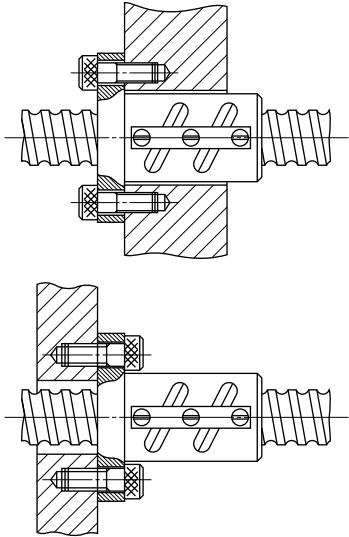


Fig. 15.5 Fixing a ball nut by flange

5. Preventing the thread screw of nut from loosening

When installing and securing the nut to the housing at the thread screw section, as in the case for RNCT type of R Series ball screws, apply an agent which prevents the nut from loosening.

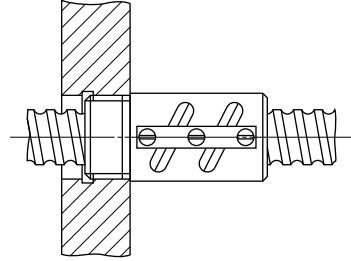


Fig. 15.6 Fixing a ball nut with thread screw

6. Installation of brush-seal to the nut

If a brush-seal is installed at the thread screw side of the nut similar to the RNCT type which comes with a thread screw, the brush-seal should be secured as shown in Fig. 15.7.

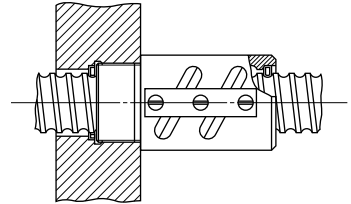


Fig. 15.7 Installation of brush-seal to a ball nut with thread screw

B-2-15.3 Effective Stroke of Ball Screw

When hardened by the induction hardening, the hardness of a ball screw may be slightly low at both ends of the screw section. Consider this low hardness prior to determining the length of effective stroke. Please consult NSK for details.

B-2-15.4 Matching after Delivery

When, after the delivery of a ball screw, you require drill knock pin hole on the screw shaft end, or at the nut mounting area, please inform NSK on the position and size of the hole.

NSK will take a measure and protect designated spots from heat treatment prior to delivery to make subsequent machining easy.

B-2-15.5 "NSK K1" Lubrication Unit

When using the NSK K1 lubrication unit, be aware of the operating temperature and chemicals that come to contact the unit for keeping the K1's best performance.

Temperature range for use:

Maximum temperature; 50°C

Momentary maximum temperature; 80°C

Chemicals that should not come to contact:

Do not leave the K1 unit in organic solvent, white kerosene such as hexane, thinner which removes oil, and rust preventive oil which contains white kerosene.

Water-type cutting oil, oil-type cutting oil, grease such as mineral-type AS2 and ester-type PS2 do not damage the K1 unit.

B-2-16 Shaft End Machining

You require to machined shaft ends in the following three occasions.

- * Precision ball screws with blank shaft end.
- * Ball screws in R Series with blank shaft end (see page B349).
- * Additional machining of a completed ball screw.

The following are the summaries of machining of these shaft ends. For details, please contact NSK.

1. Machining of blank shaft ends of precision ball screws

(a) Cutting screw shaft

Use a cutting whetstone or the like to cut the shaft, leaving stock for turning. Keep the nut in the assembled state to the screw shaft, and open only one side of the plastic wrapping bag, expose only the shaft end section to be machined, and then cut the screw shaft. This prevents foreign matters from entering to the ball screw section. Do the same for other machining.

(b) Precautions in cutting shaft end

Outside of the screw shaft is ground with precision (excluding R Series). There is a center hole in the ends. Use them for centering. Do not rotate the shaft quickly or stop it suddenly, or the nut might move along the shaft. We recommend securing the nut with tape. To machine a very long shaft, apply work rests to the screw shaft surface to suppress vibration (especially caused by critical speed).

(c) Turning by lathe

Cut to the length, turn shaft end steps, turn thread screw, and provide the center hole. Refer to JIS B1192 which sets standards for the shaft end accuracy.

(d) Processing by grinding

Apply the same precautions as for cutting for centering, securing nut, and work rest. Grind sections where the bearings and a "Spann ring" are installed.

(e) Milling processing

Process keyways and tooth seats for lock washers.

(f) Deburring, washing, and rust prevention

Wash with clean white kerosene after processing. Apply lubricant for immediate use. For later use, apply rust preventive agent.

Note: Contact NSK if nut is accidentally removed.

B-2-17 Ball Screw Selection Exercise

Drill 1: High-speed transporting system

1. Design conditions

Table mass :	$m_1 = 40 \text{ kg}$
Mass of the transporting item :	$m_2 = 20 \text{ kg}$
Maximum stroke :	$S_{\max} = 700 \text{ mm}$
Rapid traverse speed :	$V_{\max} = 1\,000 \text{ mm/sec}$ (60 m/min)
Positioning accuracy :	$\pm 0.05/700 \text{ mm}$ (0.005 mm/pulse)
Repeatability :	$\pm 0.005 \text{ mm}$
Required life :	$L_t = 25\,000 \text{ h}$ (5 years)
Guide way (rolling) :	$\mu = 0.01$ (friction coefficient)
Drive motor :	AC servo motor ($N_{\max} = 3\,000 \text{ min}^{-1}$)

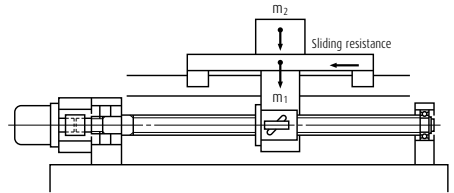


Fig. 16.1 System appearance

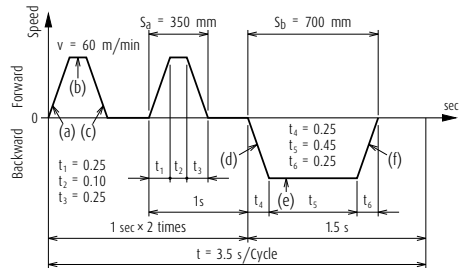


Fig. 16.2 Operating condition

2. Selection of basic factors

(1) Selection of accuracy grade and axial play

According to **Table 4.1** "Accuracy grades of ball screw and their application" on page B19, the accuracy grade of ball screws for Cartesian type industrial robots is C5 to Ct10.

From the following conditions in design, the axial play should be 0.005 mm or less.

Repeatability :	$\pm 0.005 \text{ (mm)}$
Resolution :	0.005 mm/pulse

According to **Table 4.2** "Combinations of accuracy grades and axial play" on page B20, you will require the accuracy grade C5 to satisfy the axial play of 0.005 mm or less. Therefore select the accuracy grade C5, and the axial play of 0 mm (Z-preload).

2.2 Selection of lead

Calculate the lead l based on maximum speed of AC servo motor and the rapid traverse speed V_{\max} .

$$l \geq \frac{V_{\max}}{N_{\max}} = \frac{1\,000 \times 60}{3\,000} = 20 \text{ (mm)}$$

Select a lead l of 20 mm or larger.

2.3 Selection of screw shaft diameter

According to the **Table 4.4** "Shaft diameter, lead and stroke of standard ball screw" on page B21, the screw shaft diameter d which has a lead l larger than 20 mm should be in the range of 15 mm to 32 mm. Select the smallest 15 mm.

2.4 Selection of stroke

From the **Table 4.4** "Screw shaft diameter, lead, and stroke of standard ball screw" on page B21, a ball screw with shaft diameter (d) of 15 mm and lead (l) of 20 mm meets maximum stroke of 700 mm, therefore it is possible to select from the standard ball screws. The primary selection is as follows:

Primary selection:

Shaft diameter :	15 (mm)
Lead :	20 (mm)
Stroke :	700 (mm)
Accuracy grade :	C5
Axial play :	Z

3. Confirmation of standard ball screw

In consideration of delivery time and price, select from the standard ball screws with finished shaft ends.

Primary candidate: W1507FA-3PG-C5Z20

4. Basic safety check

Let's examine the primary candidate.

4.1 Allowable axial load

4.1.1 Calculation of allowable axial load

From Fig. 16.2: Acceleration α_1 at accelerating/decelerating is:

$$\alpha_1 = \frac{V_{\max}}{t_1} = \frac{1\,000}{0.25} = 4\,000 \text{ (mm/s}^2\text{)} = 4 \text{ (m/s}^2\text{)}$$

Axial load F_1 is:

(At the time of acceleration (a)(d))

$$\begin{aligned} F_1 &= \mu(m_1 + m_2) \times g + (m_1 + m_2) \times \alpha_1 \\ &= 0.01 \times (40 + 20) \times 9.80665 + (40 + 20) \times 4 \\ &= 246 \text{ (N)} \end{aligned}$$

(At the time of constant speed (b)(e))

$$F_2 = \mu(m_1 + m_2) \times g = 0.01 \times (40 + 20) \times 9.80665 = 6 \text{ (N)}$$

(At the time of deceleration (c)(f))

$$\begin{aligned} F_3 &= -\mu(m_1 + m_2) \times g + (m_1 + m_2) \times \alpha_1 \\ &= -0.01 \times (40 + 20) \times 9.80665 + (40 + 20) \times 4 \\ &= 234 \text{ (N)} \end{aligned}$$

Thus, the maximum axial load P is 246 N.

4.1.2 Buckling load

W1507FA-3PG-C5Z20 has the support length of 804 mm ("La" as per the dimension table on page B193), and must support maximum axial load (P) of 246 N). The supporting condition of screw shaft is "Fixed - Simple", and the supporting condition of ball nut is "Fixed". Due to the direction of the load, the whole ball screw supporting condition is "Fixed - Fixed" support (Factor $m = 19.9$).

From formula 2) on page B44:

$$d_r \geq \left(\frac{P \times L_a^2}{m} \times 10^{-4} \right)^{1/4} = \left(\frac{246 \times 804^2}{19.9} \times 10^{-4} \right)^{1/4} = 5.3 \text{ (mm)}$$

W1507FA-3PG-C5Z20 has the dimension (d_r) of 12.2 mm as per the dimension chart (page B193) and therefore meets the condition.

Result: Acceptable

4.2. Allowable rotational speed

The permissible rotational speed listed in the dimension table is 3 000 min⁻¹. Since the motor maximum rotational speed is 3 000 min⁻¹, the operation is in the range of permissible rotational speed.

Result: Acceptable

4.3. Checking life expectation

4.3.1 Mean load F_m and mean rotational speed N_m

From the calculation of axial load, rotational speed N_i and the operating time t_i is:

(At the time of acceleration (a)(d))

$$F_1 = 246 \text{ (N)}$$

$$N_1 = \frac{n}{2} = \frac{3\,000}{2} = 1\,500 \text{ (min}^{-1}\text{)}$$

$$t_a = 2 \times t_1 + t_4 = 0.75 \text{ (s)}$$

(At the time of constant speed (b)(e))

$$F_2 = 6 \text{ (N)}$$

$$N_2 = 3\,000 \text{ (min}^{-1}\text{)}$$

$$t_b = 2 \times t_2 + t_5 = 0.65 \text{ (s)}$$

(At the time of deceleration (c)(f))

$$F_3 = 234 \text{ (N)}$$

$$N_3 = 1\,500 \text{ (min}^{-1}\text{)}$$

$$t_c = 2 \times t_3 + t_6 = 0.75 \text{ (s)}$$

Calculation result is shown in Table 16.1

Table 16.1 Axial load and rotational speed

Operating condition	Axial load (N)	Rotational speed (mean) (min ⁻¹)	Operating time (s)
(a) (d)	$F_1 = 246$	$N_1 = 1\,500$	$t_a = 0.75$
(b) (e)	$F_2 = 6$	$N_2 = 3\,000$	$t_b = 0.65$
(c) (f)	$F_3 = 234$	$N_3 = 1\,500$	$t_c = 0.75$

From the formulas 11) and 12) on page B53:

$$F_m = \left(\frac{F_1^3 \cdot N_1 \cdot t_a + F_2^3 \cdot N_2 \cdot t_b + F_3^3 \cdot N_3 \cdot t_c}{N_1 \cdot t_a + N_2 \cdot t_b + N_3 \cdot t_c} \right)^{1/3} = 195 \text{ (N)}$$

$$N_m = \frac{N_1 \cdot t_a + N_2 \cdot t_b + N_3 \cdot t_c}{t} = 1\,200 \text{ (min}^{-1}\text{)}$$

4.3.2 Calculation of life expectancy

At the basic dynamic load rating CA ISO of W1507FA-3PG-C5Z20 (Clearance Z) is 4 320 N (as per the dimension table on page B193), from the formulas 8) and 9) on page B53:

$$L_t = \left(\frac{C_a}{F_m \cdot f_w} \right)^3 \times \frac{1}{60N_m} \times 10^6$$

$$= \left(\frac{4\,320\text{ N}}{195 \times 1.2} \right)^3 \times \frac{1}{60 \times 1\,200} \times 10^6$$

$$\approx 87\,400\text{ (h)}$$

The ball screw satisfies the required life.

Result: Acceptable

5. Check for other requirements

(1) Accuracy and axial play

As per the dimension table on page B193 and **Table 1.2** for the permissible value of lead accuracy on page B38:

According to **Table 1.2**:

Accuracy grade: C5

$$e_p = \pm 0.035/800\text{ (mm)}$$

$$v_u = 0.025\text{ (mm)}$$

This grade satisfies the required positioning accuracy of $\pm 0.05/700\text{ mm}$.

The checking of axial play is omitted here since it is explained in "2. Selection of basic factors."

(2) Drive torque

Required specifications are as follows.

Motor rotational speed: $3\,000\text{ min}^{-1}$

Time to reach maximum speed: Less than 0.25 sec

① Load (converted to the motor axis)

Using the formula 32) and 33) on page B64, calculate the moment of inertia whereas γ is the material density of the ball screw.

(Screw shaft)

$$J_B = \frac{\pi \cdot \gamma}{32} D^4 \cdot L = \frac{\pi \times 7.8 \times 10^{-3}}{32} \times 1.5^4 \times 80$$

$$= 0.31\text{ (kg} \cdot \text{cm}^2)$$

(Moving part)

$$J_w = m \times \left(\frac{l}{2\pi} \right)^2 = 60 \times \left(\frac{2}{2\pi} \right)^2$$

$$= 6.1\text{ (kg} \cdot \text{cm}^2)$$

(Coupling)

$$J_c = 0.25\text{ (kg} \cdot \text{cm}^2) \dots \text{Temporary}$$

(As a whole)

Moment of inertia of the ball screw J_L is:

$$J_L = J_B + J_w + J_c$$

$$= 0.31 + 6.1 + 0.25$$

$$= 6.7 \times 10^{-4}\text{ (kg} \cdot \text{m}^2)$$

② Driving torque

We assume that WBK12-01 compact light load type is used as recommended for W1507FA-3PG-C5Z20, and the moment of inertia of motor (J_M) is 3.1

$$\text{(kg} \cdot \text{cm}^2) = 3.1 \times 10^{-4}\text{ (kg} \cdot \text{m}^2).$$

(At the time of constant speed)

The torque which is necessary to drive the ball screw at a constant speed resisting to external loads is: per formula 30) on page B64

$$T_1 = T_a + T_{pmax} + T_u$$

In this formula, T_a is the drive torque at constant speed, T_{pmax} is the upper limit of the dynamic friction torque of ball screw, and T_u is the friction torque of the support bearings.

From the chart on pages B193 and B422, (T_{pmax}) is $7.8\text{ (N} \cdot \text{cm)}$ and (T_u) is $2.1\text{ (N} \cdot \text{cm)}$ respectively.

$$T_a = \frac{F_a \cdot l}{2\pi\eta_1}$$

Using formula 28) on page B63, the drive torque at a constant speed T_1 is:

$$T_1 = \frac{F_a \cdot l}{2\pi \cdot \eta_1} + T_{pmax} + T_u$$

$$= \frac{6 \times 2}{2\pi \times 0.9} + 7.8 + 2.1$$

$$= 12\text{ (N} \cdot \text{cm)} = 0.12\text{ (N} \cdot \text{m)}$$

(At the time of acceleration)

The drive torque necessary for accelerating the ball screw resisting axial load can be calculated by the formula 31) on page 64.

$$T_2 = T_1 + J \cdot \frac{2\pi \cdot n}{60t_1}$$

$$= T_1 + (J_L + J_M) \cdot \frac{2\pi \cdot n}{60t_1}$$

$$= 0.12 + (6.7 \times 10^{-4} + 3.1 \times 10^{-4}) \frac{2\pi \times 3000}{60 \times 0.25}$$

$$= 1.35\text{ (N} \cdot \text{m)}$$

(At the time of deceleration)

Similarly at the time of acceleration.

$$\begin{aligned} T_3 &= T_1 - J \cdot \frac{2\pi \cdot n}{60t_3} \\ &= T_1 - (J_L + J_M) \cdot \frac{2\pi \cdot n}{60t_3} \\ &= 0.12 - (6.7 \times 10^{-4} + 3.1 \times 10^{-4}) \frac{2\pi \times 3\,000}{60 \times 0.25} \\ &= -1.11 \text{ (N} \cdot \text{m)} \end{aligned}$$

③ Selection of motor

Selection conditions are as follows.

Maximum rotational speed: $N_M \geq 3\,000 \text{ (min}^{-1}\text{)}$

Motor rating torque: $T_M \geq T_{rms} \text{ (N} \cdot \text{m)}$
(T_{rms} : Effective torque)

Moment of inertia of the motor: $J_M > J_L/3$ or more

Form above: select an AC servo motor with the following specifications.

Motor specifications:

Rating power output: $W_M = 300 \text{ (W)}$

Maximum rotational speed:

$$N_M = 3\,000 \text{ (min}^{-1}\text{)}$$

Rating torque: $T_M = 1 \text{ (N} \cdot \text{m)} = 1 \times 10^2 \text{ (N} \cdot \text{cm)}$

Moment of inertia: $J_M = 3.1 \times 10^{-4} \text{ (kg} \cdot \text{m}^2\text{)}$
 $= 3.1 \text{ (kg} \cdot \text{cm}^2\text{)}$

④ Check on effective torque

Effective torque T_{rms} can be calculated as follows:

$$\begin{aligned} T_{rms} &= \sqrt{\frac{T_2^2 \times t_a + T_1^2 \times t_b + T_3^2 \times t_c}{t}} \\ &= \sqrt{\frac{1.35^2 \times 0.75 + 0.12^2 \times 0.55 + 1.11^2 \times 0.75}{3.5}} \\ &= 0.81 \end{aligned}$$

Thus the condition of " $T_M \geq T_{rms}$ " is cleared.

⑤ Check on time to reach maximum speed

The time required to reach the rapid traverse speed can be calculated as follows.

Whereas $T_M' = 2 \times T_M$:

$$\begin{aligned} t_a &= \frac{(J_L + J_M) \times 2\pi \times n}{(T_M' - T_1)} \times 1.4 \\ &= \frac{(6.7 \times 10^{-4} + 3.1 \times 10^{-4}) \times 2\pi \times 3\,000}{(2 \times 1 - 0.12) \times 60} \times 1.4 \\ &= 0.23 \end{aligned}$$

Thus the ball screw meets the requirement of "0.25 sec or less".

From the above, use W1507FA-3PG-C5Z20

Drill 2: Processing table for special machines

1. Design conditions

Table mass:	$m_1 = 1000 \text{ kg}$
Mass of the work:	$m_2 = 600 \text{ kg}$
Maximum stroke:	$S_{\max} = 1\,000 \text{ mm}$
Maximum speed:	$V_{\max} = 15\,000 \text{ mm/min}$
Positioning accuracy:	$\pm 0.035/1\,000 \text{ mm (no load)}$

* Attitude accuracy of the table and thermal displacement are not included in the accuracy requirement of the ball screw.

Repeatability:	$\pm 0.005 \text{ mm (no load)}$
Lost motion:	$0.020 \text{ mm (no load)}$
Required life expectancy:	$L_t = 20\,000 \text{ h}$ ($16 \text{ h} \times 250 \text{ days} \times 10 \text{ years} \times 0.5 \text{ rate of operation}$)
Guide way (sliding):	$\mu = 0.15$ (friction coefficient)

Processing: Milling and drilling

Drive motor: AC servo motor
($N_{\max} = 2\,000 \text{ min}^{-1}$)

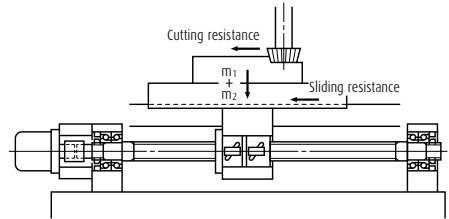


Fig. 16.3 System appearance

Table 16.2 Operating conditions

Operation	Axial load (N)		Feed speed (mm/min)	Use time ratio (%)
	Cutting resistance	Sliding resistance		
Rapid traverse	0	2 354	15 000	30
Light/medium cutting	4 000	2 354	500	50
Heavy cutting	8 000	2 354	100	20

* Sliding resistance: $F_f = \mu (m_1 + m_2) g = 0.15 \times (1\,000 + 600) \times 9.80665 = 2\,354 \text{ (N)}$

* Ignore the inertia force at the time of acceleration/deceleration because their time rate is negligibly short.

2. Selection of basic factors

(1) Selection of accuracy grade and axial play

The proper accuracy grade for machining centers should be in the range from C1 to C5 according to "Table 4.1 Accuracy grades of ball screws and their applications" on page B19. Assuming the nut length is 200 mm and extra stroke is 100 mm, the shaft length L_0 is obtained as follows:

$$\begin{aligned} L_0 &= \text{Maximum stroke} + \text{nut length} + \text{margin} \\ &= 1\,000 = (200) + (100) = 1\,300 \end{aligned}$$

From "Table 1.2 Tolerance on specified travel and travel variation of the positioning ball screws" on page B38, the accuracy which satisfy the required function are:

Accuracy C3 grade

$$e_p = \pm 0.029/1\,600 \text{ (mm)}$$

$$v_u = 0.018 \text{ (mm)}$$

Considering the importance of lost motion, select the Z code (axial play 0 mm and less) for the axial play.

(2) Selection of lead

From the maximum rotational speed of AC servo motor N_{\max} and rapid traverse speed of table V_{\max} , lead l is :

$$l \geq \frac{V_{\max}}{N_{\max}} = \frac{15\,000}{2\,000} = 7.5 \text{ (mm)}$$

A larger lead l would be beneficial for a higher feed speed. But from the view of the control system (resolution), the lead l is limited to 8 mm or 10 mm.

(3) Selection of screw shaft diameter

According to **Table 4.4** "Screw shaft diameter, lead and stroke of standard ball screw" on page B21, the screw shaft diameter with the lead of 8 mm or 10 mm are in the range of 10 mm to 50 mm. Placing more importance on rigidity than to the volume of lost motion, select a relatively large size in the range of 32 mm to 50 mm.

(4) Selection of stroke

Select 1 000 mm, the maximum stroke as specified in the design condition.

Primary selection:

Standard ball screw
 Shaft diameter: 32, 36, 40, 45, 50 mm
 Lead: 8, 10 mm
 Stroke: 1 000 mm
 grade: C3
 Axial play code: Z

3. Confirmation of standard ball screw

Giving consideration to delivery time and price, select a standard ball screw.

At the primary selection of C3 grade is not found in the standard ball screws. Let us check for application-oriented ball screws whether there is a C3 grade among ball screw.

4. Confirmation of made-to-order ball screw

Because standard ball screws do not meet the accuracy grade requirement, we will consider made-to-order ball screws which are based on standard ball screws but with accuracy grade of C3.

Second selection:

Made-to-order ball screw
 Shaft diameter : 32, 36, 40, 45, 50 mm
 Lead : 8, 10 mm
 Stroke : 1 000 mm
 Accuracy grade : C3
 Axial play : Z

5. Selection of screw shaft diameter, lead, and nut

(1) Dynamic load rating

Obtain required load carrying capacity for each lead through load conditions. From **Table 16.2** "Operating conditions" on page B91, calculate the rotation speed N_i as shown in **Table 16.3**.

$$N_i \geq \frac{V_i}{l}$$

Table 16.3 Load conditions

Operating condition	Axial load (N)	Rotations per minute (min^{-1})		Use time ratio (%)
		$l = 8$	$l = 10$	
Rapid traverse	$F_1 = 2\,354$	$N_1 = 1\,875$	$N_1 = 1\,500$	$t_1 = 30$
Light/medium cutting	$F_2 = 6\,354$	$N_2 = 62.5$	$N_2 = 50$	$t_2 = 50$
Heavy cutting	$F_3 = 10\,354$	$N_3 = 12.5$	$N_3 = 10$	$t_3 = 20$

By using the formulas 11) and 12) on page B53, calculate the mean load F_m and the mean rotational speed N_m as shown below.

$$F_m = \left(\frac{F_1^3 \cdot N_1 \cdot t_1 + F_2^3 \cdot N_2 \cdot t_2 + F_3^3 \cdot N_3 \cdot t_3}{N_1 \cdot t_1 + N_2 \cdot t_2 + N_3 \cdot t_3} \right)^{1/3}$$

$$N_m = \frac{N_1 \cdot t_a + N_2 \cdot t_b + N_3 \cdot t_c}{t}$$

Table 16.4 Mean load and mean rotational speed

Lead (mm)	8	10
Mean load F_m (N)	3 122	3 122
Mean rotational speed N_m (min^{-1})	596	477

Required dynamic load rating C_a is:

Using the formulas 8) and 9) on page B53, calculate the required dynamic load rating.

$$C_a \geq (60N_m \cdot L_t)^{1/3} \cdot F_m \cdot f_w \times 10^{-2} \text{ (N)}$$

Whereas required life expectancy $L_t = 20\,000$ (h), load coefficient $f_w = 1.2$ (refer to page B53),

$$l = 8 \text{ (mm)} \quad C_a \geq 33\,500 \text{ (N)}$$

$$l = 10 \text{ (mm)} \quad C_a \geq 31\,100 \text{ (N)}$$

(2) Selection of the nut

Due to the requirement on the lost motion, the nut will be selected as follows emphasizing the importance of system rigidity.

Table 16.5 shows the dynamic load rating of each specification.

- Standard nut ball screw, tube type
- Model: ZFT or DFT (pages B461 to B490)
- Number of turns of balls: Select from 2.5 turns 2 circuits or 2.5 turns 3 circuits

From **Table 16.5** select item that meets required dynamic load rating C_a as follows:

Third selection: In the range surrounded by the dotted lines
 in **Table 16.5**

Table 16.5 Dynamic load rating of each specification

Screw shaft diameter (mm)	Dynamic load rating C_a : (N)			
	Lead 8 mm		Lead 10 mm	
	2.5 turns 2 circuits	2.5 turns 3 circuits	2.5 turns 2 circuits	2.5 turns 3 circuits
32	37 300	-	54 500	-
36	-	-	58 000	-
40	41 100	-	61 200	-
45	-	-	65 800	93 300
50	45 700	64 800	68 100	96 500

(3) Permissible rotational speed

① Critical speed

Check if the rapid traverse speed of 15 000 mm/min (V_{max}) clears the critical speed. Ball screw rotational speed at each lead N is:

$$l = 8 \text{ (mm)} \quad N = 1\,875 \text{ (min}^{-1}\text{)}$$

$$l = 10 \text{ (mm)} \quad N = 1\,500 \text{ (min}^{-1}\text{)}$$

From the formula 7) on page B47, screw shaft root diameter to meet critical speed requirement is:

$$d_r \geq \frac{n \times L_a^2}{f} \times 10^{-7} \text{ (mm)}$$

In this formula, unsupported length L_a is:

$$L_a = \text{Maximum stroke} + \text{nut length}/2 + \text{shaft end extra length}$$

$$= 1\,000 + 100 + 200 = 1\,300 \text{ (mm)}$$

Supporting condition of the screw shaft is Fixed - Fixed support, and that of the ball nut is Fixed. Therefore, supporting condition is Fixed - Fixed support (Factor $f = 21.9$)

$$l = 8 \text{ (mm)} \quad d_r \geq 14.5 \text{ (mm)}$$

$$l = 10 \text{ (mm)} \quad d_r \geq 11.6 \text{ (mm)}$$

② $d \cdot n$ value

From **Table 3.2** on page B50, as the $d \times n$ is 70 000 or less, screw shaft diameters to meet the $d \times n$ are:

$$d \leq \frac{70\,000}{N} \text{ (mm)}$$

$$l = 8 \text{ (mm)} \quad d \leq 37.3 \text{ (mm)}$$

$$l = 10 \text{ (mm)} \quad d \leq 46.7 \text{ (mm)}$$

Based on nut specifications (pages B461 to B490) select an item that meets screw shaft root diameter (d_r) and screw shaft diameter (d).

* Please consult NSK if the $d \times n$ value is necessary to exceed 70 000.

Fourth selection: In the range surrounded by the solid-lines in **Table 16.5**

(4) Rigidity of the ball screw system

Set the lost motion of the ball screw system (screw shaft, nut and support bearings) at 80% of the specified value. Then calculate the system rigidity. The criterion lost motion is:

$$20 \text{ (}\mu\text{m)} \times 0.8 = 16 \text{ (}\mu\text{m)}$$

At this time, the one-way elastic deformation ΔL of the major factors of ball screw system shall be less than the half of above criterion.

$$\Delta L \leq 8 \text{ (}\mu\text{m)}$$

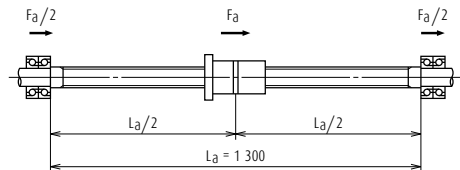


Fig. 16.3 Unsupported length

① Rigidity of the screw shaft K_S

Calculate the rigidity at the center of screw shaft where the axial deformation becomes the largest. Because the supporting condition of screw shaft is Fixed - Fixed support, the rigidity as per the formula 21) on page B58:

$$K_S = \frac{\pi \cdot d_r^2 \cdot E}{L_a} \times 10^{-3} \text{ (N/mm)}$$

At here E is the elastic modulus. From the formula 17) on page B57, the elastic deformation of the screw shaft ΔL_S is

$$\Delta L_S = \frac{F_a}{K_S} = \frac{F_a \cdot L_a}{\pi \cdot d_r^2 \cdot E} \times 10^3 \text{ (\mu m)}$$

The sliding resistance F_a is:

$$F_a = \mu (m_1 + m_2) = 0.15 \times (1\,000 + 600) = 2\,354 \text{ (N)}$$

Table 16.7 shows the rigidity of screw shaft K_S and the elastic deformation ΔL_S .

② Rigidity of the ball nut K_N

Set about 1/3 of the maximum axial load as the preload value F_{a0} .

$$F_{a0} = \frac{F_{\max}}{3} = \frac{10\,354}{3} = 3\,452 \rightarrow 3\,500 \text{ (N)}$$

From the formula 23) on page B60, the rigidity of the ball nut K_N is:

$$K_N = 0.8 \times K \left(\frac{F_{a0}}{e \cdot C_a} \right)^{1/3} = 0.8 \times K \left(\frac{3\,500}{0.1 \cdot C_a} \right)^{1/3} \text{ (N/\mu m)}$$

K : Theoretical rigidity

From the formula 17) on page B57, elastic deformation of the ball nut ΔL_N is

$$\Delta L_N = \frac{F_a}{K_N} = \frac{2\,354}{K_N}$$

Table 16.7 shows the rigidity of ball nut K_N and the elastic deformation ΔL_N .

③ Rigidity of the support bearing K_B

The bearings are Ball screw support bearings NSKAC C series. We specify the model number of support bearing unit for each shaft diameter as shown in **Table 16.6** (refer to page B437).

Table 16.6 Bearing code

Screw shaft diameter (mm)	Bearing code
32	25TAC62CDF
36	25TAC62CDF
40	30TAC62CDF
45	35TAC72CDF

Refer to page B444 for the rigidity K_B of each bearing unit (axial spring modulus). Elastic deformation of bearing ΔL_B is:

$$\Delta L_B = \frac{F_a}{2K_B}$$

Table 16.7 shows the rigidity of support bearing K_B and the elastic deformation ΔL_B .

Table 16.7 Rigidity and elastic deformation

Nut model number	Screw shaft		Nut		Support bearing		Total ΔL
	K_S	ΔL_S	K_N	ΔL_N	K_B	ΔL_B	
DFT3210-5	347	6.8	843	2.8	850	1.4	11.0
DFT3610-5	460	5.1	898	2.6	850	1.4	9.1
DFT4010-5	589	4.0	966	2.4	890	1.3	7.7
DFT4510-5	772	3.0	1 054	2.2	1 030	1.1	6.3
DFT4510-7.5	772	3.0	1 381	1.7	1 030	1.1	5.8

Choose the most economical ball screw system which meets the requirement of one-way deformation ΔL of 8 μm or less.

The selected ball screw:

Nut model code : DFT4010-5
 Shaft diameter : 40 (mm)
 Lead : 10 (mm)
 Dynamic load rating : 61 200 (N)

6. Decision of screw shaft length

DFT4010 ball nut has the length of 193 mm, and thus the unsupported length of screw shaft L_a should be:

$$L_a = \text{Maximum stroke} + \text{nut length} + \text{margin} = 1\,000 + 193 + 100 = 1\,293 \rightarrow 1\,300 \text{ mm}$$

7. Checking basic safety

(1) Permissible axial load

Calculate the buckling load for conditions shown in Fig. 16.4 with P of 10 354 (N) and L_1 of 1 210 (mm).

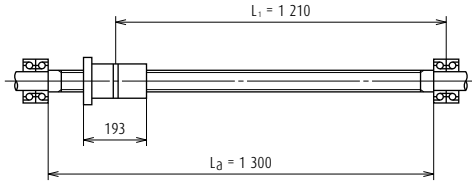


Fig. 16.4 Examination of buckling load

Supporting condition is Fixed - Fixed support, and from the calculation formula 2) on page B44, the screw shaft diameter d_f to prevent buckling is

$$d_f \geq \left(\frac{P \cdot L_1^2}{m} \times 10^{-4} \right)^{1/4}$$

$$= \left(\frac{10\,354 \times 1\,210^2}{19.9} \times 10^{-4} \right)^{1/4} = 16.6 \text{ (mm)}$$

From the specification of DFT4010-5 ball nut (page B479), the root diameter of screw shaft d_f is 34.4 mm and thus meets the above condition.

Result: Acceptable

(2) Permissible rotational speed

① Critical speed n

From the critical speed calculation formula 7) on page B47:

$$n = f \cdot \frac{d_f}{L_1^2} \times 10^7 = 21.9 \times \frac{34.4}{1\,210^2} \times 10^7$$

$$\approx 5\,140$$

The maximum rotational speed (N_{\max}) of $1\,500 \text{ min}^{-1}$ is less than the critical speed, and thus meets the requirement.

Result: Acceptable

② $d \cdot n$ value

The $d \cdot n$ value is:

$$d \cdot n = 40 \times 1\,500 = 60\,000$$

From Table 3.2 on page B50, the $d \times n$ of tube type ball nut is 70 000 or less, and meets the requirement.

Result: Acceptable

(3) Life L_t

The dynamic load rating C_a is 61 200 N (see dimension table on page B479), and from the formulas 8) and 9) on page B53 the life expectancy is:

$$L_t = \left(\frac{C_a}{f_w \cdot F_m} \right)^3 \times 10^6 \times \frac{1}{60 \cdot N_m}$$

$$\approx 152\,000$$

The above result satisfies the required life of 20 000 (h).

Result: Acceptable

8. Check whether the following factors satisfy requirements

(1) Checking accuracy

① Positioning accuracy

The positioning accuracy of $\pm 0.035/1\,000 \text{ mm}$, and therefore, from Table 1.2 "Tolerance of specified travel and travel variation" on page B38 the positioning accuracy is:

Accuracy grade : C3

$$e_p = \pm 0.029/1\,600 \text{ (mm)}$$

$$v_u = 0.018 \text{ (mm)}$$

and thus meets the required positioning accuracy.

② Measures against thermal expansion

Provide pre-tension force equivalent to the elongation of 3°C temperature rise, taking in consideration of the load carrying capacity of bearings. Also, adjust the travel compensation for the specified travel equivalent to 3°C temperature rise (refer to page B40).

(a) Thermal elongation : ΔL_0

From the formula 1) on page B40:

$$\Delta L_0 = \rho \cdot \theta \cdot L_3 = 12.0 \times 10^{-6} \times 3 \times 1\,300$$

$$= 0.047 \text{ (mm)}$$

(b) Pre-tension force : F_0

$$F_0 = \Delta L_0 \cdot K_s = \frac{\Delta L_0 \cdot E \cdot \pi \cdot d_f^2}{4L_3}$$

$$= \frac{0.047 \times 2.06 \times 10^5 \times \pi \times 34.4^2}{4 \times 1\,300}$$

$$\approx 6\,922 \rightarrow 6\,900 \text{ (N)}$$

Travel compensation : $-0.047/1\,300 \text{ (mm)}$

Pre-tension force : 6 900 (N)

Tension (elongation) volume : 0.047 (mm)

③ Selection of support bearing

Assuming that the ratio of basic dynamic load rating of support bearing (C_a) and pre-tension force (F_0) is ϵ , select a bearing which generally satisfies the following:

$$\epsilon = F_0/C_a < 0.20$$

Design the bearing supporting configuration to which pre-tension force is applied in such way that the axial load is supported by the duplex combination or a more multiple condition. Please consult NSK when one bearing must sustain the pre-tension load.

Table 16.8 Comparison of dynamic load rating and pre-tension force

Bearing reference number	C_a (N)	ϵ
30TAC62CDF	29 200	0.23
30TAC62CDFD	47 500	0.14

Selected support bearing: 30TAC62BDFD

(2) Checking drive torque of motor

⟨Required specifications⟩

- Motor rotational speed: 1 500 min⁻¹
- Time to reach maximum speed: 0.16 sec or less
(At the time of rapid traverse)

① Load (converted to the motor load)

Calculate the moment of inertia of ball screw. From the formulas 32) and 33) on page B64, moment of inertia of ball screw parts J are calculated the load as follows, whereas γ is material density and ball screw shaft length L_0 is 1 550 mm.

(Screw shaft)

$$J_B = \frac{\pi \cdot \gamma}{32} D^4 \cdot L_0 = \frac{\pi \times 7.8 \times 10^{-3}}{32} \times 4^4 \times 155$$

$$= 30 \text{ (kg} \cdot \text{cm}^2\text{)}$$

(Moving part)

$$J_W = m \times \left(\frac{l}{2\pi}\right)^2 = 1\,600 \times \left(\frac{1}{2\pi}\right)^2$$

$$= 40 \text{ (kg} \cdot \text{cm}^2\text{)}$$

(Coupling)

$$J_C = 10 \text{ (kg} \cdot \text{cm}^2\text{)} \dots \text{assumed}$$

(Total)

$$J_L = J_B + J_W + J_C = 30 + 40 + 10$$

$$= 80 \text{ (kg} \cdot \text{cm}^2\text{)} \rightarrow 80 \times 10^{-4} \text{ (kg} \cdot \text{m}^2\text{)}$$

② Driving torque

The required torque to drive a ball screw resisting to external loads T_1 can be obtained by the formula 30) on page B64:

$$T_1 = T_A + T_P + T_U$$

In this formula, T_A is drive torque at constant speed, T_P is dynamic friction torque, and, T_U is friction torque of the support bearings. From the formula 26) on page B62 and the formula 27) on page B63, T_A and T_P are:

$$T_A = \frac{F_a \cdot l}{2\pi\eta_1}$$

$$T_P = 0.014F_{a0} \sqrt{d_m \cdot l}$$

$$\eta_1 = 0.9$$

Refer to the starting torque value on page B444:

T_U is:

$$T_U = (16 \times 1.35) + (16 \times 1.35) = 43.2 \text{ (N} \cdot \text{cm)}$$

So, the required drive torque during rapid traverse T_{11} and heavy cutting T_{13} are:

(At the time of rapid traverse)

$$T_{11} = T_{A1} + T_{P1} + T_{U1}$$

$$= \frac{2\,354 \times 1}{2\pi \times 0.9} + 0.014 \times 3\,500 \sqrt{4.1 \times 1} + 43.2$$

$$= 559 \text{ (N} \cdot \text{cm)} \rightarrow 559 \times 10^{-2} \text{ (N} \cdot \text{m)}$$

(At the time of heavy cutting)

$$T_{12} = T_{A2} + T_{P2} + T_{U2}$$

$$= \frac{10\,354 \times 1}{2\pi \times 0.9} + 0.014 \times 3\,500 \sqrt{4.1 \times 1} + 43.2$$

$$= 1\,973 \text{ (N} \cdot \text{cm)} \rightarrow 1\,973 \times 10^{-2} \text{ (N} \cdot \text{m)}$$

③ Selection of the motor

⟨Selection conditions⟩

Maximum rotational speed: $N_M \geq 1\,500 \text{ (min}^{-1}\text{)}$

Motor rating torque: $T_M > T_1 \text{ (N} \cdot \text{m)}$

Moment of inertia of the motor: $J_M > J_L/3 \text{ (kg} \cdot \text{m}^2\text{)}$

Based on the above, select AC servo motor as follows.

Motor specifications

Rating power output: $W_M = 1.8$ (kW)

Maximum rotational speed:

$N_M = 1\,500$ (min^{-1})

Rating torque:

$T_M = 22.5$ ($\text{N} \cdot \text{m}$)

$= 22.5 \times 10^2$ ($\text{N} \cdot \text{cm}$)

Rotor inertia:

$J_M = 190 \times 10^{-4}$ ($\text{kg} \cdot \text{m}^2$)

$= 190$ ($\text{kg} \cdot \text{cm}^2$)

④ Checking the time to reach maximum speed:

Required time to reach rapid traverse speed can be calculated as follows (whereas $T_{M'} = 2 \times T_M$):

$$\begin{aligned}t_a &= \frac{(J_L + J_M) \times 2\pi \times N}{(T_{M'} - T_i) \times 60} \times 1.4 \\&= \frac{(80 \times 10^{-4} + 190 \times 10^{-4}) \times 2\pi \times 1\,500}{(2 \times 22.5 - 559 \times 10^{-2}) \times 60} \times 1.4 \\&= 0.15 \text{ (sec)}\end{aligned}$$

Thus the time meets the requirement 0.16 sec or less.

Drill 3: Cartesian type robot Z axis (vertical axis)

1. Design conditions

Mass of the traveling item:	$m = 300 \text{ kg}$
Maximum travel:	$S_{\max} = 1\,500 \text{ mm}$
Rapid traverse speed:	$V_{\max} = 10\,000 \text{ mm/min}$
Repeatability:	0.3 mm
Required life:	$L_t = 24\,000 \text{ h}$ ($16 \text{ hours} \times 300 \text{ days} \times 5 \text{ years}$)

Screw shaft supporting condition :

Fixed -- Simple support

Nut:

Flanged single nut

Guide way (rolling):

$\mu = 0.01$ (friction coefficient)

Drive motor:

AC servo motor ($N_{\max} = 1\,000 \text{ min}^{-1}$)

Environment:

Slightly dusty

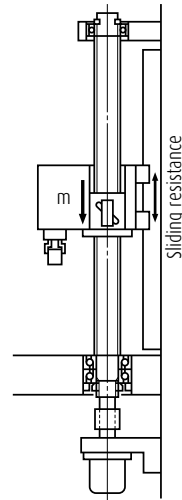


Fig. 16.5 System appearance

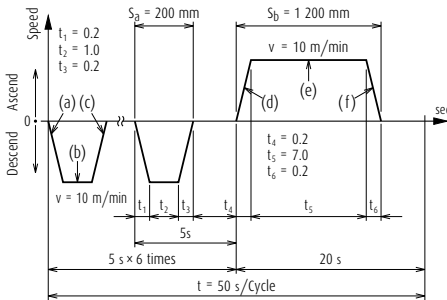


Fig. 16.6 Operating condition

2. Selection of basic factors

(1) Selection of accuracy grade

Although this application is not listed in **Table 4.1** "Accuracy grades of ball screw and their application" on page B19, the possibility is to use a ball screw for transfer equipment R series, because the required repeatability is 0.3 mm that is not very high.

(2) Selection of lead

From the maximum rotational speed of AC motor:

$$l \geq \frac{V_{\max}}{N_{\max}} = \frac{10\,000}{1\,000} = 10 \text{ (mm)}$$

Select a lead 10 mm or over.

(3) Selection of screw shaft diameter

According to the **Table 4.6** "Shaft diameter, lead and standard screw length of R Series" on page B23, the shaft diameters whose lead is 10 mm or over are in the range of 12 mm to 50 mm.

(4) Selection of stroke

From the **Table 4.6** "Screw shaft diameter, lead and standard screw shaft length of R series" on page B23, it is possible to select from R series because the diameter d of 15 mm to 50 mm and lead l of 10 mm will meet the required maximum stroke of 1 500 mm.

Primary selection: R Series ball screw for transfer equipment
 Screw shaft diameter : 15 – 50 (mm)
 Lead : 10 (mm)
 Stroke : 1 500 (mm)

3. Confirmation of standard ball screw

Select from a flanged single nuts of R Series ball screws for transfer equipment.

Second selection : R Series ball screw for transfer equipment
 Screw shaft diameter : 16, 20, 25, 32, 36, 40, 45, 50 (mm)
 Lead : 10 (mm)
 Stroke : 1 500 (mm)

4. Decision of screw length

Screw length L_0 is:

$$L_0 = \text{Stroke} + \text{nut length} + \text{margin} + \text{shaft end length} \\ = 1\,500 + 100 + 100 + 200 = 1\,900 \text{ (mm)}$$

Normally, the overall screw shaft length L_0 less than or equal to 70 times of screw shaft diameter d is recommended.

Therefore, screw shaft diameter d is:

$$d \geq \frac{L_0}{70} = \frac{1\,900}{70} = 27.1 \text{ (mm)}$$

Third selection : R Series ball screw for transfer equipment
 Shaft diameter: 32, 36, 40, 45, 50 (mm)
 Lead: 10 (mm)
 Stroke: 1 500 (mm)

5. Checking basic safety

(1) Allowable axial load

① Calculation of allowable axial load

Accelerating/decelerating time is:

$$\alpha = \frac{V}{60 t} = \frac{10 \times 10^3}{60 \times 0.2} = 833 \text{ (mm/s}^2\text{)} \\ = 0.833 \text{ (m/s}^2\text{)} \\ t = t_1 = t_3 = t_4 = t_6$$

$$\begin{aligned} \textcircled{1}, \textcircled{6} \quad \dots\dots F_1 &= mg - m\alpha \\ &= 300 \times 9.80665 - 300 \times 0.833 \\ &= 2\,690 \text{ (N)} \\ \textcircled{2}, \textcircled{5} \quad \dots\dots F_2 &= mg = 2\,940 \text{ (N)} \\ \textcircled{3}, \textcircled{4} \quad \dots\dots F_3 &= mg + m\alpha = 3\,190 \text{ (N)} \end{aligned}$$

② Buckling load

For condition in Fig. 16.7, use values below.

$$P = 3\,190 \text{ N}, L_1 = 1\,600 \text{ mm}$$

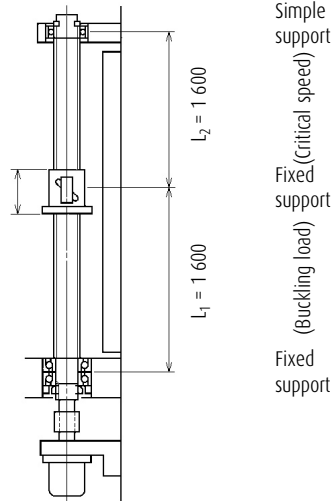


Fig. 16.7 Inspecting for buckling load and critical speed

From the formula 2) on page B44:

$$d_r \geq \left(\frac{P \cdot L_1^2}{m} \times 10^{-4} \right)^{1/4} \\ = \left(\frac{3\,190 \times 1\,600^2}{19.9} \times 10^{-4} \right)^{1/4} = 14.2 \text{ (mm)}$$

(2) Checking permissible rotational speed

① Critical speed

Use values below.

$$n = 1\,000 \text{ (min}^{-1}\text{)}, L_2 = 1\,600 \text{ (mm)}$$

From the formula 7) on page B47:

$$d_r \geq \frac{n \cdot L_2^2}{f} \times 10^{-7} = \frac{1\,000 \times 1\,600^2}{15.1} \times 10^{-7} \\ = 17 \text{ (mm)}$$

② d · n value

From **Table 3.2** on page B50:

$$d \leq \frac{50\,000}{n} = \frac{50\,000}{1\,000}$$

$$= 50 \text{ (mm)}$$

* Please consult NSK when the d · n value exceeds 50 000.

(3) Checking life (dynamic load rating)

Determine the required load carrying capacity from load conditions of **Table 16.9**.

Table 16.9 Load conditions

Operating condition	Axial load (N)	Rotational speed (mean) (min ⁻¹)	Use time (s)
(a) × ₆ (f)	F ₁ = 2 690	N ₁ = 500	t _a = 1.4
(b) × ₆ (e)	F ₂ = 2 940	N ₂ = 1 000	t _b = 13.0
(c) × ₆ (d)	F ₃ = 3 190	N ₃ = 500	t _c = 1.4

Calculate mean load F_m and mean rotational speed N_m from the formulas 11) and 12) on page B53:

Required load carrying capacity is:

$$F_m = \left(\frac{F_1^3 \cdot N_1 \cdot t_a + F_2^3 \cdot N_2 \cdot t_b + F_3^3 \cdot N_3 \cdot t_c}{N_1 \cdot t_a + N_2 \cdot t_b + N_3 \cdot t_c} \right)^{1/3}$$

$$= 2\,940 \text{ (N)}$$

$$N_m = \frac{N_1 \cdot t_a + N_2 \cdot t_b + N_3 \cdot t_c}{t}$$

$$= 288 \text{ (min}^{-1}\text{)}$$

From the formulas 8) and 9) on page B53:

$$C_a \geq (60N_m \cdot L_t)^{1/3} \cdot F_m \cdot f_w \times 10^{-2} \text{ (N)}$$

$$= (60 \times 288 \times 24\,000)^{1/3} \times 2\,940 \times 1.2 \times 10^{-2}$$

$$= 26\,300 \text{ (N)}$$

(4) Checking static load rating

$$C_{0a} = F_{\max} \times f_s = 3\,190 \times 2$$

$$= 6\,380 \text{ (N)}$$

In consideration of expense, select a ball screw shaft as follows.

Fourth selection : R Series ball screw for transfer equipment

Shaft diameter: 32 (mm)

Lead: 10 (mm)

Stroke:

Turns of balls and circuit number: 2.5 × 2

Screw length: 2 000 (mm)

Basic dynamic load rating: 35 700 (N)

5. Selection of nut

Select a "standard nut with a flange and a built-in brush seals" based on the environmental conditions.

Selected ball screw:

Nut assembly RNFTL3210A5S

Screw shaft RS3210A20

B-2-18 Reference

"NSK Motion & Control (technical journal)" was compiled to introduce NSK products and its technologies. You will find data summaries which are imperative in selecting ball screws in this catalog. If you need detailed technical data, other than described in this catalog, please refer to "NSK Motion & Control" technical journal.

For inquiries and orders, please contact NSK branch offices, sales offices, and representatives assigned at various locations.

Table 17.1 NSK Motion & Control (technical journal) : Issues relating to ball screws (1980-)

No.	Issued Date	Title
No.4	Jun. 1998	Recent Technical Trends in Ball Screws
No.8	May 2000	Ball Screw with Rotating Nut and Vibration Damper
No.9	Oct. 2000	WFA Standard-Stock Ball Screws
No.10	Apr. 2001	High Performance Seals for Ball Screws
No.11	Oct. 2001	Development of NSK S1 Series Ball Screws and Linear Guides
No.11	Oct. 2001	Low Inertia Series of Nut Rotatable Ball Screws
No.13	Oct. 2002	Development of HTF Series Ball Screws for High Load Drive Application
No.13	Oct. 2002	High Lead Precision Rolled Ball Screws
No.14	May. 2003	High Speed and Low Noise Ball Screws HMC-B02 Series
No.15	Dec. 2003	Clean Support Units for Ball Screws
No.16	Aug. 2004	Development of High Speed and Low Noise Ball Screws
No.18	Aug. 2005	S3 Ball Screws: Super Low Noise Ball Screws for Automation Equipment
No.19	Sep. 2006	High-Speed and Low-Noise Ball Screw for Standard Stock - Compact FA Series
No.21	Dec. 2007	V1 Series of Ball Screws for Contaminated Environments HTF-SRC Series of Ball Screws for High-Speed and High-Load Applications
No.22	Mar. 2011	Technological Trends of Ball Screws for Industrial Machinery BSL Series of Ball Screws for Small Lathes HTF-SRD Series of Long-Lead Ball Screws for High-Speed and Heavy-Load Applications
No.23	Jun. 2013	TW Series of Ball Screws for Twin-Drive Systems HMD Series of Ball Screws for High-Speed Machine Tools
No.24	Dec. 2014	Ball Screw for Motorcycle Brake Systems
No.25	Sep. 2015	HMS Series of Ball Screws for High-Speed Machine Tools Miniature Large-Lead Series of High-Speed, Low-Noise Ball Screws
No.26	Apr. 2016	Development of a Nut Cooling Ball Screw Ball Screws with X1 Seals for Machine-Tool Applications
No.27	Nov. 2016	HTF-SRE Large, High-Speed, High-Load Capacity Ball Screws Strategy for Frictional Behavior Control in Ball Screws
No.28	Jun. 2017	Ball Screws with Minimal Grease-Splatter L1 Seals Ultra-Large Ball Screws

(1) CAD data

Web page

<http://www.jp.nsk.com/app01/en/ctrg/>

CD-ROM

CAT. No. 7110

(3D data: Intermediate format or native,
2D data: DXF)

Catalog No.7110 (CD-ROM) contains precision machine components and rolling bearings.

Standard Ball Screws

- › Finished shaft end (Compact FA series, MA type, FA type, SA type, KA type, and RMA type)
- › Blank shaft end (MS type, FS type, and SS type)
Standard nut ball screws
- › End deflector type
Standard support units

(2) Telephone consultation with NSK engineers

This catalog contains technical explanation for each section. However, some descriptions and explanations may be insufficient due to page limitation, etc. To amend this shortcoming, NSK offers telephone assistance. NSK engineers are pleased to help you. Our local offices are listed in the last part of this catalog. Call local NSK office or representative in your area.

(3) Additional machining (processing) some part of standard ball screws in stock

NSK processes standard ball screw blank shaft end. NSK also cuts linear guide rails to required length for you. Service is available at NSK processing factories throughout the world. Requests are taken by branch offices and agencies.

B-2-20 Precautions When Handling Ball Screws

Ball screws are precision products. They require careful handling as described below.



Confirm lubrication

Lubrication

1. Confirm the state of lubrication before use. Insufficient lubrication causes loss of ball screw functions in a short period.
2. Do not apply any lubrication if grease is already applied to the ball screws. Remove dust or swarf if they stuck to the greased surface during handling. Wipe the surface with clean white kerosene, and then apply the same type of new lubricant before use. Avoid using different types of grease at the same time.

Consult NSK for special oil lubricant if it is required to your application.

3. Check the grease after two to three months of operation. Wipe off the old grease if it is excessively contaminated, and apply sufficient volume of a fresh coat of grease. After the initial check, check and replenish the grease approximately every year. Check more often if environment requires.

Note: Refer to pages B67 and D13 for lubrication.



Do not disassemble



Do not reassemble



Watch out for falling objects



Handle with care



Do not apply shock

Handling

1. Never disassemble ball screw. It invites dust to enter, and lowers precision, or may cause an accident.
2. User should never reassemble ball screw by himself. Loss of ball screw function is apt to occur if a mistake is made. Please send ball screw to NSK for repair or re-assembly. It will be reworked at the minimum service charge.
3. Ball screw shaft or nut may fall due to its own weight. Watch out for such falling object. If it falls, the ball groove or ball recirculation component may be damaged and the function might have been lost. Make certain to return such item to NSK for check. There will be the minimum charge for this service.
4. If the recirculation component, the shaft outside, or the ball groove is scratched or damaged by impact, recirculation operation becomes deficient, and may cause a loss of function.

Note: Refer to page B73 for assembling components.



Prevent dust



Rotational speed limitation



Do not overrun



Temperature limitation

Precautions in use

1. Ball screws should be used in a clean environment. Use a dust cover to keep dust and swarf from entering into the system. Insufficient dust protection causes not only the ball screw function to deteriorate but also brings about damage to the recirculation components if dust plugs the system. This may result in more serious accident such as a fall of the table.
2. For rotational speed in operation, refer to the applicable section in this catalog which describes permissible rotational speeds, or to specification drawing furnished by NSK. Exceeding permissible rotational speed damages recirculation components, and may cause the table to fall. A precaution system such as a safety nut is recommended in vertical use of ball screw. Please consult NSK for safety system.
3. Overrunning ball nut (removed from the ball thread) causes the balls to fall out, damages recirculation components, and dent ball groove, resulting in insufficient operation. Continued use under such conditions may cause premature wear, and damages recirculation components. For these reasons, avoid overrun by all means. If overrun occurs, please request NSK to check. There will be a minimum charge for this service.
4. Ball screws are designed to be used at a temperature of less than 80°C. Do not operate at temperatures higher than this limit. Use at a higher temperature may damage recirculation and seal components. Please consult NSK if it is necessary to use at a temperature higher than the limit.
When using NSK K1 lubrication unit, the operating temperature should be 50°C or less. (Momentary maximum temperature in use: 80°C)

Note: Please read page B83 before designing.



Store in the correct position

Storage

1. Store in the original NSK package. Do not unwrap or tear the inner wrapping if it is not necessary. This allows dust to enter and rust to set in, and may deteriorate functions.
2. The following position is recommended when storing ball screws.
 - 2.1 Keep in the NSK original package, and place it flat.
 - 2.2 Place flatly on supports; store in a clean area.
 - 2.3 Hang vertically in a clean place.

B-3 Ball Screw Dimension Table

B-3-1 Dimension Table and Reference Number of Standard Ball Screws

	Page
Compact FA Series.....	B107
High-Speed SS Series.....	B147
Finished Shaft End.....	B157
MA Type, Miniature, Fine Lead.....	B159
FA Type for Small Equipment.....	B181
SA Type for Machine Tools.....	B217
Finished Shaft End KA Type Stainless Steel Product.....	B273
Blank Shaft End.....	B299
MS Type, Miniature, Fine Lead.....	B301
FS Type for Small Equipment.....	B309
SS Type for Machine Tools.....	B321
Ball Screws for Transfer Equipment.....	B349
Precision Rolled Ball Screws.....	B389
Ball Screws Interchangeable.....	B401
Accessories.....	B411


B-3-1.1 Compact FA Series PSS Type, USS Type, and FSS Type

1. Features

In order to respond quickly to a wide range of needs, NSK keeps end-deflector recirculation system ball screws, which offer high-speed and low-noise operation and compact design, in standard inventories as the Compact FA Series. The exceptionally high performance ball screws are ready for use in a variety of fields such as semiconductor manufacturing equipment, LCD manufacturing equipment, chip mounting equipment, measuring apparatus, food and medical equipment, and automotive manufacturing equipment.

> Quieter sound

The operating noise level of ball screws has been reduced by 6 dB(A), about half of what is sensed by the ear.

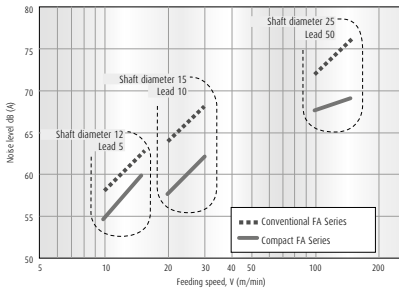

(Microphone was positioned at a distance of 400 mm for all noise levels)

Fig. 1 Comparison of noise level

> Compact

The outside diameter of the ball nut is as much as 30% smaller than those of existing NSK products. This contributes to more compact design of all sorts of equipment and devices such as low-profile positioning stages.

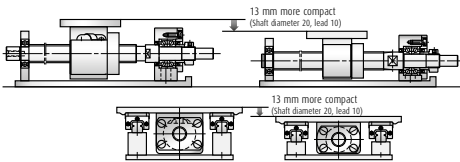


Fig. 2 Comparison of FA Type and Compact FA Series PSS Type

> High speed

The permissible rotational speed up to 5 000 min⁻¹. This capability dramatically expands the range of service conditions. Please refer to the dimension tables for details of the permissible rotational speed.

> A grease fitting is provided as a standard equipment

The new ball screw type is equipped with a grease fitting (M5 × 0.8) as a standard equipment. Two lubrication ports are provided to facilitate easy maintenance.

> Storage seal

Compact, thin plastic seal is available. Nut outside diameter is compact compare with the return tube recirculation system.

> Low-profile design

The low-profile support units especially compatible with the compact FA Series are available for a superb space-saving design.

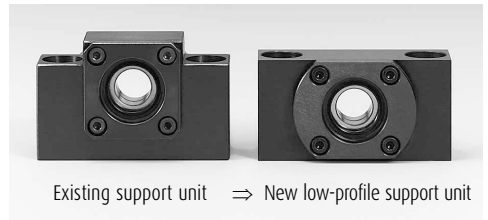


Fig. 3 Comparison of support units

> Low dust generation LG2 grease (USS Type)

The dust count is approximately 1/100 that of the existing FA series. It is suitable for applications in clean environments.

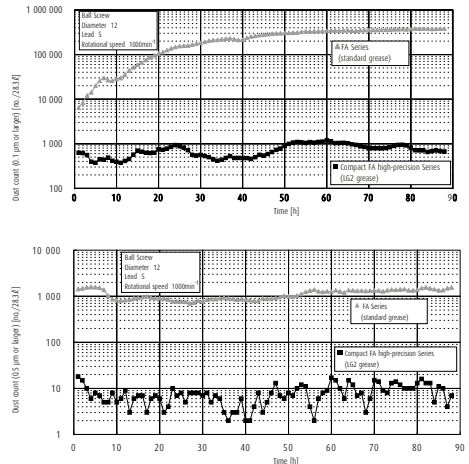


Fig. 4 Comparison of dust count

› Easy stroke setting (FSS Type)

Flexible stroke setting with fixed-simple support by means of mounting support unit (simple support side) directly onto ball screw thread outside diameter. Proprietary support unit (simple support side) is available from NSK.

2. Order of the dimension table

For each type, it is arranged in order from small diameter to large.

3. Dimension tables

Dimension tables show shapes/sizes as well as specification factors of each shaft diameter/lead combination. Tables also contain data as follows:

› Stroke

Nominal stroke: A reference for your use.

Maximum stroke: The limit stroke that the nut can move.
The figure is obtained by subtracting the nut length from the effective threaded length (L_1).

› Lead accuracy

PSS Type, C5 grade; USS Type, C3 grade; FSS Type, C17 grade

T : Travel compensation

e_p : Tolerance on specified travel

v_d : Travel variation

See "Technical Description: Lead Accuracy" (page B37) for the details of the codes.



Fig. 5 Flexible stroke setting

› Permissible rotational speed (FSS Type)

$d \cdot n$: Limited by the relative peripheral speed between the screw shaft and the nut.

Critical speed: Limited by the natural frequency of a ball screw shaft. Critical speed depends on the supporting condition of screw shaft.

The lower of the two criteria, the $d \cdot n$ and critical speed, will determine the overall permissible rotational speed of the ball screw. For details, see "Technical Description: Permissible Rotational Speed" (page B47).

4. Other

The seal of the ball screw and end deflector are made of synthetic resin. Consult NSK when using our ball screws under extreme environments or in special environments, or if using special lubricant or oil.

The NSK K1 cannot be mounted to the compact FA Series.


For special environments, see pages B70 and D2. For lubrications, see pages B67 and D13.

Note: For details of standard stock products, contact NSK.

Table 1 Combinations of screw shaft diameter and lead

Screw shaft diameter \ Lead	Lead											
	5	8	10	12	15	20	25	30	40	50	60	
4		B109		B109								
8			B111		B111							
10	B113 B133		B113									
12	B115 B135		B115 B139			B115		B115				
15	B117 B137		B117 B141			B119 B141		B119				
20	B121		B121 B143			B123 B143		B123	B125		B125	
25	B127		B127 B145			B129 B145	B129 B145	B131		B131		

Compact FA PSS Type

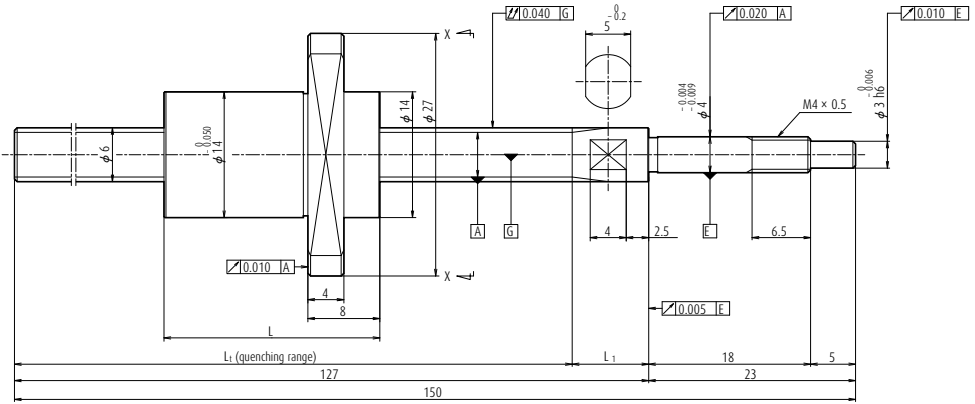


Ball screw No.	Screw shaft diameter d	Lead l	Effective turns of balls	Basic load ratings (N)		Maximum stroke	Nut length L	Screw shaft dimensions	
				Dynamic C_a	Static C_{0a}			L_t	L_1
PSS0608NAD0150	6	8	2	690	805	97.5	16	118.5	8.5
PSS0608NBD0150	6	8	4	1 480	1 940	89.5	24	118.5	8.5
PSS0612NAD0150	6	12	2	665	800	92	20	117	10
PSS0612NBD0150	6	12	4	1 430	1 970	80	32	117	10

Note 1. Contact NSK if permissible rotational speed is to be exceeded.

Screw shaft $\phi 6$ Lead 8, 12

Unit: mm



Ball screw specification	
Ball diameter/screw shaft root diameter	1.2 / 4.9
Ball circle dia.	6.2
Accuracy grade/axial play	C5 / 0.005 or less
Factory-packed grease	NSK grease PS2

Recommended


For drive side (Fixed)
WBK04-01M (square)
WBK04-11M (round)

Unit: mm

Lead accuracy			Dynamic preload torque (N·cm)	Mass (kg)	Permissible rotational speed (min ⁻¹) ⁻¹	Internal spatial volume of nut (cm ³)	Standard volume of grease replenishing (cm ³)
Target value T	Error e _p	Variation v _u					
0	0.020	18	~0.5	0.06	5 000	0.2	0.1
0	0.020	18	~0.5	0.06	5 000	0.3	0.2
0	0.020	18	~0.5	0.06	5 000	0.2	0.1
0	0.020	18	~0.5	0.07	5 000	0.3	0.2

- Service temperature range is 0 to 80°C.
- Use of NSK support unit is recommended. Refer to page B411 for details.

Compact FA PSS Type

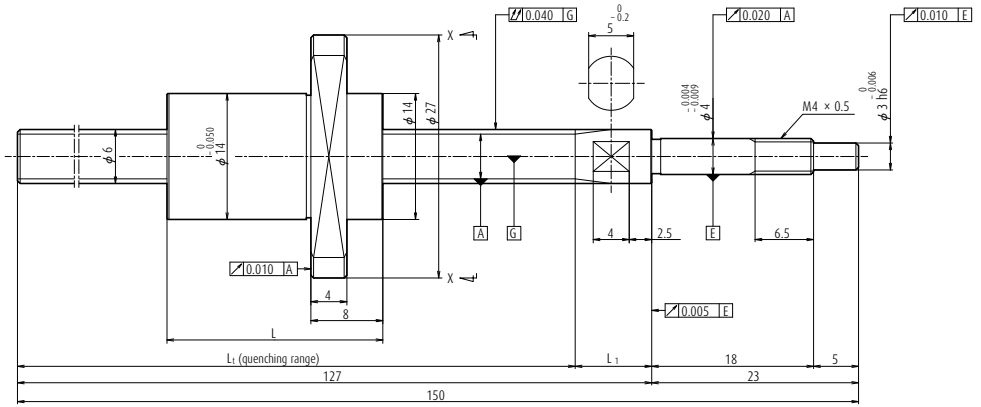


Ball screw No.	Screw shaft diameter d	Lead l	Effective turns of balls	Basic load ratings (N)		Maximum stroke	Nut length L	Screw shaft dimensions	
				Dynamic C_a	Static C_{0a}			L_t	L_1
PSS0810NAD0150	8	10	2	1 150	1 420	86.5	18	109.5	10.5
PSS0810NBD0150	8	10	4	2 470	3 430	76.5	28	109.5	10.5
PSS0815NAD0150	8	15	2	1 130	1 430	80	22	107	13
PSS0815NBD0150	8	15	4	2 410	3 520	65	37	107	13

Note 1. Contact NSK if permissible rotational speed is to be exceeded.

Screw shaft $\phi 8$ Lead 10, 15

Unit: mm

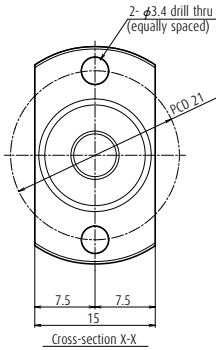

Ball screw specification	
Ball diameter/screw shaft root diameter	1.588 / 6.6
Ball circle dia.	8.3
Accuracy grade/axial play	C5 / 0.005 or less
Factory-packed grease	NSK grease PS2


Recommended

For drive side (Fixed)
WBK06-01M (square)
WBK06-11M (round)

Unit: mm

Lead accuracy			Dynamic preload torque (N·cm)	Mass (kg)	Permissible rotational speed (min ⁻¹) ²⁾	Internal spatial volume of nut (cm ³)	Standard volume of grease replenishing (cm ³)
Target value T	Error e _p	Variation v _u					
0	0.020	18	~0.5	0.09	5 000	0.4	0.2
0	0.020	18	~0.5	0.11	5 000	0.5	0.3
0	0.020	18	~0.5	0.1	5 000	0.4	0.2
0	0.020	18	~0.5	0.12	5 000	0.6	0.3

- Service temperature range is 0 to 80°C.
- Use of NSK support unit is recommended. Refer to page B411 for details.

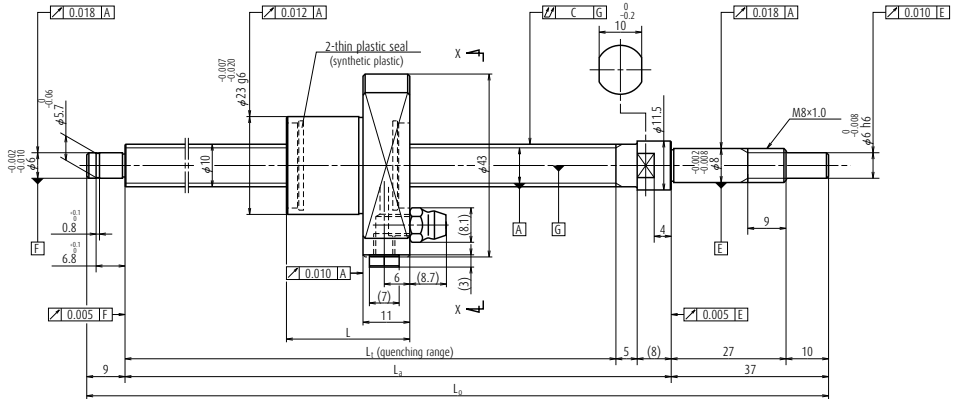


Ball screw No.	Screw shaft diameter d	Lead l	Basic load ratings (N)		Stroke		Nut length L	Screw shaft dimensions		
			Dynamic C _a	Static C _{0a}	Nominal	MAX.		L _t	L _a	L _o
PSS1005N1D0171	10	5	3 420	4 840	50	78	29	112	125	171
PSS1005N1D0221	10	5	3 420	4 840	100	128	29	162	175	221
PSS1005N1D0321	10	5	3 420	4 840	200	228	29	262	275	321
PSS1005N1D0421	10	5	3 420	4 840	300	328	29	362	375	421
PSS1005N1D0521	10	5	3 420	4 840	400	428	29	462	475	521
PSS1010N1D0221	10	10	2 290	2 980	100	125	32	162	175	221
PSS1010N1D0321	10	10	2 290	2 980	200	225	32	262	275	321
PSS1010N1D0421	10	10	2 290	2 980	300	325	32	362	375	421
PSS1010N1D0521	10	10	2 290	2 980	400	425	32	462	475	521

- Notes**
1. Indicates ball screw preload control value. Approximately 2.0 N·cm of torque is added due to thin plastic seals.
 2. Contact NSK if permissible rotational speed is to be exceeded.
 3. Service temperature range is 0 to 80°C.

Nut model: BSS

Screw shaft ϕ 10
Lead 5, 10

Unit: mm



Ball screw specification	
Preload type	Oversize ball preload (P-preload)
Ball diameter/screw shaft root diameter	2.000 / 8.2
Ball circle dia.	10.3
Accuracy grade/axial play	C5 / 0
Factory-packed grease	NSK grease PS2

Recommended support unit


For drive side (Fixed)	For opposite to drive side (Simple)
WBK08-01B (low-profile, square)	WBK08S-01B (low-profile, square)
WBK08-11 (round)	
WBK08-11B (round, light load)	

Unit: mm

Lead accuracy			Shaft run-out C	Dynamic preload torque (N·cm) ^{*1}	Mass (kg)	Permissible rotational speed (min ⁻¹) ^{*2}	Internal spatial volume of nut (cm ³)	Standard volume of grease replenishing (cm ³)
Target value T	Error e _p	Variation v _u						
0	0.020	0.018	0.030	0.7 - 3.3	0.3	5 000	0.8	0.4
0	0.020	0.018	0.045	0.7 - 3.3	0.3	5 000	0.8	0.4
0	0.023	0.018	0.060	0.6 - 4.3	0.3	5 000	0.8	0.4
0	0.025	0.020	0.070	0.6 - 4.3	0.4	5 000	0.8	0.4
0	0.027	0.020	0.085	0.4 - 4.9	0.5	5 000	0.8	0.4
0	0.020	0.018	0.045	0.7 - 3.3	0.3	5 000	0.7	0.4
0	0.023	0.018	0.060	0.6 - 4.3	0.4	5 000	0.7	0.4
0	0.025	0.020	0.070	0.6 - 4.3	0.4	5 000	0.7	0.4
0	0.027	0.020	0.085	0.4 - 4.9	0.5	5 000	0.7	0.4

4. Use of NSK support unit is recommended. Refer to page B411 for details.


5. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.

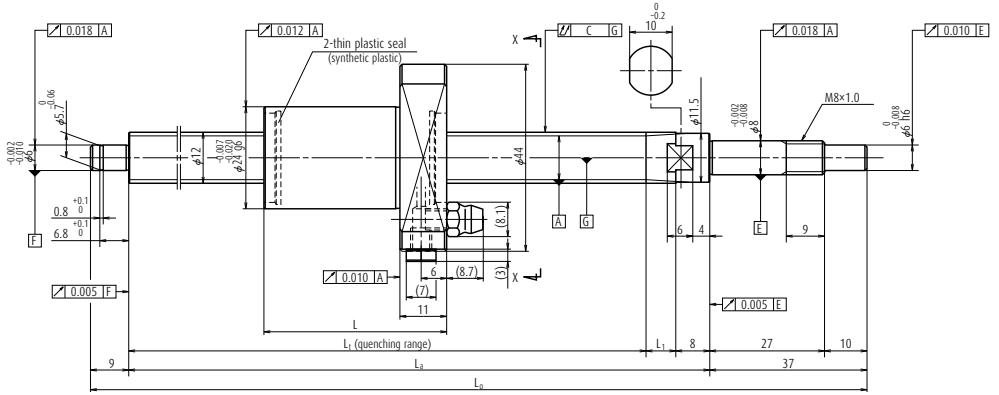

Ball screw No.	Screw shaft diameter d	Lead l	Basic load ratings (N)		Stroke		Nut length L	Screw shaft dimensions			
			Dynamic C _a	Static C _{0a}	Nominal	MAX.		L _t	L _a	L ₀	L ₁
PSS1205N1D0171	12	5	3 750	5 810	50	75	30	110	125	171	7
PSS1205N1D0221	12	5	3 750	5 810	100	125	30	160	175	221	7
PSS1205N1D0321	12	5	3 750	5 810	200	225	30	260	275	321	7
PSS1205N1D0421	12	5	3 750	5 810	300	325	30	360	375	421	7
PSS1205N1D0521	12	5	3 750	5 810	400	425	30	460	475	521	7
PSS1205N1D0621	12	10	3 750	5 810	500	525	30	560	575	621	7
PSS1210N1D0221	12	10	3 760	5 780	100	112	43	160	175	221	7
PSS1210N1D0321	12	10	3 760	5 780	200	212	43	260	275	321	7
PSS1210N1D0421	12	10	3 760	5 780	300	312	43	360	375	421	7
PSS1210N1D0521	12	10	3 760	5 780	400	412	43	460	475	521	7
PSS1210N1D0621	12	10	3 760	5 780	500	512	43	560	575	621	7
PSS1220N1D0271	12	20	2 330	3 600	100	153	50	208	225	271	9
PSS1220N1D0371	12	20	2 330	3 600	200	253	50	308	325	371	9
PSS1220N1D0471	12	20	2 330	3 600	300	353	50	408	425	471	9
PSS1220N1D0571	12	20	2 330	3 600	400	453	50	508	525	571	9
PSS1220N1D0671	12	20	2 330	3 600	500	553	50	608	625	671	9
PSS1230N1D0271	12	30	2 190	3 650	100	128	70	203	225	271	14
PSS1230N1D0371	12	30	2 190	3 650	200	228	70	303	325	371	14
PSS1230N1D0471	12	30	2 190	3 650	300	328	70	403	425	471	14
PSS1230N1D0571	12	30	2 190	3 650	400	428	70	503	525	571	14
PSS1230N1D0671	12	30	2 190	3 650	500	528	70	603	625	671	14

- Notes**
1. Indicates ball screw preload control value. Approximately 2.0 N-cm of torque is added due to thin plastic seals.
 2. Contact NSK if permissible rotational speed is to be exceeded.
 3. Service temperature range is 0 to 80°C.

Nut model: BSS

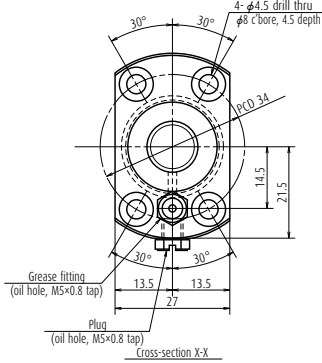

Screw shaft ϕ 12
Lead 5, 10, 20, 30

Unit: mm

Ball screw specification	
Preload type	Oversize ball preload (P-preload)
Ball diameter/screw shaft root diameter	2.000 / 10.2
Ball circle dia.	12.3
Accuracy grade/axial play	C5 / 0
Factory-packed grease	NSK grease PS2


Recommended support unit	
For drive side (Fixed)	For opposite to drive side (Simple)
WBK08-01B (low-profile, square)	WBK08S-01B (low-profile, square)
WBK08-11 (round)	
WBK08-11B (round, light load)	

Unit: mm

Lead accuracy			Shaft run-out C	Dynamic preload torque (N·cm) ^{*1}	Mass (kg)	Permissible rotational speed (min ⁻¹) ^{1/2}	Internal spatial volume of nut (cm ³)	Standard volume of grease replenishing (cm ³)
Target value T	Error e _p	Variation v _u						
0	0.020	0.018	0.030	0.7 - 3.3	0.3	5 000	1.0	0.5
0	0.020	0.018	0.045	0.7 - 3.3	0.3	5 000	1.0	0.5
0	0.023	0.018	0.060	0.6 - 4.3	0.3	5 000	1.0	0.5
0	0.025	0.020	0.070	0.6 - 4.3	0.4	5 000	1.0	0.5
0	0.027	0.020	0.085	0.6 - 4.3	0.5	5 000	1.0	0.5
0	0.030	0.023	0.085	0.4 - 4.9	0.3	5 000	1.0	0.5
0	0.020	0.018	0.045	0.7 - 3.3	0.4	5 000	1.0	0.5
0	0.023	0.020	0.060	0.6 - 4.3	0.5	5 000	1.0	0.5
0	0.025	0.020	0.070	0.6 - 4.3	0.5	5 000	1.0	0.5
0	0.027	0.020	0.085	0.6 - 4.3	0.6	5 000	1.0	0.5
0	0.030	0.023	0.085	0.4 - 4.9	0.7	5 000	1.0	0.5
0	0.023	0.018	0.045	1.4 - 4.5	0.4	5 000	1.2	0.6
0	0.023	0.018	0.060	0.9 - 4.9	0.5	5 000	1.2	0.6
0	0.027	0.020	0.070	0.9 - 4.9	0.6	5 000	1.2	0.6
0	0.030	0.023	0.085	0.6 - 5.9	0.7	5 000	1.2	0.6
0	0.030	0.023	0.110	0.6 - 5.9	0.8	4 480	1.2	0.6
0	0.023	0.018	0.045	1.4 - 4.5	0.5	5 000	1.5	0.8
0	0.023	0.018	0.060	0.9 - 4.9	0.6	5 000	1.5	0.8
0	0.027	0.020	0.070	0.9 - 4.9	0.7	5 000	1.5	0.8
0	0.030	0.023	0.085	0.6 - 5.9	0.7	5 000	1.5	0.8
0	0.030	0.023	0.110	0.6 - 5.9	0.8	4 720	1.5	0.8

4. Use of NSK support unit is recommended. Refer to page B411 for details.

5. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.

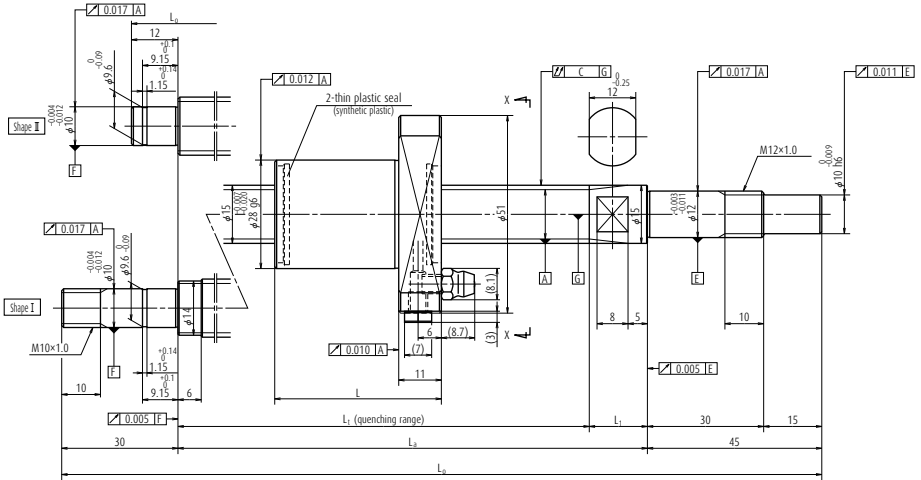


Ball screw No.	Screw shaft diameter d	Lead I	Basic load ratings (N)		Stroke		Nut length L	Screw shaft dimensions			
			Dynamic C _a	Static C _{0a}	Nominal	MAX.		L _t	L _a	L ₀	L ₁
PSS1505N1D0211	15	5	6 410	10 100	50	103	30	139	154	211	15
PSS1505N1D0261	15	5	6 410	10 100	100	153	30	189	204	261	15
PSS1505N1D0361	15	5	6 410	10 100	200	253	30	289	304	361	15
PSS1505N1D0461	15	5	6 410	10 100	300	353	30	389	404	461	15
PSS1505N1D0561	15	5	6 410	10 100	400	453	30	489	504	561	15
PSS1505N1D0661	15	5	6 410	10 100	500	553	30	589	604	661	15
PSS1505N1D0761	15	5	6 410	10 100	600	653	30	689	704	761	15
PSS1510N1D0261	15	10	6 530	10 200	100	140	43	189	204	261	15
PSS1510N1D0361	15	10	6 530	10 200	200	240	43	289	304	361	15
PSS1510N1D0461	15	10	6 530	10 200	300	340	43	389	404	461	15
PSS1510N1D0561	15	10	6 530	10 200	400	440	43	489	504	561	15
PSS1510N1D0661	15	10	6 530	10 200	500	540	43	589	604	661	15
PSS1510N1D0761	15	10	6 530	10 200	600	640	43	689	704	761	15
PSS1510N1D0879	15	10	6 530	10 200	700	740	43	789	804	879	15
PSS1510N1D0979	15	10	6 530	10 200	800	846	43	889	904	979	15
PSS1510N1D1179	15	10	6 530	10 200	1 000	1 040	43	1 089	1 104	1 179	15

- Notes**
1. Indicates ball screw preload control value. Approximately 2.0 N-cm of torque is added due to thin plastic seals.
 2. Contact NSK if permissible rotational speed is to be exceeded.
 3. Service temperature range is 0 to 80°C.

Nut model: BSS

Screw shaft $\phi 15$
Lead 5, 10

Unit: mm



Ball screw specification	
Preload type	Oversize ball preload (P-preload)
Ball diameter/screw shaft root diameter	2.778 / 12.6
Ball circle dia.	15.5
Accuracy grade/axial play	C5 / 0
Factory-packed grease	NSK grease LR3

Recommended support unit		
For drive side (Fixed)	For opposite to drive side	
	(Fixed)	(Simple)
WBK12-01B (low-profile, square)	WBK10-01B (low-profile, square)	WBK12S-01B (low-profile, square)
WBK12-11B (round)	WBK10-11 (round)	

Unit: mm

Left shaft end (opposite driven side)	Lead accuracy			Shaft run-out C	Dynamic preload torque (N·cm) *1	Mass (kg)	Permissible rotational speed (min ⁻¹) *2		Internal spatial volume of nut (cm ³)	Standard volume of grease replenishing (cm ³)
	Target value T	Error e _p	Variation v _u				Fixed-Simple	Fixed-Fixed		
II	0	0.020	0.018	0.035	0.2 - 6.9	0.5	5 000	-	2.0	1.0
II	0	0.020	0.018	0.035	0.2 - 6.9	0.5	5 000	-	2.0	1.0
II	0	0.023	0.018	0.045	0.2 - 6.9	0.6	5 000	-	2.0	1.0
II	0	0.025	0.020	0.050	0.4 - 9.8	0.8	5 000	-	2.0	1.0
II	0	0.027	0.020	0.060	0.4 - 9.8	0.9	5 000	-	2.0	1.0
II	0	0.030	0.023	0.075	0.4 - 9.8	1.0	5 000	-	2.0	1.0
II	0	0.035	0.025	0.075	0.4 - 11.8	1.1	4 130	-	2.0	1.0
II	0	0.020	0.018	0.035	0.6 - 7.4	0.6	5 000	-	2.0	1.0
II	0	0.023	0.018	0.045	0.6 - 7.4	0.7	5 000	-	2.0	1.0
II	0	0.025	0.020	0.050	0.4 - 9.8	0.8	5 000	-	2.0	1.0
II	0	0.027	0.020	0.060	0.4 - 9.8	1.0	5 000	-	2.0	1.0
II	0	0.030	0.023	0.075	0.4 - 9.8	1.1	5 000	-	2.0	1.0
II	0	0.035	0.025	0.075	0.4 - 11.8	1.2	4 210	-	2.0	1.0
I	0	0.035	0.025	0.095	0.4 - 11.8	1.4	3 190	4 410	2.0	1.0
I	0	0.040	0.027	0.095	0.4 - 11.8	1.5	2 500	3 470	2.0	1.0
I	0	0.046	0.030	0.120	0.4 - 11.8	1.7	1 650	2 320	2.0	1.0


4. Use of NSK support unit is recommended. Refer to page B411 for details.

5. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.

Nut model: BSS

Screw shaft $\phi 15$
Lead 20, 30

Unit: mm



Ball screw specification	
Preload type	Oversize ball preload (P-preload)
Ball diameter/screw shaft root diameter	3.175 / 12.2
Ball circle dia.	15.5
Accuracy grade/axial play	C5 / 0
Factory-packed grease	NSK grease LR3

Recommended support unit		
For drive side (Fixed)	For opposite to drive side	
	(Fixed)	(Simple)
WBK12-01B (low-profile, square)	WBK10-01B (low-profile, square)	WBK12S-01B (low-profile, square)
WBK12-11 (round)	WBK10-11 (round)	


Unit: mm

Left shaft end (opposite driven side)	Lead accuracy			Shaft run-out C	Dynamic preload torque (N·cm) ^{*1}	Mass (kg)	Permissible rotational speed (min ⁻¹) ^{*2}		Internal spatial volume of nut (cm ³)	Standard volume of grease replenishing (cm ³)
	Target value T	Error e _p	Variation v _u				Fixed-Simple	Fixed-Fixed		
II	0	0.020	0.018	0.035	0.8 - 8.8	0.7	5 000	—	2.8	1.4
II	0	0.023	0.018	0.045	0.8 - 8.8	0.8	5 000	—	2.8	1.4
II	0	0.025	0.020	0.050	0.8 - 10.8	0.9	5 000	—	2.8	1.4
II	0	0.027	0.020	0.060	0.8 - 10.8	1.1	5 000	—	2.8	1.4
II	0	0.030	0.023	0.075	0.8 - 10.8	1.2	5 000	—	2.8	1.4
II	0	0.035	0.025	0.075	0.8 - 13.8	1.3	4 170	—	2.8	1.4
I	0	0.035	0.025	0.095	0.8 - 13.8	1.5	3 150	4 310	2.8	1.4
I	0	0.040	0.027	0.095	0.8 - 13.8	1.6	2 460	3 390	2.8	1.4
I	0	0.046	0.030	0.120	0.8 - 13.8	1.9	1 620	2 260	2.8	1.4
II	0	0.023	0.018	0.035	1.2 - 9.3	0.8	5 000	—	3.4	1.7
II	0	0.025	0.020	0.050	0.8 - 10.8	1.0	5 000	—	3.4	1.7
II	0	0.027	0.020	0.060	0.8 - 10.8	1.1	5 000	—	3.4	1.7
II	0	0.030	0.023	0.060	0.8 - 10.8	1.2	5 000	—	3.4	1.7
II	0	0.030	0.023	0.075	0.8 - 13.8	1.4	5 000	—	3.4	1.7
II	0	0.035	0.025	0.095	0.8 - 13.8	1.5	3 770	—	3.4	1.7
I	0	0.040	0.027	0.095	0.8 - 13.8	1.6	2 880	3 910	3.4	1.7
I	0	0.040	0.027	0.120	0.8 - 13.8	1.8	2 310	3 110	3.4	1.7
I	0	0.046	0.030	0.120	0.8 - 13.8	2.0	1 540	2 100	3.4	1.7

4. Use of NSK support unit is recommended. Refer to page B411 for details.

5. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.

Unit: mm



Ball screw specification	
Preload type	Oversize ball preload (P-preload)
Ball diameter/screw shaft root diameter	3.175 / 17.2
Ball circle dia.	20.5
Accuracy grade/axial play	C5 / 0
Factory-packed grease	NSK grease LR3


For drive side (Fixed)	Recommended support unit	
	(Fixed)	(Simple)
WBK15-01B (low-profile, square)	WBK15-01B (low-profile, square)	WBK15S-01B (low-profile, square)
WBK15-11 (round)	WBK15-11 (round)	

Unit: mm

Left shaft end (opposite driven side)	Lead accuracy			Shaft run-out C	Dynamic preload torque (N·cm) *1	Mass (kg)	Permissible rotational speed (min ⁻¹) *2		Internal spatial volume of nut (cm ³)	Standard volume of grease replenishing (cm ³)
	Target value T	Error e _p	Variation v _u				Fixed-Simple	Fixed-Fixed		
II	0	0.023	0.018	0.045	0.6 - 7.4	1.0	5 000	—	3.4	1.7
II	0	0.023	0.018	0.045	0.6 - 7.4	1.1	5 000	—	3.4	1.7
II	0	0.025	0.020	0.050	0.6 - 7.4	1.3	5 000	—	3.4	1.7
II	0	0.027	0.020	0.060	0.4 - 9.8	1.5	5 000	—	3.4	1.7
II	0	0.030	0.023	0.075	0.4 - 9.8	1.7	5 000	—	3.4	1.7
II	0	0.035	0.025	0.075	0.4 - 9.8	1.9	5 000	—	3.4	1.7
II	0	0.035	0.025	0.095	0.4 - 9.8	2.2	4 410	—	3.4	1.7
I	0	0.040	0.027	0.095	0.4 - 11.8	2.4	3 450	4 710	3.4	1.7
II	0	0.023	0.018	0.045	1.2 - 9.3	1.2	5 000	—	3.2	1.6
II	0	0.025	0.020	0.050	1.2 - 9.3	1.4	5 000	—	3.2	1.6
II	0	0.027	0.020	0.060	0.8 - 10.8	1.7	5 000	—	3.2	1.6
II	0	0.030	0.023	0.075	0.8 - 10.8	1.9	5 000	—	3.2	1.6
II	0	0.035	0.025	0.075	0.8 - 10.8	2.1	5 000	—	3.2	1.6
II	0	0.035	0.025	0.095	0.8 - 10.8	2.4	4 330	—	3.2	1.6
I	0	0.040	0.027	0.120	0.8 - 13.8	2.6	3 400	4 640	3.2	1.6
I	0	0.046	0.030	0.120	0.8 - 13.8	3.1	2 250	3 110	3.2	1.6
I	0	0.054	0.035	0.160	0.8 - 13.8	3.6	1 600	2 220	3.2	1.6

4. Use of NSK support unit is recommended. Refer to page B411 for details.

5. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.

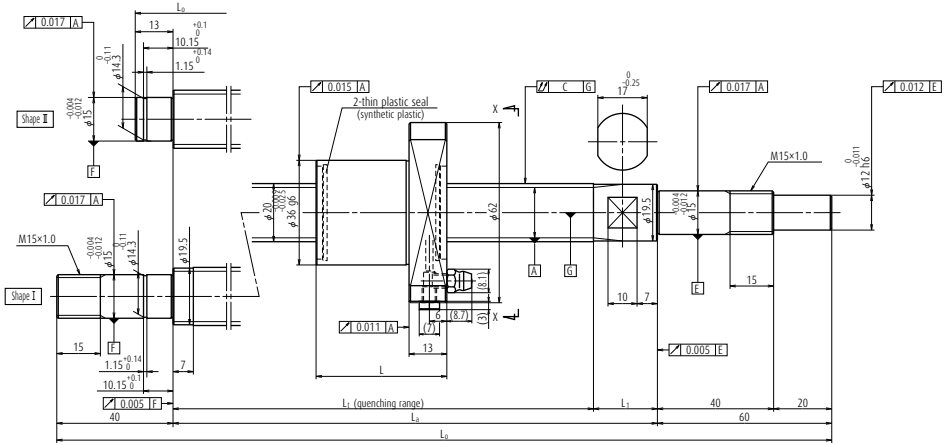


Ball screw No.	Screw shaft diameter d	Lead I	Basic load ratings (N)		Stroke		Nut length L	Screw shaft dimensions			
			Dynamic C _a	Static C _{0a}	Nominal	MAX.		L _t	L _a	L ₀	L ₁
PSS2020N1D0508	20	20	6 790	11 800	300	353	54	413	435	508	22
PSS2020N1D0608	20	20	6 790	11 800	400	453	54	513	535	608	22
PSS2020N1D0708	20	20	6 790	11 800	500	553	54	613	635	708	22
PSS2020N1D0808	20	20	6 790	11 800	600	653	54	713	735	808	22
PSS2020N1D0908	20	20	6 790	11 800	700	753	54	813	835	908	22
PSS2020N1D1035	20	20	6 790	11 800	800	851	54	913	935	1 035	22
PSS2020N1D1235	20	20	6 790	11 800	1 000	1 051	54	1 113	1 135	1 235	22
PSS2020N1D1435	20	20	6 790	11 800	1 200	1 251	54	1 313	1 335	1 435	22
PSS2020N1D1835	20	20	6 790	11 800	1 600	1 651	54	1 713	1 735	1 835	22
PSS2030N1D0408	20	30	6 550	11 800	200	228	74	308	335	408	27
PSS2030N1D0508	20	30	6 550	11 800	300	328	74	408	435	508	27
PSS2030N1D0608	20	30	6 550	11 800	400	428	74	508	535	608	27
PSS2030N1D0708	20	30	6 550	11 800	500	528	74	608	635	708	27
PSS2030N1D0808	20	30	6 550	11 800	600	628	74	708	735	808	27
PSS2030N1D0908	20	30	6 550	11 800	700	728	74	808	835	908	27
PSS2030N1D1035	20	30	6 550	11 800	800	826	74	908	935	1 035	27
PSS2030N1D1235	20	30	6 550	11 800	1 000	1 026	74	1 108	1 135	1 235	27
PSS2030N1D1435	20	30	6 550	11 800	1 200	1 226	74	1 308	1 335	1 435	27

- Notes**
1. Indicates ball screw preload control value. Approximately 2.0 N-cm of torque is added due to thin plastic seals.
 2. Contact NSK if permissible rotational speed is to be exceeded.
 3. Service temperature range is 0 to 80°C.

Nut model: BSS

Screw shaft $\phi 20$
Lead 20, 30

Unit: mm



Ball screw specification	
Preload type	Oversize ball preload (P-preload)
Ball diameter/screw shaft root diameter	3.175 / 17.2
Ball circle dia.	20.5
Accuracy grade/axial play	C5 / 0
Factory-packed grease	NSK grease LR3

For drive side (Fixed)	For opposite to drive side	
	(Fixed)	(Simple)
WBK15-01B (low-profile, square)	WBK15-01B (low-profile, square)	WBK15S-01B (low-profile, square)
WBK15-11 (round)	WBK15-11 (round)	

Unit: mm

Left shaft end (opposite driven side)	Lead accuracy			Shaft run-out C	Dynamic preload torque (N·cm) *1	Mass (kg)	Permissible rotational speed (min ⁻¹) *2		Internal spatial volume of nut (cm ³)	Standard volume of grease replenishing (cm ³)
	Target value T	Error e _p	Variation v _u				Fixed-Simple	Fixed-Fixed		
II	0	0.030	0.023	0.060	1.4 - 11.8	1.8	5 000	—	3.2	1.6
II	0	0.030	0.023	0.075	1.4 - 11.8	2.0	5 000	—	3.2	1.6
II	0	0.035	0.025	0.095	1.4 - 11.8	2.3	5 000	—	3.2	1.6
II	0	0.040	0.027	0.095	0.8 - 13.8	2.5	4 150	—	3.2	1.6
I	0	0.040	0.027	0.120	0.8 - 13.8	2.8	3 270	4 470	3.2	1.6
I	0	0.046	0.030	0.120	0.8 - 13.8	3.3	2 180	3 010	3.2	1.6
I	0	0.054	0.035	0.160	0.8 - 13.8	3.8	1 550	2 170	3.2	1.6
I	0	0.065	0.040	0.200	0.8 - 13.8	4.7	900	1 270	3.2	1.6
II	0	0.023	0.018	0.050	1.6 - 9.8	1.4	5 000	—	4.6	2.3
II	0	0.027	0.020	0.060	1.4 - 11.8	1.7	5 000	—	4.6	2.3
II	0	0.030	0.023	0.060	1.4 - 11.8	1.9	5 000	—	4.6	2.3
II	0	0.030	0.023	0.075	1.4 - 11.8	2.1	5 000	—	4.6	2.3
II	0	0.035	0.025	0.095	1.4 - 11.8	2.4	5 000	—	4.6	2.3
II	0	0.040	0.027	0.095	0.8 - 13.8	2.6	4 310	—	4.6	2.3
I	0	0.040	0.027	0.120	0.8 - 13.8	2.9	3 380	4 570	4.6	2.3
I	0	0.046	0.030	0.120	0.8 - 13.8	3.4	2 240	3 070	4.6	2.3
I	0	0.054	0.035	0.160	0.8 - 13.8	3.9	1 590	2 200	4.6	2.3


4. Use of NSK support unit is recommended. Refer to page B411 for details.

5. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.

Nut model: BSS

Screw shaft ϕ 20
Lead 40, 60

Unit: mm



Ball screw specification	
Preload type	Oversize ball preload (P-preload)
Ball diameter/screw shaft root diameter	3.175 / 17.2
Ball circle dia.	20.5
Accuracy grade/axial play	C5 / 0
Factory-packed grease	NSK grease LR3


For drive side (Fixed)	For opposite to drive side	
	(Fixed)	(Simple)
WBK15-01B (low-profile, square)	WBK15-01B (low-profile, square)	WBK15S-01B (low-profile, square)
WBK15-11 (round)	WBK15-11 (round)	

Unit: mm

Left shaft end (opposite driven side)	Lead accuracy			Shaft run-out C	Dynamic preload torque (N·cm) ^{*1}	Mass (kg)	Permissible rotational speed (min ⁻¹) ^{*2}		Internal spatial volume of nut (cm ³)	Standard volume of grease replenishing (cm ³)
	Target value T	Error e _p	Variation v _u				Fixed-Simple	Fixed-Fixed		
II	0	0.035	0.025	0.075	2.2 - 12.8	2.4	5 000	—	5.3	2.7
II	0	0.035	0.025	0.095	2.2 - 12.8	2.6	5 000	—	5.3	2.7
II	0	0.040	0.027	0.095	1.8 - 14.8	2.8	3 940	—	5.3	2.7
I	0	0.040	0.027	0.120	1.8 - 14.8	3.1	3 120	4 190	5.3	2.7
I	0	0.046	0.030	0.160	1.8 - 14.8	3.6	2 100	2 850	5.3	2.7
I	0	0.054	0.035	0.160	1.8 - 14.8	4.1	1 500	2 070	5.3	2.7
I	0	0.065	0.040	0.200	1.8 - 14.8	5.1	880	1 230	5.3	2.7
I	0	0.077	0.046	0.240	1.8 - 14.8	6.0	580	810	5.3	2.7
II	0	0.030	0.023	0.075	2.7 - 13.8	2.4	5 000	—	7.0	3.5
II	0	0.035	0.025	0.095	2.7 - 13.8	2.6	5 000	—	7.0	3.5
II	0	0.035	0.025	0.095	2.7 - 13.8	2.9	4 830	—	7.0	3.5
II	0	0.040	0.027	0.120	1.8 - 14.8	3.1	3 740	—	7.0	3.5
I	0	0.040	0.027	0.120	1.8 - 14.8	3.4	2 980	3 920	7.0	3.5
I	0	0.046	0.030	0.160	1.8 - 14.8	3.9	2 020	2 700	7.0	3.5
I	0	0.054	0.035	0.160	1.8 - 14.8	4.4	1 460	1 970	7.0	3.5
I	0	0.065	0.040	0.200	1.8 - 14.8	5.4	860	1 180	7.0	3.5
I	0	0.077	0.046	0.240	1.8 - 14.8	6.3	570	790	7.0	3.5

4. Use of NSK support unit is recommended. Refer to page B411 for details.

5. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.

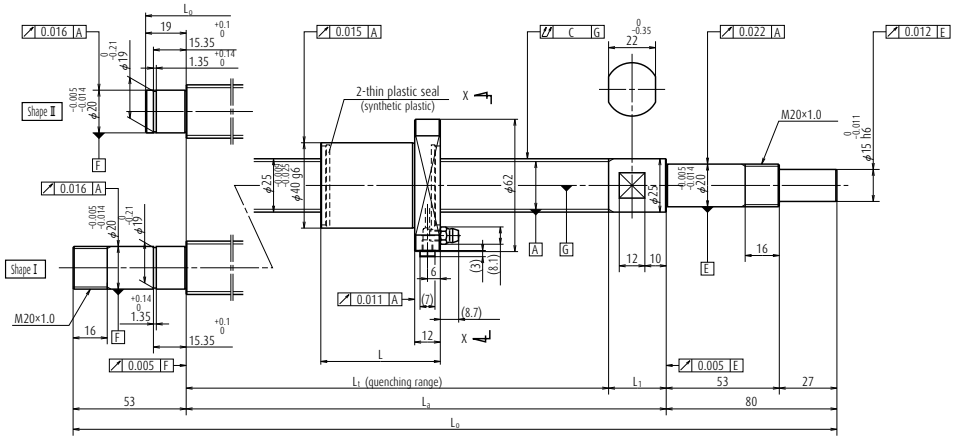


Ball screw No.	Screw shaft diameter d	Lead I	Basic load ratings (N)		Stroke		Nut length L	Screw shaft dimensions			
			Dynamic C _a	Static C _{0a}	Nominal	MAX.		L _t	L _a	L ₀	L ₁
PSS2505N1D0349	25	5	11 500	23 500	150	185	32	223	250	658	27
PSS2505N1D0399	25	5	11 500	23 500	200	235	32	273	300	758	27
PSS2505N1D0499	25	5	11 500	23 500	300	335	32	373	400	858	27
PSS2505N1D0599	25	5	11 500	23 500	400	435	32	473	500	958	27
PSS2505N1D0699	25	5	11 500	23 500	500	535	32	573	600	1 085	27
PSS2505N1D0899	25	5	11 500	23 500	700	735	32	773	800	1 285	27
PSS2505N1D0999	25	5	11 500	23 500	800	835	32	873	900	1 485	27
PSS2505N1D1233	25	5	11 500	23 500	1 000	1 027	32	1 073	1 100	1 885	27
PSS2510N1D0549	25	10	15 000	32 400	300	361	56	423	450	2 285	27
PSS2510N1D0649	25	10	15 000	32 400	400	461	56	523	550	708	27
PSS2510N1D0749	25	10	15 000	32 400	500	561	56	623	650	808	27
PSS2510N1D0849	25	10	15 000	32 400	600	661	56	723	750	908	27
PSS2510N1D0949	25	10	15 000	32 400	700	761	56	823	850	1 008	27
PSS2510N1D1049	25	10	15 000	32 400	800	861	56	923	950	1 135	27
PSS2510N1D1283	25	10	15 000	32 400	1 000	1 053	56	1 123	1 150	1 335	27
PSS2510N1D1883	25	10	15 000	32 400	1 600	1 653	56	1 723	1 750	1 535	27

- Notes**
1. Indicates ball screw preload control value. Approximately 2.0 N-cm of torque is added due to thin plastic seals.
 2. Contact NSK if permissible rotational speed is to be exceeded.
 3. Service temperature range is 0 to 80°C.

Nut model: BSS

Screw shaft $\phi 25$
Lead 5, 10

Unit: mm



Ball screw specification	
Preload type	Oversize ball preload (P-preload)
Ball diameter/screw shaft root diameter	3.175 / 22.2
Ball circle dia.	25.5
Accuracy grade/axial play	C5 / 0
Factory-packed grease	NSK grease LR3


Recommended support unit		
For drive side (Fixed)	For opposite to drive side	
	(Fixed)	(Simple)
WBK20-01 (square)	WBK20-01 (square)	WBK20S-01 (square)
WBK20-11 (round)	WBK20-11 (round)	

Unit: mm

Left shaft end (opposite driven side)	Lead accuracy			Shaft run-out C	Dynamic preload torque (N·cm) *1	Mass (kg)	Permissible rotational speed (min ⁻¹) *2		Internal spatial volume of nut (cm ³)	Standard volume of grease replenishing (cm ³)
	Target value T	Error e _p	Variation v _u				Fixed-Simple	Fixed-Fixed		
II	0	0.023	0.018	0.035	1.2 - 9.3	1.5	5 000	—	4.4	2.2
II	0	0.023	0.018	0.035	1.2 - 9.3	1.6	5 000	—	4.4	2.2
II	0	0.025	0.020	0.040	1.2 - 9.3	2.0	5 000	—	4.4	2.2
II	0	0.027	0.020	0.045	1.2 - 9.3	2.3	5 000	—	4.4	2.2
II	0	0.030	0.023	0.055	0.8 - 10.8	2.7	5 000	—	4.4	2.2
II	0	0.035	0.025	0.065	0.8 - 10.8	3.4	5 000	—	4.4	2.2
II	0	0.040	0.027	0.065	0.8 - 10.8	3.7	4 490	—	4.4	2.2
I	0	0.046	0.030	0.080	0.8 - 13.8	4.5	2 960	4 060	4.4	2.2
II	0	0.027	0.020	0.045	3.1 - 11.8	2.4	5 000	—	4.7	2.4
II	0	0.030	0.023	0.055	2.2 - 12.8	2.7	5 000	—	4.7	2.4
II	0	0.030	0.023	0.055	2.2 - 12.8	3.1	5 000	—	4.7	2.4
II	0	0.035	0.025	0.065	2.2 - 12.8	3.5	5 000	—	4.7	2.4
II	0	0.040	0.027	0.065	2.2 - 12.8	3.8	5 000	—	4.7	2.4
I	0	0.040	0.027	0.080	2.2 - 12.8	4.2	4 120	—	4.7	2.4
I	0	0.046	0.030	0.100	1.8 - 14.8	5.0	2 760	3 790	4.7	2.4
I	0	0.065	0.040	0.130	1.8 - 14.8	7.2	1 150	1 620	4.7	2.4

4. Use of NSK support unit is recommended. Refer to page B411 for details.


5. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.

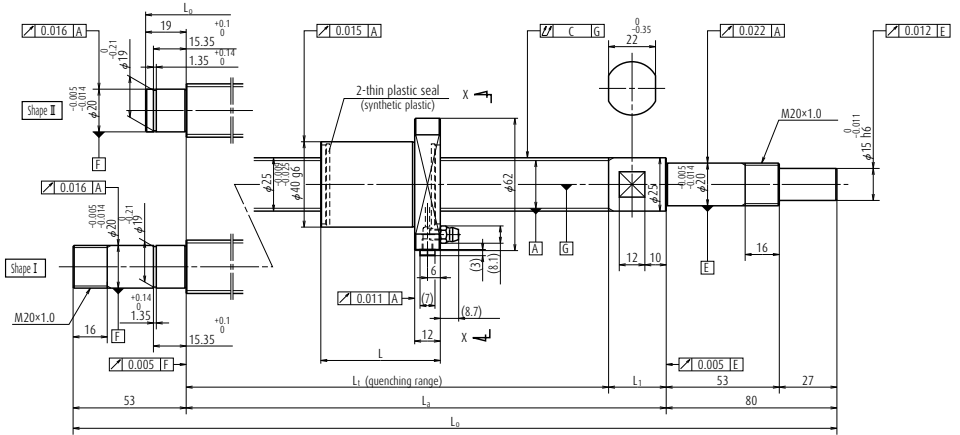

Ball screw No.	Screw shaft diameter d	Lead I	Basic load ratings (N)		Stroke		Nut length L	Screw shaft dimensions			
			Dynamic C _a	Static C _{0a}	Nominal	MAX.		L ₁	L _a	L ₀	L ₁
PSS2520N1D0729	25	20	7 650	14 800	500	544	54	604	630	729	26
PSS2520N1D0829	25	20	7 650	14 800	600	644	54	704	730	829	26
PSS2520N1D0929	25	20	7 650	14 800	700	744	54	804	830	929	26
PSS2520N1D1029	25	20	7 650	14 800	800	844	54	904	930	1 029	26
PSS2520N1D1263	25	20	7 650	14 800	1 000	1 036	54	1 104	1 130	1 263	26
PSS2520N1D1463	25	20	7 650	14 800	1 200	1 236	54	1 304	1 330	1 463	26
PSS2520N1D1863	25	20	7 650	14 800	1 600	1 636	54	1 704	1 730	1 863	26
PSS2520N1D2263	25	20	7 650	14 800	2 000	2 036	54	2 104	2 130	2 263	26
PSS2525N1D0779	25	25	7 490	14 600	500	581	63	650	680	779	30
PSS2525N1D0879	25	25	7 490	14 600	600	681	63	750	780	879	30
PSS2525N1D0979	25	25	7 490	14 600	700	781	63	850	880	979	30
PSS2525N1D1079	25	25	7 490	14 600	800	887	63	950	890	1 079	30
PSS2525N1D1313	25	25	7 490	14 600	1 000	1 073	63	1 150	1 180	1 313	30
PSS2525N1D1513	25	25	7 490	14 600	1 200	1 273	63	1 350	1 380	1 513	30
PSS2525N1D1913	25	25	7 490	14 600	1 600	1 673	63	1 750	1 780	1 913	30
PSS2525N1D2313	25	25	7 490	14 600	2 000	2 073	63	2 150	2 180	2 313	30

- Notes**
1. Indicates ball screw preload control value. Approximately 2.0 N-cm of torque is added due to thin plastic seals.
 2. Contact NSK if permissible rotational speed is to be exceeded.
 3. Service temperature range is 0 to 80°C.

Unit: mm



Ball screw specification	
Preload type	Oversize ball preload (P-preload)
Ball diameter/screw shaft root diameter	3.175 / 22.2
Ball circle dia.	25.5
Accuracy grade/axial play	C5 / 0
Factory-packed grease	NSK grease LR3


Recommended support unit		
For drive side (Fixed)	For opposite to drive side	
	(Fixed)	(Simple)
WBK20-01 (square)	WBK20-01 (square)	WBK20S-01 (square)
WBK20-11 (round)	WBK20-11 (round)	

Unit: mm

Left shaft end (opposite driven side)	Lead accuracy			Shaft run-out C	Dynamic preload torque (N·cm) *1	Mass (kg)	Permissible rotational speed (min ⁻¹) *2		Internal spatial volume of nut (cm ³)	Standard volume of grease replenishing (cm ³)
	Target value T	Error e _p	Variation v _u				Fixed-Simple	Fixed-Fixed		
II	0	0.030	0.023	0.055	2.2 - 12.8	3.1	5 000	—	3.9	2.0
II	0	0.035	0.025	0.065	2.2 - 12.8	3.4	5 000	—	3.9	2.0
II	0	0.040	0.027	0.065	2.2 - 12.8	3.8	5 000	—	3.9	2.0
II	0	0.040	0.027	0.080	2.2 - 12.8	4.2	4 280	—	3.9	2.0
I	0	0.046	0.030	0.100	1.8 - 14.8	5.0	2 850	3 920	3.9	2.0
I	0	0.054	0.035	0.100	1.8 - 14.8	5.8	2 030	2 820	3.9	2.0
I	0	0.065	0.040	0.130	1.8 - 14.8	7.3	1 180	1 650	3.9	2.0
I	0	0.077	0.046	0.170	1.8 - 14.8	8.8	770	1 080	3.9	2.0
II	0	0.035	0.025	0.055	2.7 - 13.8	3.3	5 000	—	4.3	2.2
II	0	0.035	0.025	0.065	2.7 - 13.8	3.7	5 000	—	4.3	2.2
II	0	0.040	0.027	0.065	2.7 - 13.8	4.1	4 910	—	4.3	2.2
II	0	0.040	0.027	0.080	2.7 - 13.8	4.4	3 910	—	4.3	2.2
I	0	0.046	0.030	0.100	1.8 - 14.8	5.3	2 640	3 620	4.3	2.2
I	0	0.054	0.035	0.100	1.8 - 14.8	6.0	1 900	2 630	4.3	2.2
I	0	0.065	0.040	0.130	1.8 - 14.8	7.5	1 120	1 570	4.3	2.2
I	0	0.077	0.046	0.170	1.8 - 14.8	9.1	740	1 040	4.3	2.2

4. Use of NSK support unit is recommended. Refer to page B411 for details.


5. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.

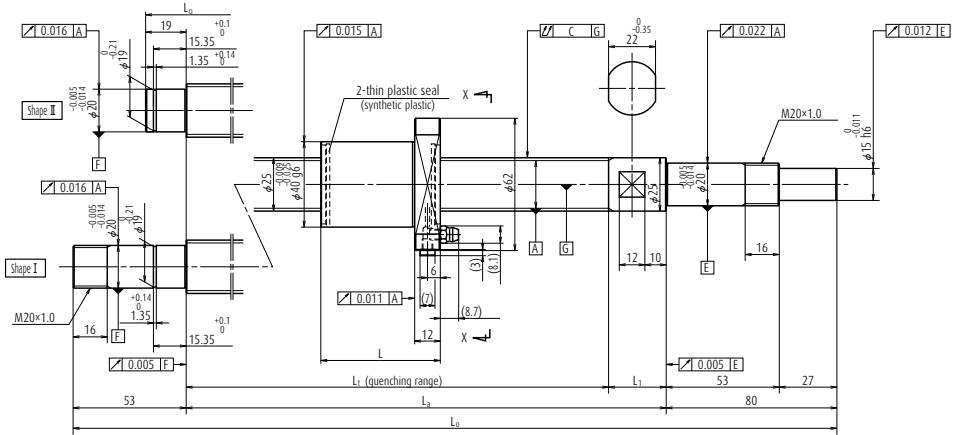

Ball screw No.	Screw shaft diameter d	Lead I	Basic load ratings (N)		Stroke		Nut length L	Screw shaft dimensions			
			Dynamic C_a	Static C_{0a}	Nominal	MAX.		L_t	L_a	L_0	L_1
PSS2530N1D0779	25	30	7 490	14 600	500	570	74	650	680	779	30
PSS2530N1D0879	25	30	7 490	14 600	600	670	74	750	780	879	30
PSS2530N1D0979	25	30	7 490	14 600	700	770	74	850	880	979	30
PSS2530N1D1079	25	30	7 490	14 600	800	870	74	950	980	1 079	30
PSS2530N1D1313	25	30	7 490	14 600	1 000	1 062	74	1 150	1 180	1 313	30
PSS2530N1D1513	25	30	7 490	14 600	1 200	1 262	74	1 350	1 380	1 513	30
PSS2530N1D1913	25	30	7 490	14 600	1 600	1 662	74	1 750	1 780	1 913	30
PSS2530N1D2313	25	30	7 490	14 600	2 000	2 062	74	2 150	2 180	2 313	30
PSS2550N1D0829	25	50	6 910	14 700	500	570	114	690	730	829	40
PSS2550N1D0929	25	50	6 910	14 700	600	670	114	790	830	929	40
PSS2550N1D1029	25	50	6 910	14 700	700	770	114	890	930	1 029	40
PSS2550N1D1129	25	50	6 910	14 700	800	870	114	990	1 030	1 129	40
PSS2550N1D1363	25	50	6 910	14 700	1 000	1 062	114	1 190	1 230	1 363	40
PSS2550N1D1563	25	50	6 910	14 700	1 200	1 262	114	1 390	1 430	1 563	40
PSS2550N1D1963	25	50	6 910	14 700	1 600	1 662	114	1 790	1 830	1 963	40
PSS2550N1D2363	25	50	6 910	14 700	2 000	2 062	114	2 190	2 230	2 363	40

- Notes**
1. Indicates ball screw preload control value. Approximately 2.0 N-cm of torque is added due to thin plastic seals.
 2. Contact NSK if permissible rotational speed is to be exceeded.
 3. Service temperature range is 0 to 80°C.

Unit: mm



Ball screw specification	
Preload type	Oversize ball preload (P-preload)
Ball diameter/screw shaft root diameter	3.175 / 22.2
Ball circle dia.	25.5
Accuracy grade/axial play	C5 / 0
Factory-packed grease	NSK grease LR3


Recommended support unit		
For drive side (Fixed)	For opposite to drive side	
	(Fixed)	(Simple)
WBK20-01 (square)	WBK20-01 (square)	WBK20S-01 (square)
WBK20-11 (round)	WBK20-11 (round)	

Unit: mm

Left shaft end (opposite driven side)	Lead accuracy			Shaft run-out C	Dynamic preload torque (N·cm) *1	Mass (kg)	Permissible rotational speed (min ⁻¹) *2		Internal spatial volume of nut (cm ³)	Standard volume of grease replenishing (cm ³)
	Target value T	Error e _p	Variation v _u				Fixed-Simple	Fixed-Fixed		
II	0	0.035	0.025	0.055	2.7 - 13.8	3.4	5 000	—	5.5	2.8
II	0	0.035	0.025	0.065	2.7 - 13.8	3.7	5 000	—	5.5	2.8
II	0	0.040	0.027	0.065	2.7 - 13.8	4.1	4 980	—	5.5	2.8
II	0	0.040	0.027	0.080	2.7 - 13.8	4.5	3 960	—	5.5	2.8
I	0	0.046	0.030	0.100	1.8 - 14.8	5.3	2 670	3 650	5.5	2.8
I	0	0.054	0.035	0.100	1.8 - 14.8	6.1	1 920	2 650	5.5	2.8
I	0	0.065	0.040	0.130	1.8 - 14.8	7.6	1 130	1 580	5.5	2.8
I	0	0.077	0.046	0.170	1.8 - 14.8	9.1	740	1 040	5.5	2.8
II	0	0.035	0.025	0.065	5.4 - 17.6	3.8	5 000	—	7.7	3.9
II	0	0.035	0.025	0.065	5.4 - 17.6	4.1	5 000	—	7.7	3.9
II	0	0.040	0.027	0.080	5.4 - 17.6	4.5	4 750	—	7.7	3.9
II	0	0.040	0.027	0.080	5.4 - 17.6	4.9	3 790	—	7.7	3.9
I	0	0.046	0.030	0.100	4.1 - 19.6	5.8	2 570	3 470	7.7	3.9
I	0	0.054	0.035	0.100	4.1 - 19.6	6.5	1 860	2 540	7.7	3.9
I	0	0.065	0.040	0.130	4.1 - 19.6	8.0	1 100	1 520	7.7	3.9
I	0	0.077	0.046	0.170	4.1 - 19.6	9.6	730	1 020	7.7	3.9


4. Use of NSK support unit is recommended. Refer to page B411 for details.

5. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.

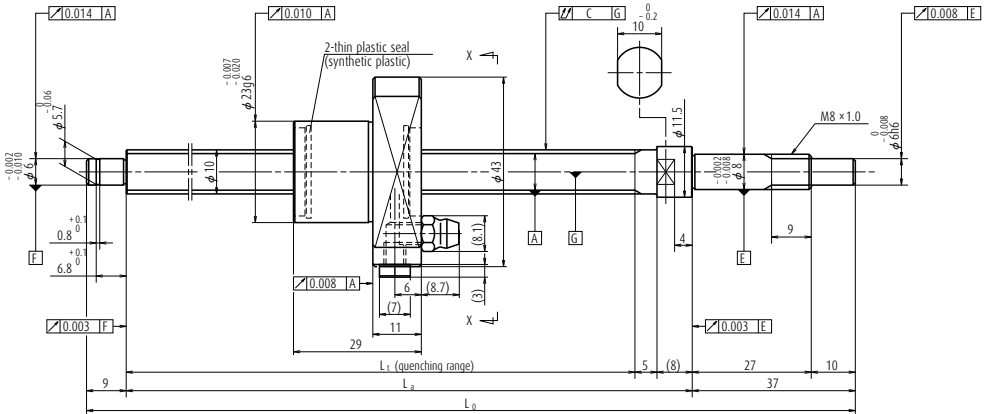

Ball screw No.	Screw shaft diameter d	Lead l	Basic load ratings (N)		Stroke		Screw shaft dimensions		
			Dynamic C _a	Static C _{0a}	Nominal	MAX.	L _t	L _a	L _o
USS1005N1D0221	10	5	3 420	4 840	100	133	162	175	221
USS1005N1D0321	10	5	3 420	4 840	200	233	262	275	321
USS1005N1D0521	10	5	3 420	4 840	400	433	462	475	521

- Notes**
1. Indicates ball screw preload control value. Approximately 0.5 N-cm of torque is added due to thin plastic seals.
 2. Contact NSK if permissible rotational speed is to be exceeded.
 3. Service temperature range is 0 to 80°C.

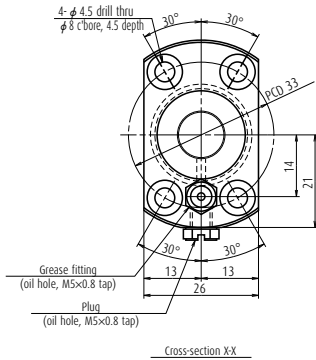

Ball screw specification

Preload type	Oversize ball preload (P-preload)
Ball diameter/screw shaft root diameter	2.000 / 8.2
Ball circle dia.	10.3
Accuracy grade/axial play	C5 / 0
Factory-packed grease	NSK grease LG2


Recommended support unit

For drive side (Fixed)	For opposite to drive side (Simple)
WBK08-01 (low-profile, square)	WBK08S-01B (low-profile, square)
WBK08-11 (round)	WBK08S-01C (square, clean)
WBK08-01C (square, clean)	
WBK08-11C (round, clean)	

Lead accuracy			Shaft run-out C	Dynamic preload torque (N-cm) *1	Mass (kg)	Permissible rotational speed (min ⁻¹) *2	Internal spatial volume of nut (cm ³)	Standard volume of grease replenishing (cm ³)
Target value T	Error e _p	Variation V _u						
0	0.010	0.008	0.035	0.2 - 1.8	0.3	5 000	0.8	0.4
0	0.012	0.008	0.045	0.2 - 2.0	0.3	5 000	0.8	0.4
0	0.015	0.010	0.070	0.2 - 3.0	0.5	4 300	0.8	0.4

4. Use of NSK support unit is recommended. Refer to page B411 for details.

Unit: mm

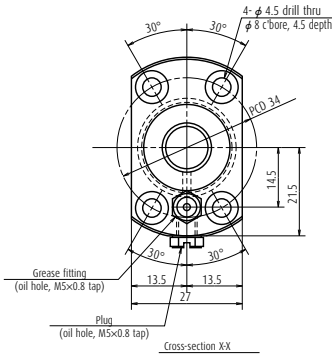


Ball screw specification	
Preload type	Oversize ball preload (P-preload)
Ball diameter/screw shaft root diameter	2.000 / 10.2
Ball circle dia.	12.3
Accuracy grade/axial play	C3 / 0
Factory-packed grease	NSK grease LG2

Recommended support unit	
For drive side (Fixed)	For opposite to drive side (Simple)
WBK08-01 (low-profile, square)	WBK08S-01B (low-profile, square)
WBK08-11 (round)	WBK08S-01C (square, clean)
WBK08-01C (square, clean)	
WBK08-11C (round, clean)	

Unit: mm

Lead accuracy			Shaft run-out C	Dynamic preload torque (N-cm) *1	Mass (kg)	Permissible rotational speed (min ⁻¹) *2	Internal spatial volume of nut (cm ³)	Standard volume of grease replenishing (cm ³)
Target value T	Error e _p	Variation V _u						
0	0.010	0.008	0.035	0.2 - 1.8	0.3	5 000	1.0	0.5
0	0.012	0.008	0.045	0.2 - 2.0	0.3	5 000	1.0	0.5
0	0.016	0.012	0.070	0.2 - 3.0	0.7	5 000	1.0	0.5

4. Use of NSK support unit is recommended. Refer to page B411 for details.

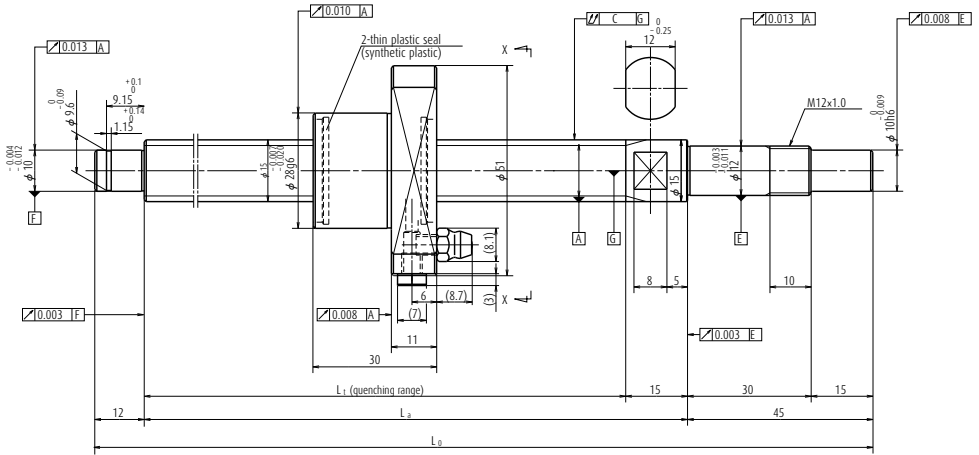

Ball screw No.	Screw shaft diameter d	Lead l	Basic load ratings (N)		Stroke		Screw shaft dimensions		
			Dynamic C_a	Static C_{0a}	Nominal	MAX.	L_t	L_a	L_o
USS1505N1D0261	15	5	6 410	10 100	100	159	189	204	261
USS1505N1D0361	15	5	6 410	10 100	200	259	289	304	361
USS1505N1D0561	15	5	6 410	10 100	400	459	489	504	561
USS1505N1D0761	15	5	6 410	10 100	600	659	689	704	761


- Notes**
1. Indicates ball screw preload control value. Approximately 0.5 N-cm of torque is added due to thin plastic seals.
 2. Contact NSK if permissible rotational speed is to be exceeded.
 3. Service temperature range is 0 to 80°C.

Nut model: BSS

Screw shaft $\phi 15$

Lead 5

Unit: mm

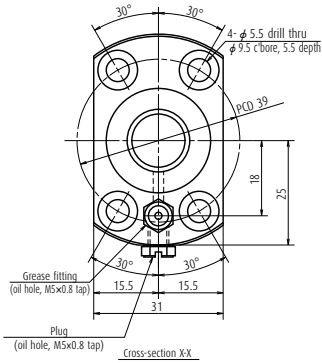


Ball screw specification	
Preload type	Oversize ball preload (P-preload)
Ball diameter/screw shaft root diameter	2.778 / 12.6
Ball circle dia.	15.5
Accuracy grade/axial play	C3 / 0
Factory-packed grease	NSK grease LG2

Recommended support unit	
For drive side (Fixed)	For opposite to drive side (Simple)
WBK12-01 (low-profile, square)	WBK12S-01B (low-profile, square)
WBK12-11 (round)	WBK12S-01C (square, clean)
WBK12-01C (square, clean)	
WBK12-11C (round, clean)	

Unit: mm

Lead accuracy			Shaft run-out C	Dynamic preload torque (N-cm) *1	Mass (kg)	Permissible rotational speed (min ⁻¹) *2	Internal spatial volume of nut (cm ³)	Standard volume of grease replenishing (cm ³)
Target value T	Error e _p	Variation V _u				Fixed-Simple		
0	0.010	0.008	0.025	0.2 - 5.0	0.5	5 000	2.0	1.0
0	0.012	0.008	0.035	0.2 - 5.0	0.6	5 000	2.0	1.0
0	0.015	0.010	0.045	0.2 - 6.0	0.9	5 000	2.0	1.0
0	0.018	0.013	0.060	0.2 - 8.0	1.1	4 130	2.0	1.0

4. Use of NSK support unit is recommended. Refer to page B411 for details.

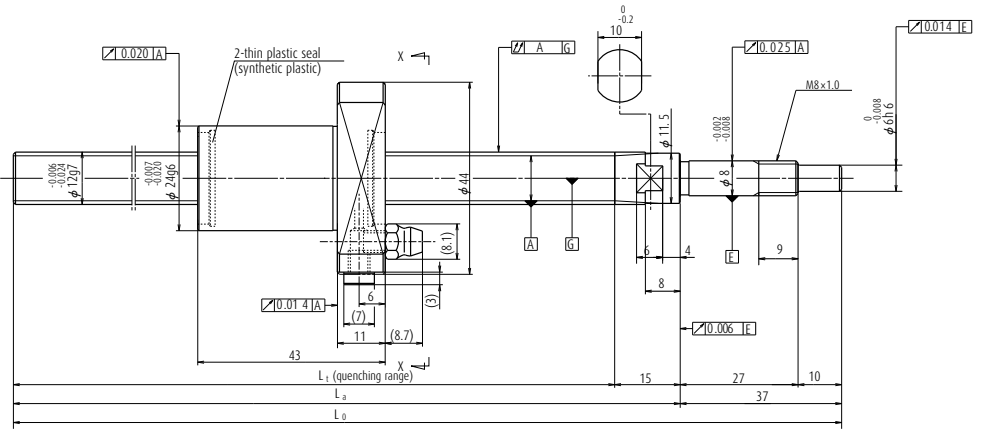

Ball screw No.	Screw shaft diameter d	Lead I	Basic load ratings (N)		Stroke		Nut length	Screw shaft dimensions			
			Dynamic C_a	Static C_{0a}	Nominal	Max.	L	L_t	L_a	L_0	L_1
FSS1210N1D0400	12	10	3 760	5 780	250	287	43	348	363	400	15
FSS1210N1D0600	12	10	3 760	5 780	450	487	43	548	563	600	15
FSS1210N1D0900	12	10	3 760	5 780	750	787	43	848	863	900	15


- Notes**
1. Indicates ball screw preload control value. Approximately 2.0 N-cm of torque is added due to thin plastic seals.
 2. Service temperature range is 0 to 80°C.
 3. Use of NSK support unit is recommended. Refer to page B411 for details.

Nut model: BSS

Screw shaft ϕ 12

Lead 10

Unit: mm

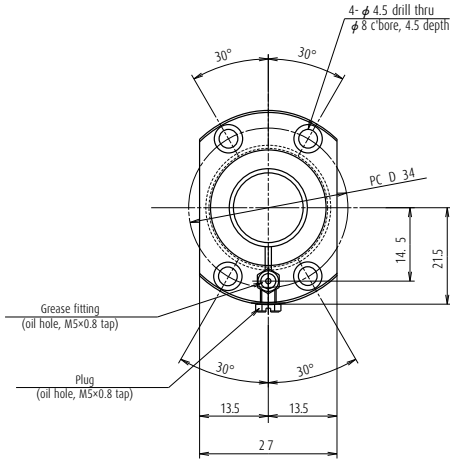

Ball screw specification

Ball diameter/ screw shaft root diameter	2.000 / 10.2
Accuracy grade/axial play	CT7 / 0.010 or less
Factory-packed grease	NSK grease LR3

Recommended support unit

For drive side (Fixed)	For opposite to drive side (Simple)
WBK08-01B (low-profile, square)	WBK12SF-01B (low-profile, square)

Unit: mm

Lead accuracy			Shaft run-out A	Dynamic preload torque (N·cm)	Mass (kg)	Permissible rotational speed (min ⁻¹) ^{②⑤} Fixed-Simple	Internal spatial volume of nut (cm ³)	Standard volume of grease replenishing (cm ³)
Target value T	Error e _p	Variation V ₃₀₀						
0	0.120	0.052	0.080	—	0.5	5 000	1.0	0.5
0	0.195	0.052	0.120	—	0.7	5 000	1.0	0.5
0	0.310	0.052	0.180	—	1.0	2 300	1.0	0.5

4. The stroke and permissible rotational speed shown in the table are the values when the support unit recommended by NSK is used and Fixed-Supported (ball screw mounting method) is selected.

5. Permissible rotational speed varies when using cut screw shaft. It is necessary to calculate two items below, and whichever smaller is the permissible rotational speed.


^②Critical speed which is the resonance vibration of the shaft (page B47).

^⑤Maximum rotational speed 5 000 min⁻¹

Nut model: BSS

Screw shaft ϕ 15
Lead 10, 20

Unit: mm

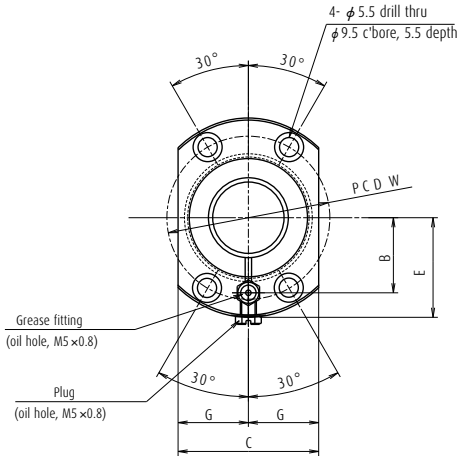

Ball screw specification

Lead	10	20
Ball diameter/ screw shaft root diameter	2.778 / 12.6	3.175 / 12.2
Accuracy grade/axial play	CT7 / 0.010 or less	
Factory-packed grease	NSK grease LR3	

Recommended support unit

For drive side (Fixed)	For opposite to drive side (Simple)
WBK12-01B (low-profile, square)	WBK15SF-01B (low-profile, square)

Unit: mm


Nut dimensions								Shaft run-out C	Dynamic preload torque (N-cm)	Mass (kg)	Permissible rotational speed (min ⁻¹) *5	Internal spatial volume of nut (cm ³)	Standard volume of grease replenishing (cm ³)
L	D ₁	D ₂	W	B	C	E	G				Fixed-Simple		
43	28	51	39	18	31	25	15.5	0.070	—	0.9	5 000	2.0	1.0
43	28	51	39	18	31	25	15.5	0.125	—	1.7	2 300	2.0	1.0
43	28	51	39	18	31	25	15.5	0.200	—	2.3	1 020	2.0	1.0
51	32	55	43	20	33	27	16.5	0.070	—	1.0	5 000	2.8	1.4
51	32	55	43	20	33	27	16.5	0.125	—	1.7	2 260	2.8	1.4
51	32	55	43	20	33	27	16.5	0.200	—	2.3	1 000	2.8	1.4

4. The stroke and permissible rotational speed shown in the table are the values when the support unit recommended by NSK is used and Fixed-Supported (ball screw mounting method) is selected.

5. Permissible rotational speed varies when using cut screw shaft. It is necessary to calculate two items below, and whichever smaller is the permissible rotational speed.

*Critical speed which is the resonance vibration of the shaft (page B47).

*Maximum rotational speed 5 000 min⁻¹

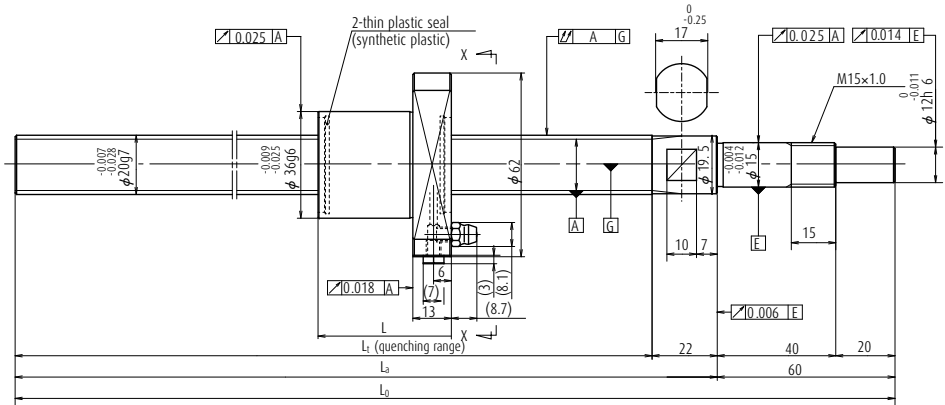


Ball screw No.	Screw shaft diameter d	Lead l	Basic load ratings (N)		Stroke		Nut length	Screw shaft dimensions			
			Dynamic C _a	Static C _{0a}	Nominal	Max.	L	L ₁	L _a	L ₀	L ₁
FSS2010N1D0600	20	10	10 200	18 600	400	451	45	518	540	600	22
FSS2010N1D1000	20	10	10 200	18 600	800	851	45	918	940	1 000	22
FSS2010N1D1450	20	10	10 200	18 600	1 250	1 301	45	1 368	1 390	1 450	22
FSS2020N1D0600	20	20	6 790	11 800	400	442	54	518	540	600	22
FSS2020N1D1000	20	20	6 790	11 800	800	842	54	918	940	1 000	22
FSS2020N1D1450	20	20	6 790	11 800	1 250	1 292	54	1 368	1 390	1 450	22

- Notes**
1. Indicates ball screw preload control value. Approximately 2.0 N-cm of torque is added due to thin plastic seals.
 2. Service temperature range is 0 to 80°C.
 3. Use of NSK support unit is recommended. Refer to page B411 for details.

Nut model: BSS

Screw shaft $\phi 20$ Lead 10, 20

Unit: mm

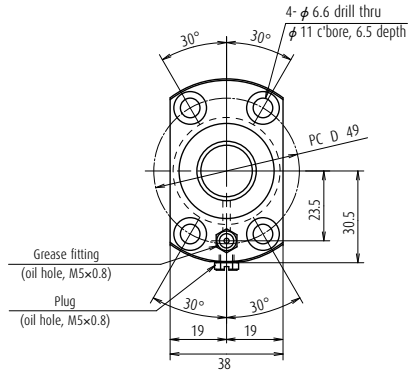

Ball screw specification

Ball diameter/ screw shaft root diameter	3.175 / 17.2
Accuracy grade/axial play	C7 / 0.010 or less
Factory-packed grease	NSK grease LR3

Recommended support unit

For drive side (Fixed)	For opposite to drive side (Simple)
WBK15-01B (low-profile, square)	WBK20SF-01B (low-profile, square)

Unit: mm


Lead accuracy			Shaft run-out C	Dynamic preload torque (N-cm)	Mass (kg)	Permissible rotational speed (min ⁻¹) *5	Internal spatial volume of nut (cm ³)	Standard volume of grease replenishing (cm ³)
Target value T	Error e _p	Variation V ₃₀₀				Fixed-Simple		
0	0.195	0.052	0.085	—	1.7	5 000	3.2	1.6
0	0.310	0.052	0.125	—	2.6	3 310	3.2	1.6
0	0.490	0.052	0.200	—	3.6	1 450	3.2	1.6
0	0.195	0.052	0.085	—	1.8	5 000	3.2	1.6
0	0.310	0.052	0.125	—	2.7	3 350	3.2	1.6
0	0.490	0.052	0.200	—	3.8	1 460	3.2	1.6

4. The stroke and permissible rotational speed shown in the table are the values when the support unit recommended by NSK is used and Fixed-Supported (ball screw mounting method) is selected.

5. Permissible rotational speed varies when using cut screw shaft. It is necessary to calculate two items below, and whichever smaller is the permissible rotational speed.

*Critical speed which is the resonance vibration of the shaft (page B47).


*Maximum rotational speed 5 000 min⁻¹

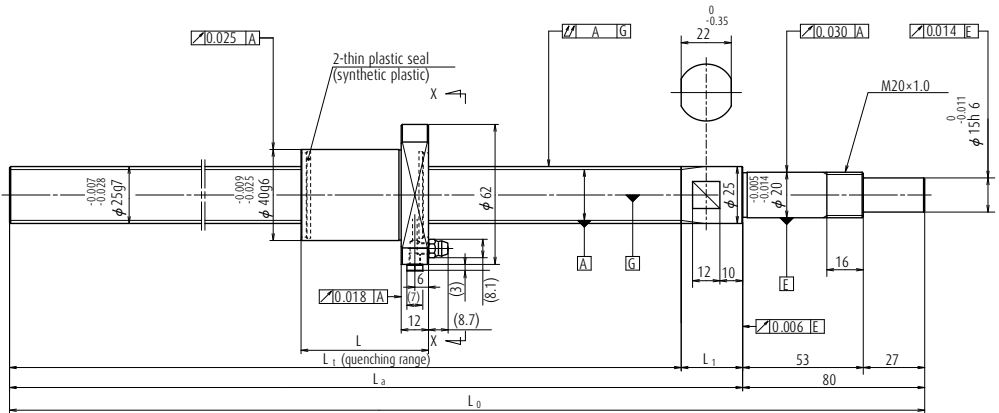

Ball screw No.	Screw shaft diameter d	Lead l	Basic load ratings (N)		Stroke		Nut length	Screw shaft dimensions			
			Dynamic C_a	Static C_{0a}	Nominal	Max.	L	L_1	L_a	L_0	L_1
FSS2510N1D0600	25	10	15 000	32 400	400	415	56	493	520	600	27
FSS2510N1D1000	25	10	15 000	32 400	800	815	56	893	920	1 000	27
FSS2510N1D1450	25	10	15 000	32 400	1 250	1 265	56	1 343	1 370	1 450	27
FSS2520N1D0600	25	20	7 650	14 800	400	418	54	494	520	600	26
FSS2520N1D1000	25	20	7 650	14 800	800	818	54	894	920	1 000	26
FSS2520N1D1450	25	20	7 650	14 800	1 250	1 268	54	1 344	1 370	1 450	26
FSS2525N1D0600	25	25	7 490	14 600	400	405	63	490	520	600	30
FSS2525N1D1000	25	25	7 490	14 600	800	805	63	890	920	1 000	30
FSS2525N1D1450	25	25	7 490	14 600	1 250	1 255	63	1 340	1 370	1 450	30

- Notes**
1. Indicates ball screw preload control value. Approximately 2.0 N-cm of torque is added due to thin plastic seals.
 2. Service temperature range is 0 to 80°C.
 3. Use of NSK support unit is recommended. Refer to page B411 for details.

Unit: mm

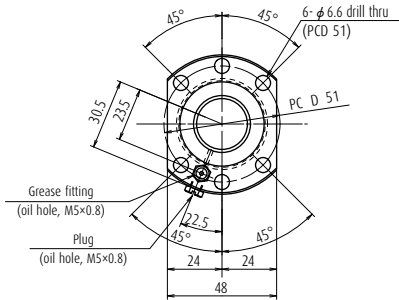

Ball screw specification

Ball diameter/ screw shaft root diameter	3.175 / 22.2
Accuracy grade/axial play	CT7 / 0.010 or less
Factory-packed grease	NSK grease LR3

Recommended support unit

For drive side (Fixed)	For opposite to drive side (Simple)
WBK20-01 (square)	WBK25SF-01 (square)

Unit: mm

Lead accuracy			Shaft run-out C	Dynamic preload torque (N·cm)	Mass (kg)	Permissible rotational speed (min ⁻¹) *5	Internal spatial volume of nut (cm ³)	Standard volume of grease replenishing (cm ³)
Target value T	Error e _p	Variation V ₃₀₀						
0	0.155	0.052	0.065	—	2.6	5 000	4.7	2.4
0	0.310	0.052	0.090	—	4.0	4 590	4.7	2.4
0	0.490	0.052	0.130	—	5.8	1 970	4.7	2.4
0	0.155	0.052	0.065	—	2.6	5 000	3.9	2.0
0	0.310	0.052	0.090	—	4.0	4 570	3.9	2.0
0	0.490	0.052	0.130	—	5.8	1 960	3.9	2.0
0	0.155	0.052	0.065	—	2.6	5 000	4.3	2.2
0	0.310	0.052	0.090	—	4.1	4 660	4.3	2.2
0	0.490	0.052	0.130	—	5.8	1 990	4.3	2.2

4. The stroke and permissible rotational speed shown in the table are the values when the support unit recommended by NSK is used and Fixed-Supported (ball screw mounting method) is selected.

5. Permissible rotational speed varies when using cut screw shaft. It is necessary to calculate two items below, and whichever smaller is the permissible rotational speed.

*Critical speed which is the resonance vibration of the shaft (page B47).

*Maximum rotational speed 5 000 min⁻¹

B-3-1.2 High Speed SS Series HSS Type

1. Features

The HMS and HMD series, originally developed for machine tools, are an addition to NSK's lineup of standard ball screws. They have a wide range of applications, from general machines to high performance machines such as those requiring high speed and precision.

> High speed

The new recirculation system that utilizes NSK's high speed and low noise technology more than doubles the $d \cdot n$ value from 70 000 to 160 000.

To extend the range of the lead to 20 mm, high speed operation of over 60 m/min. is possible.

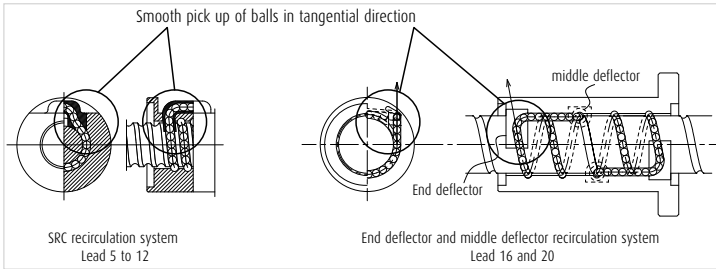


Fig. 1 Ball recirculation system

Table 1 Combinations of screw shaft diameter and lead

Screw shaft diameter (mm) \ Lead (mm)	5	10	12	16	20
	32	25m/min	50m/min		
40		40m/min	48m/min	64m/min	80m/min
45		35m/min			
50		32m/min	38m/min		

* Allowable speed needs to be calculated. See the permissible rotational speed in the dimensions table.

> Low noise and vibrations

Compared to our conventional products, the average noise level has been reduced by more than 6dB(A), reducing the number of colliding balls and recirculation parts thanks to high speed, low noise technology. The vibration level of the nut has also been reduced drastically.

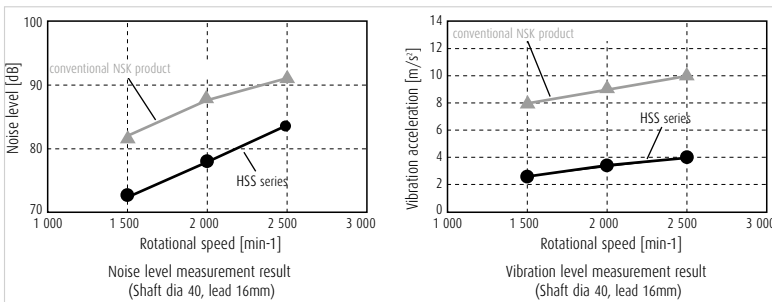


Table 2

› Installation

Installation dimension are the same as those of a conventional SS series.

› Compact

Achieved high-level stiffness and high load capacity equivalent to that of double nut preload by changing the double nut preload to the offset preload of a single nut, and compact sized nut. Adopted thin seals axially and shorten nut length.

› Blank shaft ends

The blank shaft ends can be customized according to customers' requests. See page B27 in NSK's recommended design when drawing up plans for a shaft end. The support units available on page B411 in the case of NSK's recommended design. See "Technical Description: Shaft End Processing" (page B86) for procedures of shaft end processing and precautions.

› Oil supply

2 oil holes, M6×1.0, are provided in the nut flange periphery are the end of the nut flange. A plug is standardly screwed into the periphery of the nut flange.

2. Specifications

› Accuracy grade and axial play

The available standard accuracy grade and axial play are show in **Table 2**.

Table 2 Accuracy grade and axial play

Accuracy grade	C5
Axial play	0 mm (preloaded)

› Dimension tables


Shape dimensions and specifications are listed for every shaft diameter and lead. See Table 3, the "List of pages".

3. Other

The seal of the ball screw and recirculation parts are made of synthetic resin. Consult NSK when using the ball screws under extreme environments or special environments, or using special lubricant or oil. For special environments, see pages B70 and D2. See pages B67 and D13 for lubricants.



Table 3 Combinations of screw shaft diameter and lead

Lead (mm) \ Screw shaft diameter (mm)	5	10	12	16	20
32	B149	B149			
40		B151	B151	B153	B153
45		B155			
50		B155	B155		

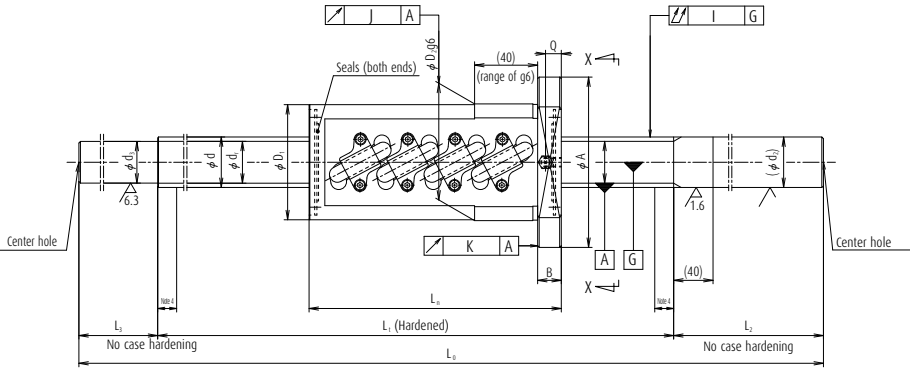


Reference No.	Screw shaft dia. d	Lead l	Ball dia. D _w	Ball circle dia. d _m	Root dia. d _r	Effective balls turns	Basic load rating (N)		Preload (N)	Dynamic friction torque, median (N·cm)	Ball nut dimensions							
							Dynamic C _a	Static C _{0a}			Diamete		Flange			Overall length		
						Turns × Circuits					D ₁	D ₂	A	G	H	B	L _n	W
						HSS3205N1D0650	32	5			3.175	32.5	29.2	2.5×2	21 800	56 000	920	17.0
HSS3205N1D0950	32	5	3.175	32.5	29.2	2.5×2	21 800	56 000	920	17.0	57	58	85	32	42	13	89	71
HSS3205N1D1250	32	5	3.175	32.5	29.2	2.5×2	21 800	56 000	920	17.0	57	58	85	32	42	13	89	71
HSS3205N1D1550	32	5	3.175	32.5	29.2	2.5×2	21 800	56 000	920	17.0	57	58	85	32	42	13	89	71
HSS3205N1D1850	32	5	3.175	32.5	29.2	2.5×2	21 800	56 000	920	17.0	57	58	85	32	42	13	89	71
HSS3210N1D0850	32	10	6.350	33.0	26.4	2.5×2	54 500	110 000	2 310	59.5	73	74	108	41	53.5	15	160	90
HSS3210N1D1050	32	10	6.350	33.0	26.4	2.5×2	54 500	110 000	2 310	59.5	73	74	108	41	53.5	15	160	90
HSS3210N1D1450	32	10	6.350	33.0	26.4	2.5×2	54 500	110 000	2 310	59.5	73	74	108	41	53.5	15	160	90
HSS3210N1D1850	32	10	6.350	33.0	26.4	2.5×2	54 500	110 000	2 310	59.5	73	74	108	41	53.5	15	160	90
HSS3210N1D2250	32	10	6.350	33.0	26.4	2.5×2	54 500	110 000	2 310	59.5	73	74	108	41	53.5	15	160	90

- Notes**
1. Service temperature range is 0 to 60°C.
 2. Use of NSK support unit is recommended. See page B411 for details.
 3. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
 4. Imperfect hardened areas for one lead exists on both ends of a screw. Exercise care when stroke setting.
 5. Permissible rotational speed: Calculated values obtained from the critical speed between the threaded length and NSK's recommended shaft end design. See page B27.

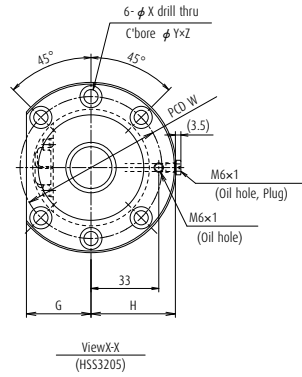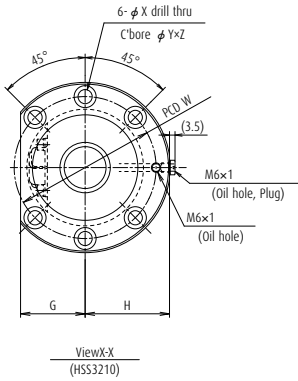


Unit: mm

Bolt hole				Screw shaft dimension						Lead accuracy			Run-out			Mass	Permissible rotational speed (min ⁻¹)		Internal spatial volume of nut (cm ³)	Standard volume of grease replenishing (cm ³)
				Oil hole	Threaded length	Shaft end right	Shaft end left	Overall length	Travel compensation	Deviation	Variation	Shaft straightness	Radial run-out	Installation	Fixed-Free support		Fixed-Fixed support			
X	Y	Z	Q	L _n	d ₂	L ₂	d ₃	L ₃	L ₀	T	e _p	U _u	I	J	K	(kg)				
6.6	11	6.5	8	400	32	200	29.2	50	650	-0.010	0.025	0.020	0.055	0.019	0.013	5.2	5 000	5 000	10	5
6.6	11	6.5	8	600	32	250	29.2	100	950	-0.014	0.030	0.023	0.065	0.019	0.013	7.0	5 000	5 000	10	5
6.6	11	6.5	8	900	32	250	29.2	100	1250	-0.022	0.040	0.027	0.080	0.019	0.013	8.7	5 000	5 000	10	5
6.6	11	6.5	8	1150	32	300	29.2	100	1550	-0.028	0.046	0.030	0.100	0.019	0.013	10.5	3 500	4 700	10	5
6.6	11	6.5	8	1450	32	300	29.2	100	1850	-0.035	0.054	0.035	0.130	0.019	0.013	12.2	2 200	2 900	10	5
9	14	8.5	10	500	32	250	26.4	100	850	-0.012	0.027	0.020	0.065	0.019	0.013	8.9	5 000	5 000	43	22
9	14	8.5	10	700	32	250	26.4	100	1050	-0.017	0.035	0.025	0.080	0.019	0.013	10.0	5 000	5 000	43	22
9	14	8.5	10	1 050	32	300	26.4	100	1450	-0.025	0.046	0.030	0.100	0.019	0.013	12.2	4 100	5 000	43	22
9	14	8.5	10	1 450	32	300	26.4	100	1850	-0.035	0.054	0.035	0.130	0.019	0.013	14.3	2 100	2 800	43	22
9	14	8.5	10	1 850	32	300	26.4	100	2250	-0.045	0.065	0.040	0.170	0.019	0.013	16.5	1 200	1 700	43	22

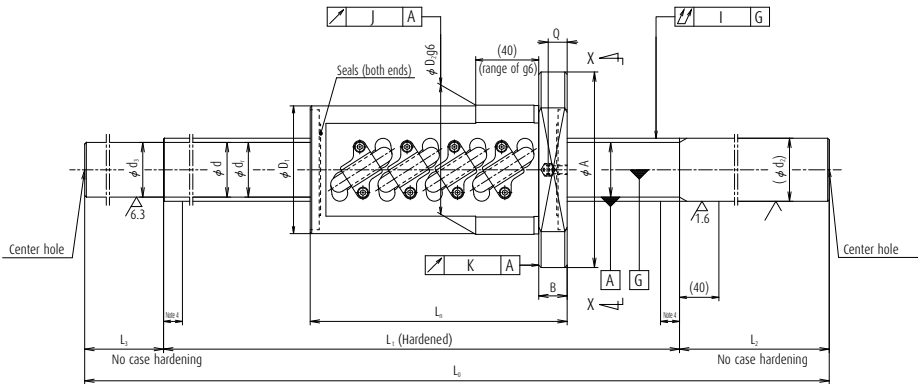


Reference No.	Screw shaft dia. d	Lead I	Ball dia. D _w	Ball circle dia. d _m	Root dia. d _r	Effective balls turns × Circuits	Basic load rating (N)		Preload (N)	Dynamic friction torque, median (N·cm)	Ball nut dimensions							
							Dynamic C _a	Static C _{0a}			Diamete		Flange				Overall length	
											D ₁	D ₂	A	G	H	B	L _n	W
HSS4010N1D0950	40	10	6.350	41.0	34.4	2.5×2	61 200	137 000	2 600	74.5	81	82	124	47	61.5	18	163	102
HSS4010N1D1450	40	10	6.350	41.0	34.4	2.5×2	61 200	137 000	2 600	74.5	81	82	124	47	61.5	18	163	102
HSS4010N1D2100	40	10	6.350	41.0	34.4	2.5×2	61 200	137 000	2 600	74.5	81	82	124	47	61.5	18	163	102
HSS4010N1D2900	40	10	6.350	41.0	34.4	2.5×2	61 200	137 000	2 600	74.5	81	82	124	47	61.5	18	163	102
HSS4012N1D1450	40	12	7.144	41.5	34.1	2.5×2	71 700	154 000	3 050	96.0	85	86	128	48	61.5	18	187	106
HSS4012N1D2100	40	12	7.144	41.5	34.1	2.5×2	71 700	154 000	3 050	96.0	85	86	128	48	63.5	18	187	106
HSS4012N1D2900	40	12	7.144	41.5	34.1	2.5×2	71 700	154 000	3 050	96.0	85	86	128	48	63.5	18	187	106

- Notes**
1. Service temperature range is 0 to 60°C.
 2. Use of NSK support unit is recommended. See page B411 for details.
 3. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
 4. Imperfect hardened areas for one lead exists on both ends of a screw. Exercise care when stroke setting.
 5. Permissible rotational speed: Calculated values obtained from the critical speed between the threaded length and NSK's recommended shaft end design. See page B27.

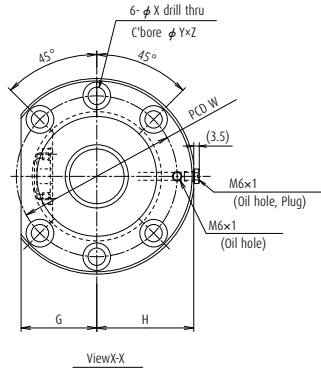


Unit: mm

Bolt hole				Screw shaft dimension							Lead accuracy			Run-out			Mass	Permissible rotational speed (min ⁻¹)		Internal spatial volume of nut (cm ³)	Standard volume of grease replenishing (cm ³)
				Oil hole	Threaded length	Shaft end right			Shaft end left			Overall length	Travel compensation	Deviation	Variation	Shaft straightness		Radial run-out			
X	Y	Z	Q	L _n	d ₂	L ₂	d ₃	L ₃	L ₀	T	e _p	v _u	I	J	K	(kg)	Fixed-Free support	Fixed-Fixed support			
11	17.5	11	12	600	40	250	34.4	100	950	-0.014	0.030	0.023	0.050	0.025	0.015	13.5	4 000	4 000	52	26	
11	17.5	11	12	1 050	40	300	34.4	100	1 450	-0.025	0.046	0.030	0.070	0.025	0.015	17.9	4 000	4 000	52	26	
11	17.5	11	12	1 600	40	350	34.4	150	2 100	-0.039	0.054	0.035	0.110	0.025	0.015	23.5	2 200	3 000	52	26	
11	17.5	11	12	2 400	40	350	34.4	150	2 900	-0.058	0.077	0.046	0.140	0.025	0.015	30.5	900	1 300	52	26	
11	17.5	11	12	1 050	40	300	34.1	100	1 450	-0.025	0.046	0.030	0.070	0.025	0.015	19.1	4 000	4 000	67	34	
11	17.5	11	12	1 600	40	350	34.1	150	2 100	-0.039	0.054	0.035	0.110	0.025	0.015	24.8	2 200	3 000	67	34	
11	17.5	11	12	2 400	40	350	34.1	150	2 900	-0.058	0.077	0.046	0.140	0.025	0.015	31.8	900	1 300	67	34	

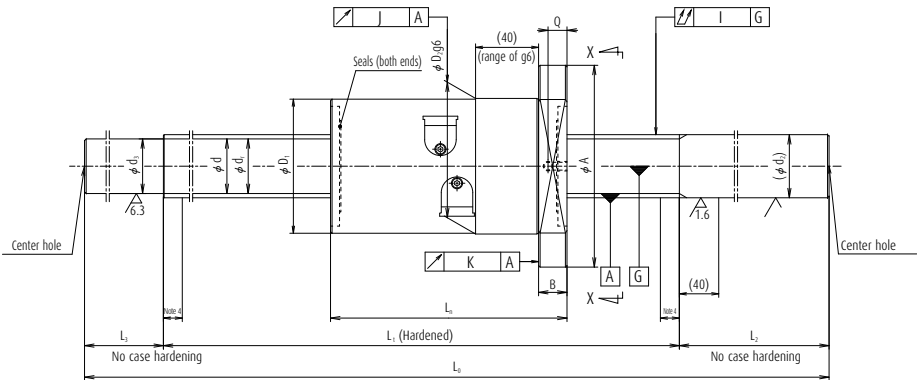


Reference No.	Screw shaft dia. d	Lead l	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective balls turns Turns × Circuits	Basic load rating (N)		Preload (N)	Dynamic friction torque, median (N·cm)	Ball nut dimensions							
							Dynamic C_a	Static C_{0a}			Diamete		Flange				Overall length	
											D_1	D_2	A	G	H	B	L_n	W
HSS4016N1D1450	40	16	7.144	41.5	34.1	3.7×1	66 900	131 000	2 850	104.0	85	86	128	48	63.5	18	160	106
HSS4016N1D2100	40	16	7.144	41.5	34.1	3.7×1	66 900	131 000	2 850	104.0	85	86	128	48	63.5	18	160	106
HSS4016N1D2900	40	16	7.144	41.5	34.1	3.7×1	66 900	131 000	2 850	104.0	85	86	128	48	63.5	18	160	106
HSS4020N1D1450	40	20	7.144	41.5	34.1	3.7×1	66 500	131 000	2 850	116.5	85	86	128	48	63.5	18	192	106
HSS4020N1D2100	40	20	7.144	41.5	34.1	3.7×1	66 500	131 000	2 850	116.5	85	86	128	48	63.5	18	192	106
HSS4020N1D2900	40	20	7.144	41.5	34.1	3.7×1	66 500	131 000	2 850	116.5	85	86	128	48	63.5	18	192	106

- Notes**
1. Service temperature range is 0 to 60°C.
 2. Use of NSK support unit is recommended. See page B411 for details.
 3. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
 4. Imperfect hardened areas for one lead exists on both ends of a screw. Exercise care when stroke setting.
 5. Permissible rotational speed: Calculated values obtained from the critical speed between the threaded length and NSK's recommended shaft end design. See page B27.

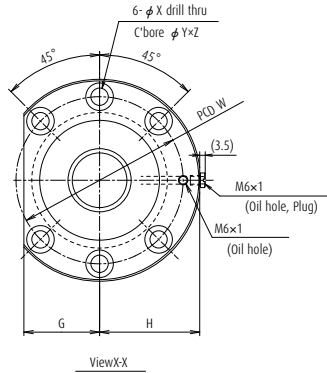


Unit: mm

				Screw shaft dimension						Lead accuracy			Run-out			Mass	Permissible rotational speed (min ⁻¹)		Internal spatial volume of nut (cm ³)	Standard volume of grease replenishing (cm ³)
Bolt hole		Oil hole	Threaded length	Shaft end right		Shaft end left		Overall length	Travel compensation	Deviation	Variation	Shaft straightness	Radial run-out		Installation		Fixed-Free support	Fixed-Fixed support		
X	Y	Z	Q	L _n	d ₂	L ₂	d ₃	L ₃	L ₀	T	e _p	υ _u	I	J		K			(kg)	
11	17.5	11	11	1 050	40	300	34.1	100	1 450	-0.025	0.046	0.030	0.070	0.025	0.015	19.2	4 000	4 000	40	20
11	17.5	11	11	1 600	40	350	34.1	150	2 100	-0.039	0.054	0.035	0.110	0.025	0.015	25.0	2 200	3 000	40	20
11	17.5	11	11	2 400	40	350	34.1	150	2 900	-0.058	0.077	0.046	0.140	0.025	0.015	32.2	900	1 300	40	20
11	17.5	11	11	1 050	40	300	34.1	100	1 450	-0.025	0.046	0.030	0.070	0.025	0.015	20.3	4 000	4 000	57	24
11	17.5	11	11	1 600	40	350	34.1	150	2 100	-0.039	0.054	0.035	0.110	0.025	0.015	26.8	2 200	3 000	57	24
11	17.5	11	11	2 400	40	350	34.1	150	2 900	-0.058	0.077	0.046	0.140	0.025	0.015	33.5	900	1 300	57	24

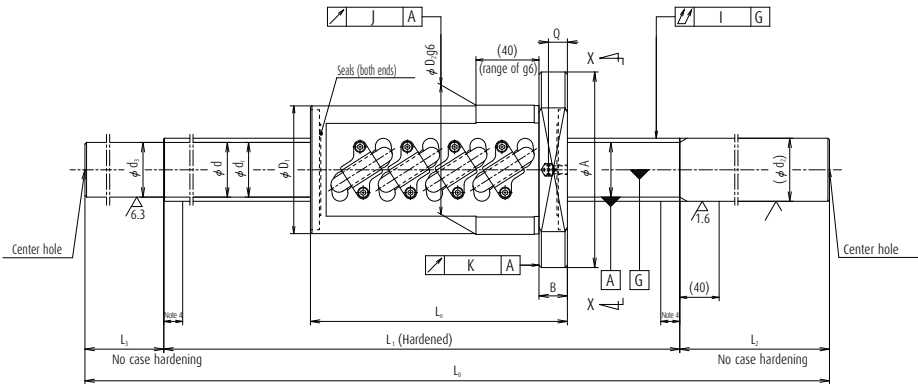

Reference No.	Screw shaft dia. d	Lead I	Ball dia. D _w	Ball circle dia. d _m	Root dia. d _r	Effective balls turns × Circuits	Basic load rating (N)		Preload (N)	Dynamic friction torque, median (N·cm)	Ball nut dimensions							
							Dynamic C _a	Static C _{0a}			Diamete		Flange				Overall length	
											D ₁	D ₂	A	G	H	B	L _n	W
HSS4510N1D1450	45	10	6.350	46.0	39.4	2.5×2	65 800	157 000	2 710	82.0	87	88	132	50	65.5	18	163	110
HSS4510N1D2100	45	10	6.350	46.0	39.4	2.5×2	65 800	157 000	2 710	82.0	87	88	132	50	65.5	18	163	110
HSS4510N1D2900	45	10	6.350	46.0	39.4	2.5×2	65 800	157 000	2 710	82.0	87	88	132	50	65.5	18	163	110
HSS5010N1D1450	50	10	6.350	51.0	44.4	2.5×2	68 100	174 000	2 880	92.0	92	93	135	51	67	18	163	113
HSS5010N1D1850	50	10	6.350	51.0	44.4	2.5×2	68 100	174 000	2 880	92.0	92	93	135	51	67	18	163	113
HSS5010N1D2350	50	10	6.350	51.0	44.4	2.5×2	68 100	174 000	2 880	92.0	92	93	135	51	67	18	163	113
HSS5010N1D2900	50	10	6.350	51.0	44.4	2.5×2	68 100	174 000	2 880	92.0	92	93	135	51	67	18	163	113
HSS5012N1D1450	50	12	7.938	51.5	43.2	2.5×2	91 500	218 000	3 880	136.5	99	100	146	55	72.5	22	193	122
HSS5012N1D2100	50	12	7.938	51.5	43.2	2.5×2	91 500	218 000	3 880	136.5	99	100	146	55	72.5	22	193	122
HSS5012N1D2900	50	12	7.938	51.5	43.2	2.5×2	91 500	218 000	3 880	136.5	99	100	146	55	72.5	22	193	122

- Notes**
1. Service temperature range is 0 to 60°C.
 2. Use of NSK support unit is recommended. See page B411 for details.
 3. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
 4. Imperfect hardened areas for one lead exists on both ends of a screw. Exercise care when stroke setting.
 5. Permissible rotational speed: Calculated values obtained from the critical speed between the threaded length and NSK's recommended shaft end design. See page B27.

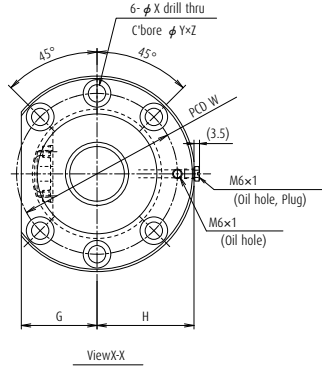

Unit: mm

Bolt hole				Screw shaft dimension							Lead accuracy			Run-out			Mass	Permissible rotational speed (min ⁻¹)		Internal spatial volume of nut (cm ³)	Standard volume of grease replenishing (cm ³)
				Oil hole	Threaded length	Shaft end right		Shaft end left		Overall length	Travel compensation	Deviation	Variation	Shaft straightness	Radial run-out			Installation			
X	Y	Z	Q	L _n	d ₂	L ₂	d ₃	L ₃	L ₀	T	e _p	v _u	I	J	K	(kg)	Fixed-Free support	Fixed-Fixed support			
11	17.5	11	12	1 050	45	300	39.4	100	1 450	-0.025	0.046	0.030	0.070	0.025	0.015	22.0	3 500	3 500	58	29	
11	17.5	11	12	1 600	45	350	39.4	150	2 100	-0.039	0.054	0.035	0.110	0.025	0.015	29.2	2 500	3 400	58	29	
11	17.5	11	12	2 400	45	350	39.4	150	2 900	-0.058	0.077	0.046	0.140	0.025	0.015	38.2	1 100	1 500	58	29	
11	17.5	11	12	1 050	50	300	44.4	100	1 450	-0.025	0.046	0.030	0.070	0.025	0.015	26.3	3 200	3 200	64	32	
11	17.5	11	12	1 450	50	300	44.4	100	1 850	-0.035	0.054	0.035	0.090	0.025	0.015	31.9	3 200	3 200	64	32	
11	17.5	11	12	1 850	50	350	44.4	150	2 350	-0.045	0.065	0.040	0.110	0.025	0.015	38.8	2 100	2 900	64	32	
11	17.5	11	12	2 400	50	350	44.4	150	2 900	-0.058	0.077	0.046	0.140	0.025	0.015	46.5	1 200	1 700	64	32	
14	20	13	12	1 050	50	300	43.2	100	1 450	-0.025	0.046	0.030	0.070	0.025	0.015	28.5	3 200	3 200	99	50	
14	20	13	12	1 600	50	350	43.2	150	2 100	-0.039	0.035	0.035	0.110	0.025	0.015	37.3	2 800	3 200	99	50	
14	20	13	12	2 400	50	350	43.2	150	2 900	-0.058	0.077	0.046	0.140	0.025	0.015	48.2	1 200	1 600	99	50	

B-3-1.3 Finished Shaft End MA type, FA type, SA type

1. Order of the dimension tables

The tables begin with the smallest shaft diameter of each MA, FA, and SA type ball screws, and proceeds to the larger sizes. If ball screws have the same shaft diameter, those with smaller leads appear first. Page numbers of shaft diameter and lead combinations are shown in **Table 1**.

2. Dimension tables

Dimension tables show shapes/sizes as well as specification factors of each shaft diameter/lead combination. Tables also contain data as follows:

> Stroke

Nominal stroke: A reference for your use.

Maximum stroke: The limit stroke that the nut can move.
The figure is obtained by subtracting the nut length from the effective threaded length (L_1).

> Lead accuracy

Lead accuracy is either C3 or C5 grades.

T: Travel compensation

e_p : Tolerance on specified travel

ψ_U : Travel variation

See "Technical Description: Lead Accuracy" (page B37) for the details of the codes.

Table 1 Combinations of screw shaft diameter and lead

Screw shaft diameter (mm) \ Lead (mm)	Lead (mm)							
	1	1.5	2	2.5	4	5	6	
4	B159							
6	B161							
8	B163	B165	B167					
10			B169	B171	B181			
12			B173	B175		B183		
14						B187		
15								
16			B177	B179		B195		
20					B217	B219		
25					B221	B223	B225	
28						B229 B239	B233 B235	
32						B237 B239	B241 B243	
36								
40						B255		
45								
50								

► Permissible rotational speed

- d · n: Limited by the relative peripheral speed between the screw shaft and the nut.
- Critical speed: Limited by the natural frequency of a ball screw shaft. Critical speed depends on the supporting condition of screw shaft.


The lower of the two criteria, the d-n and critical speed, will determine the overall permissible rotational speed of the ball screw. For details, see "Technical Description: Permissible Rotational Speed" (page B47).

3. Other

The seal of the ball screw, ball recirculating deflector, and end cap are made of synthetic resin. Consult NSK when using our ball screws under extreme environments or in special environments, or if using special lubricant or oil. For special environments, see pages B70 and D2. For lubricants, see pages B67 and D13.

Note: For details of standard stock products, contact NSK.

	8	10	12	16	20	25	32	40	50
		B185							
B189		B191			B193				
				B197			B199		
		B201			B203			B205	
		B227			B207	B209			B211
						B213			
B245		B247 B249					B215		
		B251 B253							
B257		B259 B261	B263 B265						
		B267							
		B269 B271							

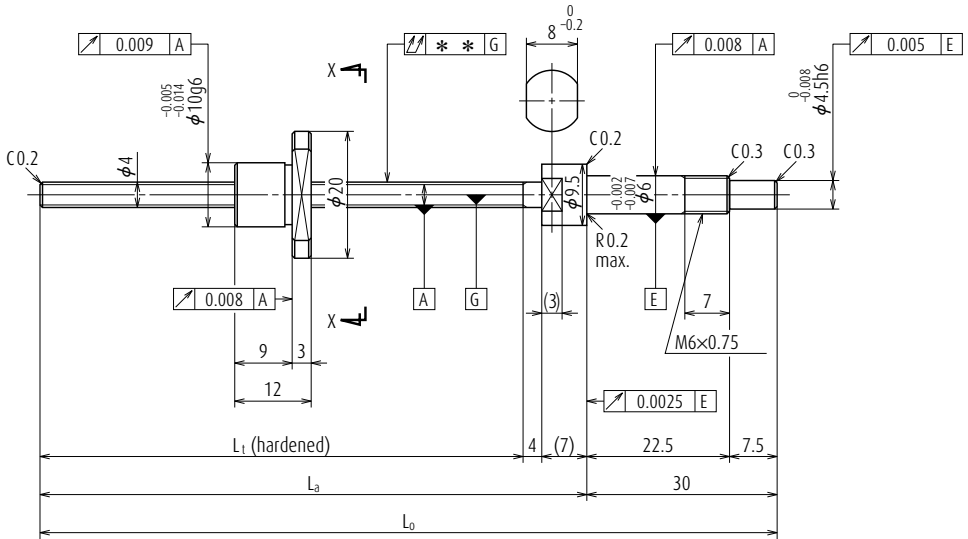


Ball screw No.		Stroke	
Preloaded (MPFD)	Precise clearance (MSFD)	Nominal	Maximum
W0400MA-1PY-C3Z1	W0400MA-2Y-C3T1	20	32
W0400MA-3PY-C3Z1	W0400MA-4Y-C3T1	40	52
W0401MA-1PY-C3Z1	W0401MA-2Y-C3T1	70	82

Notes

1. We recommend NSK support unit. See page B411 for details.
2. Use of NSK grease PS2 is recommended. Apply to screw shaft surface when replenishing. See page D16 for details.
3. Ball nut does not have seal.
4. Contact NSK if the permissible rotational speed is to be exceeded.

Nut models: MPFD, MSFD

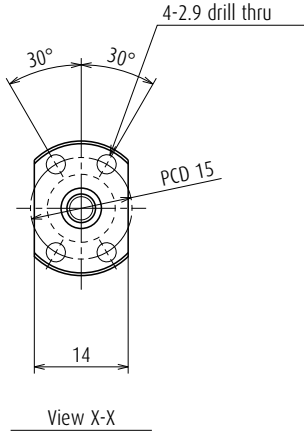

Screw shaft ϕ 4

Lead 1


Unit: mm


Ball screw specifications		
Product classification	Preloaded	Precise clearance
Shaft dia. \times Lead / Direction of turn	4 \times 1 / Right	
Preload / Ball recirculation	P-preload / Deflector (bridge type)	
Ball dia. / Ball circle dia.	0.800 / 4.2	
Screw shaft root diameter	3.2	
Effective turns of balls	1 \times 2	
Accuracy grade / Preload / Axial play	C3 / Z	C3 / T
Basic load rating (N)	Dynamic C_a	370
	Static C_{0a}	370
Axial play	0	0.005 or less
Preload (N)	19.6	-
Dynamic friction torque, (N-cm)	1.0 or less	0.3 or less
Spacer ball	None	
Factory-packed grease	NSK grease PS2	

Recommended support unit

For drive side (Fixed)
WBK06-01A (square)
WBK06-11 (round)

Unit: mm

Screw shaft length			Lead accuracy			Shaft run-out ** 	Mass (kg)	Permissible rotational speed N (min ⁻¹)
L_t	L_a	L_o	T	e_p	v_u			Supporting condition
								Fixed - Free
44	55	85	0	0.008	0.008	0.015	0.024	3 000
64	75	105	0	0.008	0.008	0.020	0.026	3 000
94	105	135	0	0.008	0.008	0.025	0.028	3 000

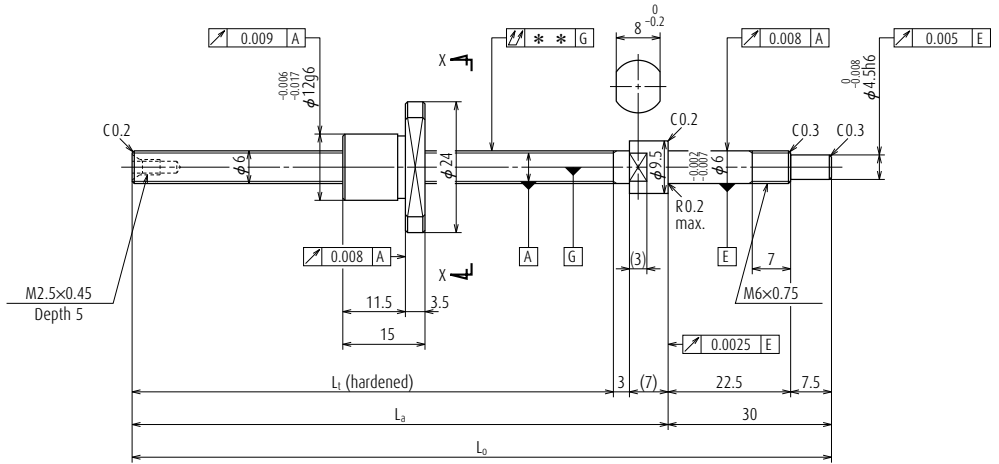


Ball screw No.		Stroke	
Preloaded (MPFD)	Precise clearance (MSFD)	Nominal	Maximum
W0600MA-1PY-C3Z1	W0600MA-2Y-C3T1	40	50
W0601MA-1PY-C3Z1	W0601MA-2Y-C3T1	70	80
W0601MA-3PY-C3Z1	W0601MA-4Y-C3T1	100	110

Notes

1. We recommend NSK support unit. See page B411 for details.
2. Use of NSK grease PS2 is recommended. Apply to screw shaft surface when replenishing. See page D16 for details.
3. Ball nut does not have seal.
4. Contact NSK if the permissible rotational speed is to be exceeded.

Nut models: MPFD, MSFD

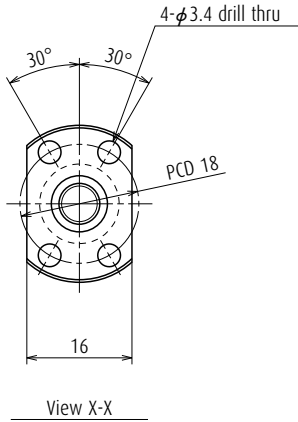

Screw shaft ϕ 6

Lead 1


Unit: mm


Ball screw specifications		
Product classification	Preloaded	Precise clearance
Shaft dia. \times Lead / Direction of turn	6 \times 1 / Right	
Preload / Ball recirculation	P-preload / Deflector (bridge)	
Ball dia. / Ball circle dia.	0.800 / 6.2	
Screw shaft root diameter	5.2	
Effective turns of balls	1 \times 3	
Accuracy grade / Preload / Axial play	C3 / Z	C3 / T
Basic load rating (N)	Dynamic C_a	680
	Static C_{0a}	920
Axial play	0	0.005 or less
Preload (N)	24.5	-
Dynamic friction torque, (N-cm)	1.3 or less	0.3 or less
Spacer ball	None	
Factory-packed grease	NSK grease PS2	

Recommended support unit

For drive side (Fixed)
WBK06-01A (square)
WBK06-11 (round)

Unit: mm

Screw shaft length			Lead accuracy			Shaft run-out ** 	Mass (kg)	Permissible rotational speed N (min ⁻¹)
L_t	L_a	L_o	T	e_p	v_u			Supporting condition
								Fixed - Free
65	75	105	0	0.008	0.008	0.015	0.039	3 000
95	105	135	0	0.008	0.008	0.020	0.045	3 000
125	135	165	0	0.010	0.008	0.025	0.051	3 000

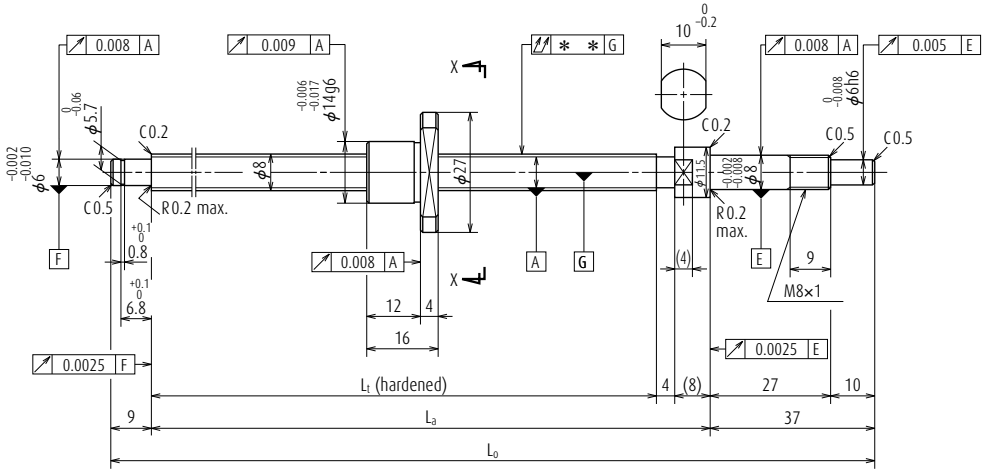


Ball screw No.		Stroke	
Preloaded (MPFD)	Precise clearance (MSFD)	Nominal	Maximum
W0800MA-1PY-C3Z1	W0800MA-2Y-C3T1	40	59
W0801MA-1PY-C3Z1	W0801MA-2Y-C3T1	70	89
W0801MA-3PY-C3Z1	W0801MA-4Y-C3T1	100	119
W0802MA-1PY-C3Z1	W0802MA-2Y-C3T1	150	169

Notes

1. We recommend NSK support unit. See page B411 for details.
2. Use of NSK grease PS2 is recommended. Apply to screw shaft surface when replenishing. See page D16 for details.
3. Ball nut does not have seal.
4. Contact NSK if the permissible rotational speed is to be exceeded.

Nut models: MPFD, MSFD

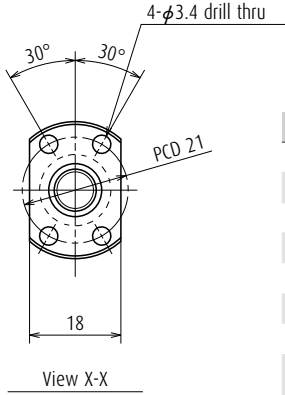

Screw shaft ϕ 8

Lead 1


Unit: mm


Ball screw specifications		
Product classification	Preloaded	Precise clearance
Shaft dia. \times Lead / Direction of turn	8 \times 1 / Right	
Preload / Ball recirculation	P-preload / Deflector (bridge)	
Ball dia. / Ball circle dia.	0.800 / 8.2	
Screw shaft root diameter	7.2	
Effective turns of balls	1 \times 3	
Accuracy grade / Preload / Axial play	C3 / Z	C3 / T
Basic load rating (N)	Dynamic C_a	790
	Static C_{0a}	1 290
Axial play	0	0.005 or less
Preload (N)	29.4	-
Dynamic friction torque, (N-cm)	1.8 or less	0.5 or less
Spacer ball	None	
Factory-packed grease	NSK grease PS2	

Recommended support unit

For drive side (Fixed)	For opposite to drive side (Simple)
WBK08-01A (square)	WBK08S-01 (square)
WBK08-11 (round)	

Unit: mm

Screw shaft length			Lead accuracy			Shaft run-out ** 	Mass (kg)	Permissible rotational speed N (min ⁻¹)
L_t	L_a	L_o	T	e_p	v_u			Supporting condition
								Fixed - Simple support
80	92	138	0	0.008	0.008	0.025	0.073	3 000
110	122	168	0	0.010	0.008	0.030	0.084	3 000
140	152	198	0	0.010	0.008	0.030	0.095	3 000
190	202	248	0	0.010	0.008	0.035	0.11	3 000

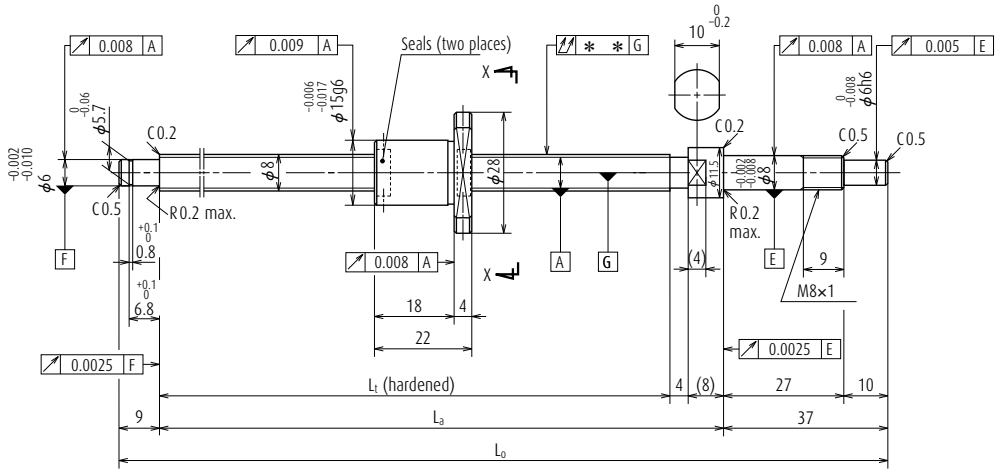


Ball screw No.		Stroke	
Preloaded (MPFD)	Precise clearance (MSFD)	Nominal	Maximum
W0800MA-3PY-C3Z1.5	W0800MA-4Y-C3T1.5	40	53
W0801MA-5PY-C3Z1.5	W0801MA-6Y-C3T1.5	70	83
W0801MA-7PY-C3Z1.5	W0801MA-8Y-C3T1.5	100	113
W0802MA-3PY-C3Z1.5	W0802MA-4Y-C3T1.5	150	163

Notes

1. We recommend NSK support unit. See page B411 for details.
2. Use of NSK grease PS2 is recommended. Apply to screw shaft surface when replenishing. See page D16 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.

Nut models: MPFD, MSFD

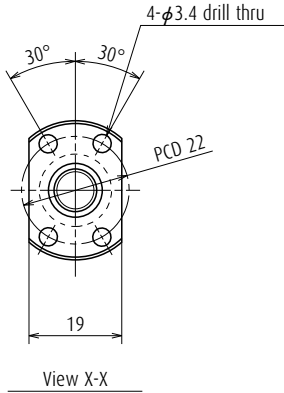

Screw shaft ϕ 8
Lead 1.5

Unit: mm


Ball screw specifications		
Product classification	Preloaded	Precise clearance
Shaft dia. \times Lead / Direction of turn	8 \times 1.5 / Right	
Preload / Ball recirculation	P-preload / Deflector (bridge)	
Ball dia. / Ball circle dia.	1.000 / 8.3	
Screw shaft root diameter	7.0	
Effective turns of balls	1 \times 3	
Accuracy grade / Preload / Axial play	C3 / Z	C3 / T
Basic load rating (N)	Dynamic C_a	1 270
	Static C_{0a}	1 970
Axial play	0	0.005 or less
Preload (N)	49.0	-
Dynamic friction torque, (N-cm)	2.0 or less	0.5 or less
Spacer ball	None	
Factory-packed grease	NSK grease PS2	

Recommended support unit

For drive side (Fixed)	For opposite to drive side (Simple)
WBK08-01A (square)	WBK08S-01 (square)
WBK08-11 (round)	

Unit: mm

Screw shaft length			Lead accuracy			Shaft run-out ** ∇	Mass (kg)	Permissible rotational speed N (min ⁻¹)
L_t	L_a	L_o	T	e_p	v_u			Supporting condition
								Fixed - Simple support
80	92	138	0	0.008	0.008	0.025	0.082	3 000
110	122	168	0	0.010	0.008	0.030	0.093	3 000
140	152	198	0	0.010	0.008	0.030	0.10	3 000
190	202	248	0	0.010	0.008	0.035	0.12	3 000

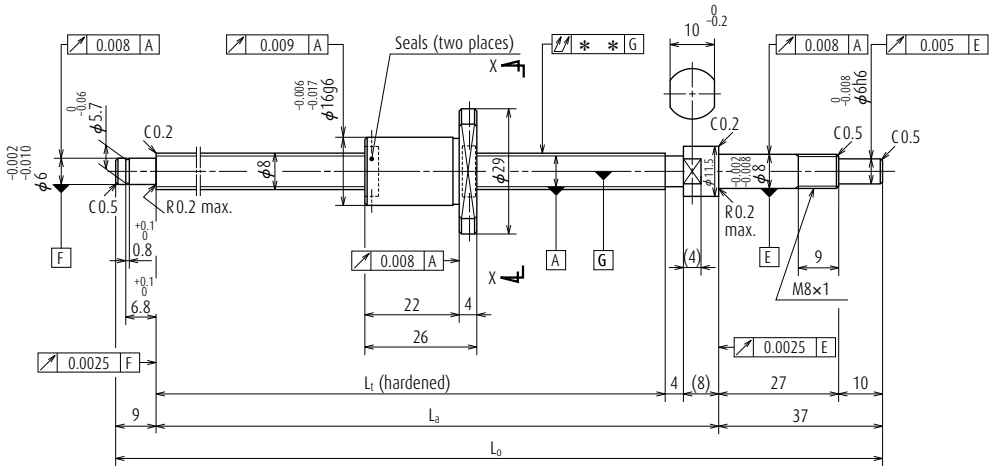


Ball screw No.		Stroke	
Preloaded (MPFD)	Precise clearance (MSFD)	Nominal	Maximum
W0800MA-5PY-C3Z2	W0800MA-6Y-C3T2	40	49
W0801MA-9PY-C3Z2	W0801MA-10Y-C3T2	70	79
W0801MA-11PY-C3Z2	W0801MA-12Y-C3T2	100	109
W0802MA-5PY-C3Z2	W0802MA-6Y-C3T2	150	159

Notes

1. We recommend NSK support unit. See page B411 for details.
2. Use of NSK grease PS2 is recommended. Apply to screw shaft surface when replenishing. See page D16 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.

Nut models: MPFD, MSFD

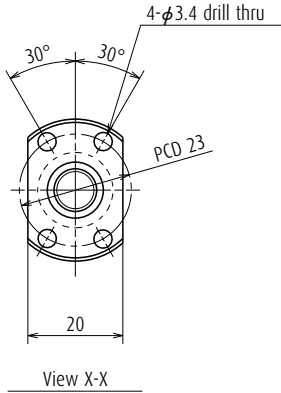

Screw shaft ϕ 8

Lead 2


Unit: mm


Ball screw specifications		
Product classification	Preloaded	Precise clearance
Shaft dia. \times Lead / Direction of turn	8 \times 2 / Right	
Preload / Ball recirculation	P-preload / Deflector (bridge)	
Ball dia. / Ball circle dia.	1.200 / 8.3	
Screw shaft root diameter	6.9	
Effective turns of balls	1 \times 3	
Accuracy grade / Preload / Axial play	C3 / Z	C3 / T
Basic load rating (N)	Dynamic C_a	1 560
	Static C_{0a}	2 200
Axial play	0	0.005 or less
Preload (N)	49.0	-
Dynamic friction torque, (N-cm)	2.0 or less	0.5 or less
Spacer ball	None	
Factory-packed grease	NSK grease PS2	

Recommended support unit

For drive side (Fixed)	For opposite to drive side (Simple)
WBK08-01A (square)	WBK08S-01 (square)
WBK08-11 (round)	

Unit: mm


Screw shaft length			Lead accuracy			Shaft run-out ** 	Mass (kg)	Permissible rotational speed N (min ⁻¹)
L_t	L_a	L_o	T	e_p	v_u			Supporting condition
								Fixed - Simple support
80	92	138	0	0.008	0.008	0.025	0.09	3 000
110	122	168	0	0.010	0.008	0.030	0.10	3 000
140	152	198	0	0.010	0.008	0.030	0.11	3 000
190	202	248	0	0.010	0.008	0.035	0.13	3 000

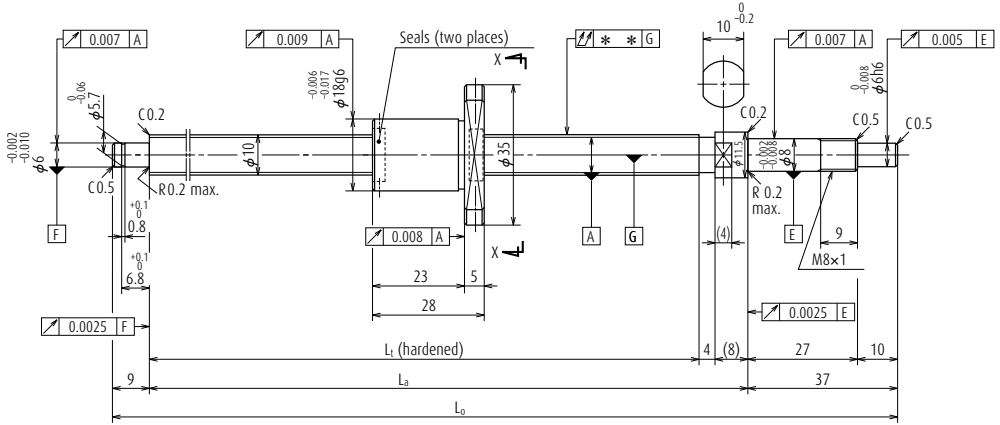

Ball screw No.		Stroke	
Preloaded (MPFD)	Precise clearance (MSFD)	Nominal	Maximum
W1001MA-1PY-C3Z2	W1001MA-2Y-C3T2	50	67
W1001MA-3PY-C3Z2	W1001MA-4Y-C3T2	100	117
W1002MA-1PY-C3Z2	W1002MA-2Y-C3T2	150	167
W1002MA-3PY-C3Z2	W1002MA-4Y-C3T2	200	217

- Notes**
1. We recommend NSK support unit. See page B411 for details.
 2. Use of NSK grease PS2 is recommended. Apply to screw shaft surface when replenishing. See page D16 for details.
 3. Contact NSK if the permissible rotational speed is to be exceeded.

Nut models: MPFD, MSFD

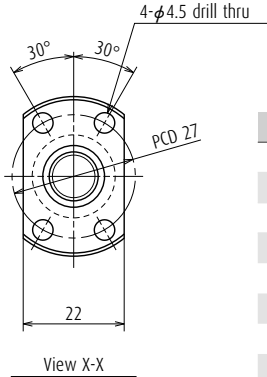

Screw shaft ϕ 10

Lead 2

Unit: mm


Ball screw specifications		
Product classification	Preloaded	Precise clearance
Shaft dia. × Lead / Direction of turn	10 × 2 / Right	
Preload / Ball recirculation	P-preload / Deflector (bridge)	
Ball dia. / Ball circle dia.	1.200 / 10.3	
Screw shaft root diameter	8.9	
Effective turns of balls	1 × 3	
Accuracy grade / Preload / Axial play	C3 / Z	C3 / T
Basic load rating (N)	Dynamic C_a	1 800
	Static C_{0a}	2 970
Axial play	0	0.005 or less
Preload (N)	58.8	-
Dynamic friction torque, (N-cm)	0.1 - 2.4	0.5 or less
Spacer ball	None	
Factory-packed grease	NSK grease PS2	

Recommended support unit

For drive side (Fixed)	For opposite to drive side (Simple)
WBK08-01A (square)	WBK08S-01 (square)
WBK08-11 (round)	

Unit: mm

Screw shaft length			Lead accuracy			Shaft run-out ** ↗	Mass (kg)	Permissible rotational speed N (min ⁻¹)
L_t	L_a	L_o	T	e_p	v_u			Supporting condition
								Fixed - Simple support
100	112	158	0	0.008	0.008	0.020	0.13	3 000
150	162	208	0	0.010	0.008	0.030	0.16	3 000
200	212	258	0	0.010	0.008	0.030	0.19	3 000
250	262	308	0	0.012	0.008	0.035	0.22	3 000

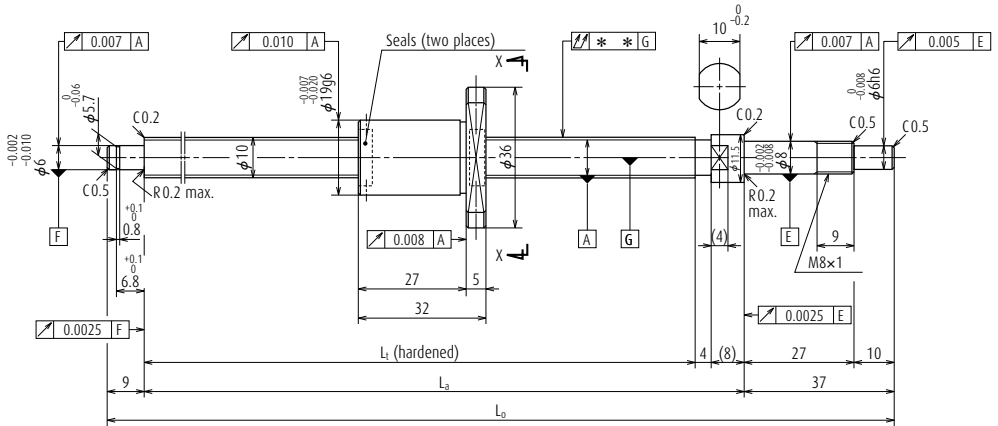


Ball screw No.		Stroke	
Preloaded (MPFD)	Precise clearance (MSFD)	Nominal	Maximum
W1001MA-5PY-C3Z2.5	W1001MA-6Y-C3T2.5	50	63
W1001MA-7PY-C3Z2.5	W1001MA-8Y-C3T2.5	100	113
W1002MA-5PY-C3Z2.5	W1002MA-6Y-C3T2.5	150	163
W1002MA-7PY-C3Z2.5	W1002MA-8Y-C3T2.5	200	213

Notes

1. We recommend NSK support unit. See page B411 for details.
2. Use of NSK grease PS2 is recommended. Apply to screw shaft surface when replenishing. See page D16 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.

Nut models: MPFD, MSFD

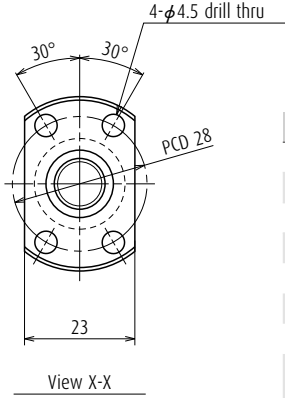

Screw shaft ϕ 10

Lead 2.5

Unit: mm

Ball screw specifications		
Product classification	Preloaded	Precise clearance
Shaft dia. \times Lead / Direction of turn	10 \times 2.5 / Right	
Preload / Ball recirculation	P-preload / Deflector (bridge)	
Ball dia. / Ball circle dia.	1.588 / 10.4	
Screw shaft root diameter	8.6	
Effective turns of balls	1 \times 3	
Accuracy grade / Preload / Axial play	C3 / Z	C3 / T
Basic load rating (N)	Dynamic C_a	2 500
	Static C_{0a}	3 630
Axial play	0	0.005 or less
Preload (N)	98.1	-
Dynamic friction torque, (N-cm)	0.2 - 2.9	0.5 or less
Spacer ball	None	
Factory-packed grease	NSK grease PS2	


Recommended support unit

For drive side (Fixed)	For opposite to drive side (Simple)
WBK08-01A (square)	WBK08S-01 (square)
WBK08-11 (round)	

Unit: mm

Screw shaft length			Lead accuracy			Shaft run-out ** ∇	Mass (kg)	Permissible rotational speed N (min ⁻¹)
L_t	L_a	L_o	T	e_p	v_u			Supporting condition
								Fixed - Simple support
100	112	158	0	0.008	0.008	0.020	0.14	3 000
150	162	208	0	0.010	0.008	0.030	0.17	3 000
200	212	258	0	0.010	0.008	0.030	0.20	3 000
250	262	308	0	0.012	0.008	0.030	0.23	3 000

Nut models: MPFD, MSFD

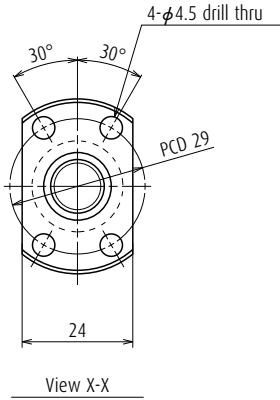

Screw shaft ϕ 12

Lead 2


Unit: mm


Ball screw specifications		
Product classification	Preloaded	Precise clearance
Shaft dia. \times Lead / Direction of turn	12 \times 2 / Right	
Preload / Ball recirculation	P-preload / Deflector (bridge)	
Ball dia. / Ball circle dia.	1.200 / 12.3	
Screw shaft root diameter	10.9	
Effective turns of balls	1 \times 3	
Accuracy grade / Preload / Axial play	C3 / Z	C3 / T
Basic load rating (N)	Dynamic C_a	1 960
	Static C_{0a}	3 620
Axial play	0	0.005 or less
Preload (N)	98.1	-
Dynamic friction torque, (N-cm)	0.4 - 3.4	1.0 or less
Spacer ball	None	
Factory-packed grease	NSK grease PS2	

Recommended support unit

For drive side (Fixed)	For opposite to drive side (Simple)
WBK10-01A (square)	WBK10S-01 (square)
WBK10-11 (round)	

Unit: mm

Screw shaft length			Lead accuracy			Shaft run-out ** 	Mass (kg)	Permissible rotational speed N (min ⁻¹)
L_t	L_a	L_o	T	e_p	v_u			Supporting condition
								Fixed - Simple support
110	125	180	0	0.010	0.008	0.020	0.20	3 000
160	175	230	0	0.010	0.008	0.030	0.24	3 000
210	225	280	0	0.012	0.008	0.030	0.28	3 000
260	275	330	0	0.012	0.008	0.040	0.32	3 000
310	325	380	0	0.012	0.008	0.040	0.36	3 000

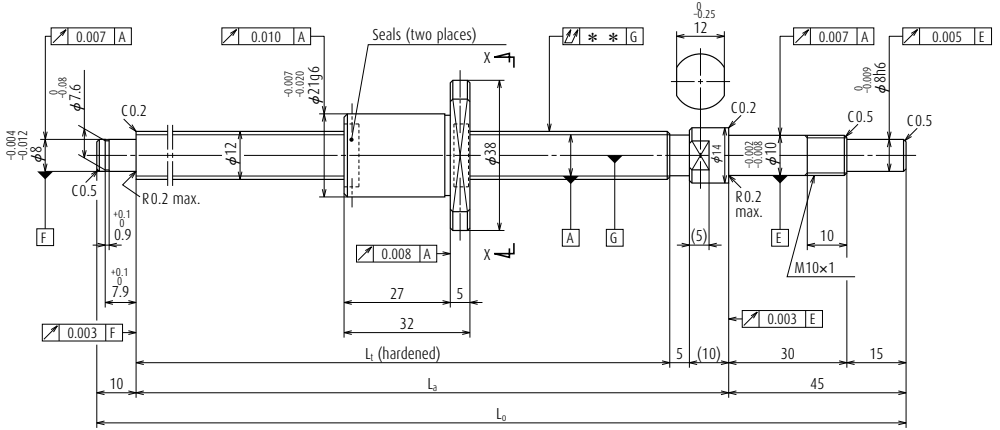


Ball screw No.		Stroke	
Preloaded (MPFD)	Precise clearance (MSFD)	Nominal	Maximum
W1201MA-5PY-C3Z2.5	W1201MA-6Y-C3T2.5	50	71
W1201MA-7PY-C3Z2.5	W1201MA-8Y-C3T2.5	100	121
W1202MA-5PY-C3Z2.5	W1202MA-6Y-C3T2.5	150	171
W1202MA-7PY-C3Z2.5	W1202MA-8Y-C3T2.5	200	221
W1203MA-3PY-C3Z2.5	W1203MA-4Y-C3T2.5	250	271

Notes

1. We recommend NSK support unit. See page B411 for details.
2. Use of NSK grease PS2 is recommended. Apply to screw shaft surface when replenishing. See page D16 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.

Nut models: MPFD, MSFD

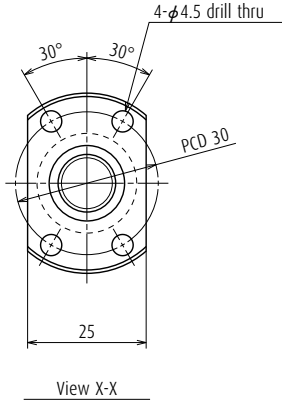

Screw shaft ϕ 12
Lead 2.5

Unit: mm

Ball screw specifications		
Product classification	Preloaded	Precise clearance
Shaft dia. \times Lead / Direction of turn	12 \times 2.5 / Right	
Preload / Ball recirculation	P-preload / Deflector (bridge)	
Ball dia. / Ball circle dia.	1.588 / 12.4	
Screw shaft root diameter	10.6	
Effective turns of balls	1 \times 3	
Accuracy grade / Preload / Axial play	C3 / Z	C3 / T
Basic load rating (N)	Dynamic C_a	2 790
	Static C_{0a}	4 530
Axial play	0	0.005 or less
Preload (N)	98.1	-
Dynamic friction torque, (N-cm)	0.4 - 3.4	1.0 or less
Spacer ball	None	
Factory-packed grease	NSK grease PS2	


Recommended support unit

For drive side (Fixed)	For opposite to drive side (Simple)
WBK10-01A (square)	WBK10S-01 (square)
WBK10-11 (round)	

Unit: mm

Screw shaft length			Lead accuracy			Shaft run-out ** ∇	Mass (kg)	Permissible rotational speed N (min ⁻¹)
L_t	L_a	L_o	T	e_p	v_u			Supporting condition
								Fixed - Simple support
110	125	180	0	0.010	0.008	0.020	0.21	3 000
160	175	230	0	0.010	0.008	0.030	0.25	3 000
210	225	280	0	0.012	0.008	0.030	0.29	3 000
260	275	330	0	0.012	0.008	0.040	0.33	3 000
310	325	380	0	0.012	0.008	0.040	0.37	3 000

Nut models: MPFD, MSFD

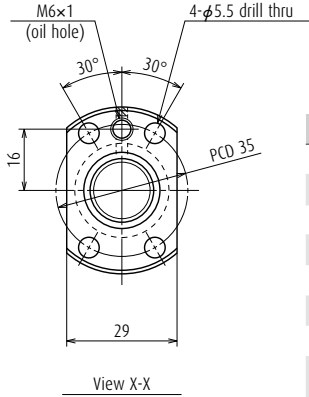

Screw shaft ϕ 16

Lead 2

Unit: mm


Ball screw specifications		
Product classification	Preloaded	Precise clearance
Shaft dia. \times Lead / Direction of turn	16 \times 2 / Right	
Preload / Ball recirculation	P-preload / Deflector (bridge)	
Ball dia. / Ball circle dia.	1.588 / 16.4	
Screw shaft root diameter	14.6	
Effective turns of balls	1 \times 4	
Accuracy grade / Preload / Axial play	C3 / Z	C3 / T
Basic load rating (N)	Dynamic C_a	4 150
	Static C_{0a}	8 450
Axial play	0	0.005 or less
Preload (N)	147	-
Dynamic friction torque, (N-cm)	0.5 - 4.9	1.5 or less
Spacer ball	None	
Factory-packed grease	NSK grease PS2	
Internal spatial volume of nut (cm ³)	1.6	
Standard volume of grease replenishing (cm ³)	0.8	

Recommended support unit

For drive side (Fixed)	For opposite to drive side (Simple)
WBK12-01A (square)	WBK12S-01 (square)
WBK12-11 (round)	

Unit: mm

Screw shaft length			Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min ⁻¹)	
L_t	L_a	L_o	T	e_p	v_u			Supporting condition	
								Fixed - Simple support	Fixed - Fixed
139	154	221	0	0.010	0.008	0.020	0.41	3 000	3 000
189	204	271	0	0.010	0.008	0.030	0.48	3 000	3 000
239	254	321	0	0.012	0.008	0.030	0.55	3 000	3 000
289	304	371	0	0.012	0.008	0.030	0.62	3 000	3 000
389	404	471	0	0.013	0.010	0.035	0.77	3 000	3 000

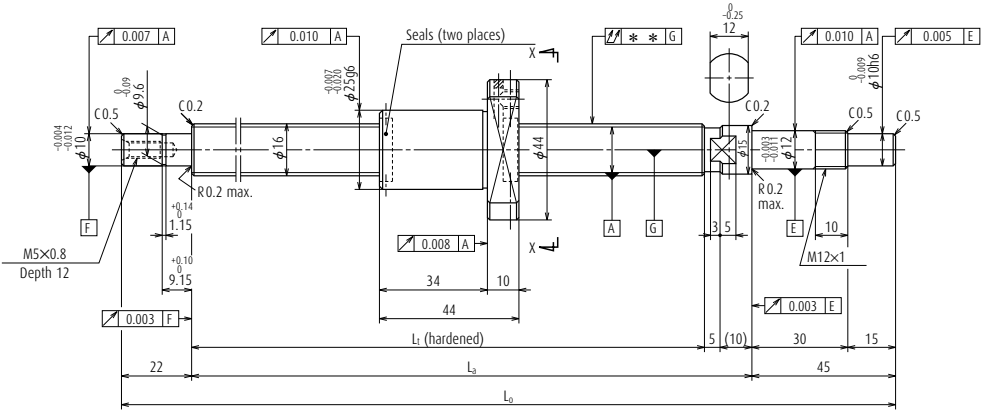


Ball screw No.		Stroke	
Preloaded (MPFD)	Precise clearance (MSFD)	Nominal	Maximum
W1601MA-5PY-C3Z2.5	W1601MA-6Y-C3T2.5	50	89
W1601MA-7PY-C3Z2.5	W1601MA-8Y-C3T2.5	100	139
W1602MA-5PY-C3Z2.5	W1602MA-6Y-C3T2.5	150	189
W1602MA-7PY-C3Z2.5	W1602MA-8Y-C3T2.5	200	239
W1603MA-3PY-C3Z2.5	W1603MA-4Y-C3T2.5	300	339

Notes

1. We recommend NSK support unit. See page B411 for details.
2. Use of NSK grease PS2 is recommended. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.
4. If Fixed is used for opposite driven side, configuration of support bearing area is designed by the customer.
5. See B51 and B52 for ball screw supporting method (Fixed-Supported, Fixed-Fixed, etc.).

Nut models: MPFD, MSFD

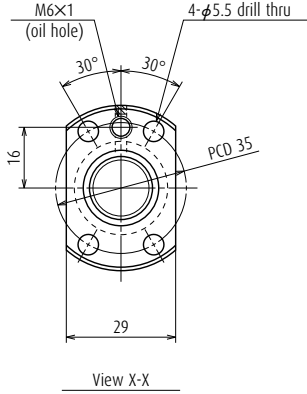

Screw shaft ϕ 16
Lead 2.5

Unit: mm


Ball screw specifications		
Product classification	Preloaded	Precise clearance
Shaft dia. \times Lead / Direction of turn	16 \times 2.5 / Right	
Preload / Ball recirculation	P-preload / Deflector (bridge)	
Ball dia. / Ball circle dia.	1.588 / 16.4	
Screw shaft root diameter	14.6	
Effective turns of balls	1 \times 4	
Accuracy grade / Preload / Axial play	C3 / Z	C3 / T
Basic load rating (N)	Dynamic C_a	4 150
	Static C_{0a}	8 440
Axial play	0	0.005 or less
Preload (N)	147	-
Dynamic friction torque, (N-cm)	0.5 - 4.9	1.5 or less
Spacer ball	None	
Factory-packed grease	NSK grease PS2	
Internal spatial volume of nut (cm ³)	1.6	
Standard volume of grease replenishing (cm ³)	0.8	

Recommended support unit

For drive side (Fixed)	For opposite to drive side (Simple)
WBK12-01A (square)	WBK12S-01 (square)
WBK12-11 (round)	

Unit: mm

Screw shaft length			Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min ⁻¹)	
L_t	L_a	L_o	T	e_p	v_u			Supporting condition	
								Fixed - Simple support	Fixed - Fixed
139	154	221	0	0.010	0.008	0.020	0.42	3 000	3 000
189	204	271	0	0.010	0.008	0.020	0.49	3 000	3 000
239	254	321	0	0.012	0.008	0.030	0.57	3 000	3 000
289	304	371	0	0.012	0.008	0.030	0.64	3 000	3 000
389	404	471	0	0.013	0.010	0.035	0.79	3 000	3 000

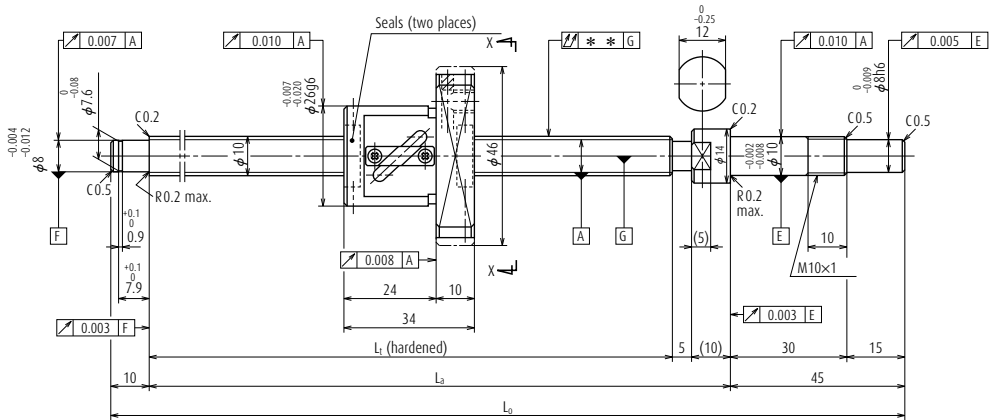


Ball screw No.		Stroke	
Preloaded (PFT)	Precise clearance (SFT)	Nominal	Maximum
W1001FA-1P-C3Z4	W1001FA-2-C3T4	50	69
W1001FA-3P-C3Z4	W1001FA-4-C3T4	100	119
W1002FA-1P-C3Z4	W1002FA-2-C3T4	150	169
W1002FA-3P-C3Z4	W1002FA-4-C3T4	200	219
W1003FA-1P-C3Z4	W1003FA-2-C3T4	250	269
W1003FA-3P-C3Z4	W1003FA-4-C3T4	300	319

Notes

1. We recommend NSK support unit. See page B411 for details.
2. Use of NSK grease PS2 is recommended. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.

Nut models: PFT, SFT

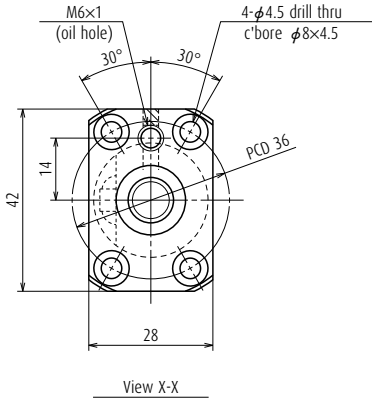

Screw shaft $\phi 10$

Lead 4

Unit: mm


Ball screw specifications		
Product classification	Preloaded	Precise clearance
Shaft dia. × Lead / Direction of turn	10 × 4 / Right	
Preload / Ball recirculation	P-preload / Return tube	
Ball dia. / Ball circle dia.	2.000 / 10.3	
Screw shaft root diameter	8.2	
Effective turns of balls	2.5 × 1	
Accuracy grade / Preload / Axial play	C3 / Z	C3 / T
Basic load rating (N)	Dynamic C_a	2 020
	Static C_{0a}	2 210
Axial play	0	0.005 or less
Preload (N)	98.1	-
Dynamic friction torque, (N-cm)	0.5 - 3.9	1.0 or less
Spacer ball	Yes	None
Factory-packed grease	NSK grease PS2	
Internal spatial volume of nut (cm ³)	0.8	
Standard volume of grease replenishing (cm ³)	0.4	

Recommended support unit

For drive side (Fixed)	For opposite to drive side (Simple)
WBK10-01A (square)	WBK10S-01 (square)
WBK10-11 (round)	

Unit: mm

Screw shaft length			Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min ⁻¹)
L_t	L_a	L_o	T	e_p	v_u			Supporting condition
								Fixed - Simple support
110	125	180	0	0.010	0.008	0.020	0.26	3 000
160	175	230	0	0.010	0.008	0.030	0.28	3 000
210	225	280	0	0.012	0.008	0.030	0.31	3 000
260	275	330	0	0.012	0.008	0.040	0.34	3 000
310	325	380	0	0.012	0.008	0.040	0.37	3 000
360	375	430	0	0.013	0.010	0.050	0.39	3 000

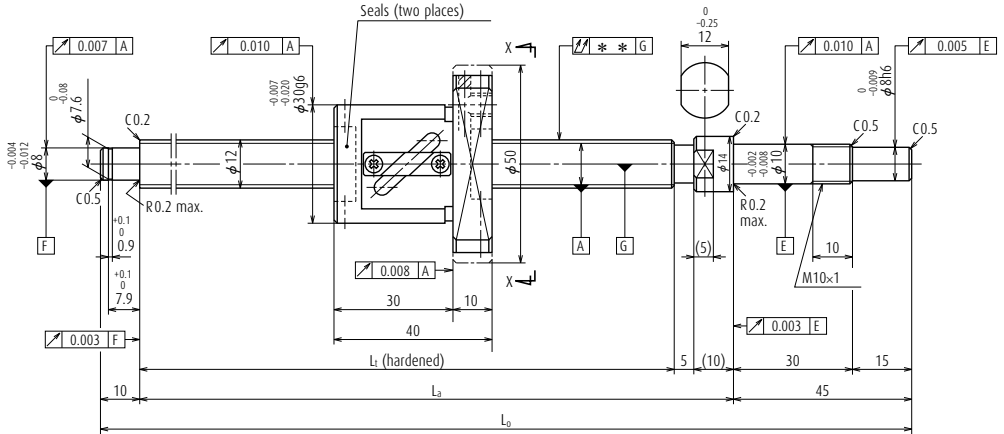

Ball screw No.		Stroke	
Preloaded (PFT)	Precise clearance (SFT)	Nominal	Maximum
W1201FA-1P-C3Z5	W1201FA-2-C3T5	50	63
W1201FA-3P-C3Z5	W1201FA-4-C3T5	100	113
W1202FA-1P-C3Z5	W1202FA-2-C3T5	150	163
W1202FA-3P-C3Z5	W1202FA-4-C3T5	200	213
W1203FA-1P-C3Z5	W1203FA-2-C3T5	250	263
W1204FA-1P-C3Z5	W1204FA-2-C3T5	350	363
W1205FA-1P-C3Z5	W1205FA-2-C3T5	450	463

Notes


1. We recommend NSK support unit. See page B411 for details.
2. Use of NSK grease PS2 is recommended. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.

Nut models: PFT, SFT

Screw shaft $\phi 12$

Lead 5

Unit: mm

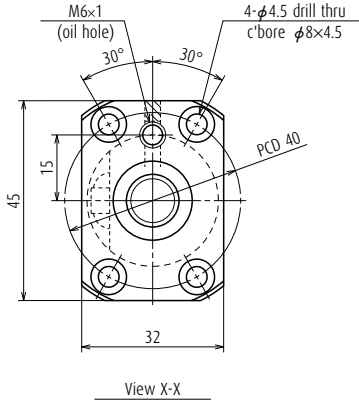

Ball screw specifications


Product classification		Preloaded	Precise clearance
Shaft dia. × Lead / Direction of turn		12 × 5 / Right	
Preload / Ball recirculation		P-preload / Return tube	
Ball dia. / Ball circle dia.		2.381 / 12.3	
Screw shaft root diameter		9.8	
Effective turns of balls		2.5 × 1	
Accuracy grade / Preload / Axial play		C3 / Z	C3 / T
Basic load rating (N)	Dynamic C _a	2 770	4 390
	Static C _{0a}	3 130	6 260
Axial play		0	0.005 or less
Preload (N)		98.1	-
Dynamic friction torque, (N·cm)		1.0 - 4.4	1.0 or less
Spacer ball		Yes	None
Factory-packed grease		NSK grease PS2	
Internal spatial volume of nut (cm ³)		1.2	
Standard volume of grease replenishing (cm ³)		0.6	

Recommended support unit

For drive side (Fixed)	For opposite to drive side (Simple)
WBK10-01A (square)	WBK10S-01 (square)
WBK10-11 (round)	

Unit: mm

Screw shaft length			Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min ⁻¹)
L _t	L _a	L ₀	T	e _p	v _u			Supporting condition
								Fixed - Simple support
110	125	180	0	0.010	0.008	0.020	0.35	3 000
160	175	230	0	0.010	0.008	0.030	0.38	3 000
210	225	280	0	0.012	0.008	0.030	0.42	3 000
260	275	330	0	0.012	0.008	0.040	0.46	3 000
310	325	380	0	0.012	0.008	0.040	0.50	3 000
410	425	480	0	0.015	0.010	0.050	0.58	3 000
510	525	580	0	0.016	0.012	0.065	0.66	3 000

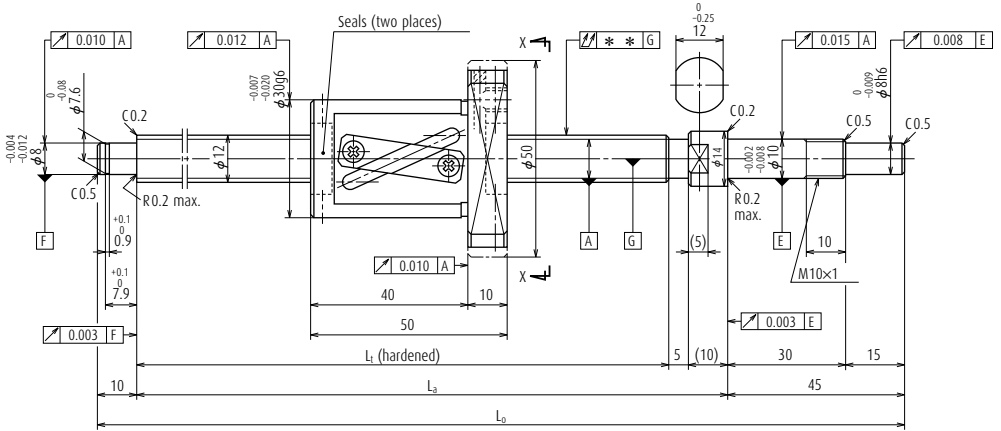


Ball screw No.		Stroke	
Preloaded (LPFT)	Precise clearance (LSFT)	Nominal	Maximum
W1201FA-5P-C5Z10	W1201FA-6-C5T10	100	103
W1202FA-5P-C5Z10	W1202FA-6-C5T10	150	153
W1203FA-3P-C5Z10	W1203FA-4-C5T10	250	253
W1204FA-3P-C5Z10	W1204FA-4-C5T10	350	353
W1205FA-3P-C5Z10	W1205FA-4-C5T10	450	453

Notes

1. We recommend NSK support unit. See page B411 for details.
2. Use of NSK grease LR3 is recommended. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.

Nut models: LPFT, LSFT

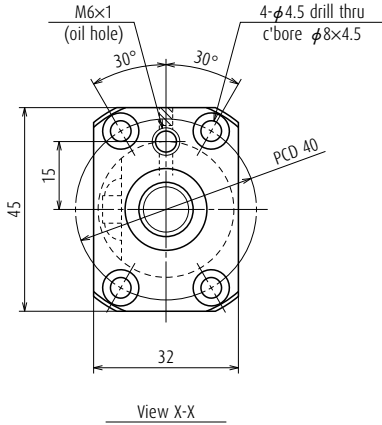

Screw shaft $\phi 12$

Lead 10

Unit: mm


Ball screw specifications			
Product classification		Preloaded	Precise clearance
Shaft dia. \times Lead / Direction of turn		12 \times 10 / Right	
Preload / Ball recirculation		P-preload / Return tube	
Ball dia. / Ball circle dia.		2.381 / 12.5	
Screw shaft root diameter		10.0	
Effective turns of balls		2.5 \times 1	
Accuracy grade / Preload / Axial play		C3 / Z	C3 / T
Basic load rating (N)	Dynamic C_a	2 790	4 430
	Static C_{0a}	3 220	6 430
Axial play		0	0.005 or less
Preload (N)		98.1	-
Dynamic friction torque, (N-cm)		1.0 - 4.9	1.5 or less
Spacer ball		Yes	None
Factory-packed grease		NSK grease LR3	
Internal spatial volume of nut (cm ³)		1.4	
Standard volume of grease replenishing (cm ³)		0.7	

Recommended support unit

For drive side (Fixed)	For opposite to drive side (Simple)
WBK10-01A (square)	WBK10S-01 (square)
WBK10-11 (round)	

Unit: mm

Screw shaft length			Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min ⁻¹)
L_t	L_a	L_o	T	e_p	v_u			Supporting condition
								Fixed - Simple support
160	175	230	0	0.020	0.018	0.035	0.43	3 000
210	225	280	0	0.023	0.018	0.035	0.47	3 000
310	325	380	0	0.023	0.018	0.050	0.56	3 000
410	425	480	0	0.027	0.020	0.060	0.64	3 000
510	525	580	0	0.030	0.023	0.075	0.72	3 000

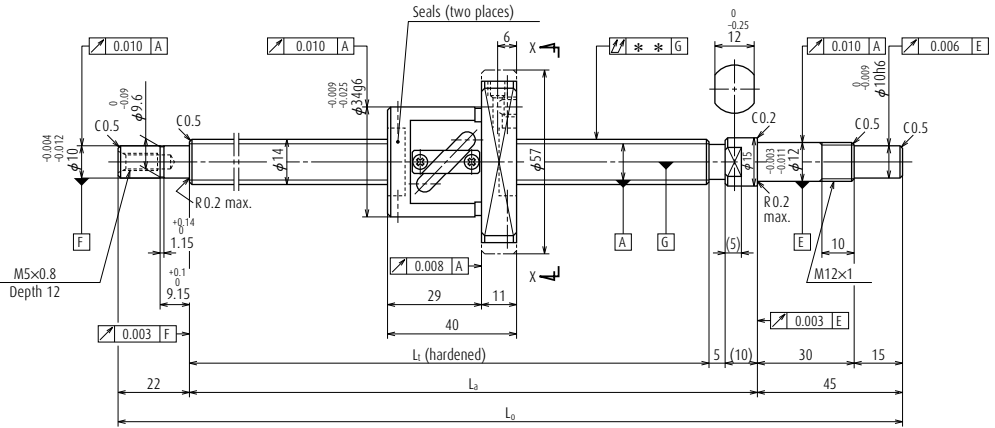


Ball screw No.		Stroke	
Preloaded (PFT)	Precise clearance (SFT)	Nominal	Maximum
W1401FA-1P-C3Z5	W1401FA-2-C3T5	100	143
W1402FA-1P-C3Z5	W1402FA-2-C3T5	150	193
W1403FA-1P-C3Z5	W1403FA-2-C3T5	250	293
W1404FA-1P-C3Z5	W1404FA-2-C3T5	350	393
W1405FA-1P-C3Z5	W1405FA-2-C3T5	450	493
W1406FA-1P-C3Z5	W1406FA-2-C3T5	600	643

Notes

1. We recommend NSK support unit. See page B411 for details.
2. Use of NSK grease PS2 is recommended. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.

Nut models: PFT, SFT

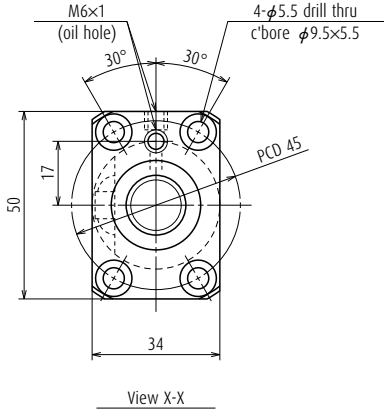

Screw shaft ϕ 14

Lead 5

Unit: mm

Ball screw specifications			
Product classification		Preloaded	Precise clearance
Shaft dia. × Lead / Direction of turn		14 × 5 / Right	
Preload / Ball recirculation		P-preload / Return tube	
Ball dia. / Ball circle dia.		3.175 / 14.5	
Screw shaft root diameter		11.2	
Effective turns of balls		2.5 × 1	
Accuracy grade / Preload / Axial play		C3 / Z	C3 / T
Basic load rating (N)	Dynamic C_a	5 020	7 970
	Static C_{0a}	5 970	11 900
Axial play		0	0.005 or less
Preload (N)		147	-
Dynamic friction torque, (N-cm)		1.5 - 6.9	2.0 or less
Spacer ball		Yes	None
Factory-packed grease		NSK grease LR3	
Internal spatial volume of nut (cm ³)		2.2	
Standard volume of grease replenishing (cm ³)		1.1	

Recommended support unit


For drive side (Fixed)	For opposite to drive side (Simple)
WBK12-01A (square)	WBK12S-01 (square)
WBK12-11 (round)	

Unit: mm

Screw shaft length			Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min ⁻¹)	
L_t	L_a	L_o	T	e_p	v_u			Supporting condition	
								Fixed - Simple support	Fixed - Fixed
189	204	271	0	0.010	0.008	0.020	0.52	3 000	3 000
239	254	321	0	0.012	0.008	0.030	0.57	3 000	3 000
339	354	421	0	0.013	0.010	0.035	0.67	3 000	3 000
439	454	521	0	0.015	0.010	0.045	0.77	3 000	3 000
539	554	621	0	0.016	0.012	0.045	0.87	3 000	3 000
689	704	771	0	0.018	0.013	0.055	1.0	3 000	3 000

Notes

- If Fixed is used for opposite driven side, configuration of support bearing area is designed by the customer.
- See B51 and B52 for ball screw supporting method (Fixed-Supported, Fixed-Fixed, etc.).

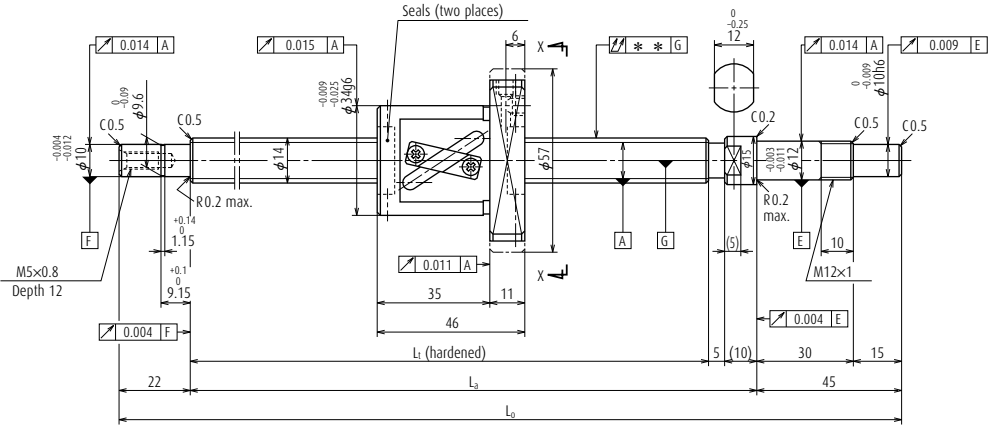


Ball screw No.		Stroke	
Preloaded (LPFT)	Precise clearance (LSFT)	Nominal	Maximum
W1401FA-3P-C5Z8	W1401FA-4-C5T8	100	137
W1402FA-3P-C5Z8	W1402FA-4-C5T8	150	187
W1402FA-5P-C5Z8	W1402FA-6-C5T8	200	237
W1403FA-3P-C5Z8	W1403FA-4-C5T8	250	287
W1403FA-5P-C5Z8	W1403FA-6-C5T8	300	337
W1404FA-3P-C5Z8	W1404FA-4-C5T8	350	387
W1404FA-5P-C5Z8	W1404FA-6-C5T8	400	437
W1405FA-3P-C5Z8	W1405FA-4-C5T8	450	487
W1405FA-5P-C5Z8	W1405FA-6-C5T8	500	537
W1406FA-3P-C5Z8	W1406FA-4-C5T8	550	587
W1406FA-5P-C5Z8	W1406FA-6-C5T8	600	637
W1407FA-1P-C5Z8	W1407FA-2-C5T8	700	737

Notes

1. We recommend NSK support unit. See page B411 for details.
2. Use of NSK grease LR3 is recommended. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.

Nut models: LPFT, LSFT

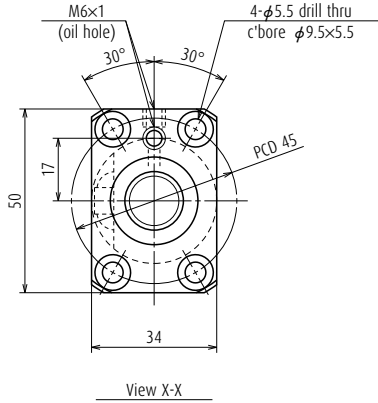

Screw shaft ϕ 14

Lead 8

Unit: mm

Ball screw specifications

Product classification		Preloaded	Precise clearance
Shaft dia. × Lead / Direction of turn		14 × 8 / Right	
Preload / Ball recirculation		P-preload / Return tube	
Ball dia. / Ball circle dia.		3.175 / 14.5	
Screw shaft root diameter		11.2	
Effective turns of balls		2.5 × 1	
Accuracy grade / Preload / Axial play		C5 / Z	C5 / T
Basic load rating (N)	Dynamic C_a	4 960	7 880
	Static C_{0a}	5 920	11 800
Axial play		0	0.005 or less
Preload (N)		147	-
Dynamic friction torque, (N·cm)		1.5 - 7.8	2.4 or less
Spacer ball		Yes	None
Factory-packed grease		NSK grease LR3	
Internal spatial volume of nut (cm ³)		2.1	
Standard volume of grease replenishing (cm ³)		1.1	

Recommended support unit


For drive side (Fixed)	For opposite to drive side (Simple)
WBK12-01A (square)	WBK12S-01 (square)
WBK12-11 (round)	

Unit: mm

Screw shaft length			Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min ⁻¹)	
L_t	L_a	L_o	T	e_p	v_u			Supporting condition	
								Fixed - Simple support	Fixed - Fixed
189	204	271	0	0.020	0.018	0.025	0.56	3 000	3 000
239	254	321	0	0.023	0.018	0.035	0.61	3 000	3 000
289	304	371	0	0.023	0.018	0.035	0.67	3 000	3 000
339	354	421	0	0.025	0.020	0.040	0.72	3 000	3 000
389	404	471	0	0.025	0.020	0.040	0.78	3 000	3 000
439	454	521	0	0.027	0.020	0.050	0.83	3 000	3 000
489	504	571	0	0.027	0.020	0.050	0.88	3 000	3 000
539	554	621	0	0.030	0.023	0.050	0.94	3 000	3 000
589	604	671	0	0.030	0.023	0.065	0.99	3 000	3 000
639	654	721	0	0.035	0.025	0.065	1.0	3 000	3 000
689	704	771	0	0.035	0.025	0.065	1.1	3 000	3 000
789	804	871	0	0.035	0.025	0.085	1.2	2 830	3 000

Notes

- If Fixed is used for opposite driven side, configuration of support bearing area is designed by the customer.
- See B51 and B52 for ball screw supporting method (Fixed-Supported, Fixed-Fixed, etc.).

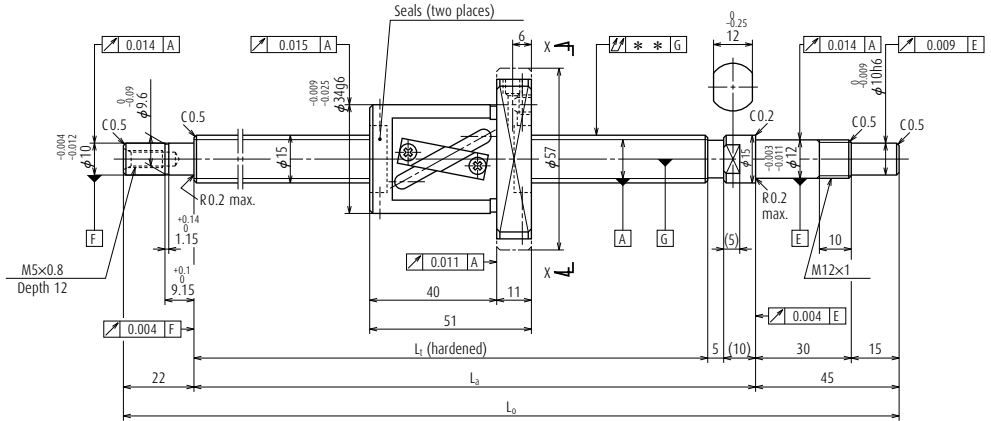

Ball screw No.		Stroke	
Preloaded (LPFT)	Precise clearance (LSFT)	Nominal	Maximum
W1501FA-1P-CSZ10	W1501FA-2-CST10	100	132
W1502FA-1P-CSZ10	W1502FA-2-CST10	150	182
W1502FA-3P-CSZ10	W1502FA-4-CST10	200	232
W1503FA-1P-CSZ10	W1503FA-2-CST10	250	282
W1503FA-3P-CSZ10	W1503FA-4-CST10	300	332
W1504FA-1P-CSZ10	W1504FA-2-CST10	350	382
W1504FA-3P-CSZ10	W1504FA-4-CST10	400	432
W1505FA-1P-CSZ10	W1505FA-2-CST10	450	482
W1505FA-3P-CSZ10	W1505FA-4-CST10	500	532
W1506FA-1P-CSZ10	W1506FA-2-CST10	550	582
W1506FA-3P-CSZ10	W1506FA-4-CST10	600	632
W1507FA-1P-CSZ10	W1507FA-2-CST10	700	732
W1508FA-1P-CSZ10	W1508FA-2-CST10	800	832
W1510FA-1P-CSZ10	W1510FA-2-CST10	1 000	1 032

Notes


1. We recommend NSK support unit. See page B411 for details.
2. Use of NSK grease LR3 is recommended. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.

Nut models: LPFT, LSFT

Screw shaft ϕ 15

Lead 10

Unit: mm

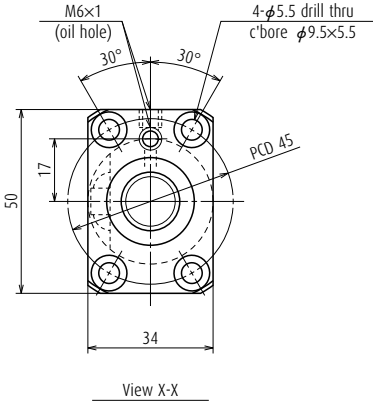

Recommended support unit

For drive side (Fixed)	For opposite to drive side (Simple)
WBK12-01A (square)	WBK12S-01 (square)
WBK12-11 (round)	


Ball screw specifications		
Product classification	Preloaded	Precise clearance
Shaft dia. × Lead / Direction of turn	15 × 10 / Right	
Preload / Ball recirculation	P-preload / Return tube	
Ball dia. / Ball circle dia.	3.175 / 15.5	
Screw shaft root diameter	12.2	
Effective turns of balls	2.5 × 1	
Accuracy grade / Preload / Axial play	C5 / Z	C5 / T
Basic load rating (N)	Dynamic C_a	5 130
	Static C_{0a}	6 420
Axial play	0	0.005 or less
Preload (N)	147	-
Dynamic friction torque, (N·cm)	1.5 - 7.8	2.4 or less
Spacer ball	Yes	None
Factory-packed grease	NSK grease LR3	
Internal spatial volume of nut (cm ³)	2.3	
Standard volume of grease replenishing (cm ³)	1.2	

Unit: mm

Screw shaft length			Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min ⁻¹)	
L_t	L_a	L_0	T	e_p	v_U			Supporting condition	
								Fixed - Simple support	Fixed - Fixed
189	204	271	0	0.020	0.018	0.025	0.61	3 000	3 000
239	254	321	0	0.023	0.018	0.035	0.67	3 000	3 000
289	304	371	0	0.023	0.018	0.035	0.74	3 000	3 000
339	354	421	0	0.025	0.020	0.040	0.80	3 000	3 000
389	404	471	0	0.025	0.020	0.040	0.86	3 000	3 000
439	454	521	0	0.027	0.020	0.050	0.93	3 000	3 000
489	504	571	0	0.027	0.020	0.050	1.0	3 000	3 000
539	554	621	0	0.030	0.023	0.050	1.1	3 000	3 000
589	604	671	0	0.030	0.023	0.065	1.1	3 000	3 000
639	654	721	0	0.035	0.025	0.065	1.2	3 000	3 000
689	704	771	0	0.035	0.025	0.065	1.2	3 000	3 000
789	804	871	0	0.035	0.025	0.085	1.4	3 000	3 000
889	904	971	0	0.040	0.027	0.085	1.5	2 430	3 000
1 089	1 104	1 171	0	0.046	0.030	0.110	1.8	1 600	2 250

Notes

- If Fixed is used for opposite driven side, configuration of support bearing area is designed by the customer.
- See B51 and B52 for ball screw supporting method (Fixed-Supported, Fixed-Fixed, etc.).

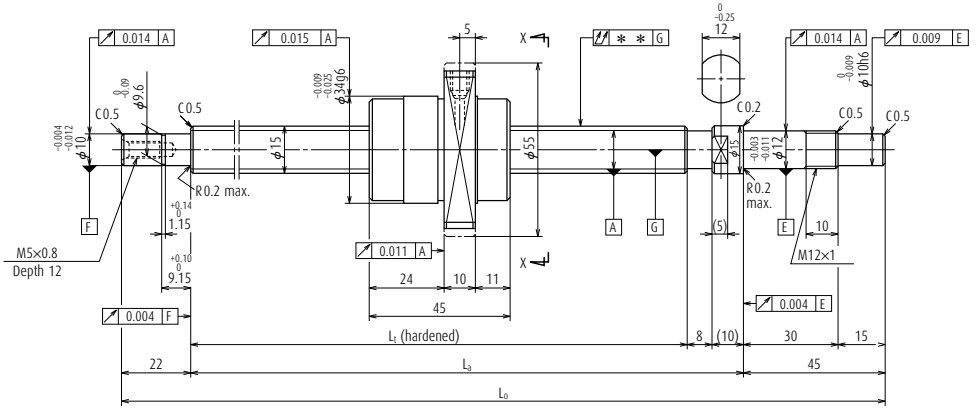


Ball screw No.		Stroke	
Preloaded (UPFC)	Precise clearance (USFC)	Nominal	Maximum
W1501FA-3PG-C5Z20	W1501FA-4G-C5T20	100	135
W1502FA-5PG-C5Z20	W1502FA-6G-C5T20	150	185
W1502FA-7PG-C5Z20	W1502FA-8G-C5T20	200	235
W1503FA-5PG-C5Z20	W1503FA-6G-C5T20	250	285
W1503FA-7PG-C5Z20	W1503FA-8G-C5T20	300	335
W1504FA-5PG-C5Z20	W1504FA-6G-C5T20	350	385
W1504FA-7PG-C5Z20	W1504FA-8G-C5T20	400	435
W1505FA-5PG-C5Z20	W1505FA-6G-C5T20	450	485
W1505FA-7PG-C5Z20	W1505FA-8G-C5T20	500	535
W1506FA-5PG-C5Z20	W1506FA-6G-C5T20	550	585
W1506FA-7PG-C5Z20	W1506FA-8G-C5T20	600	635
W1507FA-3PG-C5Z20	W1507FA-4G-C5T20	700	735
W1508FA-3PG-C5Z20	W1508FA-4G-C5T20	800	835
W1510FA-3PG-C5Z20	W1510FA-4G-C5T20	1 000	1 035

Notes

1. We recommend NSK support unit. See page B411 for details.
2. Use of NSK grease LR3 is recommended. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.

Nut models: UPFC, USFC

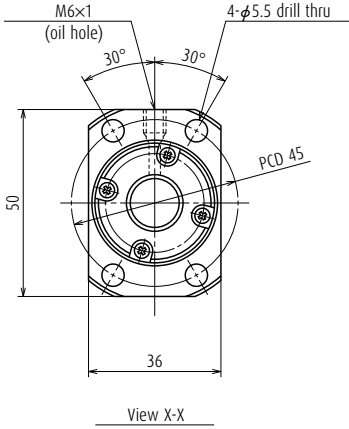

Recommended support unit

For drive side (Fixed)	For opposite to drive side (Simple)
WBK12-01A (square)	WBK12S-01 (square)
WBK12-11 (round)	

Screw shaft ϕ 15

Lead 20

Unit: mm

Ball screw specifications


Product classification		Preloaded	Precise clearance
Shaft dia. × Lead / Direction of turn		15 × 20 / Right	
Preload / Ball recirculation		P-preload / Return tube	
Ball dia. / Ball circle dia.		3.175 / 15.5	
Screw shaft root diameter		12.2	
Effective turns of balls		1.7 × 1	
Accuracy grade / Preload / Axial play		C5 / Z	C5 / T
Basic load rating (N)	Dynamic C_a	4 320	5 660
	Static C_{0a}	5 800	8 700
Axial play		0	0.005 or less
Preload (N)		147	-
Dynamic friction torque, (N·cm)		1.5 - 7.8	2.4 or less
Spacer ball		Yes	None
Factory-packed grease		NSK grease LR3	
Internal spatial volume of nut (cm ³)		1.9	
Standard volume of grease replenishing (cm ³)		1.0	

Unit: mm

Screw shaft length			Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min ⁻¹)	
L_t	L_a	L_0	T	e_p	v_U			Supporting condition	
								Fixed - Simple support	Fixed - Fixed
186	204	271	0	0.020	0.018	0.025	0.61	3 000	3 000
236	254	321	0	0.023	0.018	0.035	0.68	3 000	3 000
286	304	371	0	0.023	0.018	0.035	0.75	3 000	3 000
336	354	421	0	0.025	0.020	0.040	0.81	3 000	3 000
386	404	471	0	0.025	0.020	0.040	0.88	3 000	3 000
436	454	521	0	0.027	0.020	0.050	0.95	3 000	3 000
486	504	571	0	0.027	0.020	0.050	1.0	3 000	3 000
536	554	621	0	0.030	0.023	0.050	1.1	3 000	3 000
586	604	671	0	0.030	0.023	0.065	1.1	3 000	3 000
636	654	721	0	0.035	0.025	0.065	1.2	3 000	3 000
686	704	771	0	0.035	0.025	0.065	1.3	3 000	3 000
786	804	871	0	0.035	0.025	0.085	1.4	3 000	3 000
886	904	971	0	0.040	0.027	0.085	1.5	2 440	3 000
1 086	1 104	1 171	0	0.046	0.030	0.110	1.8	1 610	2 240

Notes

- If Fixed is used for opposite driven side, configuration of support bearing area is designed by the customer.
- See B51 and B52 for ball screw supporting method (Fixed-Supported, Fixed-Fixed, etc.).

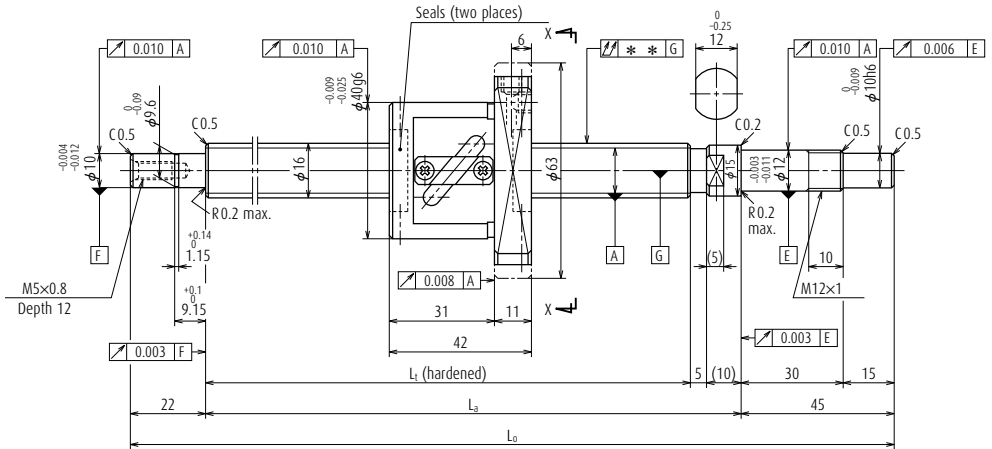


Ball screw No.		Stroke	
Preloaded (PFT)	Precise clearance (SFT)	Nominal	Maximum
W1601FA-1P-C3Z5	W1601FA-2-C3T5	100	141
W1602FA-1P-C3Z5	W1602FA-2-C3T5	200	241
W1603FA-1P-C3Z5	W1603FA-2-C3T5	300	341
W1604FA-1P-C3Z5	W1604FA-2-C3T5	400	441
W1606FA-1P-C3Z5	W1606FA-2-C3T5	600	641
W1608FA-1P-C3Z5	W1608FA-2-C3T5	800	841

Notes

1. We recommend NSK support unit. See page B411 for details.
2. Use of NSK grease LR3 is recommended. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.

Nut models: PFT, SFT

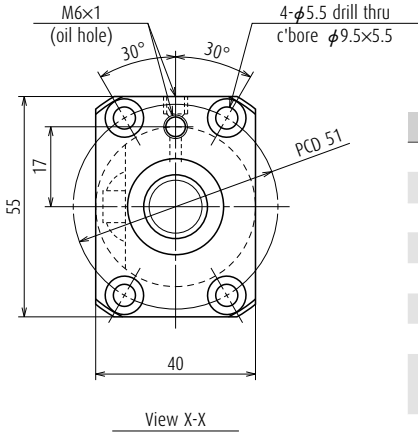

Screw shaft ϕ 16

Lead 5

Unit: mm

Ball screw specifications			
Product classification		Preloaded	Precise clearance
Shaft dia. \times Lead / Direction of turn		16 \times 5 / Right	
Preload / Ball recirculation		P-preload / Return tube	
Ball dia. / Ball circle dia.		3.175 / 16.5	
Screw shaft root diameter		13.2	
Effective turns of balls		2.5 \times 1	
Accuracy grade / Preload / Axial play		C3 / Z	C3 / T
Basic load rating (N)	Dynamic C_a	5 430	8 620
	Static C_{0a}	6 890	13 800
Axial play		0	0.005 or less
Preload (N)		147	-
Dynamic friction torque, (N-cm)		1.5 - 7.8	2.0 or less
Spacer ball		Yes	None
Factory-packed grease		NSK grease LR3	
Internal spatial volume of nut (cm ³)		2.6	
Standard volume of grease replenishing (cm ³)		1.3	

Recommended support unit


For drive side (Fixed)	For opposite to drive side (Simple)
WBK12-01A (square)	WBK12S-01 (square)
WBK12-11 (round)	

Unit: mm

Screw shaft length			Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min ⁻¹)	
L_t	L_a	L_o	T	e_p	v_u			Supporting condition	
								Fixed - Simple support	Fixed - Fixed
189	204	271	0	0.010	0.008	0.020	0.70	3 000	3 000
289	304	371	0	0.012	0.008	0.030	0.83	3 000	3 000
389	404	471	0	0.013	0.010	0.035	0.97	3 000	3 000
489	504	571	0	0.015	0.010	0.045	1.1	3 000	3 000
689	704	771	0	0.018	0.013	0.055	1.4	3 000	3 000
889	904	971	0	0.021	0.015	0.075	1.6	2 570	3 000

Notes

- If Fixed is used for opposite driven side, configuration of support bearing area is designed by the customer.
- See B51 and B52 for ball screw supporting method (Fixed-Supported, Fixed-Fixed, etc.).

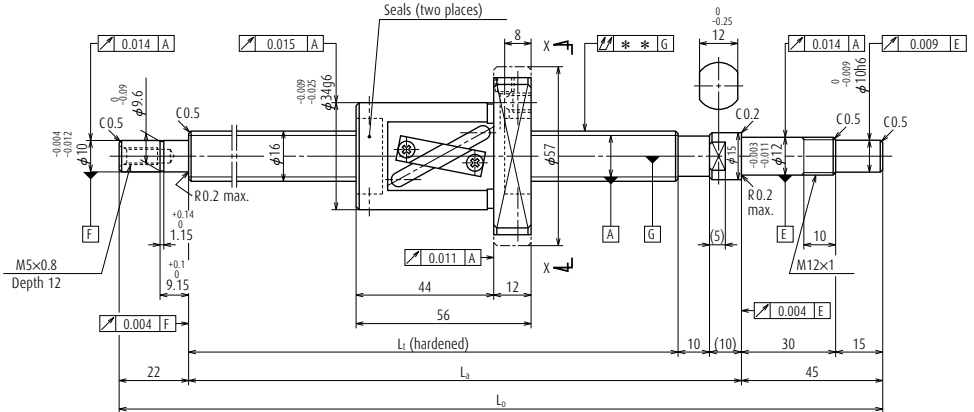

Ball screw No.		Stroke	
Preloaded (LPFT)	Precise clearance (LSFT)	Nominal	Maximum
W1601FA-3P-C5Z16	W1601FA-4-C5T16	100	122
W1602FA-3P-C5Z16	W1602FA-4-C5T16	150	172
W1602FA-5P-C5Z16	W1602FA-6-C5T16	200	222
W1603FA-3P-C5Z16	W1603FA-4-C5T16	250	272
W1603FA-5P-C5Z16	W1603FA-6-C5T16	300	322
W1604FA-3P-C5Z16	W1604FA-4-C5T16	350	372
W1604FA-5P-C5Z16	W1604FA-6-C5T16	400	422
W1605FA-1P-C5Z16	W1605FA-2-C5T16	450	472
W1605FA-3P-C5Z16	W1605FA-4-C5T16	500	522
W1606FA-3P-C5Z16	W1606FA-4-C5T16	550	572
W1606FA-5P-C5Z16	W1606FA-6-C5T16	600	622
W1607FA-1P-C5Z16	W1607FA-2-C5T16	700	722
W1608FA-3P-C5Z16	W1608FA-4-C5T16	800	822
W1610FA-1P-C5Z16	W1610FA-2-C5T16	1 000	1 022


Notes

1. We recommend NSK support unit. See page B411 for details.
2. Use of NSK grease LR3 is recommended. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.

Nut models: LPFT, LSFT

Screw shaft ϕ 16
Lead 16

Unit: mm

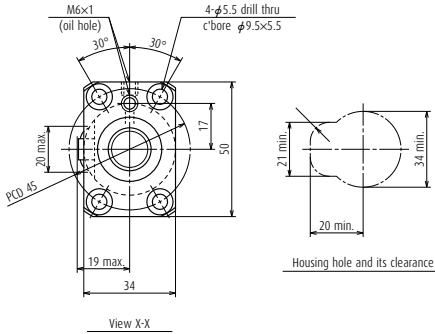

Recommended support unit

For drive side (Fixed)	For opposite to drive side (Simple)
WBK12-01A (square)	WBK12S-01 (square)
WBK12-11 (round)	


Ball screw specifications		
Product classification	Preloaded	Precise clearance
Shaft dia. × Lead / Direction of turn	16 × 16 / Right	
Preload / Ball recirculation	P-preload / Return tube	
Ball dia. / Ball circle dia.	3.175 / 16.75	
Screw shaft root diameter	13.4	
Effective turns of balls	1.5 × 1	
Accuracy grade / Preload / Axial play	C5 / Z	C5 / T
Basic load rating (N)	Dynamic C_a	4 180
	Static C_{0a}	5 390
Axial play	0	0.005 or less
Preload (N)	147	-
Dynamic friction torque, (N·cm)	1.5 - 7.8	2.4 or less
Spacer ball	Yes	None
Factory-packed grease	NSK grease LR3	
Internal spatial volume of nut (cm ³)	2.1	
Standard volume of grease replenishing (cm ³)	1.1	

Unit: mm

Screw shaft length			Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min ⁻¹)	
L_t	L_a	L_0	T	e_p	v_U			Supporting condition	
								Fixed - Simple support	Fixed - Fixed
184	204	271	0	0.020	0.018	0.025	0.69	3 000	3 000
234	254	321	0	0.023	0.018	0.035	0.77	3 000	3 000
284	304	371	0	0.023	0.018	0.035	0.84	3 000	3 000
334	354	421	0	0.025	0.020	0.040	0.92	3 000	3 000
384	404	471	0	0.025	0.020	0.040	0.99	3 000	3 000
434	454	521	0	0.027	0.020	0.050	1.1	3 000	3 000
484	504	571	0	0.027	0.020	0.050	1.1	3 000	3 000
534	554	621	0	0.030	0.023	0.050	1.2	3 000	3 000
584	604	671	0	0.030	0.023	0.065	1.3	3 000	3 000
634	654	721	0	0.035	0.025	0.065	1.4	3 000	3 000
684	704	771	0	0.035	0.025	0.065	1.4	3 000	3 000
784	804	871	0	0.035	0.025	0.085	1.6	3 000	3 000
884	904	971	0	0.040	0.027	0.085	1.7	2 720	3 000
1 084	1 104	1 171	0	0.046	0.030	0.110	2.0	1 790	2 480

Notes

4. If Fixed is used for opposite driven side, configuration of support bearing area is designed by the customer.
5. See B51 and B52 for ball screw supporting method (Fixed-Supported, Fixed-Fixed, etc.).

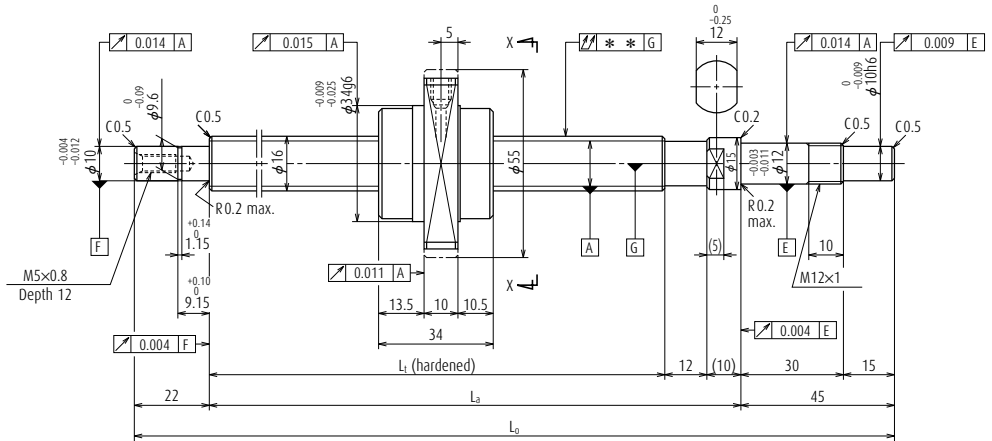


Ball screw No.		Stroke	
Preloaded (UPFC)	Precise clearance (USFC)	Nominal	Maximum
W1603FA-7PGX-C5Z32	W1603FA-8GX-C5T32	300	342
W1605FA-5PGX-C5Z32	W1605FA-6GX-C5T32	500	542
W1608FA-5PGX-C5Z32	W1608FA-6GX-C5T32	800	842
W1612FA-1PGX-C5Z32	W1612FA-2GX-C5T32	1 200	1 242

Notes

1. We recommend NSK support unit. See page B411 for details.
2. Use of NSK grease LR3 is recommended. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.
3. Ball nut does not have seal.
4. Contact NSK if the permissible rotational speed is to be exceeded.

Nut models: UPFC, USFC

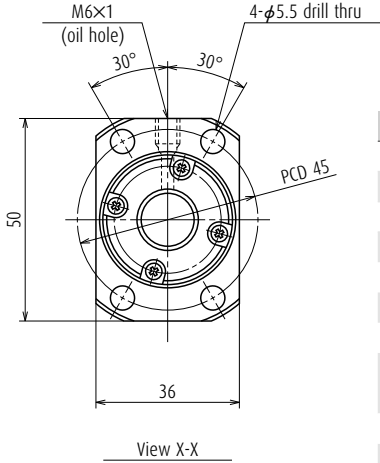

Screw shaft $\phi 16$

Lead 32

Unit: mm

Ball screw specifications		
Product classification	Preloaded	Precise clearance
Shaft dia. × Lead / Direction of turn	16 × 32 / Right	
Preload / Ball recirculation	P-preload / Return tube	
Ball dia. / Ball circle dia.	3.175 / 16.75	
Screw shaft root diameter	13.4	
Effective turns of balls	0.7 × 2	
Accuracy grade / Preload / Axial play	C5 / Z	C5 / T
Basic load rating (N)	Dynamic C_a	4 800
	Static C_{0a}	7 510
Axial play	0	0.005 or less
Preload (N)	118	-
Dynamic friction torque, (N-cm)	1.5 - 9.8	2.4 or less
Spacer ball	Yes	None
Factory-packed grease	NSK grease LR3	
Internal spatial volume of nut (cm ³)	2.0	
Standard volume of grease replenishing (cm ³)	1.0	

Recommended support unit


For drive side (Fixed)	For opposite to drive side (Simple)
WBK12-01A (square)	WBK12S-01 (square)
WBK12-11 (round)	

Unit: mm

Screw shaft length			Lead accuracy			Shaft run-out **	Mass	Permissible rotational speed N (min ⁻¹)	
L_t	L_a	L_o	T	e_p	v_u			Supporting condition	
								Fixed - Simple support	Fixed - Fixed
382	404	471	0	0.025	0.020	0.040	0.90	3 000	3 000
582	604	671	0	0.030	0.023	0.065	1.2	3 000	3 000
882	904	971	0	0.040	0.027	0.085	1.7	2 670	3 000
1 282	1 304	1 371	0	0.054	0.035	0.150	2.3	1 250	1 740

Notes

- If Fixed is used for opposite driven side, configuration of support bearing area is designed by the customer.
- See B51 and B52 for ball screw supporting method (Fixed-Supported, Fixed-Fixed, etc.).

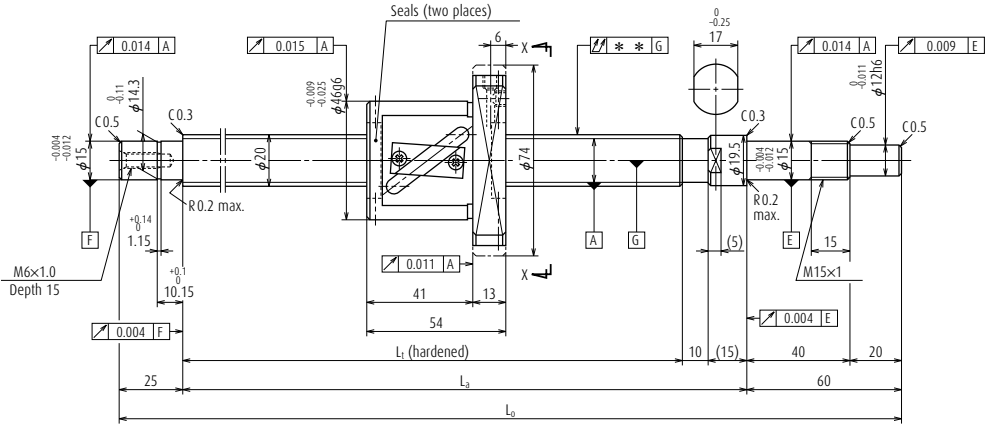

Ball screw No.		Stroke	
Preloaded (LPFT)	Precise clearance (LSFT)	Nominal	Maximum
W2002FA-1P-C5Z10	W2002FA-2-C5T10	200	229
W2003FA-1P-C5Z10	W2003FA-2-C5T10	300	329
W2004FA-1P-C5Z10	W2004FA-2-C5T10	400	429
W2005FA-1P-C5Z10	W2005FA-2-C5T10	500	529
W2006FA-1P-C5Z10	W2006FA-2-C5T10	600	629
W2007FA-1P-C5Z10	W2007FA-2-C5T10	700	729
W2008FA-1P-C5Z10	W2008FA-2-C5T10	800	829
W2009FA-1P-C5Z10	W2009FA-2-C5T10	900	929
W2010FA-1P-C5Z10	W2010FA-2-C5T10	1 000	1 029
W2011FA-1P-C5Z10	W2011FA-2-C5T10	1 100	1 129
W2012FA-1P-C5Z10	W2012FA-2-C5T10	1 200	1 229

Notes


1. We recommend NSK support unit. See page B411 for details.
2. Use of NSK grease LR3 is recommended. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.

Nut models: LPFT, LSFT

Screw shaft $\phi 20$

Lead 10

Unit: mm

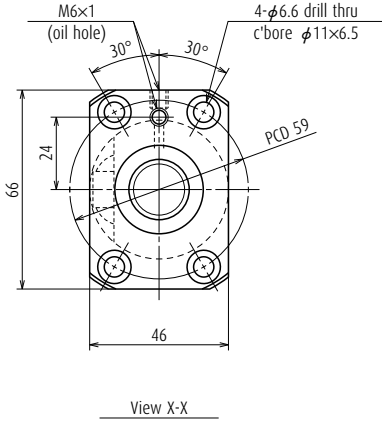

Recommended support unit

For drive side (Fixed)	For opposite to drive side (Simple)
WBK15-01A (square)	WBK155-01 (square)
WBK15-11 (round)	


Ball screw specifications		
Product classification	Preloaded	Precise clearance
Shaft dia. × Lead / Direction of turn	20 × 10 / Right	
Preload / Ball recirculation	P-preload / Return tube	
Ball dia. / Ball circle dia.	3.969 / 21	
Screw shaft root diameter	16.9	
Effective turns of balls	2.5 × 1	
Accuracy grade / Preload / Axial play	C5 / Z	C5 / T
Basic load rating (N)	Dynamic C_a	8 350
	Static C_{0a}	11 000
Axial play	0	0.005 or less
Preload (N)	196	-
Dynamic friction torque, (N·cm)	2.0 - 11.8	2.9 or less
Spacer ball	Yes	None
Factory-packed grease	NSK grease LR3	
Internal spatial volume of nut (cm ³)	4.7	
Standard volume of grease replenishing (cm ³)	2.4	

Unit: mm

Screw shaft length			Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min ⁻¹)	
L_t	L_a	L_0	T	e_p	v_U			Supporting condition	
								Fixed - Simple support	Fixed - Fixed
289	314	399	0	0.023	0.018	0.035	1.4	3 000	3 000
389	414	499	0	0.025	0.020	0.040	1.6	3 000	3 000
489	514	599	0	0.027	0.020	0.050	1.9	3 000	3 000
589	614	699	0	0.030	0.023	0.065	2.1	3 000	3 000
689	714	799	0	0.035	0.025	0.065	2.3	3 000	3 000
789	814	899	0	0.035	0.025	0.085	2.5	3 000	3 000
889	914	999	0	0.040	0.027	0.085	2.8	3 000	3 000
989	1 014	1 099	0	0.040	0.027	0.110	3.0	2 710	3 000
1 089	1 114	1 199	0	0.046	0.030	0.110	3.2	2 220	3 000
1 189	1 214	1 299	0	0.046	0.030	0.150	3.4	1 860	2 570
1 289	1 314	1 399	0	0.054	0.035	0.150	3.7	1 580	2 190

Notes

4. If Fixed is used for opposite driven side, configuration of support bearing area is designed by the customer.
5. See B51 and B52 for ball screw supporting method (Fixed-Supported, Fixed-Fixed, etc.).

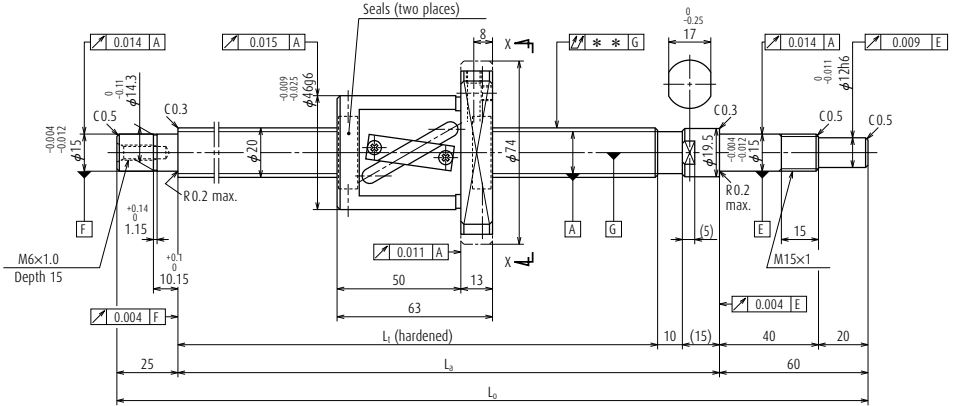

Ball screw No.		Stroke	
Preloaded (LPFT)	Precise clearance (LSFT)	Nominal	Maximum
W2003FA-3P-C5Z20	W2003FA-4-C5T20	200	241
W2004FA-3P-C5Z20	W2004FA-4-C5T20	300	341
W2005FA-3P-C5Z20	W2005FA-4-C5T20	400	441
W2006FA-3P-C5Z20	W2006FA-4-C5T20	500	541
W2007FA-3P-C5Z20	W2007FA-4-C5T20	600	641
W2008FA-3P-C5Z20	W2008FA-4-C5T20	700	741
W2009FA-3P-C5Z20	W2009FA-4-C5T20	800	841
W2010FA-3P-C5Z20	W2010FA-4-C5T20	900	941
W2011FA-3P-C5Z20	W2011FA-4-C5T20	1 000	1 041
W2012FA-3P-C5Z20	W2012FA-4-C5T20	1 100	1 141
W2015FA-1P-C5Z20	W2015FA-2-C5T20	1 400	1 441

Notes


1. We recommend NSK support unit. See page B411 for details.
2. Use of NSK grease LR3 is recommended. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.

Nut models: LPFT, LSFT

Screw shaft $\phi 20$

Lead 20

Unit: mm

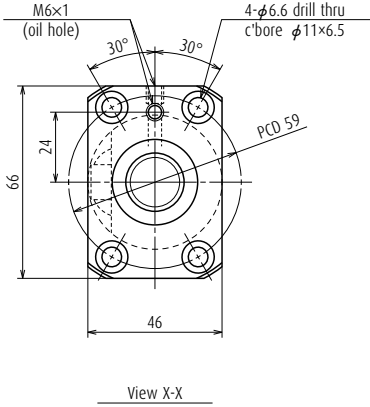

Recommended support unit

For drive side (Fixed)	For opposite to drive side (Simple)
WBK15-01A (square)	WBK155-01 (square)
WBK15-11 (round)	


Ball screw specifications		
Product classification	Preloaded	Precise clearance
Shaft dia. × Lead / Direction of turn	20 × 20 / Right	
Preload / Ball recirculation	P-preload / Return tube	
Ball dia. / Ball circle dia.	3.969 / 21	
Screw shaft root diameter	16.9	
Effective turns of balls	1.5 × 1	
Accuracy grade / Preload / Axial play	C5 / Z	C5 / T
Basic load rating (N)	Dynamic C_a	6 250
	Static C_{0a}	8 190
	8 760	13 100
Axial play	0	0.005 or less
Preload (N)	196	-
Dynamic friction torque, (N·cm)	2.0 - 11.8	2.9 or less
Spacer ball	Yes	None
Factory-packed grease	NSK grease LR3	
Internal spatial volume of nut (cm ³)	4.2	
Standard volume of grease replenishing (cm ³)	2.1	

Unit: mm

Screw shaft length			Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min ⁻¹)	
L_t	L_a	L_0	T	e_p	v_u			Supporting condition	
								Fixed - Simple support	Fixed - Fixed
310	335	420	0	0.023	0.018	0.040	1.6	3 000	3 000
410	435	520	0	0.027	0.020	0.050	1.8	3 000	3 000
510	535	620	0	0.030	0.023	0.050	2.0	3 000	3 000
610	635	720	0	0.030	0.023	0.065	2.3	3 000	3 000
710	735	820	0	0.035	0.025	0.085	2.5	3 000	3 000
810	835	920	0	0.040	0.027	0.085	2.7	3 000	3 000
910	935	1 020	0	0.040	0.027	0.110	3.0	3 000	3 000
1 010	1 035	1 120	0	0.046	0.030	0.110	3.2	2 630	3 000
1 110	1 135	1 220	0	0.046	0.030	0.110	3.4	2 160	2 970
1 210	1 235	1 320	0	0.046	0.030	0.150	3.7	1 810	2 500
1 510	1 535	1 620	0	0.054	0.035	0.180	4.4	1 150	1 610

Notes

- If Fixed is used for opposite driven side, configuration of support bearing area is designed by the customer.
- See B51 and B52 for ball screw supporting method (Fixed-Supported, Fixed-Fixed, etc.).

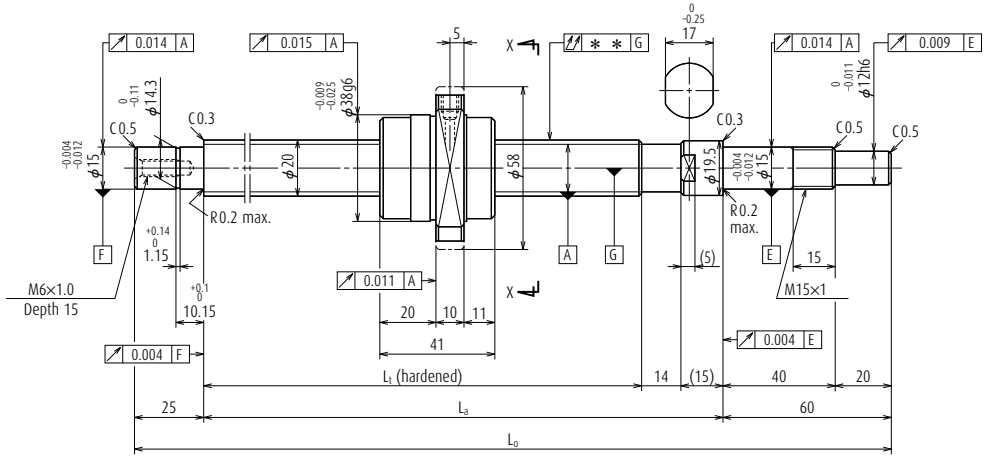


Ball screw No.		Stroke	
Preloaded (UPFC)	Precise clearance (USFC)	Nominal	Maximum
W2005FA-SPGX-CSZ40	W2005FA-6GX-CST40	400	459
W2007FA-SPGX-CSZ40	W2007FA-6GX-CST40	600	659
W2009FA-SPGX-CSZ40	W2009FA-6GX-CST40	800	859
W2011FA-SPGX-CSZ40	W2011FA-6GX-CST40	1 000	1 059
W2013FA-1PGX-CSZ40	W2013FA-2GX-CST40	1 200	1 259
W2017FA-1PGX-CSZ40	W2017FA-2GX-CST40	1 600	1 659

Notes

1. We recommend NSK support unit. See page B411 for details.
2. Use of NSK grease LR3 is recommended. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.
3. Ball nut does not have seal.
4. Contact NSK if the permissible rotational speed is to be exceeded.

Nut models: UPFC, USFC

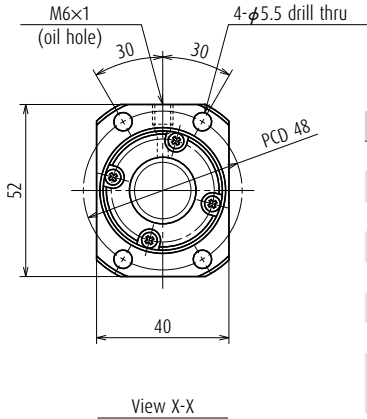

Screw shaft $\phi 20$

Lead 40

Unit: mm

Ball screw specifications		
Product classification	Preloaded	Precise clearance
Shaft dia. \times Lead / Direction of turn	20 \times 40 / Right	
Preload / Ball recirculation	P-preload / End cap	
Ball dia. / Ball circle dia.	3.175 / 20.75	
Screw shaft root diameter	17.4	
Effective turns of balls	0.7 \times 2	
Accuracy grade / Preload / Axial play	C5 / Z	C5 / T
Basic load rating (N)	Dynamic C_a	5 410
	Static C_{0a}	9 360
Axial play	0	0.005 or less
Preload (N)	148	-
Dynamic friction torque, (N-cm)	2.0 - 11.8	2.9 or less
Spacer ball	Yes	None
Factory-packed grease	NSK grease LR3	
Internal spatial volume of nut (cm ³)	2.8	
Standard volume of grease replenishing (cm ³)	1.4	

Recommended support unit


For drive side (Fixed)	For opposite to drive side (Simple)
WBK15-01A (square)	WBK15S-01 (square)
WBK15-11 (round)	

Unit: mm

Screw shaft length			Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min ⁻¹)	
L_t	L_a	L_o	T	e_p	v_u			Supporting condition	
								Fixed - Simple support	Fixed - Fixed
506	535	620	0	0.030	0.023	0.050	1.7	3 000	3 000
706	735	820	0	0.035	0.025	0.085	2.2	3 000	3 000
906	935	1 020	0	0.040	0.027	0.110	2.7	3 000	3 000
1 106	1 135	1 220	0	0.046	0.030	0.110	3.1	2 210	3 000
1 306	1 335	1 420	0	0.054	0.035	0.150	3.6	1 570	2 160
1 706	1 735	1 820	0	0.065	0.040	0.230	4.6	910	1 270

Notes

- If Fixed is used for opposite driven side, configuration of support bearing area is designed by the customer.
- See B51 and B52 for ball screw supporting method (Fixed-Supported, Fixed-Fixed, etc.).

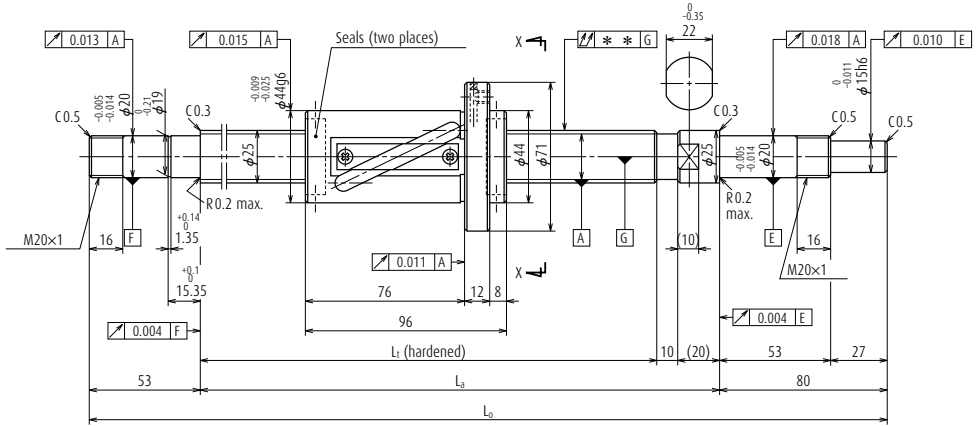

Ball screw No.		Stroke	
Preloaded (LPFT)	Precise clearance (LSFT)	Nominal	Maximum
W2507FA-1P-C5Z20	W2507FA-2-C5T20	600	640
W2509FA-1P-C5Z20	W2509FA-2-C5T20	800	840
W2511FA-1P-C5Z20	W2511FA-2-C5T20	1 000	1 040
W2513FA-1P-C5Z20	W2513FA-2-C5T20	1 200	1 240
W2515FA-1P-C5Z20	W2515FA-2-C5T20	1 400	1 440
W2517FA-1P-C5Z20	W2517FA-2-C5T20	1 600	1 640
W2521FA-1P-C5Z20	W2521FA-2-C5T20	2 000	2 040

Notes



1. We recommend NSK support unit. See page B411 for details.
2. Use of NSK grease LR3 is recommended. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.

Nut models: LPFT, LSFT

Screw shaft $\phi 25$

Lead 20

Unit: mm




Ball screw specifications		
Product classification	Preloaded	Precise clearance
Shaft dia. × Lead / Direction of turn	25 × 20 / Right	
Preload / Ball recirculation	P-preload / Return tube	
Ball dia. / Ball circle dia.	4.762 / 26.25	
Screw shaft root diameter	21.3	
Effective turns of balls	2.5 × 1	
Accuracy grade / Preload / Axial play	C5 / Z	C5 / T
Basic load rating (N)	Dynamic C_a	11 700
	Static C_{0a}	16 300
Axial play	0	0.005 or less
Preload (N)	343	-
Dynamic friction torque, (N-cm)	3.9 - 24.5	4.9 or less
Spacer ball	Yes	None
Factory-packed grease	NSK grease LR3	
Internal spatial volume of nut (cm ³)	12	
Standard volume of grease replenishing (cm ³)	6	

Recommended support unit

For drive side (Fixed)	For opposite to drive side	
	(Fixed)	(Simple)
WBK20-01 (square)	WBK20-01 (square)	WBK20S-01 (square)
WBK20-11 (round)	WBK20-11 (round)	

Unit: mm

Screw shaft length			Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min ⁻¹)	
L_t	L_a	L_0	T	e_p	v_u			Supporting condition	
								Fixed - Simple support	Fixed - Fixed
750	780	913	0	0.035	0.025	0.055	4.0	2 800	2 800
950	980	1 113	0	0.040	0.027	0.070	4.7	2 800	2 800
1 150	1 180	1 313	0	0.046	0.030	0.090	5.4	2 590	2 800
1 350	1 380	1 513	0	0.054	0.035	0.090	6.2	1 860	2 550
1 550	1 580	1 713	0	0.054	0.035	0.120	6.9	1 400	1 940
1 750	1 780	1 913	0	0.065	0.040	0.120	7.6	1 090	1 520
2 150	2 180	2 313	0	0.077	0.046	0.160	9.1	720	1 000

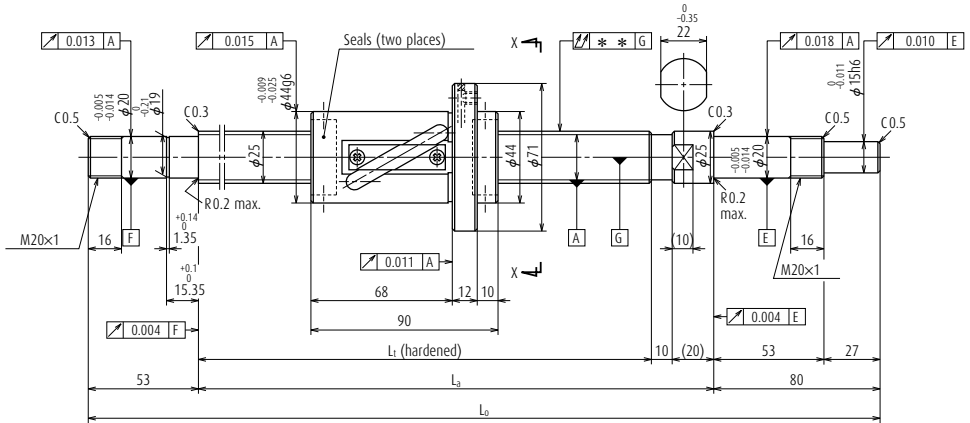

Ball screw No.		Stroke	
Preloaded (LPFT)	Precise clearance (LSFT)	Nominal	Maximum
W2507FA-3P-C5Z25	W2507FA-4-C5T25	600	646
W2509FA-3P-C5Z25	W2509FA-4-C5T25	800	846
W2511FA-3P-C5Z25	W2511FA-4-C5T25	1 000	1 046
W2513FA-3P-C5Z25	W2513FA-4-C5T25	1 200	1 246
W2515FA-3P-C5Z25	W2515FA-4-C5T25	1 400	1 446
W2517FA-3P-C5Z25	W2517FA-4-C5T25	1 600	1 646
W2521FA-3P-C5Z25	W2521FA-4-C5T25	2 000	2 046

Notes


1. We recommend NSK support unit. See page B411 for details.
2. Use of NSK grease LR3 is recommended. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.

Nut models: LPFT, LSFT

Screw shaft $\phi 25$

Lead 25

Unit: mm

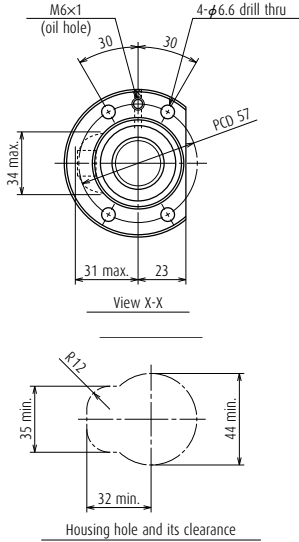


Ball screw specifications		
Product classification	Preloaded	Precise clearance
Shaft dia. × Lead / Direction of turn	25 × 25 / Right	
Preload / Ball recirculation	P-preload / Return tube	
Ball dia. / Ball circle dia.	4.762 / 26.25	
Screw shaft root diameter	21.3	
Effective turns of balls	1.5 × 1	
Accuracy grade / Preload / Axial play	C5 / Z	C5 / T
Basic load rating (N)	Dynamic C_a	8 970
	Static C_{0a}	13 100
Axial play	0	0.005 or less
Preload (N)	294	-
Dynamic friction torque, (N·cm)	3.9 - 24.5	4.9
Spacer ball	Yes	None
Factory-packed grease	NSK grease LR3	
Internal spatial volume of nut (cm ³)	7.5	
Standard volume of grease replenishing (cm ³)	3.8	

Recommended support unit

For drive side (Fixed)	For opposite to drive side	
	(Fixed)	(Simple)
WBK20-01 (square)	WBK20-01 (square)	WBK20S-01 (square)
WBK20-11 (round)	WBK20-11 (round)	

Unit: mm

Screw shaft length			Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min ⁻¹)	
L_t	L_a	L_o	T	e_p	v_u			Supporting condition	
								Fixed - Simple support	Fixed - Fixed
750	780	913	0	0.035	0.025	0.055	4.0	2 800	2 800
950	980	1 113	0	0.040	0.027	0.070	4.7	2 800	2 800
1 150	1 180	1 313	0	0.046	0.030	0.090	5.4	2 580	2 800
1 350	1 380	1 513	0	0.054	0.035	0.090	6.2	1 850	2 540
1 550	1 580	1 713	0	0.054	0.035	0.120	7.0	1 400	1 930
1 750	1 780	1 913	0	0.065	0.040	0.120	7.7	1 090	1 510
2 150	2 180	2 313	0	0.077	0.046	0.160	9.1	710	1 000

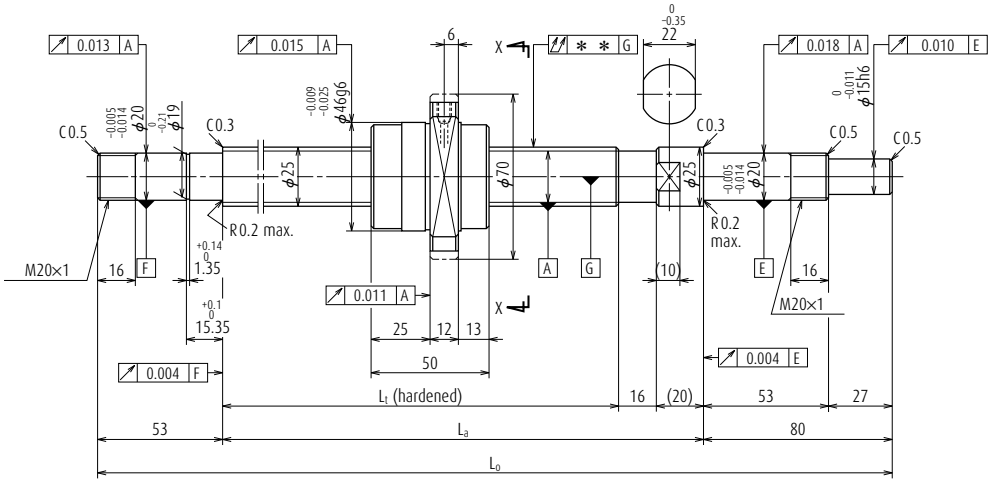


Ball screw No.		Stroke	
Preloaded (UPFC)	Precise clearance (USFC)	Nominal	Maximum
W2508FA-1PGX-CSZ50	W2508FA-2GX-CST50	700	780
W2511FA-5PGX-CSZ50	W2511FA-6GX-CST50	1 000	1 080
W2516FA-1PGX-CSZ50	W2516FA-2GX-CST50	1 500	1 580
W2521FA-5PGX-CSZ50	W2521FA-6GX-CST50	2 000	2 080

Notes

1. We recommend NSK support unit. See page B411 for details.
2. Use of NSK grease LR3 is recommended. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.
3. Ball nut does not have seal.
4. Contact NSK if the permissible rotational speed is to be exceeded.

Nut models: UPFC, USFC

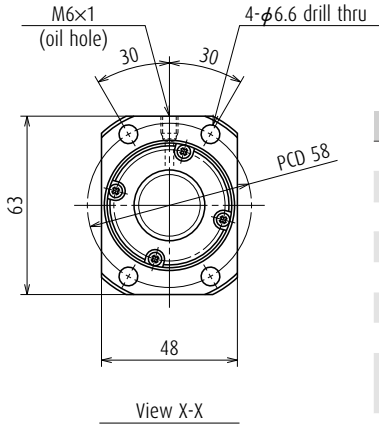

Screw shaft ϕ 25

Lead 50

Unit: mm


Ball screw specifications		
Product classification	Preloaded	Precise clearance
Shaft dia. × Lead / Direction of turn	25 × 50 / Right	
Preload / Ball recirculation	P-preload / Return tube	
Ball dia. / Ball circle dia.	3.969 / 26	
Screw shaft root diameter	21.9	
Effective turns of balls	0.7 × 2	
Accuracy grade / Preload / Axial play	C5 / Z	C5 / T
Basic load rating (N)	Dynamic C_a	8 090
	Static C_{0a}	14 600
Axial play	0	0.005 or less
Preload (N)	196	-
Dynamic friction torque, (N-cm)	2.9 - 21.5	4.9 or less
Spacer ball	Yes	None
Factory-packed grease	NSK grease LR3	
Internal spatial volume of nut (cm ³)	4.2	
Standard volume of grease replenishing (cm ³)	2.1	

Recommended support unit

For drive side (Fixed)	For opposite to drive side	
	(Fixed)	(Simple)
WBK20-01 (square)	WBK20-01 (square)	WBK20S-01 (square)
WBK20-11 (round)	WBK20-11 (round)	

Unit: mm

Screw shaft length			Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min ⁻¹)	
L_t	L_a	L_0	T	e_p	v_u			Supporting condition	
								Fixed - Simple support	Fixed - Fixed
844	880	1 013	0	0.040	0.027	0.070	4.1	2 800	2 800
1 144	1 180	1 313	0	0.046	0.030	0.090	5.3	2 600	2 800
1 644	1 680	1 813	0	0.065	0.040	0.120	7.2	1 250	1 710
2 144	2 180	2 313	0	0.077	0.046	0.160	9.1	730	1 010

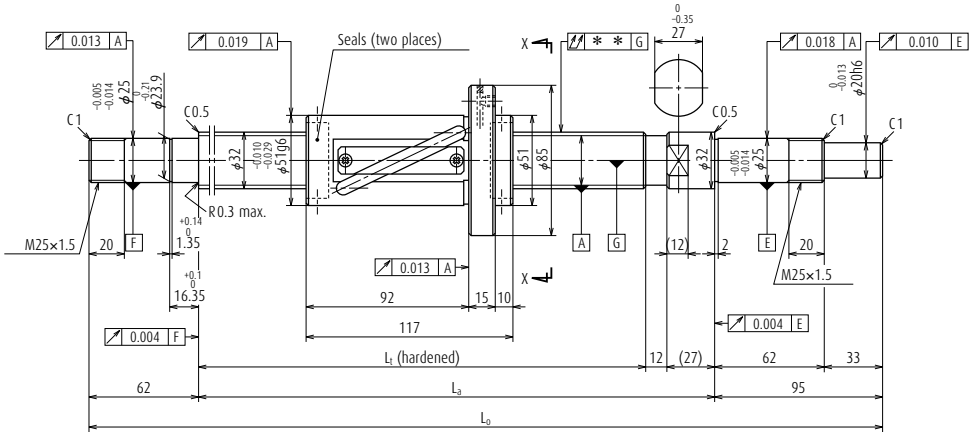


Ball screw No.		Stroke	
Preloaded (UPFC)	Precise clearance (USFC)	Nominal	Maximum
W3211FA-1P-C5Z25	W3211FA-2-C5T25	1 000	1 046
W3216FA-1P-C5Z25	W3216FA-2-C5T25	1 500	1 546
W3221FA-1P-C5Z25	W3221FA-2-C5T25	2 000	2 046
W3227FA-1P-C5Z25	W3227FA-2-C5T25	2 600	2 646

Notes

1. We recommend NSK support unit. See page B411 for details.
2. Use of NSK grease LR3 is recommended. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.

Nut models: LPFT, LSFT

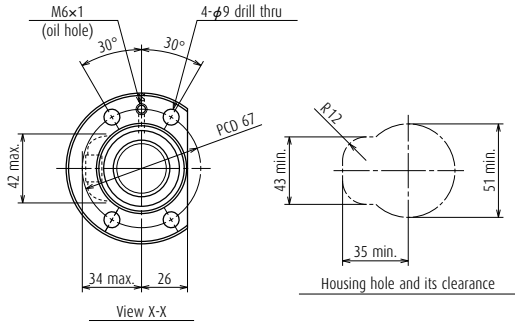

Screw shaft ϕ 32 Lead 25

Unit: mm


Ball screw specifications		
Product classification	Preloaded	Precise clearance
Shaft dia. × Lead / Direction of turn	32 × 25 / Right	
Preload / Ball recirculation	P-preload / Return tube	
Ball dia. / Ball circle dia.	4.762 / 33.25	
Screw shaft root diameter	28.3	
Effective turns of balls	2.5 × 1	
Accuracy grade / Preload / Axial play	C5 / Z	C5 / T
Basic load rating (N)	Dynamic C_a	12 900
	Static C_{0a}	21 100
Axial play	0	0.005 or less
Preload (N)	441	-
Dynamic friction torque, (N-cm)	6.8 - 31.5	7.8 or less
Spacer ball	Yes	None
Factory-packed grease	NSK grease LR3	
Internal spatial volume of nut (cm ³)	17.5	
Standard volume of grease replenishing (cm ³)	8.8	

Recommended support unit

For drive side (Fixed)	For opposite to drive side	
	(Fixed)	(Simple)
WBK25-01W (square)	WBK25-01W (square)	WBK25S-01W (square)
WBK25-11 (round)	WBK25-11 (round)	

Unit: mm

Screw shaft length			Lead accuracy			Shaft run-out ** ∇	Mass (kg)	Permissible rotational speed N (min ⁻¹)	
L_t	L_a	L_o	T	e_p	v_u			Supporting condition	
								Fixed - Simple support	Fixed - Fixed
1 180	1 219	1 376	0	0.046	0.030	0.090	9.3	2 180	2 180
1 680	1 719	1 876	0	0.065	0.040	0.120	12.3	1 600	2 180
2 180	2 219	2 376	0	0.077	0.046	0.160	15.4	930	1 300
2 780	2 819	2 976	0	0.093	0.054	0.200	19.1	570	800

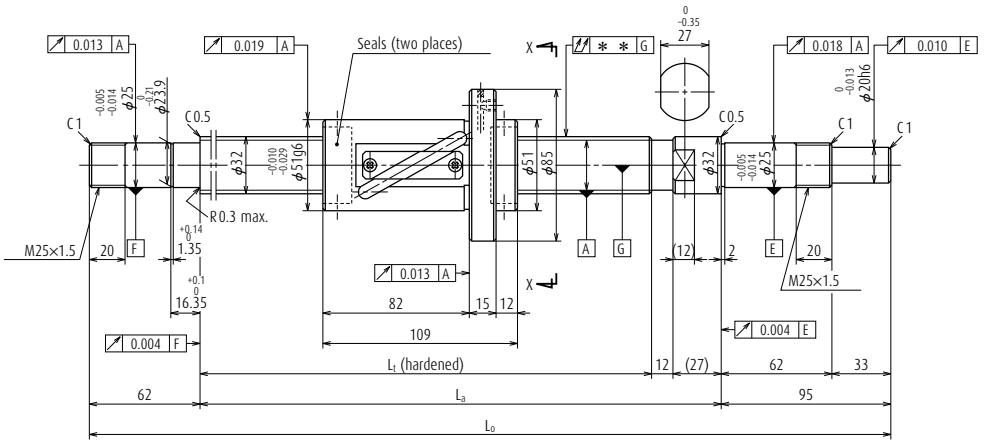


Ball screw No.		Stroke	
Preloaded (LPFT)	Precise clearance (LSFT)	Nominal	Maximum
W3211FA-3P-C5Z32	W3211FA-4-C5T32	1 000	1 054
W3216FA-3P-C5Z32	W3216FA-4-C5T32	1 500	1 554
W3221FA-3P-C5Z32	W3221FA-4-C5T32	2 000	2 054
W3227FA-3P-C5Z32	W3227FA-4-C5T32	2 600	2 654

Notes

1. We recommend NSK support unit. See page B411 for details.
2. Use of NSK grease LR3 is recommended. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.

Nut models: LPFT, LSFT

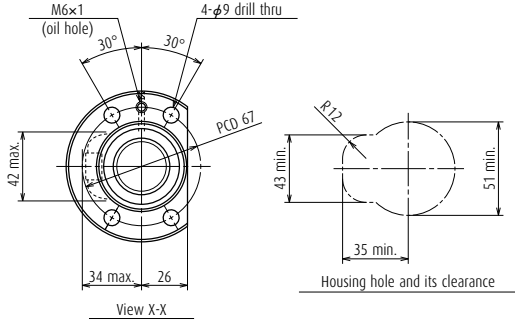

Screw shaft ϕ 32

Lead 32

Unit: mm


Ball screw specifications		
Product classification	Preloaded	Precise clearance
Shaft dia. × Lead / Direction of turn	32 × 32 / Right	
Preload / Ball recirculation	P-preload / Return tube	
Ball dia. / Ball circle dia.	4.762 / 33.25	
Screw shaft root diameter	28.3	
Effective turns of balls	1.5 × 1	
Accuracy grade / Preload / Axial play	C5 / Z	C5 / T
Basic load rating (N)	Dynamic C_a	10 100
	Static C_{0a}	16 800
Axial play	0	0.005 or less
Preload (N)	392	-
Dynamic friction torque, (N-cm)	6.9 - 31.5	7.8 or less
Spacer ball	Yes	None
Factory-packed grease	NSK grease LR3	
Internal spatial volume of nut (cm ³)	14	
Standard volume of grease replenishing (cm ³)	7	

Recommended support unit

For drive side (Fixed)	For opposite to drive side	
	(Fixed)	(Simple)
WBK25-01W (square)	WBK25-01W (square)	WBK25S-01W (square)
WBK25-11 (round)	WBK25-11 (round)	

Unit: mm

Screw shaft length			Lead accuracy			Shaft run-out ** ↗	Mass (kg)	Permissible rotational speed N (min ⁻¹)	
L_t	L_a	L_o	T	e_p	v_u			Supporting condition	
								Fixed - Simple support	Fixed - Fixed
1 180	1 219	1 376	0	0.046	0.030	0.090	9.3	2 180	2 180
1 680	1 719	1 876	0	0.065	0.040	0.120	12.3	1 590	2 180
2 180	2 219	2 376	0	0.077	0.046	0.160	15.4	930	1 290
2 780	2 819	2 976	0	0.093	0.054	0.200	19.1	570	790

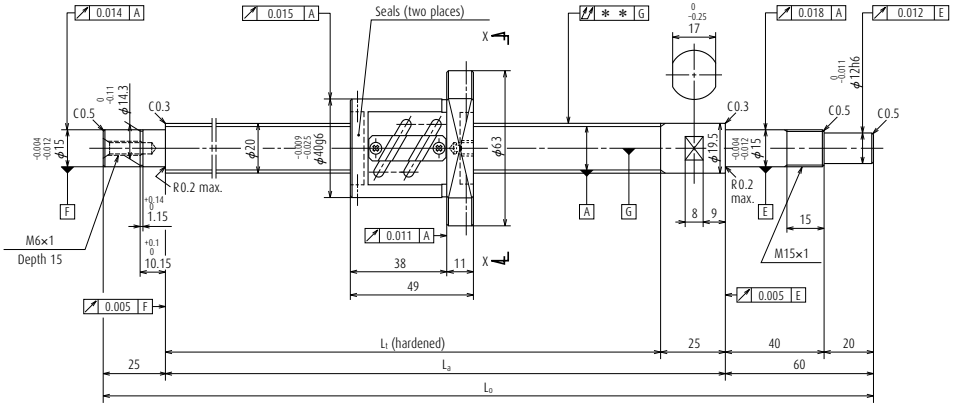


Ball screw No.	Stroke		Screw shaft length		
	Nominal	Maximum	L _t	L _a	L _o
W2002SA-1P-C5Z4	150	170	225	250	335
W2002SA-2P-C5Z4	200	220	275	300	385
W2003SA-1P-C5Z4	300	320	375	400	485
W2004SA-1P-C5Z4	400	420	475	500	585
W2005SA-1P-C5Z4	500	520	575	600	685
W2006SA-1P-C5Z4	600	620	675	700	785

Notes

1. We recommend NSK support unit. See page B411 for details.
2. **Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.**
See page D13 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.
4. If Fixed is used for opposite driven side, configuration of support bearing area is designed by the customer.
5. See B51 and B52 for ball screw supporting method (Fixed-Supported, Fixed-Fixed, etc.).

Nut model: PFT

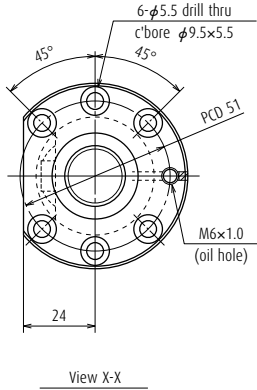

Screw shaft ϕ 20

Lead 4

Unit: mm


Ball screw specifications		
Shaft dia. × Lead / Direction of turn	20 × 4 / Right	
Preload / Ball recirculation	P-preload / Return tube	
Ball dia. / Ball circle dia.	2.381 / 20.3	
Effective turns of balls	2.5 × 2	
Screw shaft root diameter	17.8	
Accuracy grade / Preload	C5 / Z	
Basic load rating (N)	Dynamic C_d	6 550
	Static C_{0a}	10 900
Preload (N)	294	
Dynamic friction torque, median, (N-cm)	3.9	
Spacer ball	Yes	
Factory-packed grease	Refer to Notes 2.	
Internal spatial volume of nut (cm ³)	2.7	
Standard volume of grease replenishing (cm ³)	1.4	

Recommended support unit

For drive side (Fixed)	For opposite to drive side (Simple)
WBK15-01A (square)	WBK155-01 (square)
WBK15-11 (round)	

Unit: mm

Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min ⁻¹)	
T	e_p	v_u			Supporting condition	
					Fixed - Simple Support	Fixed - Fixed
-0.005	0.023	0.018	0.045	1.1	3 000	3 000
-0.007	0.023	0.018	0.045	1.2	3 000	3 000
-0.009	0.025	0.020	0.055	1.5	3 000	3 000
-0.011	0.027	0.020	0.070	1.7	3 000	3 000
-0.014	0.030	0.023	0.085	1.9	3 000	3 000
-0.016	0.035	0.025	0.085	2.1	3 000	3 000

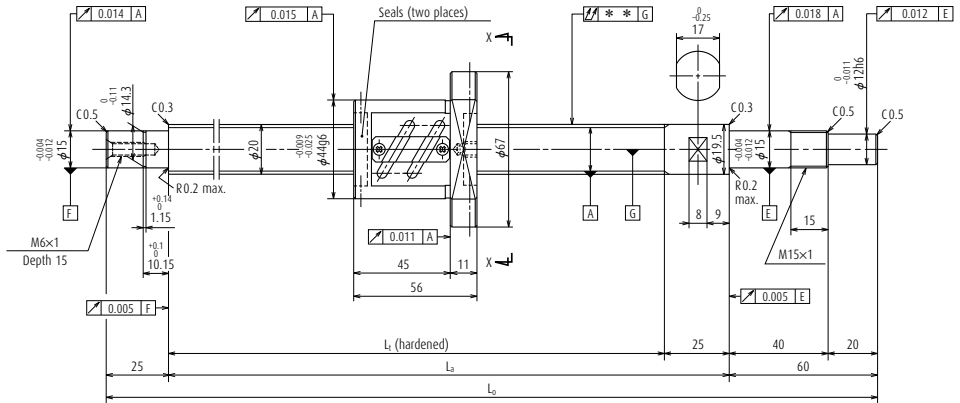


Ball screw No.	Stroke		Screw shaft length		
	Nominal	Maximum	L _t	L _a	L ₀
W2002SA-3P-C5Z5	150	163	225	250	335
W2002SA-4P-C5Z5	200	213	275	300	385
W2003SA-2P-C5Z5	300	313	375	400	485
W2004SA-2P-C5Z5	400	413	475	500	585
W2005SA-2P-C5Z5	500	513	575	600	685
W2007SA-1P-C5Z5	700	713	775	800	885

Notes

1. We recommend NSK support unit. See page B411 for details.
2. **Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.**
See page D13 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.
4. If Fixed is used for opposite driven side, configuration of support bearing area is designed by the customer.
5. See B51 and B52 for ball screw supporting method (Fixed-Supported, Fixed-Fixed, etc.).

Nut model: PFT

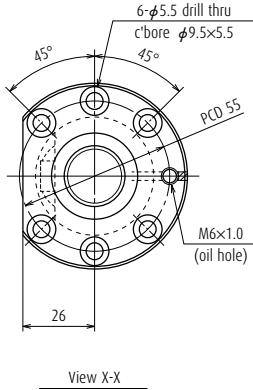

Screw shaft ϕ 20

Lead 5

Unit: mm


Ball screw specifications		
Shaft dia. × Lead / Direction of turn	20 × 5 / Right	
Preload / Ball recirculation	P-preload / Return tube	
Ball dia. / Ball circle dia.	3.175 / 20.5	
Screw shaft root diameter	17.2	
Effective turns of balls	2.5 × 2	
Accuracy grade / Preload	C5 / Z	
Basic load rating (N)	Dynamic C_d	11 100
	Static C_{0a}	17 100
Preload (N)	490	
Dynamic friction torque, median, (N-cm)	7.8	
Spacer ball	Yes	
Factory-packed grease	Refer to Notes 2.	
Internal spatial volume of nut (cm ³)	4.3	
Standard volume of grease replenishing (cm ³)	2.2	

Recommended support unit

For drive side (Fixed)	For opposite to drive side (Simple)
WBK15-01A (square)	WBK155-01 (square)
WBK15-11 (round)	

Unit: mm

Lead accuracy			Shaft run-out ** ∇	Mass (kg)	Permissible rotational speed N (min ⁻¹)	
T	e_p	v_u			Supporting condition	
					Fixed - Simple Support	Fixed - Fixed
-0.005	0.023	0.018	0.045	1.3	3 000	3 000
-0.007	0.023	0.018	0.045	1.4	3 000	3 000
-0.009	0.025	0.020	0.055	1.6	3 000	3 000
-0.011	0.027	0.020	0.070	1.8	3 000	3 000
-0.014	0.030	0.023	0.085	2.0	3 000	3 000
-0.019	0.035	0.025	0.110	2.5	3 000	3 000

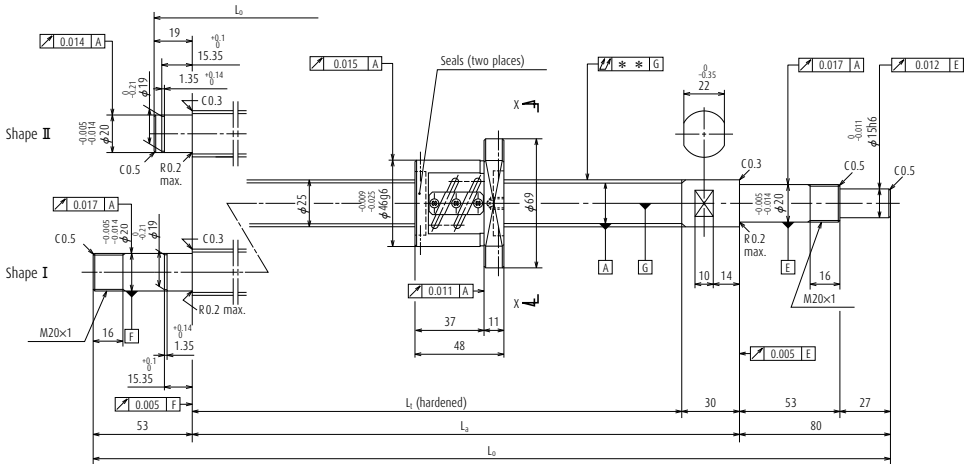


Ball screw No.	Stroke		Screw shaft length		
	Nominal	Maximum	L _t	L _a	L ₀
W2502SA-1P-C5Z4	150	166	220	250	349
W2502SA-2P-C5Z4	200	216	270	300	399
W2503SA-1P-C5Z4	300	316	370	400	499
W2504SA-1P-C5Z4	400	416	470	500	599
W2505SA-1P-C5Z4	500	516	570	600	733
W2507SA-1P-C5Z4	700	716	770	800	933

Notes

1. We recommend NSK support unit. See page B411 for details.
2. **Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.**
See page D13 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.
4. The maximum stroke is -8 mm when Fixed-Fixed is used for left shaft end shape I.

Nut model: PFT

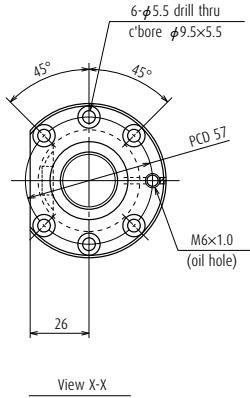

Screw shaft ϕ 25

Lead 4

Unit: mm


Ball screw specifications		
Shaft dia. \times Lead / Direction of turn	25 \times 4 / Right	
Preload / Ball recirculation	P-preload / Return tube	
Ball dia. / Ball circle dia.	2.381 / 25.3	
Screw shaft root diameter	22.8	
Effective turns of balls	2.5 \times 2	
Accuracy grade / Preload	C5 / Z	
Basic load rating (N)	Dynamic C_d	7 110
	Static C_{0a}	13 600
Preload (N)	290	
Dynamic friction torque, median, (N-cm)	4.9	
Spacer ball	Yes	
Factory-packed grease	Refer to Notes 2.	
Internal spatial volume of nut (cm ³)	3.2	
Standard volume of grease replenishing (cm ³)	1.6	

Recommended support unit

For drive side (Fixed)	For opposite to drive side	
	(Fixed)	(Simple)
WBK20-01 (square)	WBK20-01 (square)	WBK20S-01 (square)
WBK20-11 (round)	WBK20-11 (round)	

Unit: mm


Left side shaft end	Lead accuracy			Shaft run-out ** ∇	Mass (kg)	Permissible rotational speed N (min ⁻¹)	
	T	e_p	v_u			Supporting condition	
						Fixed - Simple Support	Fixed - Fixed
II	-0.005	0.023	0.018	0.035	1.6	2 800	—
II	-0.006	0.023	0.018	0.035	1.8	2 800	—
II	-0.009	0.025	0.020	0.040	2.2	2 800	—
II	-0.011	0.027	0.020	0.050	2.5	2 800	—
I	-0.014	0.030	0.023	0.060	3.0	2 800	2 800
I	-0.018	0.035	0.025	0.075	3.7	2 800	2 800

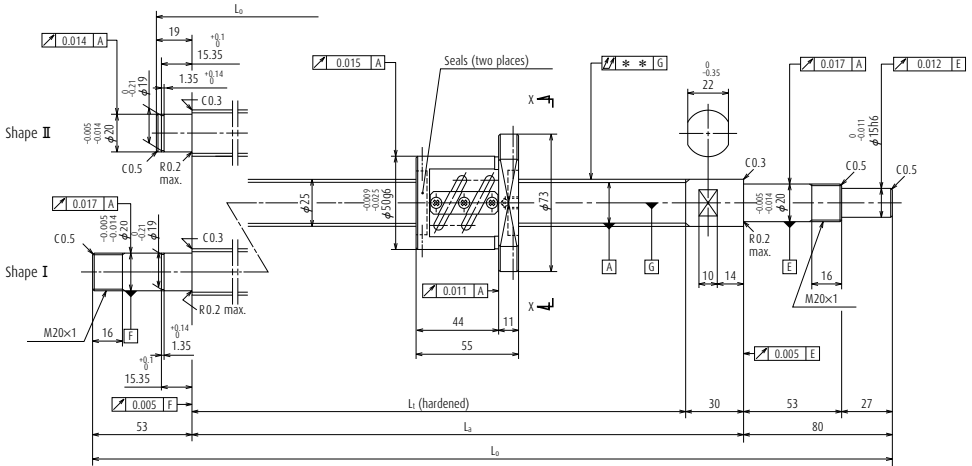

Ball screw No.	Stroke		Screw shaft length		
	Nominal	Maximum	L ₁	L ₃	L ₀
W2502SA-3P-C5Z5	150	159	220	250	349
W2502SA-4P-C5Z5	200	209	270	300	399
W2503SA-2P-C5Z5	300	309	370	400	499
W2504SA-2P-C5Z5	400	409	470	500	599
W2505SA-2P-C5Z5	500	509	570	600	733
W2506SA-1P-C5Z5	600	609	670	700	833
W2507SA-2P-C5Z5	700	709	770	800	933
W2509SA-1P-C5Z5	900	909	970	1 000	1 133
W2511SA-1P-C5Z5	1 000	1 109	1 170	1 200	1 333

- Notes**
1. We recommend NSK support unit. See page B411 for details.
 2. **Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.**
See page D13 for details.
 3. Contact NSK if the permissible rotational speed is to be exceeded.
 4. The maximum stroke is -8 mm when Fixed-Fixed is used for left shaft end shape I.

Nut model: PFT

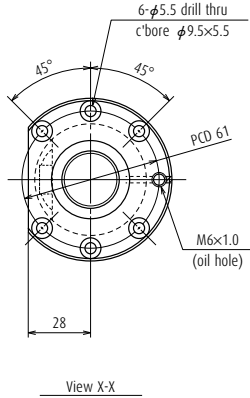

Screw shaft ϕ 25

Lead 5

Unit: mm


Ball screw specifications		
Shaft dia. \times Lead / Direction of turn	25 \times 5 / Right	
Preload / Ball recirculation	P-preload / Return tube	
Ball dia. / Ball circle dia.	3.175 / 25.5	
Screw shaft root diameter	22.2	
Effective turns of balls	2.5 \times 2	
Accuracy grade / Preload	C5 / Z	
Basic load rating (N)	Dynamic C_d	12 300
	Static C_{0a}	21 800
Preload (N)	540	
Dynamic friction torque, median, (N-cm)	8.8	
Spacer ball	Yes	
Factory-packed grease	Refer to Notes 2.	
Internal spatial volume of nut (cm ³)	5.0	
Standard volume of grease replenishing (cm ³)	2.5	

Recommended support unit

For drive side (Fixed)	For opposite to drive side	
	(Fixed)	(Simple)
WBK20-01 (square)	WBK20-01 (square)	WBK20S-01 (square)
WBK20-11 (round)	WBK20-11 (round)	

Unit: mm

Left side shaft end	Lead accuracy			Shaft run-out ** \uparrow	Mass (kg)	Permissible rotational speed N (min ⁻¹)	
	T	e_p	v_u			Supporting condition	
						Fixed - Simple Support	Fixed - Fixed
II	-0.005	0.023	0.018	0.035	1.8	2 800	—
II	-0.006	0.023	0.018	0.035	2.0	2 800	—
II	-0.009	0.025	0.020	0.040	2.3	2 800	—
II	-0.011	0.027	0.020	0.050	2.7	2 800	—
I	-0.014	0.030	0.023	0.060	3.1	2 800	2 800
I	-0.016	0.035	0.025	0.075	3.4	2 800	2 800
I	-0.018	0.035	0.025	0.075	3.8	2 800	2 800
I	-0.023	0.040	0.027	0.090	4.5	2 800	2 800
I	-0.028	0.046	0.030	0.120	5.2	2 520	2 800

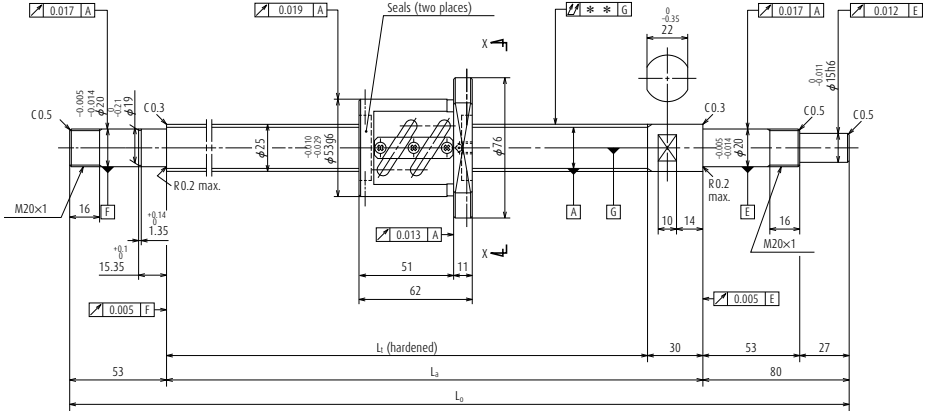


Ball screw No.	Stroke		Screw shaft length		
	Nominal	Maximum	L _t	L _a	L ₀
W2503SA-3P-C5Z6	250	302	370	400	533
W2505SA-3P-C5Z6	450	502	570	600	733
W2507SA-3P-C5Z6	650	702	770	800	933
W2511SA-2P-C5Z6	1 050	1 102	1 170	1 200	1 333

Notes

1. We recommend NSK support unit. See page B411 for details.
2. **Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.**
See page D13 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.
4. The maximum stroke is -8 mm when Fixed-Fixed is used.

Nut model: PFT

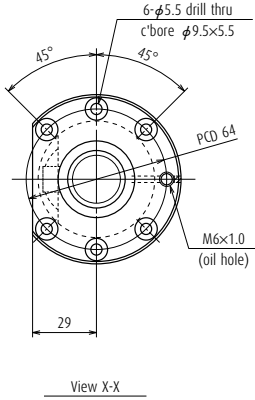

Screw shaft ϕ 25

Lead 6


Unit: mm


Ball screw specifications		
Shaft dia. × Lead / Direction of turn	25 × 6 / Right	
Preload / Ball recirculation	P-preload / Return tube	
Ball dia. / Ball circle dia.	3.969 / 25.5	
Screw shaft root diameter	21.4	
Effective turns of balls	2.5 × 2	
Accuracy grade / Preload	C5 / Z	
Basic load rating (N)	Dynamic C_d	16 600
	Static C_{0a}	26 700
Preload (N)	685	
Dynamic friction torque, median, (N-cm)	13.8	
Spacer ball	Yes	
Factory-packed grease	Refer to Notes 2.	
Internal spatial volume of nut (cm ³)	7.0	
Standard volume of grease replenishing (cm ³)	3.5	

Recommended support unit

For drive side (Fixed)	For opposite to drive side	
	(Fixed)	(Simple)
WBK20-01 (square)	WBK20-01 (square)	WBK20-01 (square)
WBK20-11 (round)	WBK20-11 (round)	

Unit: mm

Lead accuracy			Shaft run-out ** 	Mass (kg)	Permissible rotational speed N (min ⁻¹)	
T	e_p	v_u			Supporting condition	
					Fixed - Simple Support	Fixed - Fixed
-0.009	0.025	0.020	0.050	2.5	2 800	2 800
-0.014	0.030	0.023	0.060	3.2	2 800	2 800
-0.018	0.035	0.025	0.075	3.9	2 800	2 800
-0.028	0.046	0.030	0.120	5.2	2 450	2 800

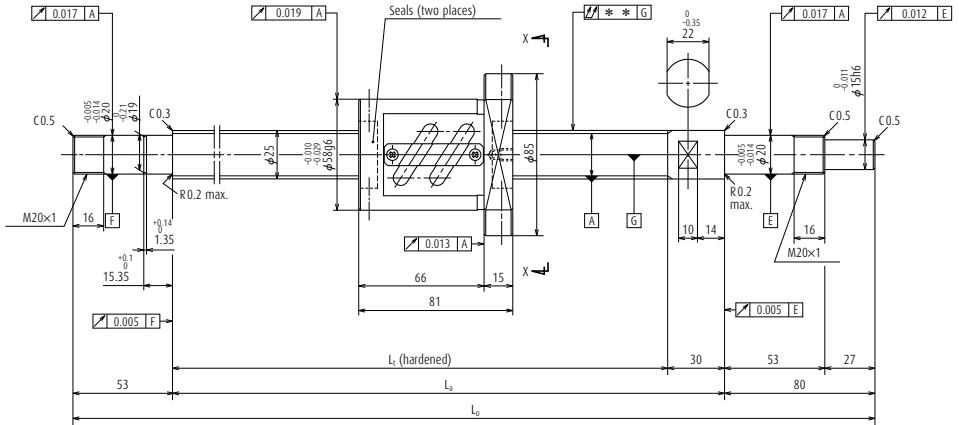


Ball screw No.	Stroke		Screw shaft length		
	Nominal	Maximum	L _t	L _a	L ₀
W2503SA-4P-C5Z10	250	283	370	400	533
W2505SA-4P-C5Z10	450	483	570	600	733
W2507SA-4P-C5Z10	650	683	770	800	933
W2509SA-2P-C5Z10	850	883	970	1 000	1 133
W2511SA-3P-C5Z10	1 050	1 083	1 170	1 200	1 333
W2514SA-1P-C5Z10	1 350	1 383	1 470	1 500	1 633

Notes

1. We recommend NSK support unit. See page B411 for details.
2. **Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.**
See page D13 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.
4. The maximum stroke is -8 mm when Fixed-Fixed is used.

Nut model: PFT

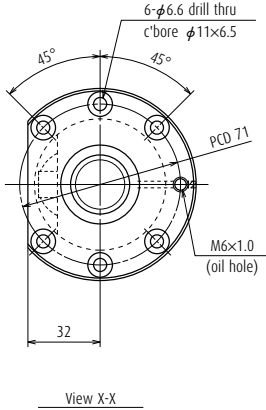

Screw shaft ϕ 25

Lead 10

Unit: mm


Ball screw specifications		
Shaft dia. × Lead / Direction of turn	25 × 10 / Right	
Preload / Ball recirculation	P-preload / Return tube	
Ball dia. / Ball circle dia.	4.762 / 25.5	
Screw shaft root diameter	20.5	
Effective turns of balls	1.5 × 2	
Accuracy grade / Preload	C5 / Z	
Basic load rating (N)	Dynamic C_d	13 600
	Static C_{0a}	18 900
Preload (N)	585	
Dynamic friction torque, median, (N-cm)	13.8	
Spacer ball	Yes	
Factory-packed grease	Refer to Notes 2.	
Internal spatial volume of nut (cm ³)	9.5	
Standard volume of grease replenishing (cm ³)	4.8	

Recommended support unit

For drive side (Fixed)	For opposite to drive side	
	(Fixed)	(Simple)
WBK20-01 (square)	WBK20-01 (square)	WBK20S-01 (square)
WBK20-11 (round)	WBK20-11 (round)	

Unit: mm

Lead accuracy			Shaft run-out ** ∇	Mass (kg)	Permissible rotational speed N (min ⁻¹)	
T	e_p	v_u			Supporting condition	
					Fixed - Simple Support	Fixed - Fixed
-0.009	0.025	0.020	0.050	3.2	2 800	2 800
-0.014	0.030	0.023	0.060	3.8	2 800	2 800
-0.018	0.035	0.025	0.075	4.5	2 800	2 800
-0.023	0.040	0.027	0.090	5.2	2 800	2 800
-0.028	0.046	0.030	0.120	5.9	2 390	2 800
-0.035	0.054	0.035	0.150	6.9	1 490	2 050

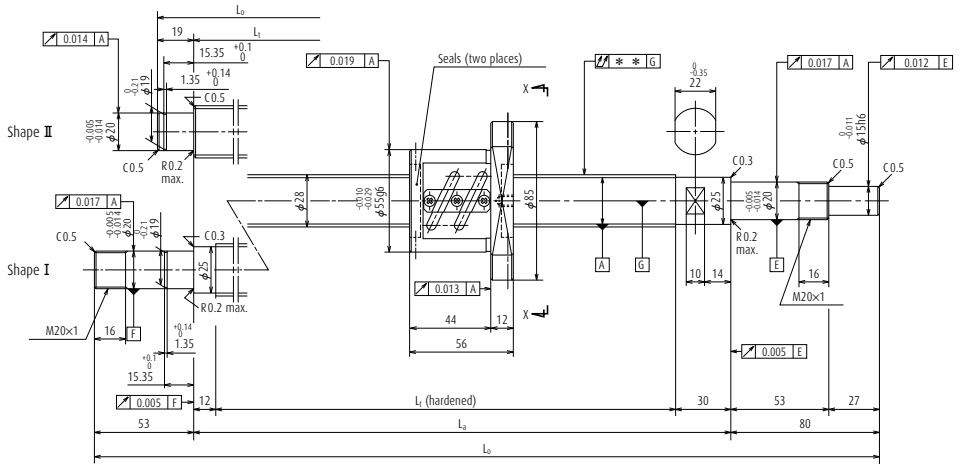

Ball screw No.	Stroke		Screw shaft length		
	Nominal	Maximum	L _t	L _a	L ₀
W2802SA-1P-C5Z5	200	208	270	300	399
W2803SA-1P-C5Z5	300	308	370	400	499
W2804SA-1P-C5Z5	400	408	470	500	599
W2805SA-1P-C5Z5	450	502	558	600	733
W2807SA-1P-C5Z5	650	702	758	800	933
W2809SA-1P-C5Z5	850	902	958	1 000	1 133
W2811SA-1P-C5Z5	1 050	1 102	1 158	1 200	1 333

Notes


1. We recommend NSK support unit. See page B411 for details.
2. **Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.**
See page D13 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.
4. The maximum stroke is -2 mm when Fixed-Fixed is used for left shaft end shape I.

Nut model: PFT

Screw shaft $\phi 28$

Lead 5

Unit: mm

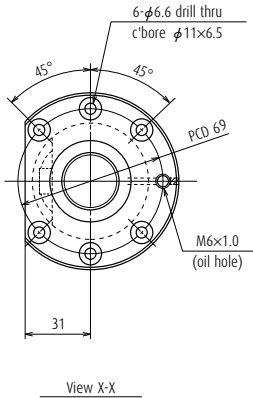


Ball screw specifications		
Shaft dia. × Lead / Direction of turn	28 × 5 / Right	
Preload / Ball recirculation	P-preload / Return tube	
Ball dia. / Ball circle dia.	3.175 / 28.5	
Screw shaft root diameter	25.2	
Effective turns of balls	2.5 × 2	
Accuracy grade / Preload	C5 / Z	
Basic load rating (N)	Dynamic C_a	13 000
	Static C_{0a}	24 400
Preload (N)	540	
Dynamic friction torque, median, (N-cm)	9.8	
Spacer ball	Yes	
Factory-packed grease	Refer to Notes 2.	
Internal spatial volume of nut (cm ³)	6.0	
Standard volume of grease replenishing (cm ³)	3.0	

Recommended support unit

For drive side (Fixed)	For opposite to drive side	
	(Fixed)	(Simple)
WBK20-01 (square)	WBK20-01 (square)	WBK20-01 (square)
WBK20-11 (round)	WBK20-11 (round)	

Unit: mm

Left side shaft end	Lead accuracy			Shaft run-out ** ∇	Mass (kg)	Permissible rotational speed N (min ⁻¹)	
	T	e_p	v_u			Supporting condition	
						Fixed - Simple Support	Fixed - Fixed
II	-0.006	0.023	0.018	0.035	2.5	2 500	—
II	-0.009	0.025	0.020	0.040	2.9	2 500	—
II	-0.011	0.027	0.020	0.050	3.3	2 500	—
I	-0.014	0.030	0.023	0.060	3.8	2 500	2 500
I	-0.018	0.035	0.025	0.075	4.7	2 500	2 500
I	-0.024	0.040	0.027	0.090	5.6	2 500	2 500
I	-0.028	0.046	0.030	0.120	6.5	2 500	2 500

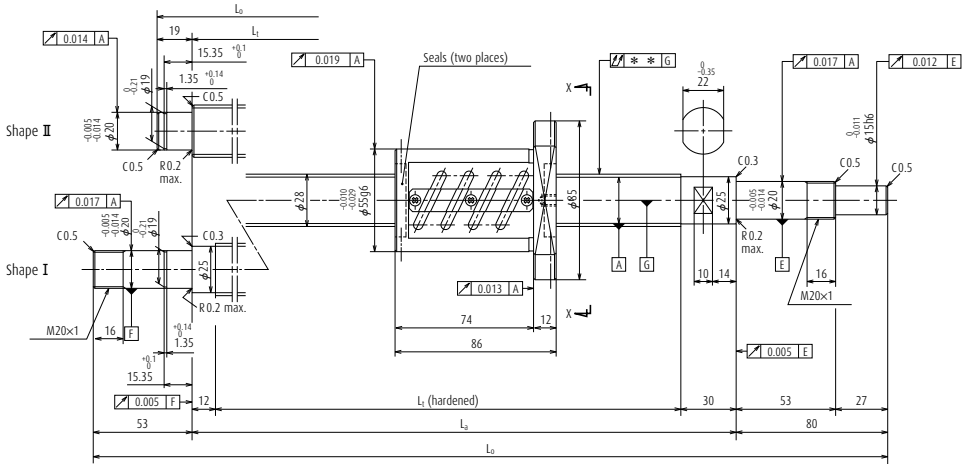


Ball screw No.	Stroke		Screw shaft length		
	Nominal	Maximum	L_t	L_a	L_o
W2802SA-2Z-C5Z5	150	178	270	300	399
W2803SA-2Z-C5Z5	250	278	370	400	499
W2804SA-2Z-C5Z5	350	378	470	500	599
W2805SA-2Z-C5Z5	450	472	558	600	733
W2807SA-2Z-C5Z5	650	672	758	800	933
W2809SA-2Z-C5Z5	850	872	958	1 000	1 133
W2811SA-2Z-C5Z5	1 050	1 072	1 158	1 200	1 333

Notes

1. We recommend NSK support unit. See page B411 for details.
2. **Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.**
See page D13 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.
4. The maximum stroke is -2 mm when Fixed-Fixed is used for left shaft end shape I.

Nut model: ZFT

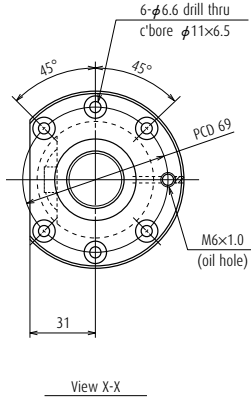

Screw shaft ϕ 28

Lead 5

Unit: mm


Ball screw specifications		
Shaft dia. \times Lead / Direction of turn	28 \times 5 / Right	
Preload / Ball recirculation	Z-preload / Return tube	
Ball dia. / Ball circle dia.	3.175 / 28.5	
Screw shaft root diameter	25.2	
Effective turns of balls	2.5 \times 2	
Accuracy grade / Preload	C5 / Z	
Basic load rating (N)	Dynamic C_a	20 600
	Static C_{0a}	48 700
Preload (N)	1 220	
Dynamic friction torque, median, (N-cm)	21.5	
Spacer ball	None	
Factory-packed grease	Refer to Notes 2.	
Internal spatial volume of nut (cm ³)	9.0	
Standard volume of grease replenishing (cm ³)	4.5	

Recommended support unit

For drive side (Fixed)	For opposite to drive side	
	(Fixed)	(Simple)
WBK20-01 (square)	WBK20-01 (square)	WBK20-01 (square)
WBK20-11 (round)	WBK20-11 (round)	

Unit: mm

Left side shaft end	Lead accuracy			Shaft run-out ** ∇	Mass (kg)	Permissible rotational speed N (min ⁻¹)	
	T	e_p	v_u			Supporting condition	
						Fixed - Simple Support	Fixed - Fixed
II	-0.006	0.023	0.018	0.035	2.8	2 500	—
II	-0.009	0.025	0.020	0.040	3.2	2 500	—
II	-0.011	0.027	0.020	0.050	3.7	2 500	—
I	-0.013	0.030	0.023	0.060	4.2	2 500	2 500
I	-0.018	0.035	0.025	0.075	5.1	2 500	2 500
I	-0.023	0.040	0.027	0.090	5.9	2 500	2 500
I	-0.028	0.046	0.030	0.120	6.8	2 500	2 500

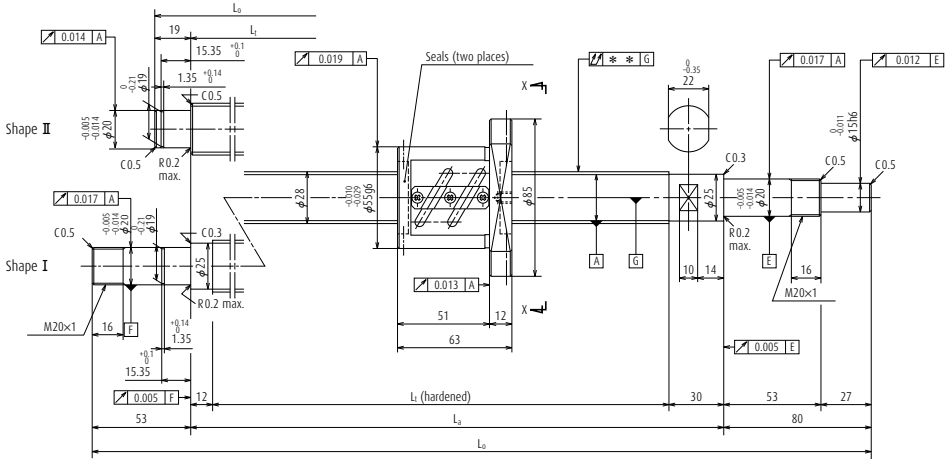


Ball screw No.	Stroke		Screw shaft length		
	Nominal	Maximum	L _t	L _a	L ₀
W2803SA-3P-C5Z6	250	301	370	400	499
W2805SA-3P-C5Z6	450	501	570	600	699
W2807SA-3P-C5Z6	650	695	758	800	933
W2809SA-3P-C5Z6	850	895	958	1 000	1 133
W2811SA-3P-C5Z6	1 050	1 095	1 158	1 200	1 333

Notes

1. We recommend NSK support unit. See page B411 for details.
2. **Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.**
See page D13 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.
4. The maximum stroke is -2 mm when Fixed-Fixed is used for left shaft end shape I.

Nut model: PFT

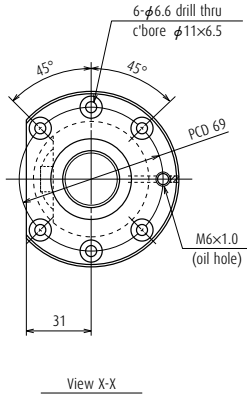

Screw shaft ϕ 28

Lead 6

Unit: mm


Ball screw specifications		
Shaft dia. \times Lead / Direction of turn	28 \times 6 / Right	
Preload / Ball recirculation	P-preload / Return tube	
Ball dia. / Ball circle dia.	3.175 / 28.5	
Screw shaft root diameter	25.2	
Effective turns of balls	2.5 \times 2	
Accuracy grade / Preload	C5 / Z	
Basic load rating (N)	Dynamic C_d	12 900
	Static C_{0a}	24 300
Preload (N)	540	
Dynamic friction torque, median, (N-cm)	11.8	
Spacer ball	Yes	
Factory-packed grease	Refer to Notes 2.	
Internal spatial volume of nut (cm ³)	6.0	
Standard volume of grease replenishing (cm ³)	3.0	

Recommended support unit

For drive side (Fixed)	For opposite to drive side	
	(Fixed)	(Simple)
WBK20-01 (square)	WBK20-01 (square)	WBK20S-01 (square)
WBK20-11 (round)	WBK20-11 (round)	

Unit: mm

Left side shaft end	Lead accuracy			Shaft run-out ** ∇	Mass (kg)	Permissible rotational speed N (min ⁻¹)	
	T	e_p	v_u			Supporting condition	
						Fixed - Simple Support	Fixed - Fixed
II	-0.009	0.025	0.020	0.040	3.0	2 500	—
II	-0.014	0.030	0.023	0.060	3.9	2 500	—
I	-0.018	0.035	0.025	0.075	4.9	2 500	2 500
I	-0.023	0.040	0.027	0.090	5.8	2 500	2 500
I	-0.028	0.046	0.030	0.120	6.6	2 500	2 500

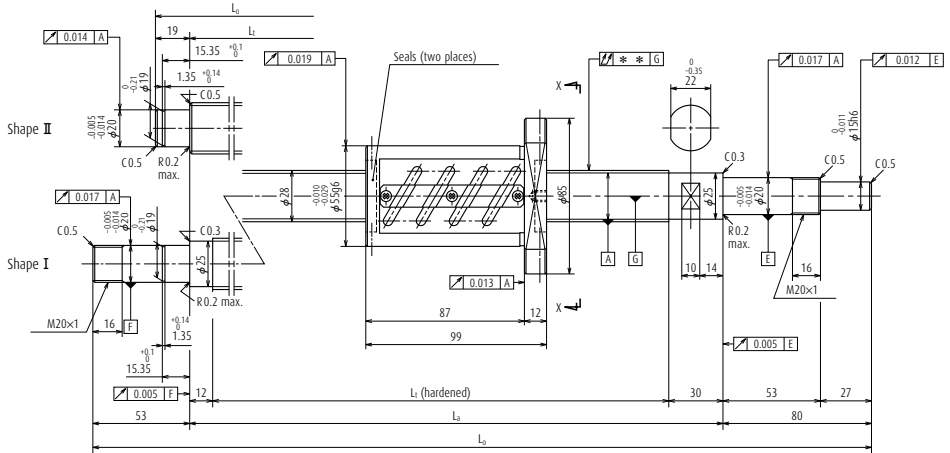


Ball screw No.	Stroke		Screw shaft length		
	Nominal	Maximum	L ₁	L _a	L ₀
W2803SA-4Z-C5Z6	250	265	370	400	499
W2805SA-4Z-C5Z6	450	465	570	600	699
W2807SA-4Z-C5Z6	650	659	758	800	933
W2809SA-4Z-C5Z6	850	859	958	1 000	1 133
W2811SA-4Z-C5Z6	1 050	1 059	1 158	1 200	1 333

Notes

1. We recommend NSK support unit. See page B411 for details.
2. **Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.**
See page D13 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.
4. The maximum stroke is -2 mm when Fixed-Fixed is used for left shaft end shape I.

Nut model: ZFT

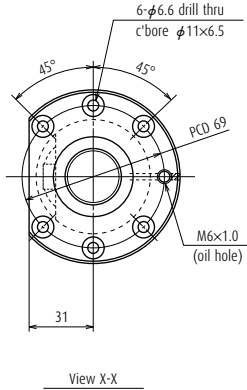

Screw shaft ϕ 28

Lead 6

Unit: mm

Ball screw specifications		
Shaft dia. × Lead / Direction of turn	28 × 6 / Right	
Preload / Ball recirculation	Z-preload / Return tube	
Ball dia. / Ball circle dia.	3.175 / 28.5	
Screw shaft root diameter	25.2	
Effective turns of balls	2.5 × 2	
Accuracy grade / Preload	C5 / Z	
Basic load rating (N)	Dynamic C_d	20 600
	Static C_{0a}	48 700
Preload (N)	1 220	
Dynamic friction torque, median, (N-cm)	23.5	
Spacer ball	None	
Factory-packed grease	Refer to Notes 2.	
Internal spatial volume of nut (cm ³)	9.5	
Standard volume of grease replenishing (cm ³)	4.8	


Recommended support unit

For drive side (Fixed)	For opposite to drive side	
	(Fixed)	(Simple)
WBK20-01 (square)	WBK20-01 (square)	WBK20-01 (square)
WBK20-11 (round)	WBK20-11 (round)	

Unit: mm

Left side shaft end	Lead accuracy			Shaft run-out ** ∇	Mass (kg)	Permissible rotational speed N (min ⁻¹)	
	T	e_p	v_u			Supporting condition	
						Fixed - Simple Support	Fixed - Fixed
II	-0.009	0.025	0.020	0.040	3.4	2 500	—
II	-0.014	0.030	0.023	0.060	4.3	2 500	—
I	-0.018	0.035	0.025	0.075	5.3	2 500	2 500
I	-0.023	0.040	0.027	0.090	6.2	2 500	2 500
I	-0.028	0.046	0.030	0.120	7.1	2 500	2 500

Nut model: PFT

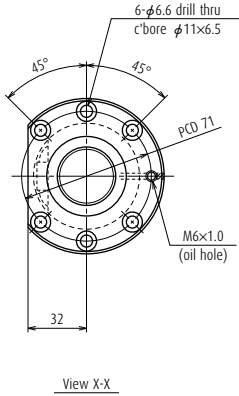

Screw shaft ϕ 32

Lead 5

Unit: mm


Ball screw specifications		
Shaft dia. × Lead / Direction of turn	32 × 5 / Right	
Preload / Ball recirculation	P-preload / Return tube	
Ball dia. / Ball circle dia.	3.175 / 32.5	
Screw shaft root diameter	29.2	
Effective turns of balls	2.5 × 2	
Accuracy grade / Preload	C5 / Z	
Basic load rating (N)	Dynamic C_d	13 700
	Static C_{0a}	28 000
Preload (N)	590	
Dynamic friction torque, median, (N-cm)	11.8	
Spacer ball	Yes	
Factory-packed grease	Refer to Notes 2.	
Internal spatial volume of nut (cm ³)	7.0	
Standard volume of grease replenishing (cm ³)	3.5	

Recommended support unit

For drive side (Fixed)	For opposite to drive side	
	(Fixed)	(Simple)
WBK25-01W (square)	WBK25-01W (square)	WBK25-01W (square)
WBK25-11 (round)	WBK25-11 (round)	

Unit: mm


Left side shaft end	Lead accuracy			Shaft run-out ** ↗	Mass (kg)	Permissible rotational speed N (min ⁻¹)	
	T	e_p	v_u			Supporting condition	
						Fixed - Simple Support	Fixed - Fixed
II	-0.006	0.023	0.018	0.040	3.1	2 180	—
II	-0.009	0.025	0.020	0.050	3.7	2 180	—
II	-0.011	0.027	0.020	0.050	4.2	2 180	—
II	-0.014	0.030	0.023	0.060	4.8	2 180	—
I	-0.016	0.035	0.025	0.075	5.6	2 180	2 180
I	-0.018	0.035	0.025	0.075	6.1	2 180	2 180
I	-0.023	0.040	0.027	0.090	7.3	2 180	2 180
I	-0.028	0.046	0.030	0.120	8.5	2 180	2 180
I	-0.035	0.054	0.035	0.150	10.2	2 100	2 180

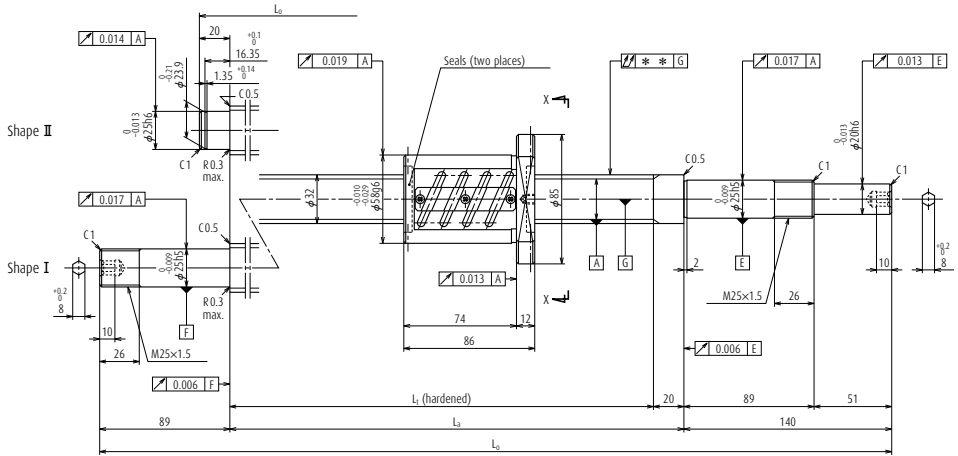

Ball screw No.	Stroke		Screw shaft length		
	Nominal	Maximum	L ₁	L ₂	L ₀
W3202SA-ZZ-C5Z5	150	186	280	300	460
W3203SA-ZZ-C5Z5	250	286	380	400	560
W3204SA-ZZ-C5Z5	350	386	480	500	660
W3205SA-ZZ-C5Z5	450	486	580	600	760
W3206SA-ZZ-C5Z5	550	586	680	700	929
W3207SA-ZZ-C5Z5	650	686	780	800	1 029
W3209SA-ZZ-C5Z5	850	886	980	1 000	1 229
W3211SA-ZZ-C5Z5	1 050	1 086	1 180	1 200	1 429
W3214SA-ZZ-C5Z5	1 350	1 386	1 480	1 500	1 729

- Notes**
1. We recommend NSK support unit. See page B411 for details.
 2. **Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.**
See page D13 for details.
 3. Contact NSK if the permissible rotational speed is to be exceeded.
 4. The maximum stroke is -9 mm when Fixed-Fixed is used for left shaft end shape I.

Nut model: ZFT

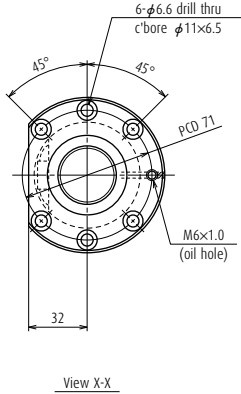

Screw shaft ϕ 32

Lead 5

Unit: mm


Ball screw specifications		
Shaft dia. \times Lead / Direction of turn	32 \times 5 / Right	
Preload / Ball recirculation	Z-preload / Return tube	
Ball dia. / Ball circle dia.	3.175 / 32.5	
Screw shaft root diameter	29.2	
Effective turns of balls	2.5 \times 2	
Accuracy grade / Preload	C5 / Z	
Basic load rating (N)	Dynamic C_d	21 800
	Static C_{0a}	56 000
Preload (N)	1 270	
Dynamic friction torque, median, (N-cm)	23.5	
Spacer ball	None	
Factory-packed grease	Refer to Notes 2.	
Internal spatial volume of nut (cm ³)	10	
Standard volume of grease replenishing (cm ³)	5	

Recommended support unit

For drive side, for opposite to drive side (Fixed)
WBK25DF-31H (round)

Unit: mm

Left side shaft end	Lead accuracy			Shaft run-out ** \uparrow	Mass (kg)	Permissible rotational speed N (min ⁻¹)	
	T	e_p	v_u			Supporting condition	
						Fixed - Simple Support	Fixed - Fixed
II	-0.007	0.023	0.018	0.040	3.5	2 180	—
II	-0.009	0.025	0.020	0.050	4.1	2 180	—
II	-0.012	0.027	0.020	0.060	4.7	2 180	—
II	-0.014	0.030	0.023	0.060	5.3	2 180	—
I	-0.016	0.035	0.025	0.075	6.1	2 180	2 180
I	-0.019	0.035	0.025	0.090	6.7	2 180	2 180
I	-0.024	0.040	0.027	0.090	7.9	2 180	2 180
I	-0.028	0.046	0.030	0.120	9.0	2 180	2 180
I	-0.036	0.054	0.035	0.150	10.8	2 100	2 180

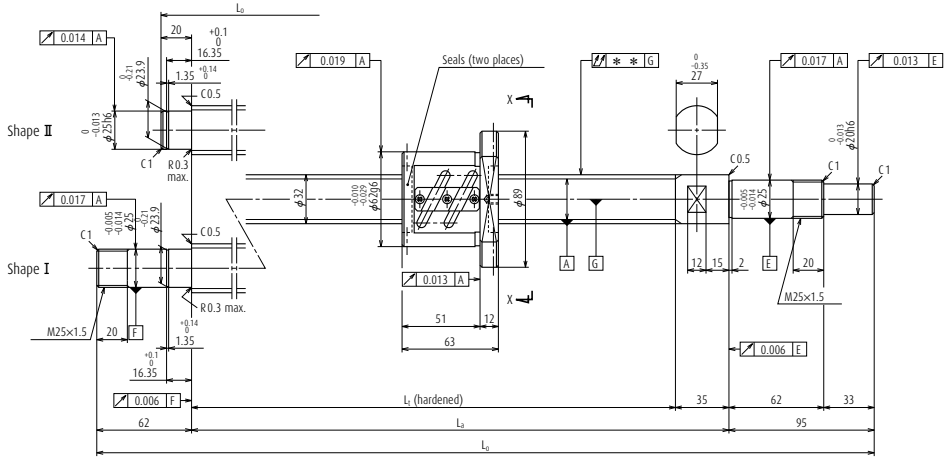


Ball screw No.	Stroke		Screw shaft length		
	Nominal	Maximum	L ₁	L _a	L ₀
W3203SA-3P-C5Z6	250	294	365	400	515
W3205SA-3P-C5Z6	450	494	565	600	715
W3207SA-3P-C5Z6	650	694	765	800	957
W3209SA-3P-C5Z6	850	894	965	1 000	1 157
W3211SA-3P-C5Z6	1 050	1 094	1 165	1 200	1 357
W3214SA-3P-C5Z6	1 350	1 394	1 465	1 500	1 657

Notes

1. We recommend NSK support unit. See page B411 for details.
2. **Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.**
See page D13 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.
4. The maximum stroke is -9 mm when Fixed-Fixed is used for left shaft end shape I.

Nut model: PFT

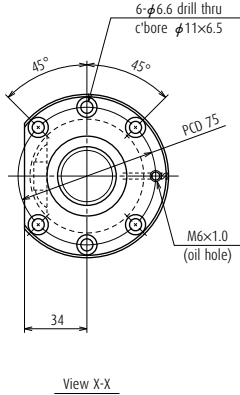

Screw shaft ϕ 32

Lead 6

Unit: mm


Ball screw specifications		
Shaft dia. \times Lead / Direction of turn	32 \times 6 / Right	
Preload / Ball recirculation	P-preload / Return tube	
Ball dia. / Ball circle dia.	3.969 / 32.5	
Screw shaft root diameter	28.4	
Effective turns of balls	2.5 \times 2	
Accuracy grade / Preload	C5 / Z	
Basic load rating (N)	Dynamic C_d	18 300
	Static C_{0a}	34 700
Preload (N)	780	
Dynamic friction torque, median, (N-cm)	15.7	
Spacer ball	Yes	
Factory-packed grease	Refer to Notes 2.	
Internal spatial volume of nut (cm ³)	9.5	
Standard volume of grease replenishing (cm ³)	4.8	

Recommended support unit

For drive side (Fixed)	For opposite to drive side	
	(Fixed)	(Simple)
WBK25-01W (square)	WBK25-01W (square)	WBK255-01W (square)
WBK25-11 (round)	WBK25-11 (round)	

Unit: mm


Left side shaft end	Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min ⁻¹)	
	T	e_p	v_u			Supporting condition	
						Fixed - Simple Support	Fixed - Fixed
II	-0.009	0.025	0.020	0.050	3.8	2 180	—
II	-0.014	0.030	0.023	0.060	5.0	2 180	—
I	-0.018	0.035	0.025	0.075	6.3	2 180	2 180
I	-0.023	0.040	0.027	0.090	7.4	2 180	2 180
I	-0.028	0.046	0.030	0.120	8.5	2 180	2 180
I	-0.035	0.054	0.035	0.150	10.2	2 050	2 180

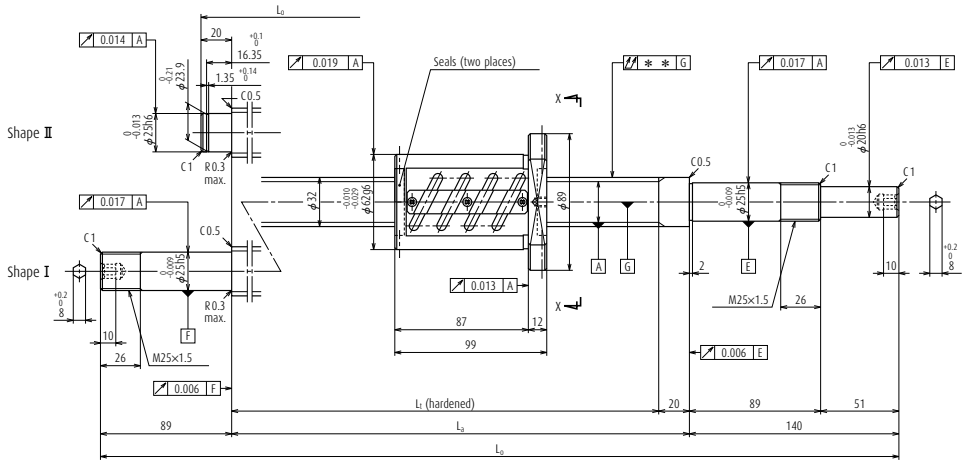

Ball screw No.	Stroke		Screw shaft length		
	Nominal	Maximum	L ₁	L ₂	L ₀
W3203SA-4Z-C5Z6	250	273	380	400	560
W3205SA-4Z-C5Z6	450	473	580	600	760
W3207SA-4Z-C5Z6	650	673	780	800	1 029
W3209SA-4Z-C5Z6	850	873	980	1 000	1 229
W3211SA-4Z-C5Z6	1 050	1 073	1 180	1 200	1 429
W3214SA-4Z-C5Z6	1 350	1 373	1 480	1 500	1 729

- Notes**
1. We recommend NSK support unit. See page B411 for details.
 2. **Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.**
See page D13 for details.
 3. Contact NSK if the permissible rotational speed is to be exceeded.

Nut model: ZFT

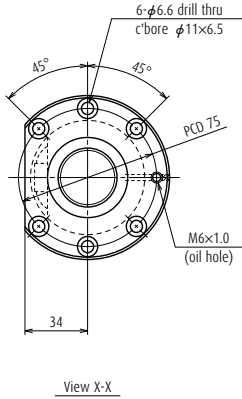

Screw shaft $\phi 32$

Lead 6

Unit: mm


Ball screw specifications		
Shaft dia. × Lead / Direction of turn	32 × 6 / Right	
Preload / Ball recirculation	Z-preload / Return tube	
Ball dia. / Ball circle dia.	3.969 / 32.5	
Screw shaft root diameter	28.4	
Effective turns of balls	2.5 × 2	
Accuracy grade / Preload	C5 / Z	
Basic load rating (N)	Dynamic C_d	29 100
	Static C_{0a}	69 300
Preload (N)	1 710	
Dynamic friction torque, median, (N-cm)	35.0	
Spacer ball	None	
Factory-packed grease	Refer to Notes 2.	
Internal spatial volume of nut (cm ³)	14	
Standard volume of grease replenishing (cm ³)	7	

Recommended support unit

For drive side, for opposite to drive side (Fixed)
WBK25DF-31H (round)

Unit: mm

Left side shaft end	Lead accuracy			Shaft run-out** ↕	Mass (kg)	Permissible rotational speed N (min ⁻¹)	
	T	e_p	v_u			Supporting condition	
						Fixed - Simple Support	Fixed - Fixed
II	-0.009	0.025	0.020	0.050	4.5	2 180	—
II	-0.014	0.030	0.023	0.060	5.6	2 180	—
I	-0.019	0.035	0.025	0.090	7.0	2 180	2 180
I	-0.024	0.040	0.027	0.090	8.1	2 180	2 180
I	-0.028	0.046	0.030	0.120	9.3	2 180	2 180
I	-0.036	0.054	0.035	0.150	11.0	2 060	2 180

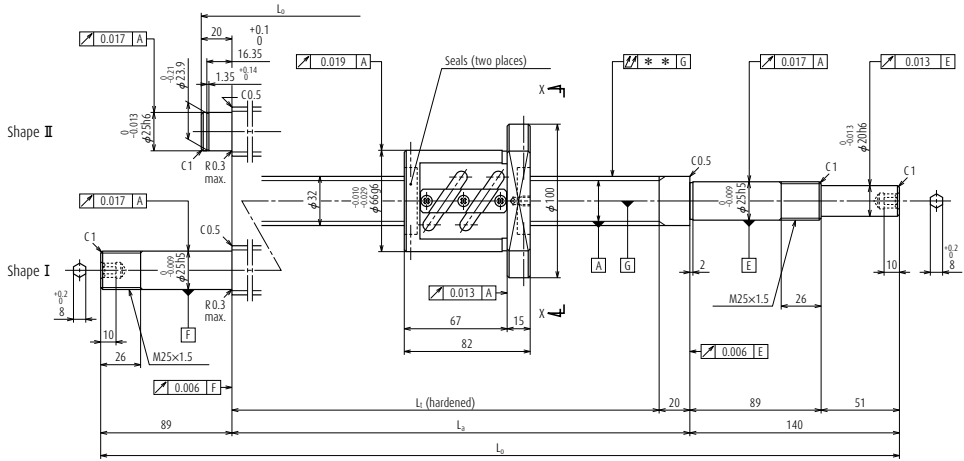


Ball screw No.	Stroke		Screw shaft length		
	Nominal	Maximum	L ₁	L ₂	L ₀
W3203SA-5Z-C5Z8	250	290	380	400	560
W3205SA-5Z-C5Z8	450	490	580	600	760
W3207SA-5Z-C5Z8	650	690	780	800	1 029
W3209SA-5Z-C5Z8	850	890	980	1 000	1 229
W3214SA-5Z-C5Z8	1 350	1 390	1 480	1 500	1 729

Notes

1. We recommend NSK support unit. See page B411 for details.
2. **Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.**
See page D13 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.

Nut model: ZFT

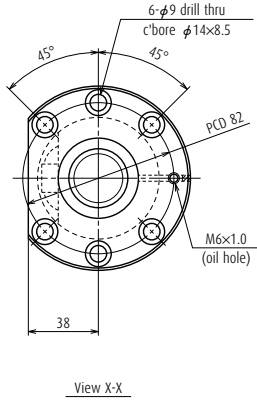

Screw shaft φ 32

Lead 8

Unit: mm


Ball screw specifications		
Shaft dia. × Lead / Direction of turn	32 × 8 / Right	
Preload / Ball recirculation	Z-preload / Return tube	
Ball dia. / Ball circle dia.	4.762 / 32.5	
Screw shaft root diameter	27.5	
Effective turns of balls	2.5 × 1	
Accuracy grade / Preload	C5 / Z	
Basic load rating (N)	Dynamic C _a	20 600
	Static C _{0a}	40 900
Preload (N)	1 320	
Dynamic friction torque, median, (N-cm)	31.0	
Spacer ball	None	
Factory-packed grease	Refer to Notes 2.	
Internal spatial volume of nut (cm ³)	13	
Standard volume of grease replenishing (cm ³)	6.5	

Recommended support unit

For drive side, for opposite to drive side (Fixed)
WBK25DF-31H (round)

Unit: mm


Left side shaft end	Lead accuracy			Shaft run-out ** ↕	Mass (kg)	Permissible rotational speed N (min ⁻¹)	
	T	e _p	v _l			Supporting condition	
						Fixed - Simple Support	Fixed - Fixed
II	-0.009	0.025	0.020	0.050	4.7	2 180	—
II	-0.014	0.030	0.023	0.060	5.8	2 180	—
I	-0.019	0.035	0.025	0.090	7.2	2 180	2 180
I	-0.024	0.040	0.027	0.090	8.3	2 180	2 180
I	-0.036	0.054	0.035	0.150	11.1	1 960	2 180

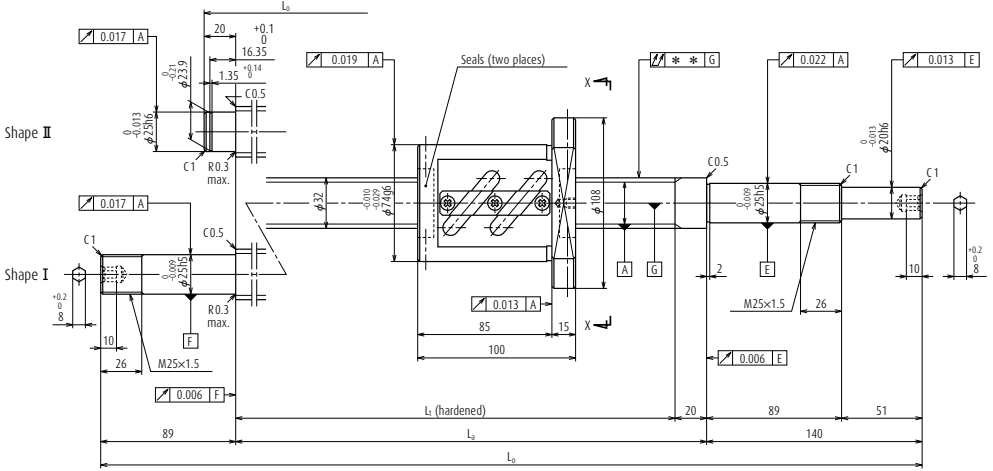

Ball screw No.	Stroke		Screw shaft length		
	Nominal	Maximum	L ₁	L ₂	L ₀
W3203SA-6Z-C5Z10	250	272	380	400	560
W3204SA-3Z-C5Z10	350	372	480	500	660
W3205SA-6Z-C5Z10	450	472	580	600	760
W3206SA-3Z-C5Z10	550	572	680	700	929
W3207SA-6Z-C5Z10	650	672	780	800	1 029
W3209SA-6Z-C5Z10	850	872	980	1 000	1 229
W3211SA-5Z-C5Z10	1 050	1 072	1 180	1 200	1 429
W3214SA-6Z-C5Z10	1 350	1 372	1 480	1 500	1 729
W3217SA-1Z-C5Z10	1 650	1 672	1 780	1 800	2 029

- Notes**
1. We recommend NSK support unit. See page B411 for details.
 2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
 3. Contact NSK if the permissible rotational speed is to be exceeded.

Nut model: ZFT

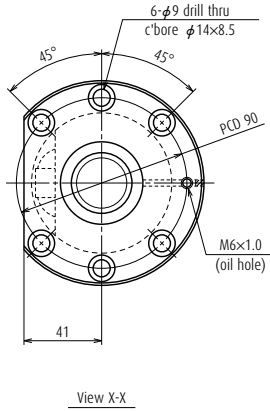

Screw shaft ϕ 32

Lead 10

Unit: mm


Ball screw specifications		
Shaft dia. \times Lead / Direction of turn	32 \times 10 / Right	
Preload / Ball recirculation	Z-preload / Return tube	
Ball dia. / Ball circle dia.	6.35 / 33	
Screw shaft root diameter	26.4	
Effective turns of balls	2.5 \times 1	
Accuracy grade / Preload	C5 / Z	
Basic load rating (N)	Dynamic C_a	30 000
	Static C_{0a}	55 100
Preload (N)	1 960	
Dynamic friction torque, median, (N-cm)	54.0	
Spacer ball	None	
Factory-packed grease	Refer to Notes 2.	
Internal spatial volume of nut (cm ³)	22	
Standard volume of grease replenishing (cm ³)	11	

Recommended support unit

For drive side, for opposite to drive side (Fixed)
WBK25DF-31H (round)

Unit: mm


Left side shaft end	Lead accuracy			Shaft run-out ** $\uparrow \downarrow$	Mass (kg)	Permissible rotational speed N (min ⁻¹)	
	T	e_p	v_u			Supporting condition	
						Fixed - Simple Support	Fixed - Fixed
II	-0.009	0.025	0.020	0.050	5.5	2 180	—
II	-0.012	0.027	0.020	0.060	6.0	2 180	—
II	-0.014	0.030	0.023	0.060	6.6	2 180	—
I	-0.016	0.035	0.025	0.075	7.4	2 180	2 180
I	-0.019	0.035	0.025	0.090	7.9	2 180	2 180
I	-0.024	0.040	0.027	0.090	9.0	2 180	2 180
I	-0.028	0.046	0.030	0.120	10.1	2 180	2 180
I	-0.036	0.054	0.035	0.150	11.7	1 920	2 180
I	-0.043	0.065	0.040	0.200	13.3	1 310	1 810

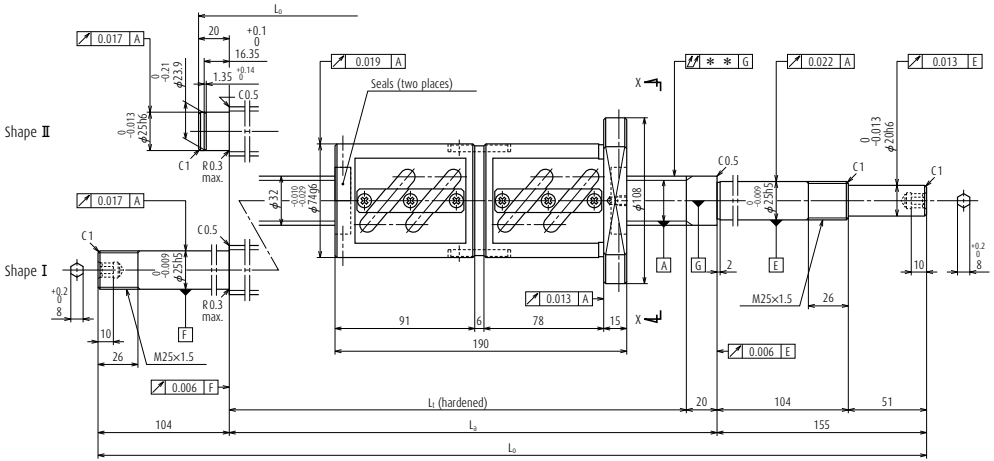

Ball screw No.	Stroke		Screw shaft length		
	Nominal	Maximum	L ₁	L _a	L ₀
W3203SA-7D-C5Z10	150	182	380	400	575
W3204SA-4D-C5Z10	250	282	480	500	675
W3205SA-7D-C5Z10	350	382	580	600	775
W3206SA-4D-C5Z10	450	482	680	700	959
W3207SA-7D-C5Z10	550	582	780	800	1 059
W3209SA-7D-C5Z10	750	782	980	1 000	1 259
W3211SA-6D-C5Z10	950	982	1 180	1 200	1 459
W3214SA-7D-C5Z10	1 250	1 282	1 480	1 500	1 759
W3217SA-2D-C5Z10	1 550	1 582	1 780	1 800	2 059

- Notes**
1. We recommend NSK support unit. See page B411 for details.
 2. **Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.**
See page D13 for details.
 3. Contact NSK if the permissible rotational speed is to be exceeded.

Nut model: DFT

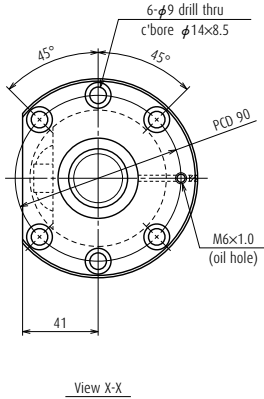

Screw shaft ϕ 32

Lead 10

Unit: mm


Ball screw specifications		
Shaft dia. \times Lead / Direction of turn	32 \times 10 / Right	
Preload / Ball recirculation	D-preload / Return tube	
Ball dia. / Ball circle dia.	6.35 / 33	
Screw shaft root diameter	26.4	
Effective turns of balls	2.5 \times 2	
Accuracy grade / Preload	C5 / Z	
Basic load rating (N)	Dynamic C_d	54 500
	Static C_{0a}	110 000
Preload (N)	3 230	
Dynamic friction torque, median, (N-cm)	83.0	
Spacer ball	None	
Factory-packed grease	Refer to Notes 2.	
Internal spatial volume of nut (cm ³)	44	
Standard volume of grease replenishing (cm ³)	22	

Recommended support unit

For drive side, for opposite to drive side (Fixed)
WBK25DF-31H (round)

Unit: mm

Left side shaft end	Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min ⁻¹)	
	T	e_p	v_u			Supporting condition	
						Fixed - Simple Support	Fixed - Fixed
II	-0.009	0.025	0.020	0.050	7.5	2 180	—
II	-0.012	0.027	0.020	0.060	8.1	2 180	—
II	-0.014	0.030	0.023	0.060	8.6	2 180	—
I	-0.016	0.035	0.025	0.075	9.5	2 180	2 180
I	-0.019	0.035	0.025	0.090	10.0	2 180	2 180
I	-0.024	0.040	0.027	0.120	11.1	2 180	2 180
I	-0.028	0.046	0.030	0.120	12.2	2 180	2 180
I	-0.036	0.054	0.035	0.150	13.8	2 050	2 180
I	-0.043	0.065	0.040	0.200	15.4	1 380	1 910

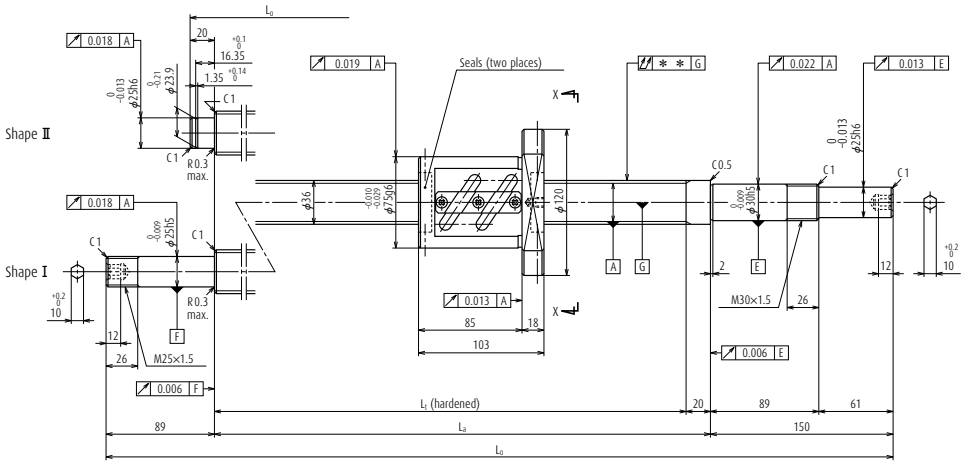


Ball screw No.	Stroke		Screw shaft length		
	Nominal	Maximum	L ₁	L ₂	L ₀
W3604SA-1Z-C5Z10	350	370	480	500	670
W3606SA-1Z-C5Z10	550	570	680	700	870
W3609SA-1Z-C5Z10	850	870	980	1 000	1 239
W3613SA-1Z-C5Z10	1 250	1 270	1 380	1 400	1 639
W3617SA-1Z-C5Z10	1 650	1 670	1 780	1 800	2 039

Notes

1. We recommend NSK support unit. See page B411 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.

Nut model: ZFT

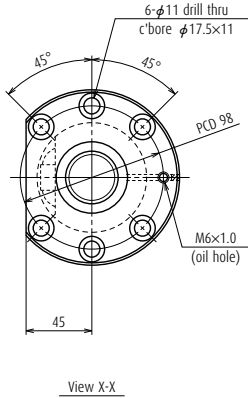

Screw shaft ϕ 36

Lead 10

Unit: mm


Ball screw specifications	
Shaft dia. \times Lead / Direction of turn	36 \times 10 / Right
Preload / Ball recirculation	Z-preload / Return tube
Ball dia. / Ball circle dia.	6.35 / 37
Screw shaft root diameter	30.4
Effective turns of balls	2.5 \times 1
Accuracy grade / Preload	C5 / Z
Basic load rating (N)	Dynamic C_a
	Static C_{0a}
Preload (N)	2 060
Dynamic friction torque, median, (N-cm)	59.0
Spacer ball	None
Factory-packed grease	Refer to Notes 2.
Internal spatial volume of nut (cm ³)	32
Standard volume of grease replenishing (cm ³)	16

Recommended support unit

For drive side (Fixed)	for opposite to drive side (Simple)
WBK300DF-31H (round)	WBK25DF-31H (round)

Unit: mm

Left side shaft end	Lead accuracy			Shaft run-out ** $\uparrow \downarrow$	Mass (kg)	Permissible rotational speed N (min ⁻¹)	
	T	e_p	v_u			Supporting condition	
						Fixed - Simple Support	Fixed - Fixed
II	-0.012	0.027	0.020	0.040	7.4	1 940	—
II	-0.016	0.035	0.025	0.050	8.8	1 940	—
I	-0.024	0.040	0.027	0.065	11.1	1 940	1 940
I	-0.033	0.054	0.035	0.100	13.9	1 940	1 940
I	-0.043	0.065	0.040	0.130	16.6	1 510	1 940

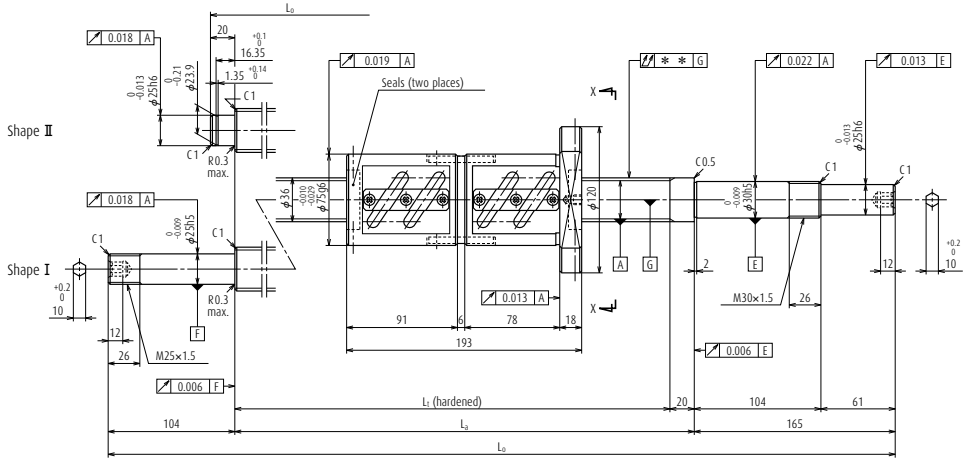


Ball screw No.	Stroke		Screw shaft length		
	Nominal	Maximum	L _t	L _a	L ₀
W3604SA-2D-C5Z10	250	280	480	500	685
W3606SA-2D-C5Z10	450	480	680	700	885
W3609SA-2D-C5Z10	750	780	980	1 000	1 269
W3613SA-2D-C5Z10	1 150	1 180	1 380	1 400	1 669
W3617SA-2D-C5Z10	1 550	1 580	1 780	1 800	2 069

Notes

1. We recommend NSK support unit. See page B411 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.

Nut model: DFT

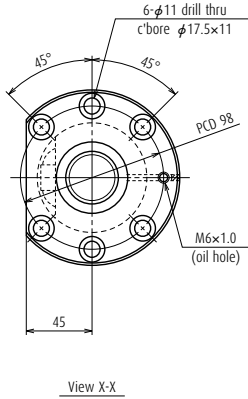

Screw shaft ϕ 36

Lead 10

Unit: mm


Ball screw specifications		
Shaft dia. \times Lead / Direction of turn	36 \times 10 / Right	
Preload / Ball recirculation	D-preload / Return tube	
Ball dia. / Ball circle dia.	6.35 / 37	
Screw shaft root diameter	30.4	
Effective turns of balls	2.5 \times 2	
Accuracy grade / Preload	C5 / Z	
Basic load rating (N)	Dynamic C_d	58 000
	Static C_{0a}	122 000
Preload (N)	3 430	
Dynamic friction torque, median, (N-cm)	93.0	
Spacer ball	None	
Factory-packed grease	Refer to Notes 2.	
Internal spatial volume of nut (cm ³)	64	
Standard volume of grease replenishing (cm ³)	27	

Recommended support unit

For drive side (Fixed)	For opposite to drive side (Simple)
WBK30DFD-31H	WBK25DFD-31H

Unit: mm

Left side shaft end	Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min ⁻¹)	
	T	e_p	v_u			Supporting condition	
						Fixed - Simple Support	Fixed - Fixed
II	-0.012	0.027	0.020	0.040	9.3	1 940	—
II	-0.016	0.035	0.025	0.050	10.7	1 940	—
I	-0.024	0.040	0.027	0.080	13.1	1 940	1 940
I	-0.033	0.054	0.035	0.100	15.9	1 940	1 940
I	-0.043	0.065	0.040	0.130	18.6	1 600	1 940

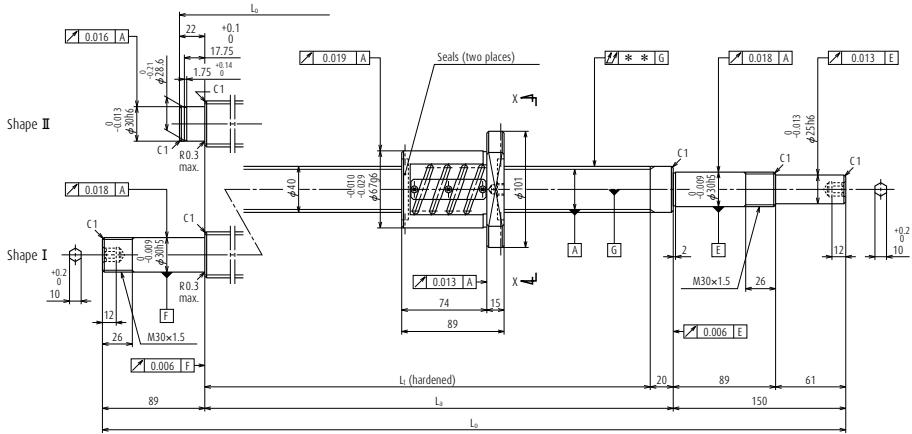


Ball screw No.	Stroke		Screw shaft length		
	Nominal	Maximum	L ₁	L _a	L ₀
W4003SA-1Z-C5Z5	250	284	380	400	572
W4005SA-1Z-C5Z5	450	484	580	600	772
W4007SA-1Z-C5Z5	650	684	780	800	1 039
W4009SA-1Z-C5Z5	850	884	980	1 000	1 239
W4011SA-1Z-C5Z5	1 050	1 084	1 180	1 200	1 439
W4015SA-1Z-C5Z5	1 450	1 484	1 580	1 600	1 839

Notes

1. We recommend NSK support unit. See page B411 for details.
2. **Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.**
See page D13 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.

Nut model: ZFT

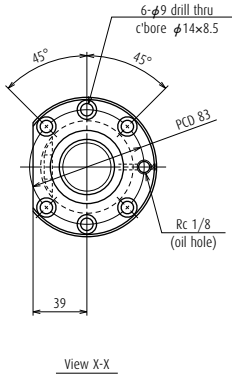

Screw shaft ϕ 40

Lead 5

Unit: mm


Ball screw specifications		
Shaft dia. \times Lead / Direction of turn	40 \times 5 / Right	
Preload / Ball recirculation	Z-preload / Return tube	
Ball dia. / Ball circle dia.	3.175 / 40.5	
Screw shaft root diameter	37.2	
Effective turns of balls	2.5 \times 2	
Accuracy grade / Preload	C5 / Z	
Basic load rating (N)	Dynamic C_a	23 900
	Static C_{0a}	70 500
Preload (N)	1 420	
Dynamic friction torque, median, (N-cm)	29.5	
Spacer ball	None	
Factory-packed grease	Refer to Notes 2.	
Internal spatial volume of nut (cm ³)	14	
Standard volume of grease replenishing (cm ³)	7	

Recommended support unit

For drive side, for opposite to drive side (Fixed)
WBK30DF-31H (round)

Unit: mm


Left side shaft end	Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min ⁻¹)	
	T	e_p	v_u			Supporting condition	
						Fixed - Simple Support	Fixed - Fixed
II	-0.009	0.025	0.020	0.035	6.3	1 750	—
II	-0.014	0.030	0.023	0.040	8.1	1 750	—
I	-0.019	0.035	0.025	0.065	10.3	1 750	1 750
I	-0.024	0.040	0.027	0.065	12.2	1 750	1 750
I	-0.028	0.046	0.030	0.080	14.0	1 750	1 750
I	-0.038	0.054	0.035	0.100	17.7	1 750	1 750

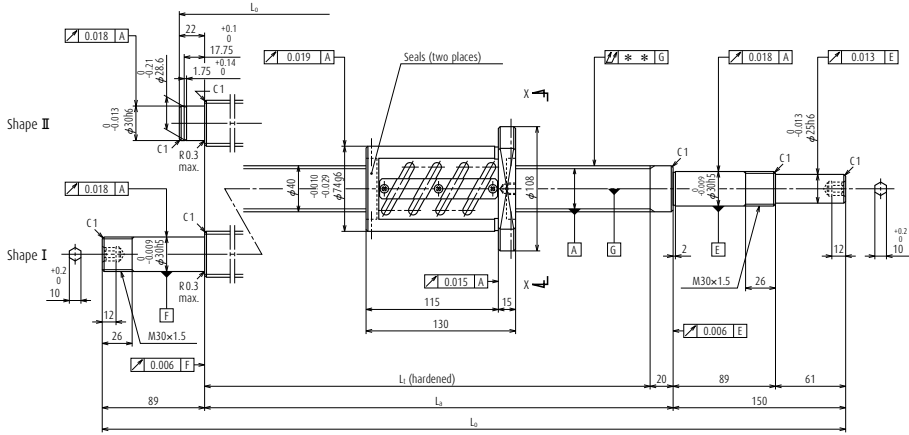

Ball screw No.	Stroke		Screw shaft length		
	Nominal	Maximum	L ₁	L ₂	L ₀
W4003SA-2Z-C5Z8	200	243	380	400	572
W4005SA-2Z-C5Z8	400	443	580	600	772
W4007SA-2Z-C5Z8	600	643	780	800	1 039
W4009SA-2Z-C5Z8	800	843	980	1 000	1 239
W4011SA-2Z-C5Z8	1 000	1 043	1 180	1 200	1 439
W4015SA-2Z-C5Z8	1 400	1 443	1 580	1 600	1 839

- Notes**
1. We recommend NSK support unit. See page B411 for details.
 2. **Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.**
See page D13 for details.
 3. Contact NSK if the permissible rotational speed is to be exceeded.

Nut model: ZFT

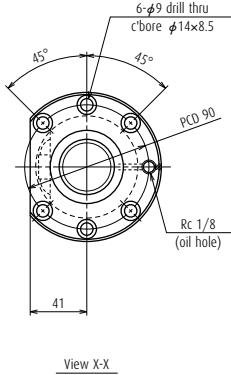

Screw shaft ϕ 40

Lead 8

Unit: mm

Ball screw specifications		
Shaft dia. × Lead / Direction of turn	40 × 8 / Right	
Preload / Ball recirculation	Z-preload / Return tube	
Ball dia. / Ball circle dia.	4.762 / 40.5	
Screw shaft root diameter	35.5	
Effective turns of balls	2.5 × 2	
Accuracy grade / Preload	C5 / Z	
Basic load rating (N)	Dynamic C_a	41 100
	Static C_{0a}	103 000
Preload (N)	2 450	
Dynamic friction torque, median, (N-cm)	64.0	
Spacer ball	None	
Factory-packed grease	Refer to Notes 2.	
Internal spatial volume of nut (cm ³)	27	
Standard volume of grease replenishing (cm ³)	14	


Recommended support unit

For drive side, for opposite to drive side (Fixed)
WBK30DF-31H (round)

Unit: mm

Left side shaft end	Lead accuracy			Shaft run-out** ↕	Mass (kg)	Permissible rotational speed N (min ⁻¹)	
	T	e _p	v _u			Supporting condition	
						Fixed - Simple Support	Fixed - Fixed
II	-0.009	0.025	0.020	0.035	7.4	1 750	—
II	-0.014	0.030	0.023	0.040	9.2	1 750	—
I	-0.019	0.035	0.025	0.065	11.3	1 750	1 750
I	-0.024	0.040	0.027	0.065	13.1	1 750	1 750
I	-0.028	0.046	0.030	0.080	14.9	1 750	1 750
I	-0.038	0.054	0.035	0.100	18.5	1 750	1 750

Nut model: ZFT

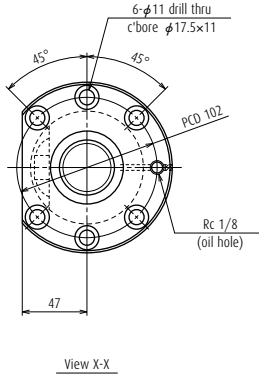

Screw shaft ϕ 40

Lead 10

Unit: mm


Ball screw specifications		
Shaft dia. \times Lead / Direction of turn	40 \times 10 / Right	
Preload / Ball recirculation	Z-preload / Return tube	
Ball dia. / Ball circle dia.	6.35 / 41	
Screw shaft root diameter	34.4	
Effective turns of balls	2.5 \times 1	
Accuracy grade / Preload	C5 / Z	
Basic load rating (N)	Dynamic C_a	33 700
	Static C_{0a}	68 300
Preload (N)	2 160	
Dynamic friction torque, median, (N-cm)	64.0	
Spacer ball	None	
Factory-packed grease	Refer to Notes 2.	
Internal spatial volume of nut (cm ³)	30	
Standard volume of grease replenishing (cm ³)	15	

Recommended support unit

For drive side, for opposite to drive side (Fixed)
WBK30DF-31H (round)

Unit: mm


Left side shaft end	Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min ⁻¹)	
	T	e_p	v_u			Supporting condition	
						Fixed - Simple Support	Fixed - Fixed
II	-0.012	0.027	0.020	0.040	8.7	1 750	—
II	-0.014	0.030	0.023	0.040	9.6	1 750	—
II	-0.016	0.035	0.025	0.050	10.4	1 750	—
I	-0.019	0.035	0.025	0.065	11.7	1 750	1 750
I	-0.024	0.040	0.027	0.065	13.4	1 750	1 750
I	-0.028	0.046	0.030	0.080	15.1	1 750	1 750
I	-0.033	0.054	0.035	0.100	16.9	1 750	1 750
I	-0.038	0.054	0.035	0.100	18.6	1 750	1 750
I	-0.043	0.065	0.040	0.130	20.3	1 710	1 750
I	-0.057	0.077	0.046	0.170	25.5	940	1 320

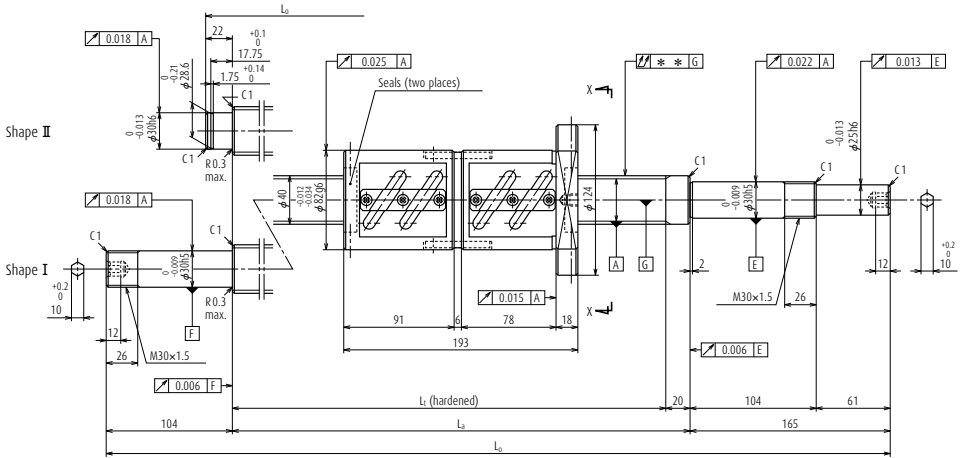

Ball screw No.	Stroke		Screw shaft length		
	Nominal	Maximum	L ₁	L ₃	L ₀
W4004SA-2D-C5Z10	250	280	480	500	687
W4005SA-4D-C5Z10	350	380	580	600	787
W4006SA-2D-C5Z10	450	480	680	700	887
W4007SA-4D-C5Z10	550	580	780	800	1 069
W4009SA-4D-C5Z10	750	780	980	1 000	1 269
W4011SA-4D-C5Z10	950	980	1 180	1 200	1 469
W4013SA-2D-C5Z10	1 150	1 180	1 380	1 400	1 669
W4015SA-4D-C5Z10	1 350	1 380	1 580	1 600	1 869
W4017SA-2D-C5Z10	1 550	1 580	1 780	1 800	2 069
W4023SA-2D-C5Z10	2 150	2 180	2 380	2 400	2 669

- Notes**
1. We recommend NSK support unit. See page B411 for details.
 2. **Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.**
See page D13 for details.
 3. Contact NSK if the permissible rotational speed is to be exceeded.

Nut model: DFT

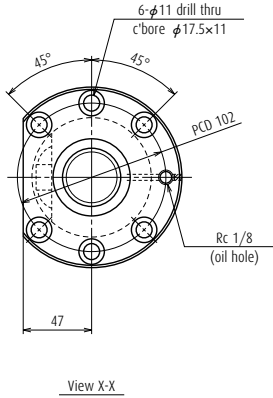

Screw shaft φ 40

Lead 10

Unit: mm


Ball screw specifications		
Shaft dia. × Lead / Direction of turn	40 × 10 / Right	
Preload / Ball recirculation	D-preload / Return tube	
Ball dia. / Ball circle dia.	6.35 / 41	
Screw shaft root diameter	34.4	
Effective turns of balls	2.5 × 2	
Accuracy grade / Preload	C5 / Z	
Basic load rating (N)	Dynamic C _a	61 200
	Static C _{0a}	137 000
Preload (N)	3 630	
Dynamic friction torque, median, (N-cm)	108	
Spacer ball	None	
Factory-packed grease	Refer to Notes 2.	
Internal spatial volume of nut (cm ³)	59	
Standard volume of grease replenishing (cm ³)	30	

Recommended support unit

For drive side, for opposite to drive side (Fixed)
WBK30DFD-31H (round)

Unit: mm

Left side shaft end	Lead accuracy			Shaft run-out ** ↗	Mass (kg)	Permissible rotational speed N (min ⁻¹)	
	T	e _p	v _u			Supporting condition	
						Fixed - Simple Support	Fixed - Fixed
II	-0.012	0.027	0.020	0.040	11.0	1 750	—
II	-0.014	0.030	0.023	0.040	11.9	1 750	—
II	-0.016	0.035	0.025	0.050	12.7	1 750	—
I	-0.019	0.035	0.025	0.065	14.1	1 750	1 750
I	-0.024	0.040	0.027	0.065	15.8	1 750	1 750
I	-0.028	0.046	0.030	0.080	17.5	1 750	1 750
I	-0.033	0.054	0.035	0.100	19.3	1 750	1 750
I	-0.038	0.054	0.035	0.100	21.0	1 750	1 750
I	-0.043	0.065	0.040	0.130	22.7	1 750	1 750
I	-0.057	0.077	0.046	0.170	27.9	980	1 370

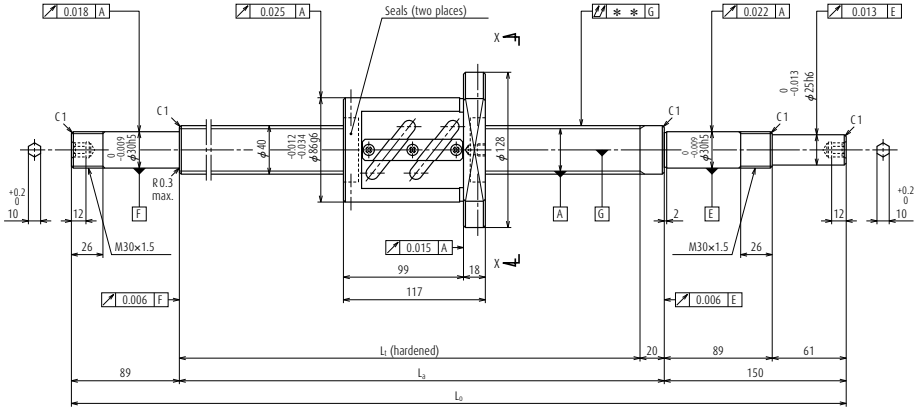


Ball screw No.	Stroke		Screw shaft length		
	Nominal	Maximum	L_t	L_a	L_b
W4006SA-3Z-C5Z12	500	556	680	700	939
W4009SA-5Z-C5Z12	800	856	980	1 000	1 239
W4013SA-3Z-C5Z12	1 200	1 256	1 380	1 400	1 639
W4017SA-3Z-C5Z12	1 600	1 656	1 780	1 800	2 039
W4024SA-1Z-C5Z12	2 300	2 356	2 480	2 500	2 739

Notes

1. We recommend NSK support unit. See page B411 for details.
2. **Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.**
See page D13 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.

Nut model: ZFT

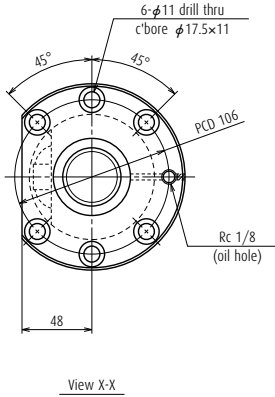

Screw shaft ϕ 40

Lead 12

Unit: mm


Ball screw specifications		
Shaft dia. \times Lead / Direction of turn	40 \times 12 / Right	
Preload / Ball recirculation	Z-preload / Return tube	
Ball dia. / Ball circle dia.	7.144 / 41.5	
Screw shaft root diameter	34.1	
Effective turns of balls	2.5 \times 1	
Accuracy grade / Preload	C5 / Z	
Basic load rating (N)	Dynamic C_d	39 500
	Static C_{0a}	77 200
Preload (N)	2 550	
Dynamic friction torque, median, (N-cm)	83.0	
Spacer ball	None	
Factory-packed grease	Refer to Notes 2.	
Internal spatial volume of nut (cm ³)	33	
Standard volume of grease replenishing (cm ³)	17	

Recommended support unit

For drive side, for opposite to drive side (Fixed)
WBK30DF-31H (round)

Unit: mm

Lead accuracy			Shaft run-out ** ∇	Mass (kg)	Permissible rotational speed N (min ⁻¹)	
T	e_p	v_u			Supporting condition	
					Fixed - Simple Support	Fixed - Fixed
-0.016	0.035	0.025	0.050	11.6	1 750	1 750
-0.024	0.040	0.027	0.065	14.2	1 750	1 750
-0.033	0.054	0.035	0.100	17.7	1 750	1 750
-0.043	0.065	0.040	0.130	21.2	1 710	1 750
-0.060	0.077	0.046	0.170	27.2	870	1 210

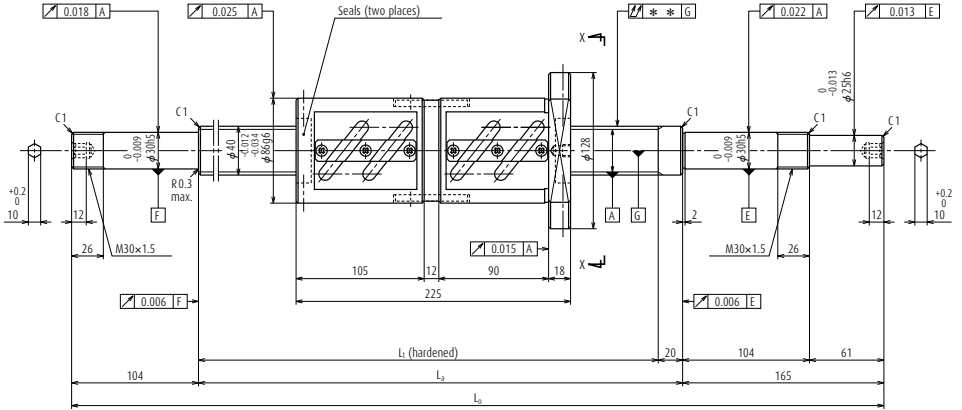


Ball screw No.	Stroke		Screw shaft length		
	Nominal	Maximum	L_t	L_a	L_0
W4006SA-4D-C5Z12	400	448	680	700	969
W4009SA-6D-C5Z12	700	748	980	1 000	1 269
W4013SA-4D-C5Z12	1 100	1 148	1 380	1 400	1 669
W4017SA-4D-C5Z12	1 500	1 548	1 780	1 800	2 069
W4024SA-2D-C5Z12	2 200	2 248	2 480	2 500	2 769

Notes

1. We recommend NSK support unit. See page B411 for details.
2. **Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.**
See page D13 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.

Nut model: DFT

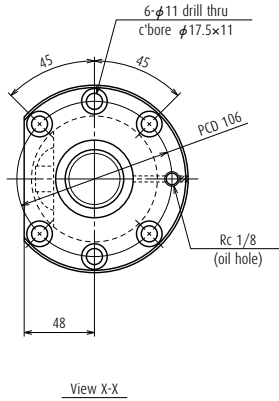

Screw shaft ϕ 40

Lead 12

Unit: mm


Ball screw specifications		
Shaft dia. \times Lead / Direction of turn	40 \times 12 / Right	
Preload / Ball recirculation	D-preload / Return tube	
Ball dia. / Ball circle dia.	7.144 / 41.5	
Screw shaft root diameter	34.1	
Effective turns of balls	2.5 \times 2	
Accuracy grade / Preload	C5 / Z	
Basic load rating (N)	Dynamic C_d	71 700
	Static C_{0a}	154 000
Preload (N)	4 310	
Dynamic friction torque, median, (N-cm)	137	
Spacer ball	None	
Factory-packed grease	Refer to Notes 2.	
Internal spatial volume of nut (cm ³)	76	
Standard volume of grease replenishing (cm ³)	38	

Recommended support unit

For drive side, for opposite to drive side (Fixed)
WBK30DFD-31H (round)

Unit: mm

Lead accuracy			Shaft run-out ** 	Mass (kg)	Permissible rotational speed N (min ⁻¹)	
T	e_p	v_u			Supporting condition	
					Fixed - Simple Support	Fixed - Fixed
-0.016	0.035	0.025	0.050	14.8	1 750	1 750
-0.024	0.040	0.027	0.080	17.4	1 750	1 750
-0.033	0.054	0.035	0.100	20.9	1 750	1 750
-0.043	0.065	0.040	0.130	24.3	1 750	1 750
-0.060	0.077	0.046	0.170	30.4	910	1 270

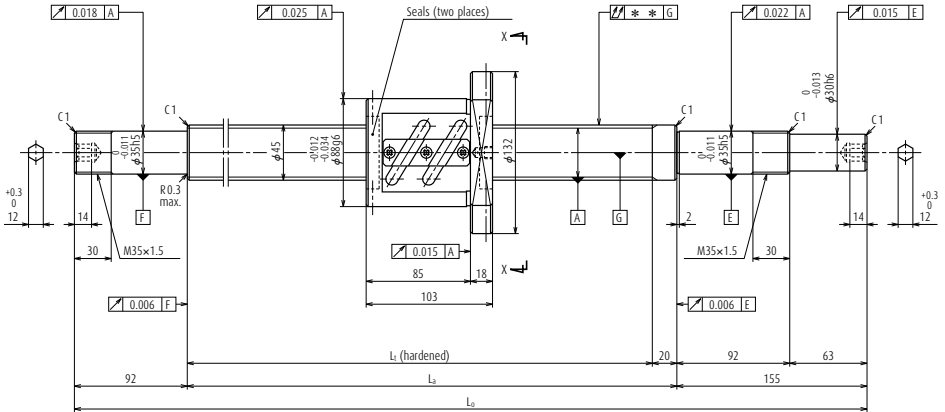


Ball screw No.	Stroke		Screw shaft length		
	Nominal	Maximum	L_t	L_a	L_o
W4506SA-1Z-C5Z10	550	568	680	700	947
W4509SA-1Z-C5Z10	850	868	980	1 000	1 247
W4513SA-1Z-C5Z10	1 250	1 268	1 380	1 400	1 647
W4517SA-1Z-C5Z10	1 650	1 668	1 780	1 800	2 047
W4524SA-1Z-C5Z10	2 350	2 368	2 480	2 500	2 747

Notes

1. We recommend NSK support unit. See page B411 for details.
2. **Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.**
See page D13 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.

Nut model: ZFT

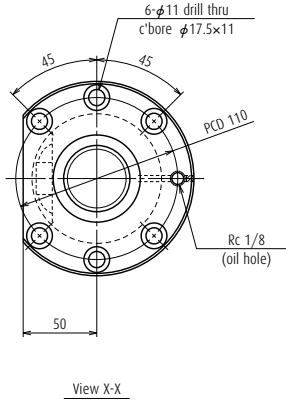

Screw shaft ϕ 45

Lead 10


Unit: mm


Ball screw specifications		
Shaft dia. \times Lead / Direction of turn	45 \times 10 / Right	
Preload / Ball recirculation	Z-preload / Return tube	
Ball dia. / Ball circle dia.	6.35 / 46	
Screw shaft root diameter	39.4	
Effective turns of balls	2.5 \times 1	
Accuracy grade / Preload	C5 / Z	
Basic load rating (N)	Dynamic C_a	36 300
	Static C_{0a}	78 500
Preload (N)	2 260	
Dynamic friction torque, median, (N-cm)	69.0	
Spacer ball	None	
Factory-packed grease	Refer to Notes 2.	
Internal spatial volume of nut (cm ³)	33	
Standard volume of grease replenishing (cm ³)	17	

Recommended support unit

For drive side, for opposite to drive side (Fixed)
WBK35DF-31H (round)

Unit: mm

Lead accuracy			Shaft run-out ** 	Mass (kg)	Permissible rotational speed N (min ⁻¹)	
T	e_p	v_u			Supporting condition	
					Fixed - Simple Support	Fixed - Fixed
-0.016	0.035	0.025	0.050	13.4	1 550	1 550
-0.024	0.040	0.027	0.065	16.7	1 550	1 550
-0.033	0.054	0.035	0.100	21.2	1 550	1 550
-0.043	0.065	0.040	0.130	25.6	1 550	1 550
-0.060	0.077	0.046	0.170	33.4	990	1 390

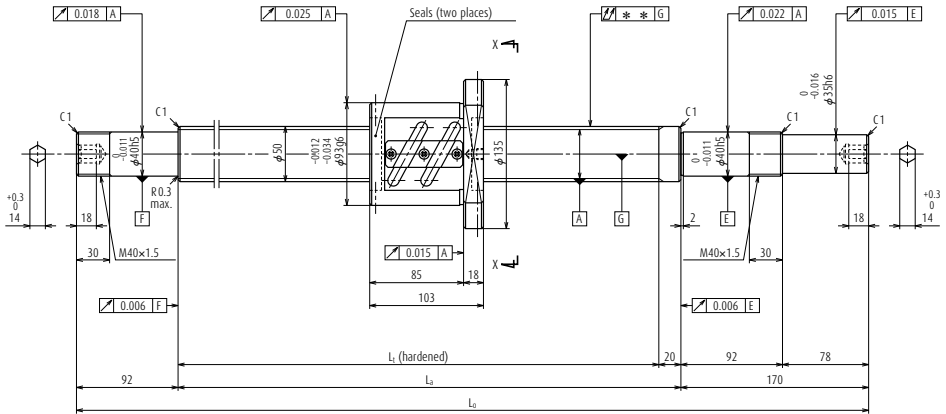


Ball screw No.	Stroke		Screw shaft length		
	Nominal	Maximum	L_t	L_a	L_o
W5005SA-1Z-C5Z10	450	468	580	600	862
W5007SA-1Z-C5Z10	650	668	780	800	1 062
W5009SA-1Z-C5Z10	850	868	980	1 000	1 262
W5011SA-1Z-C5Z10	1 050	1 068	1 180	1 200	1 462
W5014SA-1Z-C5Z10	1 350	1 368	1 480	1 500	1 762
W5019SA-1Z-C5Z10	1 850	1 868	1 980	2 000	2 262
W5025SA-1Z-C5Z10	2 450	2 468	2 580	2 600	2 862

Notes

1. We recommend NSK support unit. See page B411 for details.
2. **Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.** See page D13 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.

Nut model: ZFT

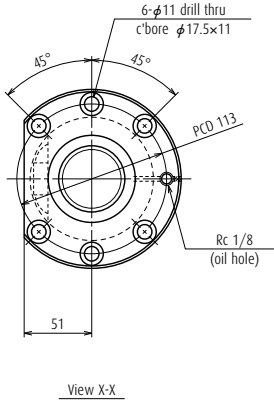

Screw shaft ϕ 50

Lead 10

Unit: mm

Ball screw specifications


Shaft dia. \times Lead / Direction of turn	50 \times 10 / Right	
Preload / Ball recirculation	Z-preload / Return tube	
Ball dia. / Ball circle dia.	6.35 / 51	
Screw shaft root diameter	44.4	
Effective turns of balls	2.5 \times 1	
Accuracy grade / Preload	C5 / Z	
Basic load rating (N)	Dynamic C_d	37 500
	Static C_{0a}	87 200
Preload (N)	2 450	
Dynamic friction torque, median, (N-cm)	79.0	
Spacer ball	None	
Factory-packed grease	Refer to Notes 2.	
Internal spatial volume of nut (cm ³)	37	
Standard volume of grease replenishing (cm ³)	19	

Recommended support unit

For drive side, for opposite to drive side (Fixed)
WBK40DF-31H (round)

Unit: mm

Lead accuracy			Shaft run-out ** ∇	Mass (kg)	Permissible rotational speed N (min ⁻¹)	
T	e_p	v_u			Supporting condition	
					Fixed - Simple Support	Fixed - Fixed
-0.014	0.030	0.023	0.050	14.8	1 400	1 400
-0.019	0.035	0.025	0.065	17.6	1 400	1 400
-0.024	0.040	0.027	0.080	20.3	1 400	1 400
-0.028	0.046	0.030	0.080	23.1	1 400	1 400
-0.036	0.054	0.035	0.100	27.3	1 400	1 400
-0.048	0.065	0.040	0.130	34.2	1 400	1 400
-0.062	0.093	0.054	0.170	42.5	1 030	1 400

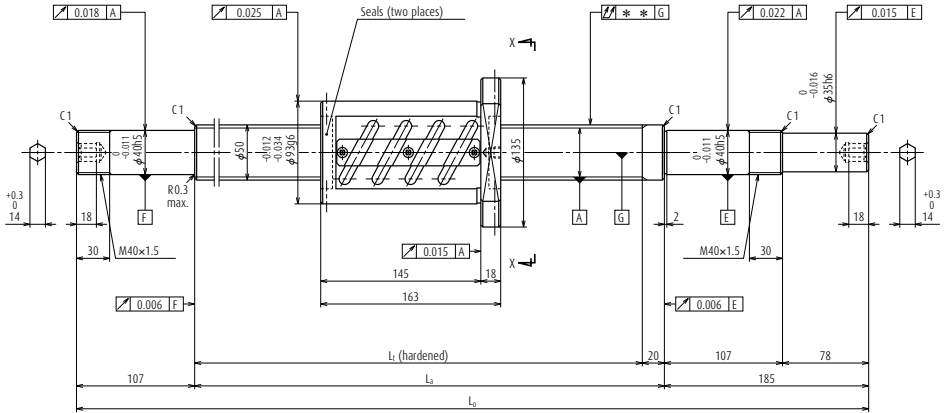


Ball screw No.	Stroke		Screw shaft length		
	Nominal	Maximum	L _t	L _a	L ₀
W5005SA-2Z-C5Z10	350	408	580	600	892
W5007SA-2Z-C5Z10	550	608	780	800	1 092
W5009SA-2Z-C5Z10	750	808	980	1 000	1 292
W5011SA-2Z-C5Z10	950	1 008	1 180	1 200	1 492
W5014SA-2Z-C5Z10	1 250	1 308	1 480	1 500	1 792
W5019SA-2Z-C5Z10	1 750	1 808	1 980	2 000	2 292
W5025SA-2Z-C5Z10	2 350	2 408	2 580	2 600	2 892

Notes

1. We recommend NSK support unit. See page B411 for details.
2. **Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.** See page D13 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.

Nut model: ZFT

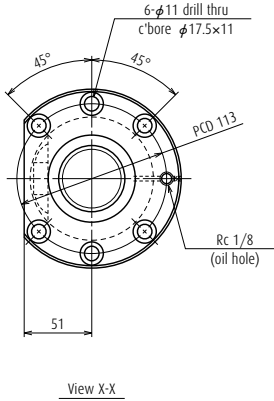

Screw shaft ϕ 50

Lead 10

Unit: mm

Ball screw specifications		
Shaft dia. \times Lead / Direction of turn	50 \times 10 / Right	
Preload / Ball recirculation	Z-preload / Return tube	
Ball dia. / Ball circle dia.	6.35 / 51	
Screw shaft root diameter	44.4	
Effective turns of balls	2.5 \times 2	
Accuracy grade / Preload	C5 / Z	
Basic load rating (N)	Dynamic C_d	68 100
	Static C_{0a}	174 000
Preload (N)	4 020	
Dynamic friction torque, median, (N-cm)	137	
Spacer ball	None	
Factory-packed grease	Refer to Notes 2.	
Internal spatial volume of nut (cm ³)	59	
Standard volume of grease replenishing (cm ³)	30	

Recommended support unit

For drive side, for opposite to drive side (Fixed)
WBK40DFD-31H (round)

Unit: mm

Lead accuracy			Shaft run-out ** ∇	Mass (kg)	Permissible rotational speed N (min ⁻¹)	
T	e_p	v_u			Supporting condition	
					Fixed - Simple Support	Fixed - Fixed
-0.014	0.030	0.023	0.050	16.8	1 400	1 400
-0.019	0.035	0.025	0.065	19.6	1 400	1 400
-0.024	0.040	0.027	0.080	22.3	1 400	1 400
-0.028	0.046	0.030	0.080	25.1	1 400	1 400
-0.036	0.054	0.035	0.100	29.3	1 400	1 400
-0.048	0.065	0.040	0.130	36.2	1 400	1 400
-0.062	0.093	0.054	0.170	44.6	1 060	1 400

B-3-1.4 Finished Shaft End Ball Screws Made of Stainless Steel KA Type

1. Order of the dimension tables

The tables begin with the smallest shaft diameter ball screw, and proceeds to larger sizes. If ball screws have the same shaft diameter, those with smaller leads appear first. Page numbers of shaft diameter and lead combinations are shown in Table 1.

2. Dimension tables

The dimension tables show shapes/sizes as well as specification factors of each shaft diameter/lead combination. Tables also contain data as follows:

> Stroke

Nominal stroke: A reference for your use.

Maximum stroke: The stroke limit that the nut can move.

> Lead accuracy

Lead accuracy is either C3 or C5 grades.

T : Travel compensation

e_p : Tolerance on specified travel

v_u : Travel variation

See "Technical Description: Lead Accuracy" (page B37) for the details of the codes.

> Permissible rotational speed

$d \cdot n$: Limited by the relative peripheral speed between the screw shaft and the nut.

Critical speed: Limited by the natural frequency of a ball screw shaft. Critical speed depends on the supporting condition of screw shaft.

The lower of the two criteria, the $d \cdot n$ and critical speed, will determine the overall permissible rotational speed of the ball screw. For details, see "Technical Description: Permissible Rotational Speed" (page B47).

Table 1 Combinations of screw shaft diameter and lead

Screw shaft diameter (mm)	Lead (mm)		
		1	2
6		B275	
8		B277	B279
10			B281
12			B285
15			
16			B295
20			

3. Material

A martensitic stainless steel is used. A special heat treatment technology provides the ball groove section with sufficient hardness which produces high load carrying capacity and durability.


4. Other

The seal of the ball screw, ball recirculating deflector, and end cap are made of synthetic resin. Consult NSK when using our ball screws under extreme environments or in special environments, or if using special lubricant or oil. For special environments, see pages B70 and D2. For lubricants, see pages B67 and D13.

Note: For details of standard stock products, contact NSK.

4	5	10	20
B283			
	B287	B289	
		B291	B293
			B297

Finished shaft end stainless steel product KA Type (Fine lead)

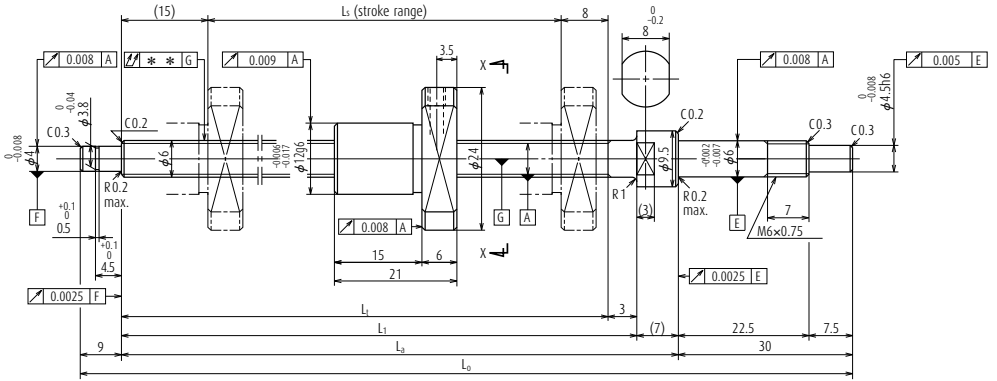

Ball screw No.	Stroke L_s		Thread length			
	Nominal	Maximum	L_t	L_1	L_a	L_0
W0601KA-3PY-C3Z1	100	102	125	128	135	174

Notes


1. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.
See page D13 for details.
Use of NSK Clean Grease LG2 is recommended.
2. Ball nut does not have seal.
3. Contact NSK if the permissible rotational speed is to be exceeded.

Nut model: MPFD

Screw shaft $\phi 6$

Lead 1


Unit: mm

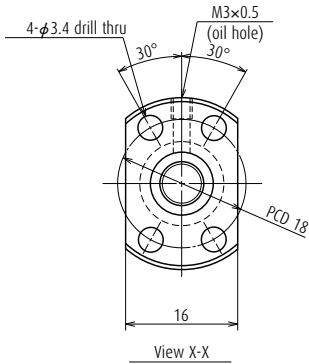


Ball screw specifications

Shaft dia. \times Lead / Direction of turn	6 \times 1 / Right	
Preload / Ball recirculation	P-preload / Deflector (bridge)	
Ball dia. / Ball circle dia.	0.800 / 6.2	
Screw shaft root diameter	5.2	
Effective turns of balls	1 \times 3	
Accuracy grade / Preload	C3 / Z	
Basic load rating (N)	Dynamic C_a	555
	Static C_{0a}	680
Axial play	0	
Preload (N)	24.5	
Dynamic friction torque, (N-cm)	1.3 or less	
Spacer ball	None	
Factory-packed grease	Refer to Notes 1.	

Unit: mm

Lead accuracy			Shaft run-out ** 	Mass (kg)	Permissible rotational speed N (min ⁻¹)
T	e_p	v_u			Supporting condition
0	0.010	0.008	0.025	0.06	Fixed - Simple Support 3 000

Finished shaft end stainless steel product KA Type (Fine lead)

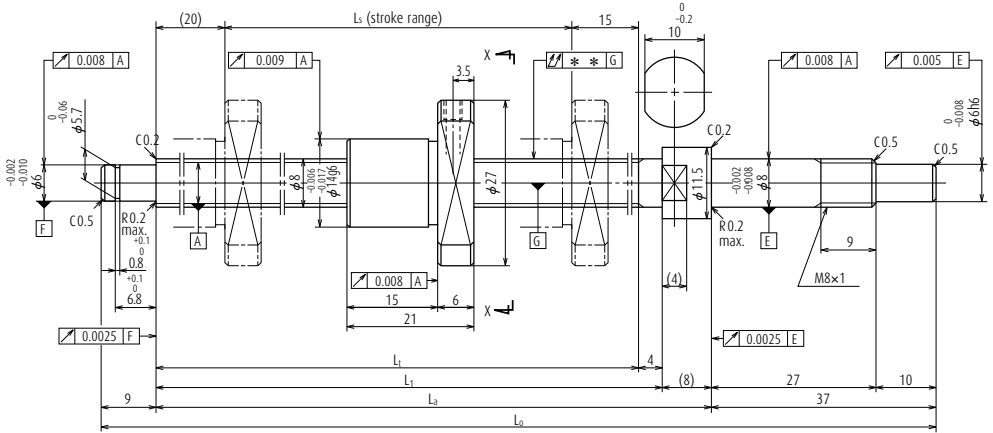


Ball screw No.	Stroke L_s		Thread length			
	Nominal	Maximum	L_t	L_1	L_a	L_0
W0802KA-1PY-C3Z1	150	155	190	194	202	248

Notes

1. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.
See page D13 for details.
Use of NSK Clean Grease LG2 is recommended.
2. Ball nut does not have seal.
3. Contact NSK if the permissible rotational speed is to be exceeded.

Nut model: MPFD

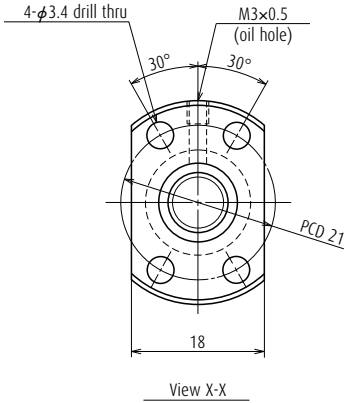

Screw shaft ϕ 8

Lead 1

Unit: mm

Ball screw specifications		
Shaft dia. \times Lead / Direction of turn	8 \times 1 / Right	
Preload / Ball recirculation	P-preload / Deflector (bridge)	
Ball dia. / Ball circle dia.	0.800 / 8.2	
Screw shaft root diameter	7.2	
Effective turns of balls	1 \times 3	
Accuracy grade / Preload	C3 / Z	
Basic load rating (N)	Dynamic C_a	645
	Static C_{0a}	955
Axial play	0	
Preload (N)	29.4	
Dynamic friction torque, (N-cm)	1.8 or less	
Spacer ball	None	
Factory-packed grease	Refer to Notes 1.	


Recommended support unit

For drive side (Fixed)	For opposite to drive side (Free)
WBK08-01C (square, clean)	WBK08S-01C (square, clean)
WBK08-11C (round, clean)	

Unit: mm

Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min ⁻¹)
T	e_p	v_u			Supporting condition
0	0.010	0.008	0.035	0.12	Fixed - Simple Support 3 000


Finished shaft end stainless steel product KA Type (Fine lead)

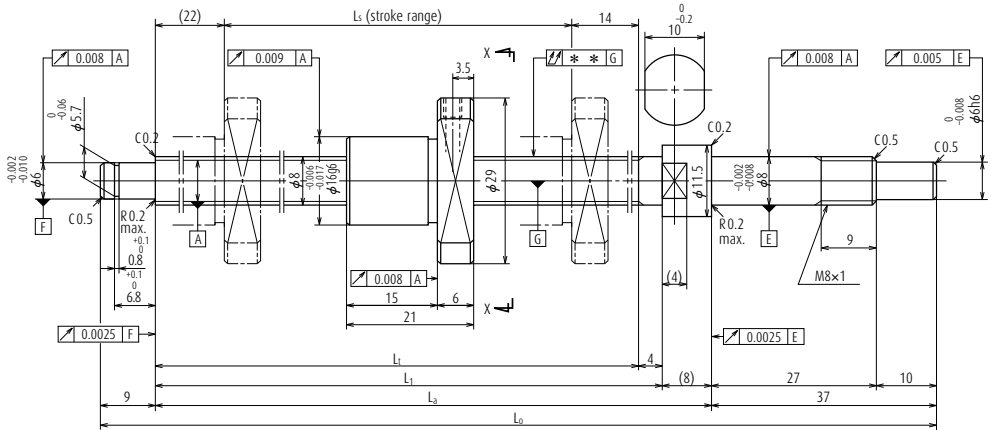

Ball screw No.	Stroke L_s		Thread length			
	Nominal	Maximum	L_t	L_1	L_3	L_0
W0802KA-5PY-C3Z2	150	154	190	194	202	248

- Notes**
1. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.
See page D13 for details.
Use of NSK Clean Grease LG2 is recommended.
 2. Contact NSK if the permissible rotational speed is to be exceeded.

Nut model: MPFD

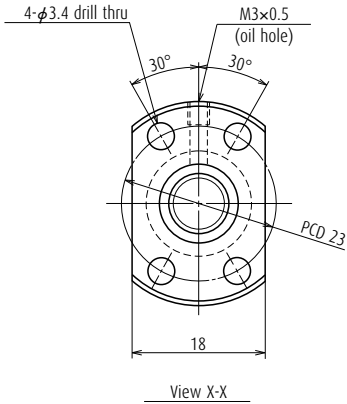

Screw shaft ϕ 8

Lead 2

Unit: mm

Ball screw specifications		
Shaft dia. \times Lead / Direction of turn	8 \times 2 / Right	
Preload / Ball recirculation	P-preload / Deflector (bridge)	
Ball dia. / Ball circle dia.	1.200 / 8.3	
Screw shaft root diameter	6.9	
Effective turns of balls	1 \times 3	
Accuracy grade / Preload	C3 / Z	
Basic load rating (N)	Dynamic C_a	1 270
	Static C_{0a}	1 630
Axial play	0	
Preload (N)	49.0	
Dynamic friction torque, (N-cm)	2.0 or less	
Spacer ball	None	
Factory-packed grease	Refer to Notes 1.	
Internal spatial volume of nut (cm ³)	0.34	
Standard volume of grease replenishing (cm ³)	0.17	


Recommended support unit

For drive side (Fixed)	For opposite to drive side (Free)
WBK08-01C (square, clean)	WBK08S-01C (square, clean)
WBK08-11C (round, clean)	

Unit: mm

Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min ⁻¹)
T	e_p	v_u			Supporting condition
					Fixed - Simple Support
0	0.010	0.008	0.035	0.13	3 000


Finished shaft end stainless steel product KA Type (Fine lead)

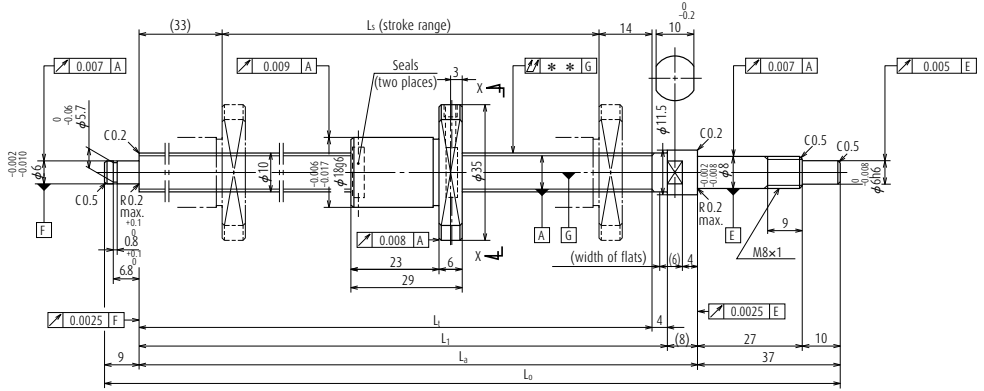

Ball screw No.	Stroke L_s		Thread length			
	Nominal	Maximum	L_1	L_2	L_3	L_4
W1002KA-3PY-C3Z2	200	203	250	254	262	308

- Notes**
1. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.
See page D13 for details.
Use of NSK Clean Grease LG2 is recommended.
 2. Contact NSK if the permissible rotational speed is to be exceeded.

Nut model: MPFD

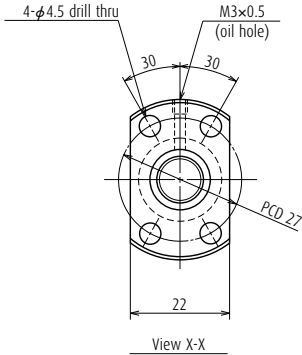

Screw shaft ϕ 10

Lead 2


Unit: mm

Ball screw specifications		
Shaft dia. \times Lead / Direction of turn	10 \times 2 / Right	
Preload / Ball recirculation	P-preload / Deflector (bridge)	
Ball dia. / Ball circle dia.	1.200 / 10.3	
Screw shaft root diameter	8.9	
Effective turns of balls	1 \times 3	
Accuracy grade / Preload	C3 / Z	
Basic load rating (N)	Dynamic C_a	1 470
	Static C_{0a}	2 190
Axial play	0	
Preload (N)	58.8	
Dynamic friction torque, (N-cm)	0.10 - 2.5	
Spacer ball	None	
Factory-packed grease	Refer to Notes 1.	
Internal spatial volume of nut (cm ³)	0.44	
Standard volume of grease replenishing (cm ³)	0.22	


Recommended support unit

For drive side (Fixed)	For opposite to drive side (Free)
WBK08-01C (square, clean)	WBK08S-01C (square, clean)
WBK08-11C (round, clean)	

Unit: mm

Lead accuracy			Shaft run-out ** 	Mass (kg)	Permissible rotational speed N (min ⁻¹)
T	e_p	u			Supporting condition
					Fixed - Simple Support
0	0.012	0.008	0.030	0.22	3 000


Finished shaft end stainless steel product KA Type (Fine lead)

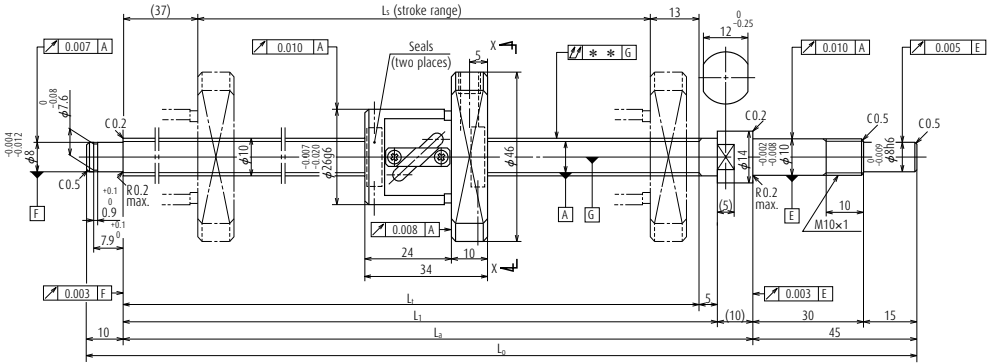

Ball screw No.	Stroke L_s		Thread length			
	Nominal	Maximum	L_t	L_1	L_2	L_0
W1001KA-3P-C3Z4	100	110	160	165	175	230
W1003KA-3P-C3Z4	300	310	360	365	375	430

- Notes**
1. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.
See page D13 for details.
Use of NSK Clean Grease LG2 is recommended.
 2. Contact NSK if the permissible rotational speed is to be exceeded.

Nut model: PFT

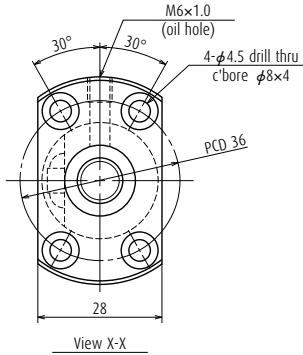

Screw shaft ϕ 10

Lead 4

Unit: mm

Ball screw specifications		
Shaft dia. \times Lead / Direction of turn	10 \times 4 / Right	
Preload / Ball recirculation	P-preload / Return tube	
Ball dia. / Ball circle dia.	2.000 / 10.3	
Screw shaft root diameter	8.2	
Effective turns of balls	2.5 \times 1	
Accuracy grade / Preload	C3 / Z	
Basic load rating (N)	Dynamic C_d	2 630
	Static C_{0a}	3 270
Axial play	0	
Preload (N)	98.1	
Dynamic friction torque, (N-cm)	0.5 - 3.9	
Spacer ball	None	
Factory-packed grease	Refer to Notes 1.	
Internal spatial volume of nut (cm ³)	0.8	
Standard volume of grease replenishing (cm ³)	0.4	


Recommended support unit

For drive side (Fixed)	For opposite to drive side (Free)
WBK10-01C (square, clean)	WBK10S-01C (square, clean)
WBK10-11C (round, clean)	

Unit: mm

Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min ⁻¹)
T	e_p	v_u			
0	0.010	0.008	0.030	0.29	Supporting condition Fixed - Simple Support 3 000
0	0.013	0.008	0.050	0.39	3 000

Nut model: MPFD



Screw shaft ϕ 12

Lead 2

Unit: mm

Ball screw specifications		
Shaft dia. \times Lead / Direction of turn	12 \times 2 / Right	
Preload / Ball recirculation	P-preload / Deflector (bridge)	
Ball dia. / Ball circle dia.	1.200 / 12.3	
Screw shaft root diameter	10.9	
Effective turns of balls	1 \times 3	
Accuracy grade / Preload	C3 / Z	
Basic load rating (N)	Dynamic C_a	1 600
	Static C_{0a}	2 670
Axial play	0	
Preload (N)	98.1	
Dynamic friction torque, (N-cm)	0.4 - 3.4	
Spacer ball	None	
Factory-packed grease	Refer to Notes 1.	
Internal spatial volume of nut (cm ³)	0.53	
Standard volume of grease replenishing (cm ³)	0.27	


Recommended support unit

For drive side (Fixed)	For opposite to drive side (Free)
WBK10-01C (square, clean)	WBK10S-01C (square, clean)
WBK10-11C (round, clean)	

Unit: mm

Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min ⁻¹)
T	e_p	v_u			
0	0.010	0.008	0.030	0.24	Supporting condition Fixed - Simple Support 3 000
0	0.012	0.008	0.040	0.36	3 000


Finished shaft end stainless steel product KA Type (Fine lead)

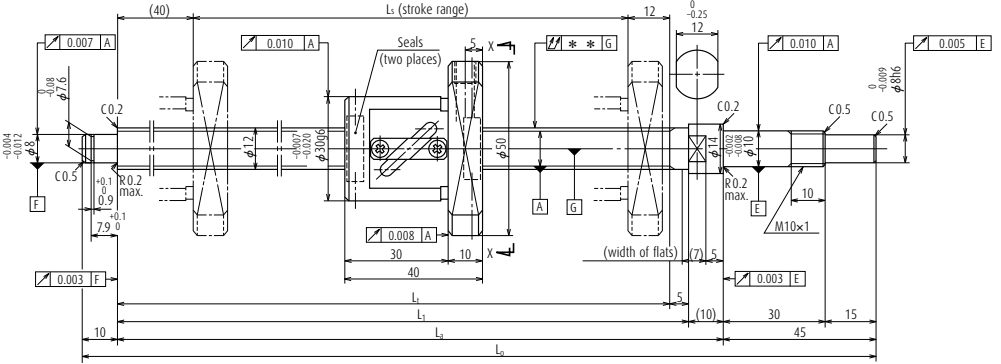

Ball screw No.	Stroke L_s		Thread length			
	Nominal	Maximum	L_t	L_1	L_a	L_0
W1202KA-3P-C3Z5	200	208	260	265	275	330
W1205KA-1P-C3Z5	450	458	510	515	525	580

- Notes**
1. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.
See page D13 for details.
Use of NSK Clean Grease LG2 is recommended.
 2. Contact NSK if the permissible rotational speed is to be exceeded.

Nut model: PFT

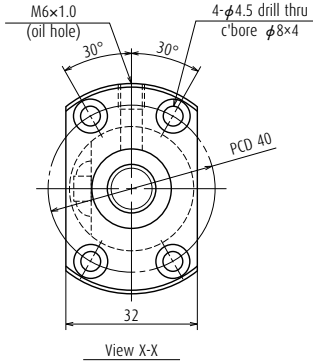

Screw shaft ϕ 12

Lead 5

Unit: mm

Ball screw specifications		
Shaft dia. \times Lead / Direction of turn	12 \times 5 / Right	
Preload / Ball recirculation	P-preload / Return tube	
Ball dia. / Ball circle dia.	2.381 / 12.3	
Screw shaft root diameter	9.8	
Effective turns of balls	2.5 \times 1	
Accuracy grade / Preload	C3 / Z	
Basic load rating (N)	Dynamic C_a	3 590
	Static C_{0a}	4 630
Axial play	0	
Preload (N)	98.1	
Dynamic friction torque, (N-cm)	1.0 - 4.4	
Spacer ball	None	
Factory-packed grease	Refer to Notes 1.	
Internal spatial volume of nut (cm ³)	1.2	
Standard volume of grease replenishing (cm ³)	0.6	


Recommended support unit

For drive side (Fixed)	For opposite to drive side (Free)
WBK10-01C (square, clean)	WBK10S-01C (square, clean)
WBK10-11C (round, clean)	

Unit: mm

Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min ⁻¹)
T	e_p	v_u			
0	0.012	0.008	0.040	0.47	Supporting condition Fixed - Simple Support 3 000
0	0.016	0.012	0.065	0.66	3 000


Finished shaft end stainless steel product KA Type (Medium lead)

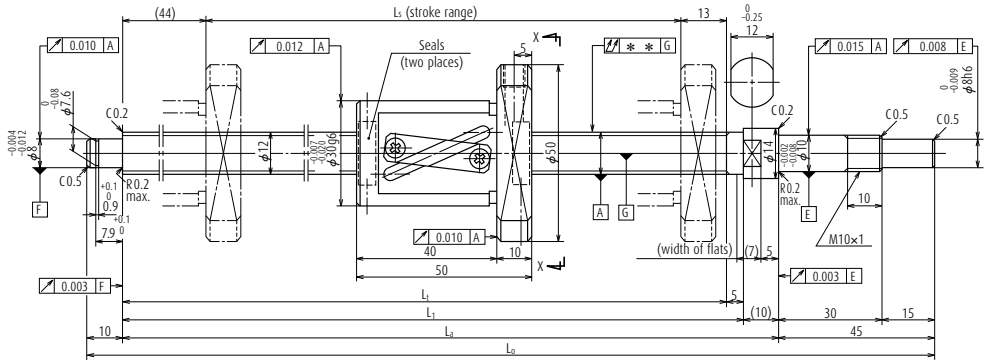

Ball screw No.	Stroke L_s		Thread length			
	Nominal	Maximum	L_t	L_1	L_a	L_b
W1203KA-3P-C5Z10	250	253	310	315	325	380
W1205KA-3P-C5Z10	450	453	510	515	525	580

- Notes**
1. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.
See page D13 for details.
Use of NSK Clean Grease LG2 is recommended.
 2. Contact NSK if the permissible rotational speed is to be exceeded.

Nut model: LPFT

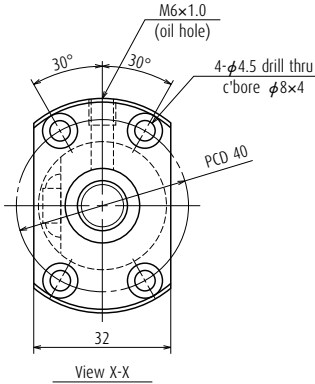

Screw shaft ϕ 12

Lead 10

Unit: mm

Ball screw specifications		
Shaft dia. \times Lead / Direction of turn	12 \times 10 / Right	
Preload / Ball recirculation	P-preload / Return tube	
Ball dia. / Ball circle dia.	2.381 / 12.5	
Screw shaft root diameter	10.0	
Effective turns of balls	2.5 \times 1	
Accuracy grade / Preload	C5 / Z	
Basic load rating (N)	Dynamic C_d	3 620
	Static C_{0a}	4 750
Axial play	0	
Preload (N)	98.1	
Dynamic friction torque, (N-cm)	1.0 - 4.9	
Spacer ball	None	
Factory-packed grease	Refer to Notes 1.	
Internal spatial volume of nut (cm ³)	1.4	
Standard volume of grease replenishing (cm ³)	0.7	


Recommended support unit

For drive side (Fixed)	For opposite to drive side (Free)
WBK10-01C (square, clean)	WBK10S-01C (square, clean)
WBK10-11C (round, clean)	

Unit: mm

Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min ⁻¹)
T	e_p	v_u			
0	0.023	0.018	0.050	0.56	Supporting condition Fixed - Simple Support 3 000
0	0.030	0.023	0.075	0.72	3 000


Finished shaft end stainless steel product KA Type (Medium lead)

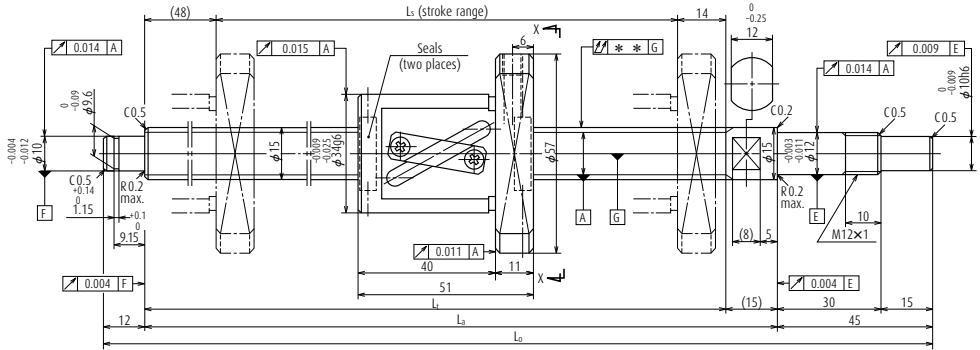

Ball screw No.	Stroke L_s		Thread length		
	Nominal	Maximum	L_1	L_3	L_0
W1504KA-3P-C5Z10	400	427	489	504	561
W1506KA-3P-C5Z10	600	627	689	704	761
W1510KA-1P-C5Z10	1 000	1 027	1 089	1 104	1 161

- Notes**
1. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.
See page D13 for details.
Use of NSK Clean Grease LG2 is recommended.
 2. Contact NSK if the permissible rotational speed is to be exceeded.

Nut model: LPFT

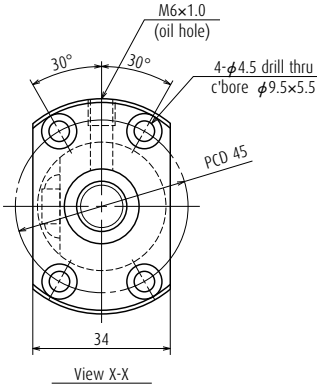

Screw shaft ϕ 15

Lead 10


Unit: mm

Ball screw specifications		
Shaft dia. \times Lead / Direction of turn	15 \times 10 / Right	
Preload / Ball recirculation	P-preload / Return tube	
Ball dia. / Ball circle dia.	3.175 / 15.5	
Screw shaft root diameter	12.2	
Effective turns of balls	2.5 \times 1	
Accuracy grade / Preload	C5 / Z	
Basic load rating (N)	Dynamic C_d	6 660
	Static C_{0a}	9 480
Axial play	0	
Preload (N)	147	
Dynamic friction torque, (N-cm)	1.5 - 7.9	
Spacer ball	None	
Factory-packed grease	Refer to Notes 1.	
Internal spatial volume of nut (cm ³)	2.3	
Standard volume of grease replenishing (cm ³)	1.4	


Recommended support unit

For drive side (Fixed)	For opposite to drive side (Free)
WBK12-01C (square, clean)	WBK12S-01C (square, clean)
WBK12-11C (round, clean)	

Unit: mm

Lead accuracy			Shaft run-out ** 	Mass (kg)	Permissible rotational speed N (min ⁻¹)
T	e_p	v_u			Supporting condition
					Fixed - Simple Support
0	0.027	0.020	0.050	0.99	3 000
0	0.035	0.025	0.065	1.2	3 000
0	0.046	0.030	0.110	1.7	1 610


Finished shaft end stainless steel product KA Type (Medium lead)

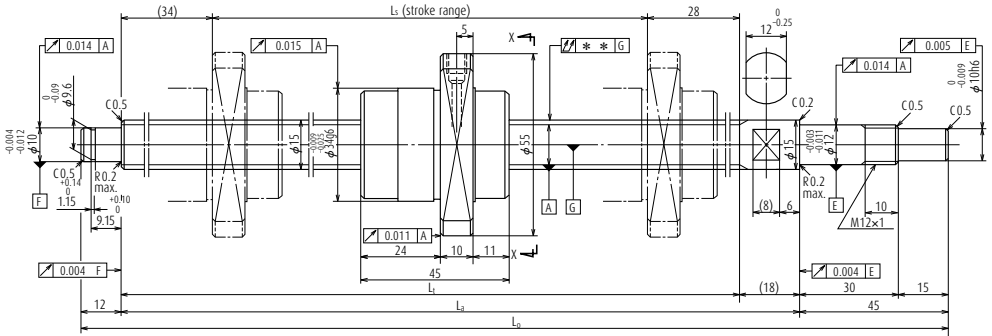

Ball screw No.	Stroke L_s		Thread length		
	Nominal	Maximum	L_1	L_a	L_0
W1504KA-7PG-C5Z20	400	424	486	504	561
W1506KA-7PG-C5Z20	600	624	686	704	761
W1510KA-3PG-C5Z20	1 000	1 024	1 086	1 104	1 161

- Notes**
1. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.
See page D13 for details.
Use of NSK Clean Grease LG2 is recommended.
 2. Contact NSK if the permissible rotational speed is to be exceeded.

Nut model: UPFC

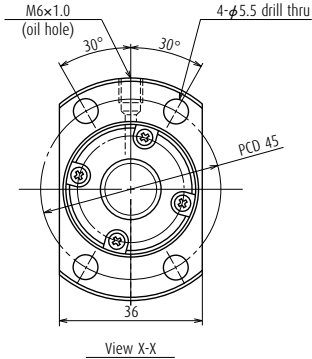

Screw shaft ϕ 15

Lead 20

Unit: mm


Ball screw specifications		
Shaft dia. \times Lead / Direction of turn	15 \times 20 / Right	
Preload / Ball recirculation	P-preload / End cap	
Ball dia. / Ball circle dia.	3.175 / 15.5	
Screw shaft root diameter	12.2	
Effective turns of balls	1.7 \times 1	
Accuracy grade / Preload	C5 / Z	
Basic load rating (N)	Dynamic C_a	4 630
	Static C_{0a}	6 430
Axial play	0	
Preload (N)	147	
Dynamic friction torque, (N-cm)	1.5 - 7.9	
Spacer ball	None	
Factory-packed grease	Refer to Notes 1.	
Internal spatial volume of nut (cm ³)	1.9	
Standard volume of grease replenishing (cm ³)	1.0	

Recommended support unit

For drive side (Fixed)	For opposite to drive side (Free)
WBK12-01C (square, clean)	WBK12S-01C (square, clean)
WBK12-11C (round, clean)	

Unit: mm

Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min ⁻¹)
T	e_p	v_u			Supporting condition
					Fixed - Simple Support
0	0.027	0.020	0.050	1.0	3 000
0	0.035	0.025	0.065	1.3	3 000
0	0.046	0.030	0.110	1.8	1 610

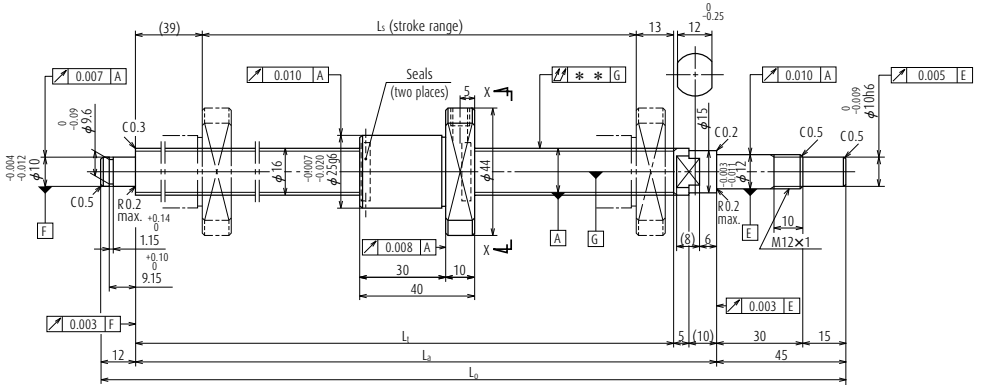

Ball screw No.	Stroke L_s		Thread length		
	Nominal	Maximum	L_t	L_a	L_0
W1601KA-3PY-C3Z2	100	137	189	204	261
W1603KA-1PY-C3Z2	300	337	389	404	461

Notes


1. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.
See page D13 for details.
Use of NSK Clean Grease LG2 is recommended.
2. Contact NSK if the permissible rotational speed is to be exceeded.

Nut model: MPFD

Screw shaft $\phi 16$

Lead 2

Unit: mm

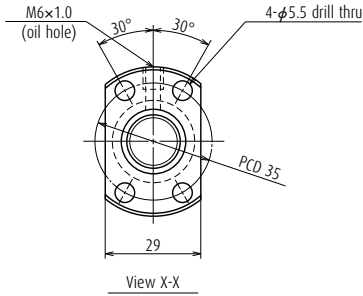

Ball screw specifications

Shaft dia. × Lead / Direction of turn	16 × 2 / Right	
Preload / Ball recirculation	P-preload / Deflector (bridge)	
Ball dia. / Ball circle dia.	1.588 / 16.4	
Screw shaft root diameter	14.6	
Effective turns of balls	1 × 4	
Accuracy grade / Preload	C3 / Z	
Basic load rating (N)	Dynamic C_a	3 400
	Static C_{0a}	6 240
Axial play	0	
Preload (N)	147	
Dynamic friction torque, (N·cm)	0.5 - 4.9	
Spacer ball	None	
Factory-packed grease	Refer to Notes 1.	
Internal spatial volume of nut (cm ³)	1.6	
Standard volume of grease replenishing (cm ³)	0.8	


Recommended support unit

For drive side (Fixed)	For opposite to drive side (Free)
WBK12-01C (square, clean)	WBK12S-01C (square, clean)
WBK12-11C (round, clean)	

Unit: mm

Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min ⁻¹)
T	e_p	v_u			
0	0.010	0.008	0.020	0.46	Supporting condition Fixed - Simple Support 3 000
0	0.013	0.010	0.035	0.75	3 000


Finished shaft end stainless steel product KA Type (High helix lead)

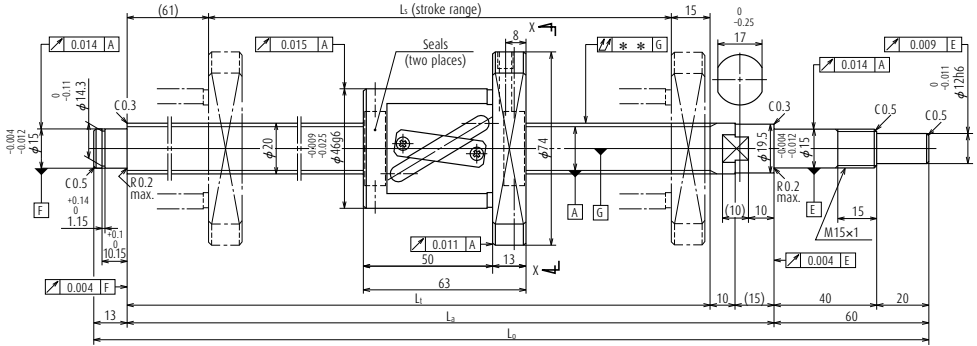

Ball screw No.	Stroke L_s		Thread length		
	Nominal	Maximum	L_1	L_a	L_0
W2005KA-3P-C5Z20	400	434	510	535	608
W2007KA-3P-C5Z20	600	634	710	735	808
W2011KA-3P-C5Z20	1 000	1 034	1 110	1 135	1 208

- Notes**
- Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.
See page D13 for details.
Use of NSK Clean Grease LG2 is recommended.
 - Contact NSK if the permissible rotational speed is to be exceeded.

Nut model: LPFT

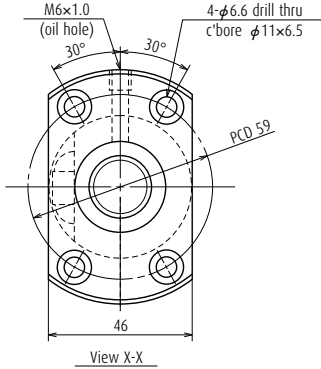

Screw shaft ϕ 20

Lead 20

Unit: mm

Ball screw specifications		
Shaft dia. \times Lead / Direction of turn	20 \times 20 / Right	
Preload / Ball recirculation	P-preload / Return tube	
Ball dia. / Ball circle dia.	3.969 / 21	
Screw shaft root diameter	16.9	
Effective turns of balls	1.5 \times 1	
Accuracy grade / Preload	C5 / Z	
Basic load rating (N)	Dynamic C_d	6 700
	Static C_{0a}	9 710
Axial play	0	
Preload (N)	196	
Dynamic friction torque, (N-cm)	2.0 - 11.8	
Spacer ball	None	
Factory-packed grease	Refer to Notes 1.	
Internal spatial volume of nut (cm ³)	4.2	
Standard volume of grease replenishing (cm ³)	2.1	

Recommended support unit

For drive side (Fixed)	For opposite to drive side (Free)
WBK15-01C (square, clean)	WBK15S-01C (square, clean)
WBK15-11C (round, clean)	

Unit: mm

Lead accuracy			Shaft run-out **	Mass (kg)	Permissible rotational speed N (min ⁻¹)	
T	e_p	v_u			Supporting condition	
					Fixed - Simple Support	
0	0.030	0.023	0.050	2.0	3 000	
0	0.035	0.025	0.085	2.5	3 000	
0	0.046	0.030	0.110	3.4	2 160	

B-3-1.5 Blank Shaft End MS Type, FS Type, SS Type

1. Order of the dimension tables

The dimension table begins with the smallest shaft diameter of each MS, FS and SS type ball screws, and proceed to larger sizes. If ball screws have the same shaft diameter, those with smaller leads appear first. Page numbers of shaft diameter and lead combinations are shown in the **Table 1**.

2. Dimension tables

The dimension tables show shapes/sizes as well as specification factors of each shaft diameter/lead combination. Tables also contain data as follows:

› Lead accuracy

Lead accuracy is either C3 or C5 grades.

T : Travel compensation

e_p : Tolerance on specified travel

v_u : Travel variation

See "Technical Description: Lead Accuracy" (page B37) for the details of the codes.

› Permissible rotational speed

$d \cdot n$: Limited by the relative peripheral speed between the screw shaft and the nut.

Critical speed: Limited by the natural frequency of a ball screw shaft. Critical speed depends on the supporting condition of screw shaft.

Criterion of maximum rotational speed: 3000 min⁻¹

Table 1 Combinations of screw shaft diameter and lead

Screw shaft diameter (mm)	Lead (mm)							
	1	1.5	2	2.5	4	5	6	
4	B301							
6	B301							
8	B301	B303	B303					
10			B303	B305	B309			
12			B305	B305		B309		
14						B311		
15								
16			B307	B307		B315		
20					B321	B321		
25					B323	B323 B325	B323	
28						B327 B329	B327 B329	
32						B331 B333 B335	B331 B333	
36								
40						B337		
45								
50								

The lower of the two criteria, d-n and critical speed, will determine the overall permissible rotational speed of the ball screw. For details, see "Technical Description: Permissible Rotational Speed" (page B47).

3. Shaft end processing

MS, FS, and SS types require shaft end processing to your specification. The exclusive support units (page B411) are available to design the bearing seats. See "Configuration of shaft end" (page B27 and following pages) when using a support unit. See "Technical Description: Shaft End Processing" (page B86) for procedures of shaft end processing and precautions.


4. Other

The seals of the ball screw, ball recirculating deflectors and end caps are made of synthetic resin. Consult NSK when using the ball screws under extreme environments or special environments, or using special lubricant or oil.

For special environments, see pages B70 and D2. See pages B67 and D13 for lubricants.

Note: For details of standard stock products, contact NSK.

8	10	12	16	20	25	32	40	50
	B309							
B311	B311			B313				
			B315			B313		
	B315			B315			B313	
	B325 B327			B317	B317			B317
B333	B335 B337 B339				B319	B319		
	B337 B339							
B341	B341 B343 B345	B341 B343						
	B347							
	B345 B347							

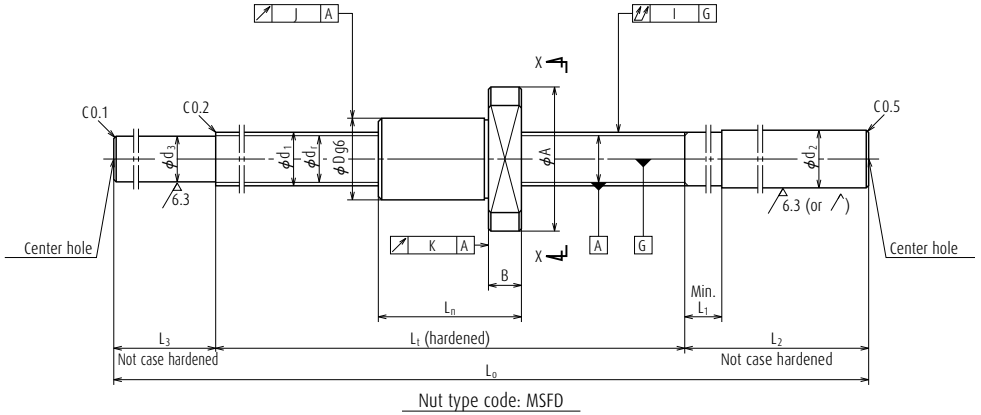


Ball screw No.	Stroke Max. L_f-L_n	Screw shaft dia. d_1	Lead l	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective ball turns	Basic load rating (N)		Axial play Max.	Nut			
								Dynamic C_a	Static C_{0a}		Outside dia.		Flange	
											D	A	H	B
W0400MS-1Y-C3T1	68	4	1	0.8	4.2	3.2	2	370	370	0.005	10	20	14	3
W0601MS-1Y-C3T1	110	6	1	0.8	6.2	5.2	3	680	920	0.005	12	24	16	3.5
W0801MS-1Y-C3T1	94	8	1	0.8	8.2	7.2	3	790	1290	0.005	14	27	18	4
W0802MS-1Y-C3T1	174	8	1	0.8	8.2	7.2	3	790	1290	0.005	14	27	18	4

- Notes**
1. Use of NSK support unit is recommended. See page B411 for details.
 2. **Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.**
See page D13 for details.
 3. Ball nut does not have seal.
 4. The permissible rotational speed is determined by d-n value, critical speed, and maximum rotational speed. See B299 and B47.
The permissible rotational speed shown in the table is the value when the ball screw mounting method is Fixed-Fixed.

Nut model: MSFD


Screw shaft $\phi 4$, $\phi 6$, $\phi 8$
Lead 1



View X-X

Unit: mm


dimensions			Screw shaft dimensions							Lead accuracy			Run-out			Mass	Permissible rotational speed
Overall length	Bolt hole		Threaded length	Shaft end right			Shaft end left			Overall length	T	Devia-tion	Varia-tion	Shaft straight-ness	Radial run-out		
	L_n	W		X	L_t	d_2	L_1	L_2	d_3						L_3	L_0	e_p
12	15	2.9	80	6.0	4	40	3.3	10	130	0	0.008	0.008	0.030	0.009	0.008	0.026	3 000
15	18	3.4	125	8.0	4	50	5.3	15	190	0	0.010	0.008	0.030	0.009	0.008	0.063	3 000
16	21	3.4	110	10.2	4	60	7.3	25	195	0	0.010	0.008	0.030	0.009	0.008	0.11	3 000
16	21	3.4	190	10.2	4	60	7.3	25	275	0	0.010	0.008	0.050	0.009	0.008	0.14	3 000

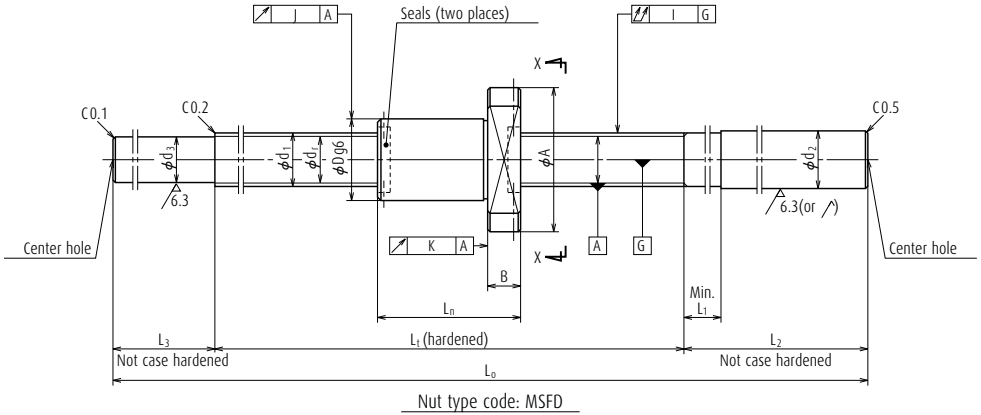

Ball screw No.	Stroke Max. L_f-L_n	Screw shaft dia. d_1	Lead l	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective ball turns	Basic load rating (N)		Axial play Max.	Nut			
								Dynamic C_a	Static C_{0a}		Outside dia.		Flange	
											D	A	H	B
W0801MS-2Y-C3T1.5	88	8	1.5	1.0	8.3	7.0	3	1 270	1 970	0.005	15	28	19	4
W0802MS-2Y-C3T1.5	168	8	1.5	1.0	8.3	7.0	3	1 270	1 970	0.005	15	28	19	4
W0801MS-3Y-C3T2	84	8	2	1.2	8.3	6.9	3	1 560	2 200	0.005	16	29	20	4
W0802MS-3Y-C3T2	164	8	2	1.2	8.3	6.9	3	1 560	2 200	0.005	16	29	20	4
W1001MS-1Y-C3T2	122	10	2	1.2	10.3	8.9	3	1 800	2 970	0.005	18	35	22	5
W1002MS-1Y-C3T2	222	10	2	1.2	10.3	8.9	3	1 800	2 970	0.005	18	35	22	5

- Notes**
1. Use of NSK support unit is recommended. See page B411 for details.
 2. **Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.** See page D13 for details.
 3. The permissible rotational speed is determined by d·n value, critical speed, and maximum rotational speed. See B299 and B47. The permissible rotational speed shown in the table is the value when the ball screw mounting method is Fixed-Fixed.

Nut model: MSFD




View X-X

Screw shaft ϕ 8
 Lead 1.5, 2
 Screw shaft ϕ 10
 Lead 2

Unit: mm


dimensions			Screw shaft dimensions							Lead accuracy			Run-out			Mass	Permissible rotational speed
Overall length	Bolt hole		Threaded length	Shaft end right			Shaft end left		Overall length	T	Deviation	Variation	Shaft straightness	Radial run-out			
	L _n	W		X	L _t	d ₂	L ₁	L ₂						d ₃	L ₃	L ₀	e _p
22	22	3.4	110	10.2	4	60	7.2	25	195	0	0.010	0.008	0.030	0.009	0.008	0.12	3 000
22	22	3.4	190	10.2	4	60	7.2	25	275	0	0.010	0.008	0.050	0.009	0.008	0.15	3 000
26	23	3.4	110	10.2	4	60	7.0	25	195	0	0.010	0.008	0.030	0.009	0.008	0.12	3 000
26	23	3.4	190	10.2	4	60	7.0	25	275	0	0.010	0.008	0.050	0.009	0.008	0.15	3 000
28	27	4.5	150	12.2	4	70	9.0	30	250	0	0.010	0.008	0.035	0.009	0.008	0.22	3 000
28	27	4.5	250	12.2	4	70	9.0	30	350	0	0.012	0.008	0.050	0.009	0.008	0.17	3 000

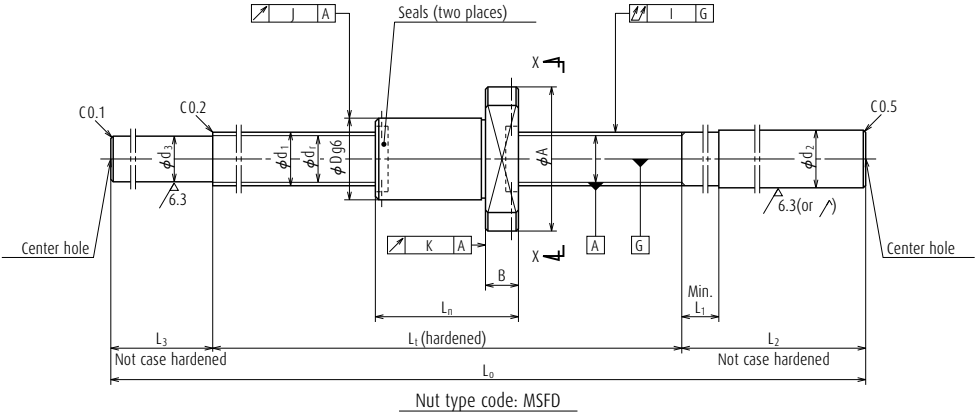

Ball screw No.	Stroke Max. L_f-L_n	Screw shaft dia. d_1	Lead I	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective ball turns	Basic load rating (N)		Axial play Max.	Nut			
								Dynamic C_a	Static C_{0a}		Outside dia.		Flange	
											D	A	H	B
W1001MS-2Y-C3T2.5	118	10	2.5	1.588	10.4	8.6	3	2 500	3 630	0.005	19	36	23	5
W1002MS-2Y-C3T2.5	218	10	2.5	1.588	10.4	8.6	3	2 500	3 630	0.005	19	36	23	5
W1202MS-1Y-C3T2	182	12	2	1.200	12.3	10.9	3	1 960	3 620	0.005	20	37	24	5
W1203MS-1Y-C3T2	282	12	2	1.200	12.3	10.9	3	1 960	3 620	0.005	20	37	24	5
W1202MS-2Y-C3T2.5	178	12	2.5	1.588	12.4	10.6	3	2 790	4 530	0.005	21	38	25	5
W1203MS-2Y-C3T2.5	278	12	2.5	1.588	12.4	10.6	3	2 790	4 530	0.005	21	38	25	5

- Notes**
1. Use of NSK support unit is recommended. See page B411 for details.
 2. **Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.**
See page D13 for details.
 3. The permissible rotational speed is determined by d-n value, critical speed, and maximum rotational speed.
See B299 and B47. The permissible rotational speed shown in the table is the value when the ball screw mounting method is Fixed-Fixed.

Nut model: MSFD




View X-X

Screw shaft ϕ 10
Lead 2.5
Screw shaft ϕ 12
Lead 2, 2.5

Unit: mm

dimensions			Screw shaft dimensions							Lead accuracy			Run-out			Mass	Permissible rotational speed
Overall length	Bolt hole		Threaded length	Shaft end right			Shaft end left		Overall length	T	Deviation	Variation	Shaft straightness	Radial run-out			
	L_n	W		X	L_t	d_2	L_1	L_2						d_3	L_3	L_0	e_p
32	28	4.5	150	12.2	4	70	8.7	30	250	0	0.010	0.008	0.035	0.010	0.008	0.23	3 000
32	28	4.5	250	12.2	4	70	8.7	30	350	0	0.012	0.008	0.050	0.010	0.008	0.28	3 000
28	29	4.5	210	14.2	5	80	11.0	35	325	0	0.012	0.008	0.050	0.010	0.008	0.36	3 000
28	29	4.5	310	14.2	5	80	11.0	35	425	0	0.012	0.008	0.060	0.010	0.008	0.44	3 000
32	30	4.5	210	14.2	5	80	10.7	35	325	0	0.012	0.008	0.050	0.010	0.008	0.37	3 000
32	30	4.5	310	14.2	5	80	10.7	35	425	0	0.012	0.008	0.060	0.010	0.008	0.45	3 000

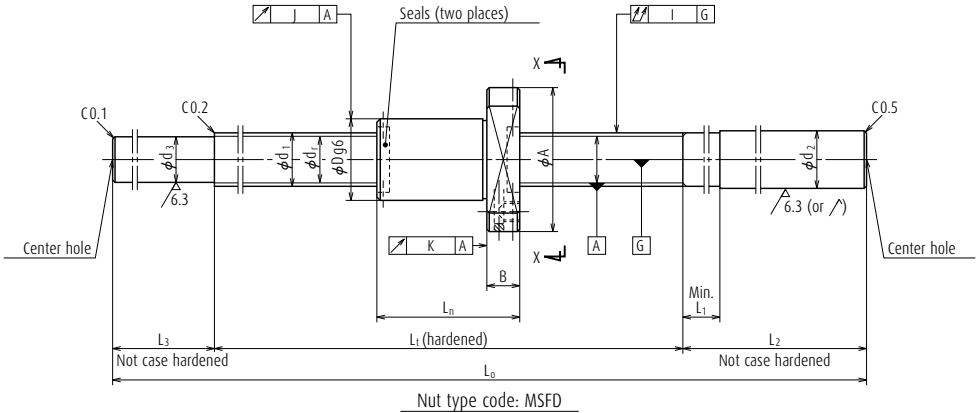


Ball screw No.	Stroke Max. L_t-L_n	Screw shaft dia. d_1	Lead l	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective ball turns	Basic load rating (N)		Axial play Max.	Nut							
								Dynamic C_a	Static C_{0a}		Outside dia.	Flange			Overall length		Bolt hole	
												D	A	H	B	L_n	W	X
											A							
W1602MS-1Y-C3T2	210	16	2	1.588	16.4	14.6	4	4 150	8 450	0.005	25	44	29	10	40	35	5.5	
W1604MS-1Y-C3T2	360	16	2	1.588	16.4	14.6	4	4 150	8 450	0.005	25	44	29	10	40	35	5.5	
W1602MS-2Y-C3T2.5	206	16	2.5	1.588	16.4	14.6	4	4 150	8 440	0.005	25	44	29	10	44	35	5.5	
W1604MS-2Y-C3T2.5	356	16	2.5	1.588	16.4	14.6	4	4 150	8 440	0.005	25	44	29	10	44	35	5.5	

- Notes**
1. Use of NSK support unit is recommended. See page B411 for details.
 2. **Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.**
See page D13 for details.
 3. The permissible rotational speed is determined by $d-n$ value, critical speed, and maximum rotational speed.
See B299 and B47. The permissible rotational speed shown in the table is the value when the ball screw mounting method is Fixed-Fixed.

Nut model: MSFD

Screw shaft $\phi 16$
Lead 2, 2.5

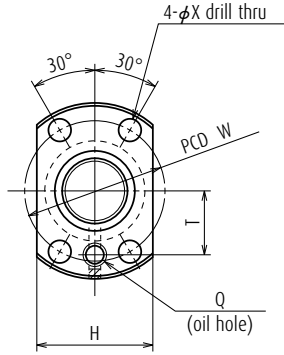


View X-X

Unit: mm

dimensions		Screw shaft dimensions							Lead accuracy			Run-out			Mass	Permissible rotational speed	Internal spatial volume of nut	Standard volume of grease replenishing
Oil hole	Threaded length	Shaft end right			Shaft end left		Overall length	T	Deviation	Variation	Shaft straightness	Radial run-out						
		L _t	d ₂	L ₁	L ₂	d ₃			L ₃	L ₀		e _p	v _u	I	J	K	(kg)	N (min ⁻¹)
M6×1	16	250	16.2	30	100	14.7	40	390	0	0.012	0.008	0.035	0.010	0.008	0.71	3 000	1.5	0.8
M6×1	16	400	16.2	30	100	14.7	40	540	0	0.013	0.010	0.050	0.010	0.008	0.93	3 000	1.5	0.8
M6×1	16	250	16.2	30	100	14.7	40	390	0	0.012	0.008	0.035	0.010	0.008	0.73	3 000	1.5	0.8
M6×1	16	400	16.2	30	100	14.7	40	540	0	0.013	0.010	0.050	0.010	0.008	0.95	3 000	1.5	0.8

Blank shaft end FS type

(Fine, Medium lead: Tube type)

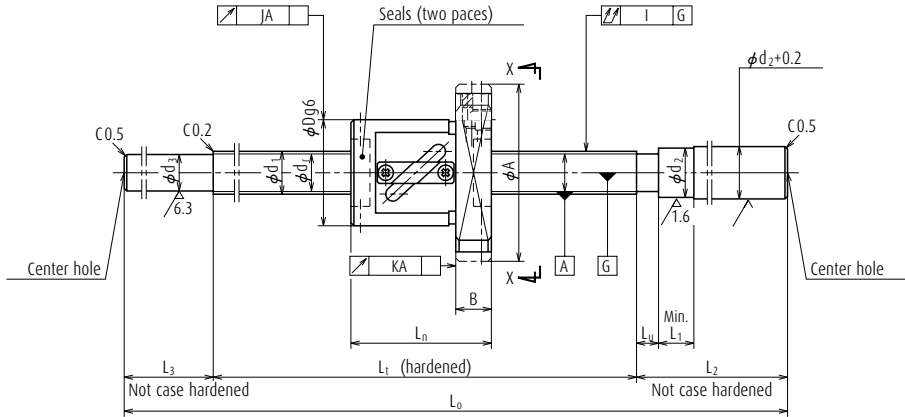


Nut type code: SFT, LSFT

Ball screw No.	Stroke Max. L_t-L_n	Screw shaft dia. d_1	Lead l	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective ball turns Tune × Circuits	Basic load rating (N)		Axial play Max.	Nut									
								Dynamic C_d	Static C_{0a}		Outside dia. D	Flange			Overall length L_n	Bolt hole				
												A	H	K		B	W	X	Y	Z
W1001FS-1-C3T4	126	10	4	2.000	10.3	8.2	2.5×1	3 210	4 420	0.005	26	46	28	42	10	34	36	4.5	8	4.5
W1002FS-1-C3T4	226	10	4	2.000	10.3	8.2	2.5×1	3 210	4 420	0.005	26	46	28	42	10	34	36	4.5	8	4.5
W1003FS-1-C3T4	326	10	4	2.000	10.3	8.2	2.5×1	3 210	4 420	0.005	26	46	28	42	10	34	36	4.5	8	4.5
W1201FS-1-C3T5	110	12	5	2.381	12.3	9.8	2.5×1	4 390	6 260	0.005	30	50	32	45	10	40	40	4.5	8	4.5
W1202FS-1-C3T5	210	12	5	2.381	12.3	9.8	2.5×1	4 390	6 260	0.005	30	50	32	45	10	40	40	4.5	8	4.5
W1204FS-1-C3T5	410	12	5	2.381	12.3	9.8	2.5×1	4 390	6 260	0.005	30	50	32	45	10	40	40	4.5	8	4.5
W1202FS-2-C5T10	200	12	10	2.381	12.5	10.0	2.5×1	4 430	6 430	0.005	30	50	32	45	10	50	40	4.5	8	4.5
W1204FS-2-C5T10	400	12	10	2.381	12.5	10.0	2.5×1	4 430	6 430	0.005	30	50	32	45	10	50	40	4.5	8	4.5

- Notes**
1. Use of NSK support unit is recommended. See page B411 for details.
 2. **Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.**
See page D13 for details.
 3. The permissible rotational speed is determined by d-n value, critical speed, and maximum rotational speed.
See B299 and B47. The permissible rotational speed shown in the table is the value when the ball screw mounting method is Fixed-Fixed.

Nut models: SFT, LSFT

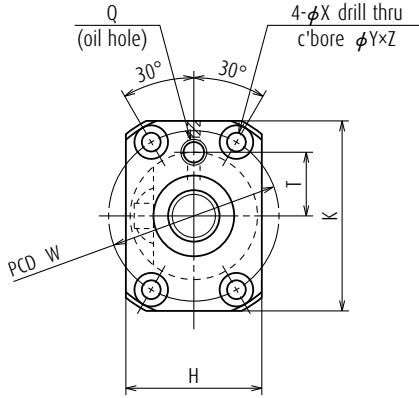


Screw shaft ϕ 10
Lead 4
Screw shaft ϕ 12
Lead 5, 10

Unit: mm

dimensions		Screw shaft dimensions								Lead accuracy			Run-out			Mass (kg)	Permissible rotational speed N (min ⁻¹)	Internal spatial volume of nut (cm ³)	Standard volume of grease replenishing (cm ³)
Oil hole Q	Threaded length T	L _t	Shaft end right			Shaft end left		Overall length L ₀	T	Devia- tion e _p	Varia- tion v _u	Shaft straight- ness I	Radial run-out						
			d ₂	L _u	L ₁	L ₂	d ₃						L ₃	J	K				
M6x1	14	160	14	5	40	70	8.2	35	265	0	0.010	0.008	0.030	0.010	0.008	0.34	3 000	0.86	0.43
M6x1	14	260	14	5	40	70	8.2	35	365	0	0.012	0.008	0.040	0.010	0.008	0.39	3 000	0.86	0.43
M6x1	14	360	14	5	40	70	8.2	35	465	0	0.013	0.010	0.050	0.010	0.008	0.45	3 000	0.86	0.43
M6x1	15	150	14	5	40	70	9.8	35	255	0	0.010	0.008	0.030	0.010	0.008	0.44	3 000	1.2	0.6
M6x1	15	250	14	5	40	70	9.8	35	355	0	0.012	0.008	0.040	0.010	0.008	0.52	3 000	1.2	0.6
M6x1	15	450	14	5	40	70	9.8	35	555	0	0.015	0.010	0.065	0.010	0.008	0.67	3 000	1.2	0.6
M6x1	15	250	14	8	40	70	10.0	35	355	0	0.023	0.018	0.050	0.012	0.010	0.57	3 000	1.4	0.7
M6x1	15	450	14	8	40	70	10.0	35	555	0	0.027	0.020	0.075	0.012	0.010	0.74	3 000	1.4	0.7

Blank shaft end FS type

(Fine, Medium lead: Tube type)

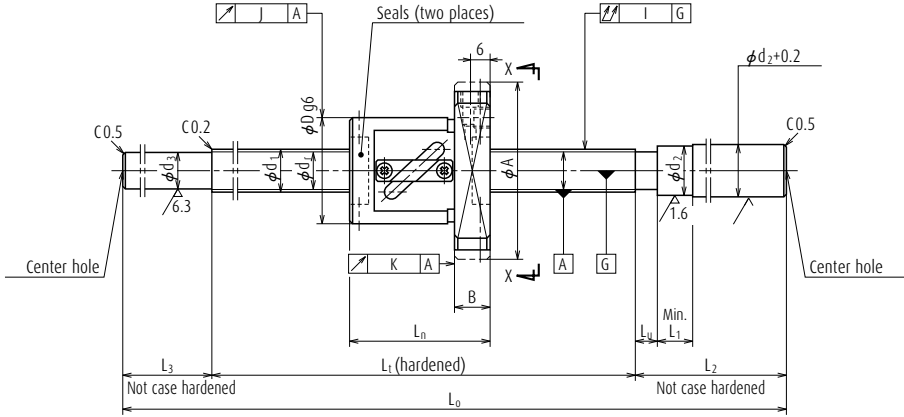


Nut type code: SFT, LSFT

Ball screw No.	Stroke Max. L_t-L_n	Screw shaft dia. d_1	Lead l	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective ball turns Turns × Circuits	Basic load rating (N)		Axial play Max.	Nut									
								Dynamic C_d	Static C_{0a}		Outside dia. D	Flange			Overall length L_n	Bolt hole				
												A	H	K		B	W	X	Y	Z
								L_t-L_n	d_1		l	D_w	d_m	d_r	Turns × Circuits	C_d	C_{0a}	D	A	H
W1403FS-1-C3T5	310	14	5	3.175	14.5	11.2	2.5×1	7 970	11 900	0.005	34	57	34	50	11	40	45	5.5	9.5	5.5
W1406FS-1-C3T5	560	14	5	3.175	14.5	11.2	2.5×1	7 970	11 900	0.005	34	57	34	50	11	40	45	5.5	9.5	5.5
W1405FS-1-C5T8	454	14	8	3.175	14.5	11.2	2.5×1	7 880	11 800	0.005	34	57	34	50	11	46	45	5.5	9.5	5.5
W1408FS-1-C5T8	754	14	8	3.175	14.5	11.2	2.5×1	7 880	11 800	0.005	34	57	34	50	11	46	45	5.5	9.5	5.5
W1504FS-1-C5T10	349	15	10	3.175	15.5	12.2	2.5×1	8 140	12 800	0.005	34	57	34	50	11	51	45	5.5	9.5	5.5
W1506FS-1-C5T10	549	15	10	3.175	15.5	12.2	2.5×1	8 140	12 800	0.005	34	57	34	50	11	51	45	5.5	9.5	5.5
W1509FS-1-C5T10	849	15	10	3.175	15.5	12.2	2.5×1	8 140	12 800	0.005	34	57	34	50	11	51	45	5.5	9.5	5.5
W1511FS-1-C5T10	1 049	15	10	3.175	15.5	12.2	2.5×1	8 140	12 800	0.005	34	57	34	50	11	51	45	5.5	9.5	5.5

Notes

1. Use of NSK support unit is recommended. See page B411 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
3. The permissible rotational speed is determined by d-n value, critical speed, and maximum rotational speed. See B299 and B47. The permissible rotational speed shown in the table is the value when the ball screw mounting method is Fixed-Fixed.

Nut models: SFT, LSFT

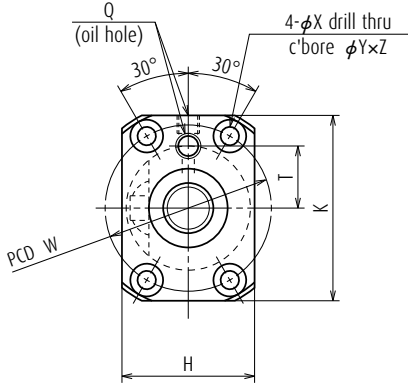


View X-X

Screw shaft ϕ 14
Lead 5, 8
Screw shaft ϕ 15
Lead 10

Unit: mm

dimensions		Screw shaft dimensions								Lead accuracy			Run-out			Mass	Permissible rotational speed	Internal spatial volume of nut	Standard volume of grease replenishing
Oil hole	Threaded length	Shaft end right			Shaft end left			Overall length	T	Deviation	Variation	Shaft straightness	Radial run-out						
		L _t	d ₂	L _u	L ₁	L ₂	d ₃						L ₃	L ₀	e _p	v _u	I	J	K
M6×1	17	350	15	5	40	100	11.2	40	490	0	0.013	0.010	0.035	0.012	0.008	0.78	3 000	2.0	1.0
M6×1	17	600	15	5	40	100	11.2	40	740	0	0.016	0.012	0.055	0.012	0.008	1.0	3 000	2.0	1.0
M6×1	17	500	15	8	40	100	11.2	40	640	0	0.027	0.020	0.065	0.015	0.011	1.0	3 000	2.0	1.0
M6×1	17	800	15	8	40	100	11.2	40	940	0	0.035	0.025	0.085	0.015	0.011	1.3	3 000	2.0	1.0
M6×1	17	400	15	8	40	120	12.2	50	570	0	0.025	0.020	0.050	0.015	0.011	1.0	3 000	2.3	1.2
M6×1	17	600	15	8	40	120	12.2	50	770	0	0.030	0.023	0.065	0.015	0.011	1.3	3 000	2.3	1.2
M6×1	17	900	15	8	40	120	12.2	50	1 070	0	0.040	0.027	0.110	0.015	0.011	1.7	3 000	2.3	1.2
M6×1	17	1 100	15	8	40	120	12.2	50	1 270	0	0.046	0.030	0.150	0.015	0.011	1.9	3 000	2.3	1.2

Nut model: USFC

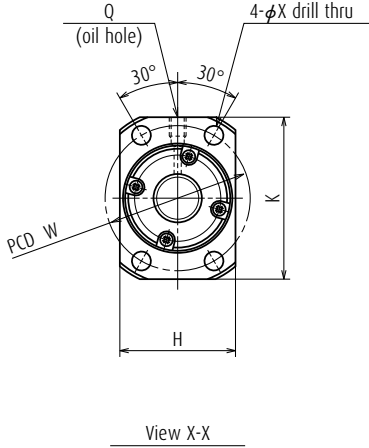


- Screw shaft ϕ 15
Lead 20
- Screw shaft ϕ 16
Lead 32
- Screw shaft ϕ 20
Lead 40

Unit: mm

dimensions		Screw shaft dimensions							Lead accuracy			Run-out			Mass	Permissible rotational speed	Internal spatial volume of nut	Standard volume of grease replenishing	
Oil hole	Threaded length	Shaft end right			Shaft end left		Overall length	Travel compensation	Deviation	Variation	Shaft straightness	Radial run-out							
Q	T	L _t	d ₂	L _u	L ₁	L ₂	d ₃	L ₃	L ₀	T	e _p	v _u	I	J	K	(kg)	N (min ⁻¹)	(cm ³)	(cm ³)
M6×1	5	400	15.2	13	40	120	12.2	50	570	0	0.025	0.020	0.050	0.015	0.011	1.0	3 000	1.9	1.0
M6×1	5	600	15.2	13	40	120	12.2	50	770	0	0.030	0.023	0.065	0.015	0.011	1.3	3 000	1.9	1.0
M6×1	5	900	15.2	13	40	120	12.2	50	1 070	0	0.040	0.027	0.110	0.015	0.011	1.7	3 000	1.9	1.0
M6×1	5	1 100	15.2	13	40	120	12.2	50	1 270	0	0.046	0.030	0.150	0.015	0.011	2.0	3 000	1.9	1.0
M6×1	5	900	16.2	19	40	150	13.4	60	1 110	0	0.040	0.027	0.110	0.015	0.011	1.9	3 000	2.0	1.0
M6×1	5	1 300	16.2	19	40	150	13.4	60	1 510	0	0.054	0.035	0.150	0.015	0.011	2.5	3 000	2.0	1.0
M6×1	5	1 100	20.2	22	60	150	17.4	80	1 330	0	0.046	0.030	0.150	0.015	0.011	3.5	3 000	2.7	1.4
M6×1	5	1 700	20.2	22	60	150	17.4	80	1 930	0	0.065	0.040	0.200	0.015	0.011	4.9	3 000	2.7	1.4

Blank shaft end FS type (High helix, Ultra high helix: End cap type)

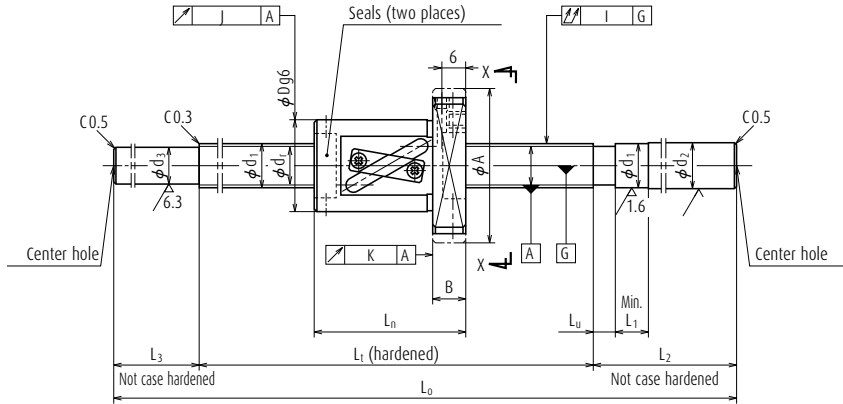


Nut type code: SFT, LSFT


Ball screw No.	Stroke Max. L_t-L_n	Screw shaft dia. d_1	Lead I	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective ball turns \times Circuits	Basic load rating (N)		Axial play Max.	Nut									
								Dynamic C_3	Static C_{0a}		Outside dia. D	Flange				Overall length L_n	Bolt hole			
												A	H	K	B		W	X	Y	Z
											D					A				
W1605FS-1-C3T5	458	16	5	3.175	16.5	13.2	2.5×1	8 620	13 800	0.005	40	63	40	55	11	42	51	5.5	9.5	5.5
W1609FS-1-C3T5	858	16	5	3.175	16.5	13.2	2.5×1	8 620	13 800	0.005	40	63	40	55	11	42	51	5.5	9.5	5.5
W1606FS-1-CST16	544	16	16	3.175	16.75	13.4	1.5×1	5 480	8 080	0.005	34	57	34	50	12	56	45	5.5	9.5	5.5
W1611FS-1-CST16	1 044	16	16	3.175	16.75	13.4	1.5×1	5 480	8 080	0.005	34	57	34	50	12	56	45	5.5	9.5	5.5
W2009FS-1-CST10	846	20	10	3.969	21	16.9	2.5×1	13 300	21 900	0.005	46	74	46	66	13	54	59	6.6	11	6.5
W2013FS-1-CST10	1 246	20	10	3.969	21	16.9	2.5×1	13 300	21 900	0.005	46	74	46	66	13	54	59	6.6	11	6.5
W2010FS-1-CST20	937	20	20	3.969	21	16.9	1.5×1	8 190	13 100	0.005	46	74	46	66	13	63	59	6.6	11	6.5
W2015FS-1-CST20	1 437	20	20	3.969	21	16.9	1.5×1	8 190	13 100	0.005	46	74	46	66	13	63	59	6.6	11	6.5

- Notes**
1. Use of NSK support unit is recommended. See page B411 for details.
 2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
 3. The permissible rotational speed is determined by d-n value, critical speed, and maximum rotational speed. See B299 and B47. The permissible rotational speed shown in the table is the value when the ball screw mounting method is Fixed-Fixed.

Nut models: SFT, LSFT

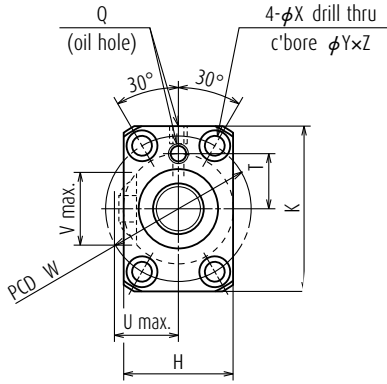

View X-X




Housing hole and its clearance
(only applicable to shaft dia. φ16, lead 16)

Screw shaft φ 16
Lead 5, 16
Screw shaft φ 20
Lead 10, 20

Unit: mm

dimensions			Screw shaft dimensions										Lead accuracy			Run-out			Mass (kg)	Per- missible rotational speed N (min ⁻¹)	Internal spatial volume of nut (cm ³)	Standard volume of grease repleni- shing (cm ³)
Projecting tube	Oil hole	Threaded length	Shaft end right			Shaft end left			Overall length	T	Devia- tion e _p	Varia- tion v _u	Shaft straight- ness I	Radial run-out								
			L _t	d ₂	L _u	L ₁	L ₂	d ₃						L ₃	L ₀	J	K					
U	V	R	Q	T	L _t	d ₂	L _u	L ₁	L ₂	d ₃	L ₃	L ₀	T	e _p	v _u	I	J	K	(kg)	N (min ⁻¹)	(cm ³)	(cm ³)
—	—	—	M6×1	17	500	16.2	5	40	150	13.2	60	710	0	0.015	0.010	0.055	0.012	0.008	1.4	3 000	2.6	1.3
—	—	—	M6×1	17	900	16.2	5	40	150	13.2	60	1 100	0	0.021	0.015	0.095	0.012	0.008	1.9	3 000	2.6	1.3
19	20	8	M6×1	17	600	16.2	10	40	150	13.4	60	810	0	0.030	0.023	0.085	0.015	0.011	1.5	3 000	2.1	1.1
19	20	8	M6×1	17	1 100	16.2	10	40	150	13.4	60	1 310	0	0.046	0.030	0.150	0.015	0.011	2.3	2 480	2.1	1.1
—	—	—	M6×1	24	900	20.2	10	60	150	16.9	80	1 130	0	0.040	0.027	0.110	0.015	0.011	3.2	3 000	4.7	2.4
—	—	—	M6×1	24	1 300	20.2	10	60	150	16.9	80	1 530	0	0.054	0.035	0.150	0.015	0.011	4.1	2 190	4.7	2.4
—	—	—	M6×1	24	1 000	20.2	13	60	150	16.9	80	1 230	0	0.040	0.027	0.110	0.015	0.011	3.6	3 000	4.2	2.1
—	—	—	M6×1	24	1 500	20.2	13	60	150	16.9	80	1 730	0	0.054	0.035	0.200	0.015	0.011	4.8	1 610	4.2	2.1

Blank shaft end FS type (Medium, High helix, Ultra high helix lead: End cap type)

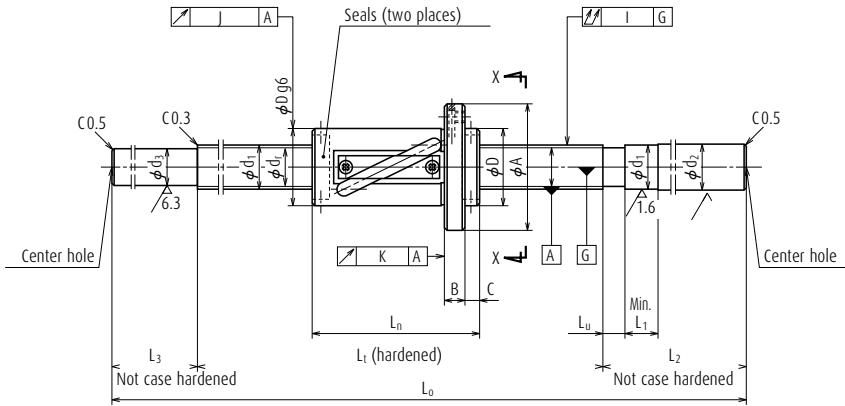


Nut type code: LSFT

Ball screw No.	Stroke Max.	Screw shaft dia.	Lead	Ball dia.	Ball circle dia.	Root dia.	Effective ball turns	Basic load rating (N)		Axial play Max.	Nut type code	Nut										
								Dynamic C_d	Static C_{0a}			Outside dia.	Flange					Overall length	Bolt hole			
													A	G	H	K	B		C	L_n	W	X
W2513FS-1-CST20	1 254	25	20	4.762	26.25	21.3	2.5×1	18 600	32 600	0.005	LSFT	44	71	23	—	—	12	8	96	57	6.6	
W2521FS-1-CST20	2 054	25	20	4.762	26.25	21.3	2.5×1	18 600	32 600	0.005	LSFT	44	71	23	—	—	12	8	96	57	6.6	
W2513FS-2-CST25	1 260	25	25	4.762	26.25	21.3	1.5×1	11 700	19 700	0.005	LSFT	44	71	23	—	—	12	10	90	57	6.6	
W2521FS-2-CST25	2 060	25	25	4.762	26.25	21.3	1.5×1	11 700	19 700	0.005	LSFT	44	71	23	—	—	12	10	90	57	6.6	
W2515FS-1GX-CST50	1 450	25	50	3.969	26	21.9	0.7×2	7 280	13 200	0.005	USFC	46	70	—	48	63	12	13	50	58	6.6	
W2521FS-3GX-CST50	2 100	25	50	3.969	26	21.9	0.7×2	7 280	13 200	0.005	USFC	46	70	—	48	63	12	13	50	58	6.6	

- Notes**
1. Use of NSK support unit is recommended. See page B411 for details.
 2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
 3. The permissible rotational speed is determined by d-n value, critical speed, and maximum rotational speed. See B299 and B47. The permissible rotational speed shown in the table is the value when the ball screw mounting method is Fixed-Fixed.

Nut models: LSFT, USFC

Screw shaft ϕ 25
Lead 20, 25, 50

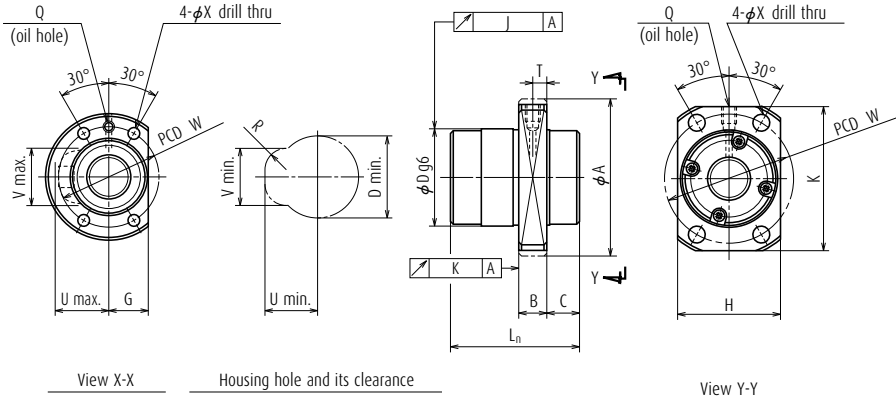


Nut type code: USFC

Unit: mm

dimensions				Screw shaft dimensions						Lead accuracy			Run-out			Mass	Permissible rotational speed	Internal spatial volume of nut	Standard volume of grease replenishing			
Projecting tube		Oil hole		Threaded length		Shaft end right		Shaft end left		Overall length	T	Deviation		Shaft straightness	Radial run-out							
U	V	R	Q	T	L _t	d ₂	L _u	L ₁	L ₂	d ₃		L ₃	L ₀	e _p	U _u					I	J	K
31	35	12	M6×1	—	1 350	25.2	13	70	200	21.3	100	1 650	0	0.054	0.035	0.120	0.015	0.011	6.8	2 550	12	6.0
31	35	12	M6×1	—	2 150	25.2	13	70	200	21.3	100	2 450	0	0.077	0.046	0.160	0.015	0.011	9.8	1 000	12	6.0
32	34	12	M6×1	—	1 350	25.2	15	70	200	21.3	100	1 650	0	0.054	0.035	0.120	0.015	0.011	6.8	2 540	10	5.0
32	34	12	M6×1	—	2 150	25.2	15	70	200	21.3	100	2 450	0	0.077	0.046	0.160	0.015	0.011	9.8	1 000	10	5.0
—	—	—	M6×1	6	1 500	25.2	26	70	200	21.9	100	1 800	0	0.054	0.035	0.120	0.015	0.011	7.3	1 250	5.3	2.7
—	—	—	M6×1	6	2 150	25.2	26	70	200	21.9	100	2 450	0	0.077	0.046	0.160	0.015	0.011	9.8	1 000	5.3	2.7

Blank shaft end FS type (Medium, High helix lead: Tube type)

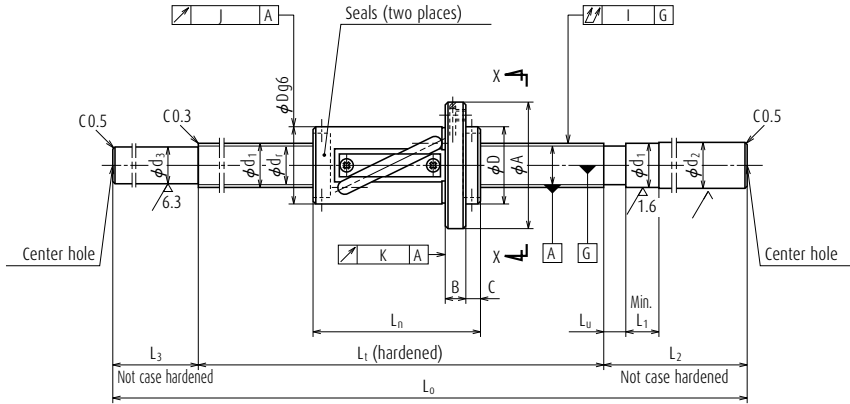


Nut type code: LSFT


Ball screw No.	Stroke Max. L_t-L_n	Screw shaft dia. d_1	Lead l	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_f	Effective ball turns \times Circuits	Basic load rating (N)		Axial play Max.	Nut							
								Dynamic C_a	Static C_{0a}		Outside dia.	Flange			Overall length L_n	Bolt hole		
												D	A	G		B	C	W
W3217FS-1-CST25	1 583	32	25	4.762	33.25	28.3	2.5×1	20 400	42 200	0.005	51	85	26	15	10	117	67	9
W3227FS-1-CST25	2 583	32	25	4.762	33.25	28.3	2.5×1	20 400	42 200	0.005	51	85	26	15	10	117	67	9
W3217FS-2-CST32	1 591	32	32	4.762	33.25	28.3	1.5×1	13 300	25 200	0.005	51	85	26	15	12	109	67	9
W3227FS-2-CST32	2 591	32	32	4.762	33.25	28.3	1.5×1	13 300	25 200	0.005	51	85	26	15	12	109	67	9

- Notes**
1. Use of NSK support unit is recommended. See page B411 for details.
 2. **Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.**
See page D13 for details.
 3. The permissible rotational speed is determined by $d-n$ value, critical speed, and maximum rotational speed.
See B299 and B47. The permissible rotational speed shown in the table is the value when the ball screw mounting method is Fixed-Fixed.

Nut model: LSFT

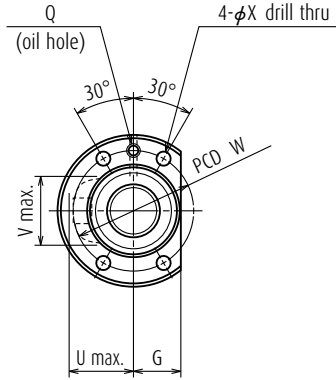

View X-X




Housing hole and its clearance

Screw shaft ϕ 32
Lead 25, 32

Unit: mm

dimensions				Screw shaft dimensions									Lead accuracy			Run-out			Mass	Permissible rotational speed	Internal spatial volume of nut	Standard volume of grease replenishing
Projecting tube		Oil hole	Threaded length	Shaft end right			Shaft end left			Overall length	Travel compensation	Deviation	Variation	Shaft straightness	Radial run-out							
U	V	R	Q	L _t	d ₂	L _u	L ₁	L ₂	d ₃	L ₃	L ₀	T	e _p	u _u	I	J	K	(kg)	N (min ⁻¹)	(cm ³)	(cm ³)	
34	42	12	M6×1	1 700	32.3	15	70	250	28.3	120	2 070	0	0.065	0.040	0.160	0.019	0.013	13.8	2 180	17	8.5	
34	42	12	M6×1	2 700	32.3	15	70	250	28.3	120	3 070	0	0.093	0.054	0.210	0.019	0.013	20.0	800	17	8.5	
34	42	12	M6×1	1 700	32.3	19	70	250	28.3	120	2 070	0	0.065	0.040	0.160	0.019	0.013	13.9	2 180	15	7.5	
34	42	12	M6×1	2 700	32.3	19	70	250	28.3	120	3 070	0	0.093	0.054	0.210	0.019	0.013	20.0	790	15	7.5	

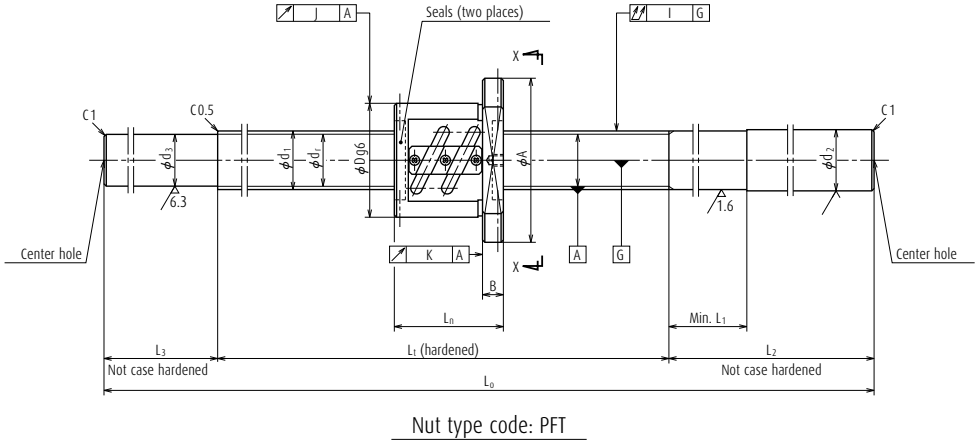


Ball screw No.	Stroke Max. L_t-L_n	Screw shaft dia. d_1	Lead l	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective ball turns Turns × Circuits	Basic load rating (N)		Preload (N)	Dynamic friction torque, median (N-cm)	Nut							
								Dynamic C_a	Static C_{0a}			Outside dia. D	Flange			Overall length		Bolt hole	
													A	G	B	L_n	W	X	
W2003SS-1P-CSZ4	251	20	4	2.381	20.3	17.8	2.5×2	6 550	10 900	290	3.9	40	63	24	11	49	51	5.5	
W2005SS-1P-CSZ4	451	20	4	2.381	20.3	17.8	2.5×2	6 550	10 900	290	3.9	40	63	24	11	49	51	5.5	
W2008SS-1P-CSZ4	751	20	4	2.381	20.3	17.8	2.5×2	6 550	10 900	290	3.9	40	63	24	11	49	51	5.5	
W2003SS-2P-CSZ5	244	20	5	3.175	20.5	17.2	2.5×2	11 100	17 100	490	7.8	44	67	26	11	56	55	5.5	
W2005SS-2P-CSZ5	444	20	5	3.175	20.5	17.2	2.5×2	11 100	17 100	490	7.8	44	67	26	11	56	55	5.5	
W2007SS-1P-CSZ5	644	20	5	3.175	20.5	17.2	2.5×2	11 100	17 100	490	7.8	44	67	26	11	56	55	5.5	
W2010SS-1P-CSZ5	944	20	5	3.175	20.5	17.2	2.5×2	11 100	17 100	490	7.8	44	67	26	11	56	55	5.5	

Notes

1. Use of NSK support unit is recommended. See page B411 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
3. The permissible rotational speed is determined by d-n value, critical speed, and maximum rotational speed. See B299 and B47. The permissible rotational speed shown in the table is the value when the ball screw mounting method is Fixed-Fixed.


Nut model: PFT

Screw shaft $\phi 20$
Lead 4, 5

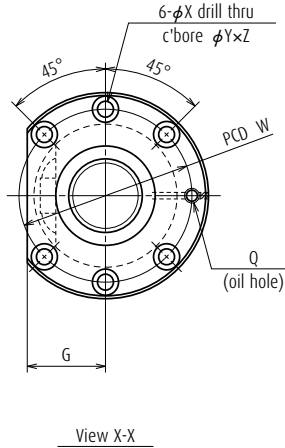

Unit: mm

dimensions			Screw shaft dimensions						Lead accuracy			Run-out			Mass	Per- missible rotational speed	Internal spatial volume of nut	Standard volume of grease replenishing	
Bolt hole	Oil hole	Threaded length	Shaft end right		Shaft end left		Overall length	Travel compen- sation	Deviation	Variation	Shaft straight- ness	Radial run-out							
Y	Z	Q	L _t	d ₂	L ₁	L ₂	d ₃	L ₃	L ₀	T	e _p	v _u	I	J	K	(kg)	N (min ⁻¹)	(cm ³)	(cm ³)
9.5	5.5	M6 \times 1	300	20.2	40	150	17.8	—	450	-0.007	0.023	0.018	0.055	0.015	0.011	1.5	3 000	2.7	1.4
9.5	5.5	M6 \times 1	500	20.2	40	150	17.8	50	700	-0.012	0.027	0.020	0.085	0.015	0.011	2.0	3 000	2.7	1.4
9.5	5.5	M6 \times 1	800	20.2	40	200	17.8	100	1 100	-0.019	0.035	0.025	0.140	0.015	0.011	2.9	3 000	2.7	1.4
9.5	5.5	M6 \times 1	300	20.2	40	150	17.2	—	450	-0.007	0.023	0.018	0.055	0.015	0.011	1.6	3 000	4.3	2.2
9.5	5.5	M6 \times 1	500	20.2	40	150	17.2	50	700	-0.012	0.027	0.020	0.085	0.015	0.011	2.2	3 000	4.3	2.2
9.5	5.5	M6 \times 1	700	20.2	40	200	17.2	100	1 000	-0.017	0.035	0.025	0.110	0.015	0.011	2.8	3 000	4.3	2.2
9.5	5.5	M6 \times 1	1 000	20.2	40	200	17.2	100	1 300	-0.024	0.040	0.027	0.180	0.015	0.011	3.5	3 000	4.3	2.2

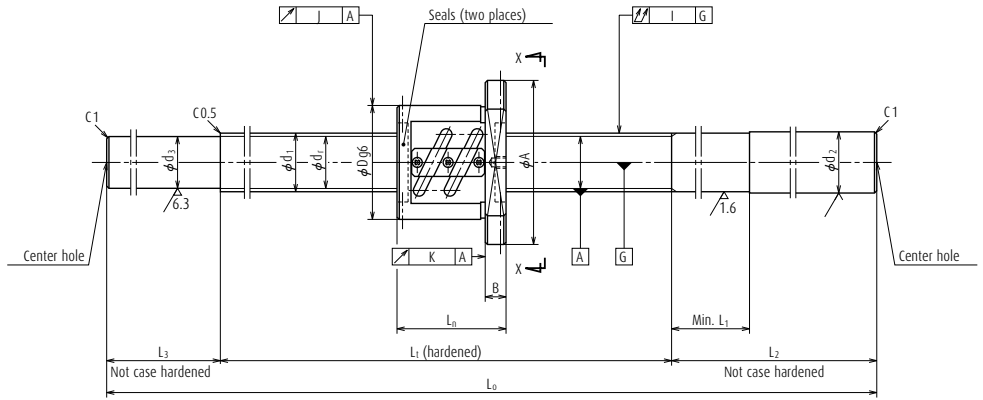


Nut type code: PFT

Ball screw No.	Stroke Max. L_t-L_n	Screw shaft dia. d_1	Lead l	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective ball turns Turns × Circuits	Basic load rating (N)		Preload (N)	Dynamic friction torque, median (N-cm)	Nut						
								Dynamic C_a	Static C_{0a}			Outside dia. D	Flange		Overall length L_n	Bolt hole		
													A	G		B	W	X
W2503SS-1P-CSZ4	252	25	4	2.381	25.3	22.8	2.5×2	7 110	13 600	290	4.9	46	69	26	11	48	57	5.5
W2506SS-1P-CSZ4	552	25	4	2.381	25.3	22.8	2.5×2	7 110	13 600	290	4.9	46	69	26	11	48	57	5.5
W2510SS-1P-CSZ4	952	25	4	2.381	25.3	22.8	2.5×2	7 110	13 600	290	4.9	46	69	26	11	48	57	5.5
W2503SS-2P-CSZ5	245	25	5	3.175	25.5	22.2	2.5×2	12 300	21 800	540	8.8	50	73	28	11	55	61	5.5
W2505SS-1P-CSZ5	445	25	5	3.175	25.5	22.2	2.5×2	12 300	21 800	540	8.8	50	73	28	11	55	61	5.5
W2508SS-1P-CSZ5	745	25	5	3.175	25.5	22.2	2.5×2	12 300	21 800	540	8.8	50	73	28	11	55	61	5.5
W2512SS-1P-CSZ5	1 145	25	5	3.175	25.5	22.2	2.5×2	12 300	21 800	540	8.8	50	73	28	11	55	61	5.5
W2504SS-1P-CSZ6	338	25	6	3.969	25.5	21.4	2.5×2	16 600	26 700	690	13.8	53	76	29	11	62	64	5.5
W2508SS-2P-CSZ6	738	25	6	3.969	25.5	21.4	2.5×2	16 600	26 700	690	13.8	53	76	29	11	62	64	5.5
W2512SS-2P-CSZ6	1 138	25	6	3.969	25.5	21.4	2.5×2	16 600	26 700	690	13.8	53	76	29	11	62	64	5.5

- Notes**
1. Use of NSK support unit is recommended. See page B411 for details.
 2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
 3. The permissible rotational speed is determined by $d-n$ value, critical speed, and maximum rotational speed. See B299 and B47. The permissible rotational speed shown in the table is the value when the ball screw mounting method is Fixed-Fixed.

Nut model: PFT


Screw shaft $\phi 25$
Lead 4, 5, 6

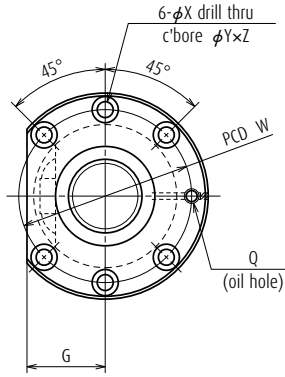

View X-X

Unit: mm

dimensions			Screw shaft dimensions						Lead accuracy			Run-out			Mass	Permissible rotational speed	Internal spatial volume of nut	Standard volume of grease replenishing	
Bolt hole	Oil hole	Threaded length	Shaft end right		Shaft end left		Overall length	Travel compensation	Deviation	Variation	Shaft straightness	Radial run-out							
Y	Z	Q	L _t	d ₂	L ₁	L ₂	d ₃	L ₃	L ₀	T	e _p	υ _u	I	J	K	(kg)	N (min ⁻¹)	(cm ³)	(cm ³)
9.5.5.5	M6×1	300	25.2	40	150	22.8	—	450	-0.007	0.023	0.018	0.040	0.015	0.011	2.2	2 800	3.2	1.6	
9.5.5.5	M6×1	600	25.2	40	200	22.8	100	900	-0.014	0.030	0.023	0.075	0.015	0.011	3.8	2 800	3.2	1.6	
9.5.5.5	M6×1	1 000	25.2	40	200	22.8	100	1 300	-0.024	0.040	0.027	0.120	0.015	0.011	5.2	2 800	3.2	1.6	
9.5.5.5	M6×1	300	25.2	40	200	22.2	—	500	-0.007	0.023	0.018	0.040	0.015	0.011	2.5	2 800	5.2	2.6	
9.5.5.5	M6×1	500	25.2	40	200	22.2	50	750	-0.012	0.027	0.020	0.060	0.015	0.011	3.4	2 800	5.2	2.6	
9.5.5.5	M6×1	800	25.2	40	250	22.2	100	1 150	-0.019	0.035	0.025	0.090	0.015	0.011	4.8	2 800	5.2	2.6	
9.5.5.5	M6×1	1 200	25.2	40	300	22.2	100	1 600	-0.029	0.046	0.030	0.120	0.015	0.011	6.3	2 800	5.2	2.6	
9.5.5.5	M6×1	400	25.2	40	200	21.4	—	600	-0.010	0.025	0.020	0.050	0.019	0.013	3.0	2 800	7.0	3.5	
9.5.5.5	M6×1	800	25.2	40	250	21.4	100	1 150	-0.019	0.035	0.025	0.090	0.019	0.013	4.8	2 800	7.0	3.5	
9.5.5.5	M6×1	1 200	25.2	40	300	21.4	100	1 600	-0.029	0.046	0.030	0.120	0.019	0.013	6.3	2 800	7.0	3.5	

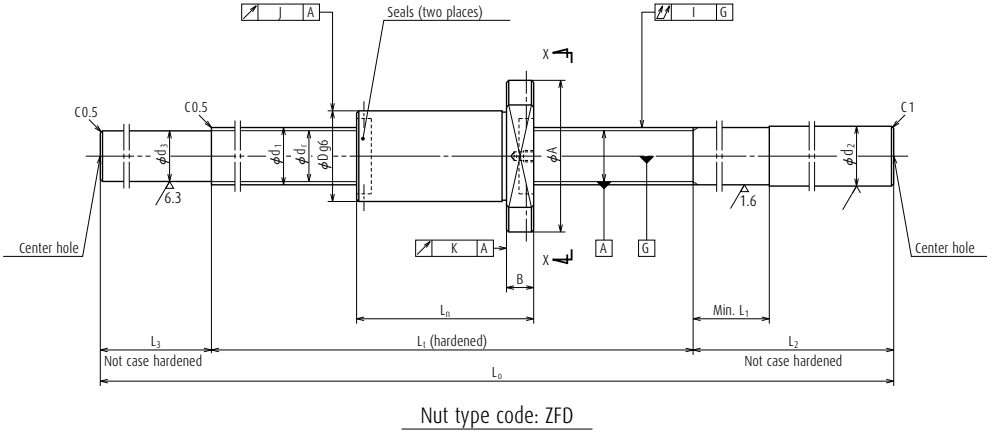


Ball screw No.	Stroke Max. L_1-L_n	Screw shaft dia. d_1	Lead l	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective ball turns Turns \times Circuits	Basic load rating (N)		Preload (N)	Dynamic friction torque, median (N-cm)	Nut							
								Dynamic C_a	Static C_{0a}			Outside dia. D	Flange			Overall length		Bolt hole	
													A	G	B	L_n	W	X	
W2502SS-1ZY-CSZ5	184	25	5	3.175	25.75	22.4	1 \times 3	11 600	22 900	740	13.8	40	63	24	11	66	51	5.5	
W2504SS-3ZY-CSZ5	334	25	5	3.175	25.75	22.4	1 \times 3	11 600	22 900	740	13.8	40	63	24	11	66	51	5.5	
W2506SS-2ZY-CSZ5	534	25	5	3.175	25.75	22.4	1 \times 3	11 600	22 900	740	13.8	40	63	24	11	66	51	5.5	
W2509SS-1ZY-CSZ5	834	25	5	3.175	25.75	22.4	1 \times 3	11 600	22 900	740	13.8	40	63	24	11	66	51	5.5	
W2512SS-3ZY-CSZ5	1 134	25	5	3.175	25.75	22.4	1 \times 3	11 600	22 900	740	13.8	40	63	24	11	66	51	5.5	
W2504SS-4ZY-CSZ10	312	25	10	4.762	26.25	21.3	1 \times 2	13 300	21 200	880	21.5	42	69	26	15	88	55	6.6	
W2506SS-3ZY-CSZ10	512	25	10	4.762	26.25	21.3	1 \times 2	13 300	21 200	880	21.5	42	69	26	15	88	55	6.6	
W2508SS-3ZY-CSZ10	712	25	10	4.762	26.25	21.3	1 \times 2	13 300	21 200	880	21.5	42	69	26	15	88	55	6.6	
W2511SS-1ZY-CSZ10	1 012	25	10	4.762	26.25	21.3	1 \times 2	13 300	21 200	880	21.5	42	69	26	15	88	55	6.6	
W2515SS-2ZY-CSZ10	1 412	25	10	4.762	26.25	21.3	1 \times 2	13 300	21 200	880	21.5	42	69	26	15	88	55	6.6	

- Notes**
1. Use of NSK support unit is recommended. See page B411 for details.
 2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
 3. The permissible rotational speed is determined by d-n value, critical speed, and maximum rotational speed. See B299 and B47. The permissible rotational speed shown in the table is the value when the ball screw mounting method is Fixed-Fixed.


Nut model: ZFD

Screw shaft $\phi 25$
Lead 5, 10

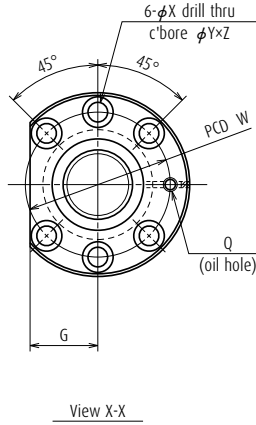

Unit: mm

dimensions			Screw shaft dimensions						Lead accuracy			Run-out			Mass	Per- missible rotational speed	Internal spatial volume of nut	Standard volume of grease replenishing	
Bolt hole	Oil hole	Threaded length	Shaft end right		Shaft end left		Overall length	Travel compen- sation	Deviation	Variation	Shaft straight- ness	Radial run-out							
Y	Z	Q	L_t	d_2	L_1	L_2	d_3	L_3	L_0	T	e_p	v_u	I	J	K	(kg)	N (min ⁻¹)	(cm ³)	(cm ³)
9.5	5.5	M6×1	250	25.2	40	200	22.4	—	450	-0.005	0.023	0.018	0.040	0.015	0.011	2.1	2 800	5.4	2.7
9.5	5.5	M6×1	400	25.2	40	200	22.4	50	650	-0.009	0.025	0.020	0.060	0.015	0.011	2.8	2 800	5.4	2.7
9.5	5.5	M6×1	600	25.2	40	250	22.4	100	950	-0.013	0.030	0.023	0.075	0.015	0.011	3.9	2 800	5.4	2.7
9.5	5.5	M6×1	900	25.2	40	250	22.4	100	1 250	-0.021	0.040	0.027	0.090	0.015	0.011	4.9	2 800	5.4	2.7
9.5	5.5	M6×1	1 200	25.2	40	300	22.4	100	1 600	-0.028	0.046	0.030	0.120	0.015	0.011	6.2	2 800	5.4	2.7
11	6.5	M6×1	400	25.2	60	200	21.3	50	650	-0.008	0.025	0.020	0.060	0.015	0.011	3.0	2 800	9.0	4.5
11	6.5	M6×1	600	25.2	60	250	21.3	100	950	-0.012	0.030	0.023	0.075	0.015	0.011	4.1	2 800	9.0	4.5
11	6.5	M6×1	800	25.2	60	250	21.3	100	1 150	-0.017	0.035	0.025	0.090	0.015	0.011	4.8	2 800	9.0	4.5
11	6.5	M6×1	1 100	25.2	60	300	21.3	100	1 500	-0.024	0.046	0.030	0.120	0.015	0.011	6.0	2 800	9.0	4.5
11	6.5	M6×1	1 500	25.2	60	300	21.3	100	1 900	-0.034	0.054	0.035	0.150	0.015	0.011	7.4	2 800	9.0	4.5

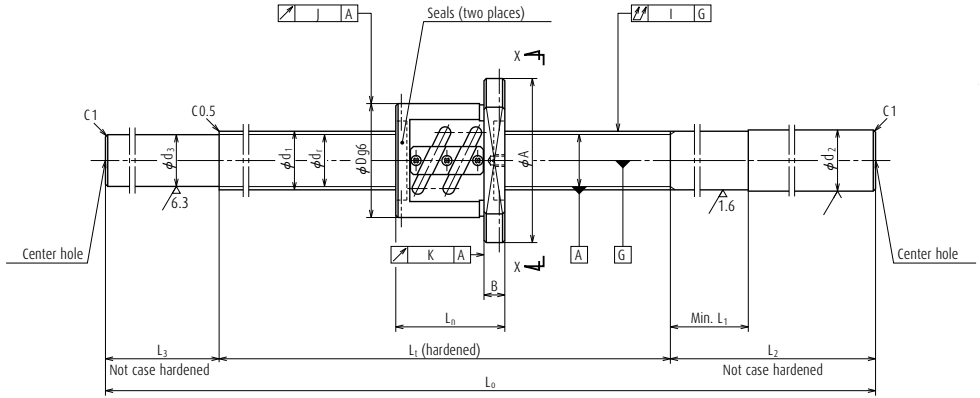


Nut type code: PFT

Ball screw No.	Stroke Max. L_t-L_n	Screw shaft dia. d_1	Lead I	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective ball turns Turns × Circuits	Basic load rating (N)		Preload (N)	Dynamic friction torque, median (N-cm)	Nut							
								Dynamic C_a	Static C_{0a}			Outside dia.		Flange		Overall length		Bolt hole	
												D	A	G	B	L_n	W	X	
W2504SS-2P-CSZ10	319	25	10	4.762	25.5	20.5	1.5×2	13 600	18 900	590	13.8	58	85	32	15	81	71	6.6	
W2507SS-1P-CSZ10	619	25	10	4.762	25.5	20.5	1.5×2	13 600	18 900	590	13.8	58	85	32	15	81	71	6.6	
W2510SS-2P-CSZ10	919	25	10	4.762	25.5	20.5	1.5×2	13 600	18 900	590	13.8	58	85	32	15	81	71	6.6	
W2515SS-1P-CSZ10	1 419	25	10	4.762	25.5	20.5	1.5×2	13 600	18 900	590	13.8	58	85	32	15	81	71	6.6	
W2804SS-1P-CSZ5	344	28	5	3.175	28.5	25.2	2.5×2	13 000	24 400	540	9.8	55	85	31	12	56	69	6.6	
W2806SS-1P-CSZ5	544	28	5	3.175	28.5	25.2	2.5×2	13 000	24 400	540	9.8	55	85	31	12	56	69	6.6	
W2808SS-1P-CSZ5	744	28	5	3.175	28.5	25.2	2.5×2	13 000	24 400	540	9.8	55	85	31	12	56	69	6.6	
W2812SS-1P-CSZ5	1 144	28	5	3.175	28.5	25.2	2.5×2	13 000	24 400	540	9.8	55	85	31	12	56	69	6.6	
W2804SS-3P-CSZ6	337	28	6	3.175	28.5	25.2	2.5×2	12 900	24 300	540	10.8	55	85	31	12	63	69	6.6	
W2806SS-3P-CSZ6	537	28	6	3.175	28.5	25.2	2.5×2	12 900	24 300	540	10.8	55	85	31	12	63	69	6.6	
W2808SS-3P-CSZ6	737	28	6	3.175	28.5	25.2	2.5×2	12 900	24 300	540	10.8	55	85	31	12	63	69	6.6	
W2812SS-3P-CSZ6	1 137	28	6	3.175	28.5	25.2	2.5×2	12 900	24 300	540	10.8	55	85	31	12	63	69	6.6	

- Notes**
1. Use of NSK support unit is recommended. See page B411 for details.
 2. **Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.**
See page D13 for details.
 3. The permissible rotational speed is determined by d-n value, critical speed, and maximum rotational speed.
See B299 and B47. The permissible rotational speed shown in the table is the value when the ball screw mounting method is Fixed-Fixed.

Nut model: PFT

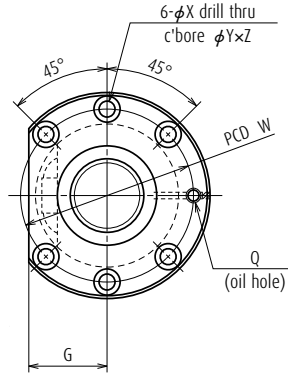


View X-X

Screw shaft $\phi 25$
Lead 5, 10
Screw shaft $\phi 28$
Lead 5, 6

Unit: mm

dimensions			Screw shaft dimensions						Lead accuracy			Run-out			Mass	Permissible rotational speed	Internal spatial volume of nut	Standard volume of grease replenishing	
Bolt hole	Oil hole	Threaded length	Shaft end right		Shaft end left		Overall length	Travel compensation	Deviation	Variation	Shaft straightness	Radial run-out							
Y	Z	Q	L_t	d_2	L_1	L_2	d_3	L_3	L_0	T	e_p	v_u	I	J	K	(kg)	N (min ⁻¹)	(cm ³)	(cm ³)
11	6.5	M6×1	400	25.2	60	200	20.5	50	650	-0.010	0.025	0.020	0.060	0.019	0.013	3.8	2 800	9.7	4.9
11	6.5	M6×1	700	25.2	60	250	20.5	100	1 050	-0.017	0.035	0.025	0.090	0.019	0.013	5.1	2 800	9.7	4.9
11	6.5	M6×1	1 000	25.2	60	250	20.5	100	1 350	-0.024	0.040	0.027	0.120	0.019	0.013	6.1	2 800	9.7	4.9
11	6.5	M6×1	1 500	25.2	60	300	20.5	100	1 900	-0.036	0.054	0.035	0.150	0.019	0.013	8.0	2 050	9.7	4.9
11	6.5	M6×1	400	28.2	40	200	25.2	—	600	-0.010	0.025	0.020	0.050	0.019	0.013	3.7	2 500	6.1	3.1
11	6.5	M6×1	600	28.2	40	250	25.2	100	950	-0.014	0.030	0.023	0.075	0.019	0.013	5.2	2 500	6.1	3.1
11	6.5	M6×1	800	28.2	40	250	25.2	100	1 150	-0.019	0.035	0.025	0.090	0.019	0.013	6.1	2 500	6.1	3.1
11	6.5	M6×1	1 200	28.2	40	300	25.2	100	1 600	-0.029	0.046	0.030	0.120	0.019	0.013	8.1	2 500	6.1	3.1
11	6.5	M6×1	400	28.2	40	200	25.2	—	600	-0.010	0.025	0.020	0.050	0.019	0.013	3.8	2 500	6.1	3.1
11	6.5	M6×1	600	28.2	40	250	25.2	100	950	-0.014	0.030	0.023	0.075	0.019	0.013	5.3	2 500	6.1	3.1
11	6.5	M6×1	800	28.2	40	250	25.2	100	1 150	-0.019	0.035	0.025	0.090	0.019	0.013	6.2	2 500	6.1	3.1
11	6.5	M6×1	1 200	28.2	40	300	25.2	100	1 600	-0.029	0.046	0.030	0.120	0.019	0.013	8.2	2 500	6.1	3.1

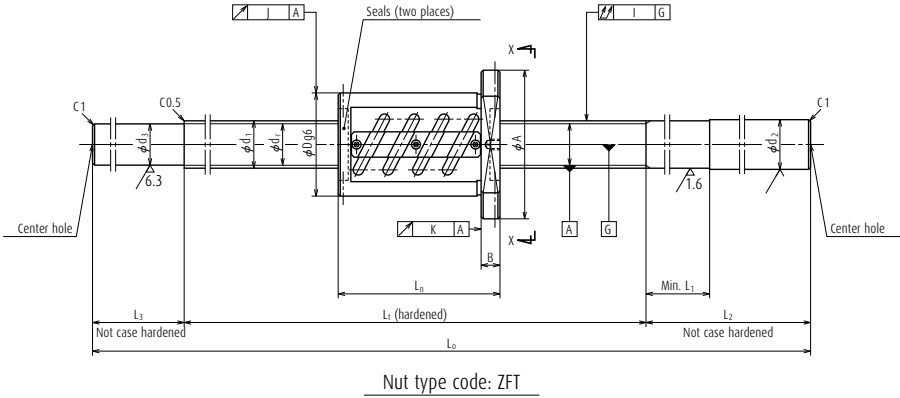


Ball screw No.	Stroke Max. L _t -L _n	Screw shaft dia. d ₁	Lead l	Ball dia. D _w	Ball circle dia. d _m	Root dia. d _r	Effective ball turns Turns × Circuits	Basic load rating (N)		Preload (N)	Dynamic friction torque, median (N-cm)	Nut						
								Dynamic C _a	Static C _{0a}			Dynamic friction torque, median (N-cm)	Overall length		Bolt hole			
													Outside dia. D	Flange A G B		L _n	W X	
W2804SS-2Z-C5Z5	314	28	5	3.175	28.5	25.2	2.5×2	20 600	48 700	1 225	21.5	55	85	31	12	86	69	6.6
W2806SS-2Z-C5Z5	514	28	5	3.175	28.5	25.2	2.5×2	20 600	48 700	1 225	21.5	55	85	31	12	86	69	6.6
W2808SS-2Z-C5Z5	714	28	5	3.175	28.5	25.2	2.5×2	20 600	48 700	1 225	21.5	55	85	31	12	86	69	6.6
W2812SS-2Z-C5Z5	1 114	28	5	3.175	28.5	25.2	2.5×2	20 600	48 700	1 225	21.5	55	85	31	12	86	69	6.6
W2804SS-4Z-C5Z6	301	28	6	3.175	28.5	25.2	2.5×2	20 600	48 700	1 225	22.5	55	85	31	12	99	69	6.6
W2806SS-4Z-C5Z6	501	28	6	3.175	28.5	25.2	2.5×2	20 600	48 700	1 225	22.5	55	85	31	12	99	69	6.6
W2808SS-4Z-C5Z6	701	28	6	3.175	28.5	25.2	2.5×2	20 600	48 700	1 225	22.5	55	85	31	12	99	69	6.6
W2812SS-4Z-C5Z6	1 101	28	6	3.175	28.5	25.2	2.5×2	20 600	48 700	1 225	22.5	55	85	31	12	99	69	6.6

Notes

1. Use of NSK support unit is recommended. See page B411 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
3. The permissible rotational speed is determined by d-n value, critical speed, and maximum rotational speed. See B299 and B47. The permissible rotational speed shown in the table is the value when the ball screw mounting method is Fixed-Fixed.


Nut model: ZFT

Screw shaft $\phi 28$
Lead 5, 6

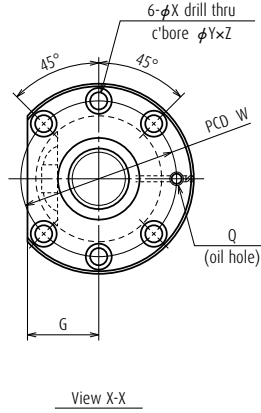

Unit: mm

dimensions			Screw shaft dimensions						Lead accuracy			Run-out			Mass	Permissible rotational speed	Internal spatial volume of nut	Standard volume of grease replenishing	
Bolt hole	Oil hole	Threaded length	Shaft end right		Shaft end left		Overall length	Travel compensation	Deviation	Variation	Shaft straightness	Radial run-out							
Y	Z	Q	L_t	d_2	L_1	L_2	d_3	L_3	L_0	T	e_p	v_u	I	J	K	(kg)	N (min ⁻¹)	(cm ³)	(cm ³)
11	6.5	M6×1	400	28.2	40	200	25.2	—	600	-0.010	0.025	0.020	0.050	0.019	0.013	4.7	2 500	9.2	4.6
11	6.5	M6×1	600	28.2	40	250	25.2	100	950	-0.014	0.030	0.023	0.075	0.019	0.013	5.5	2 500	9.2	4.6
11	6.5	M6×1	800	28.2	40	250	25.2	100	1 150	-0.019	0.035	0.025	0.090	0.019	0.013	6.4	2 500	9.2	4.6
11	6.5	M6×1	1 200	28.2	40	300	25.2	100	1 600	-0.029	0.046	0.030	0.120	0.019	0.013	8.4	2 500	9.2	4.6
11	6.5	M6×1	400	28.2	40	200	25.2	—	600	-0.010	0.025	0.020	0.050	0.019	0.013	4.2	2 500	9.5	4.8
11	6.5	M6×1	600	28.2	40	250	25.2	100	950	-0.014	0.030	0.023	0.075	0.019	0.013	5.7	2 500	9.5	4.8
11	6.5	M6×1	800	28.2	40	250	25.2	100	1 150	-0.019	0.035	0.025	0.090	0.019	0.013	6.6	2 500	9.5	4.8
11	6.5	M6×1	1 200	28.2	40	300	25.2	100	1 600	-0.029	0.046	0.030	0.120	0.019	0.013	8.6	2 500	9.5	4.8

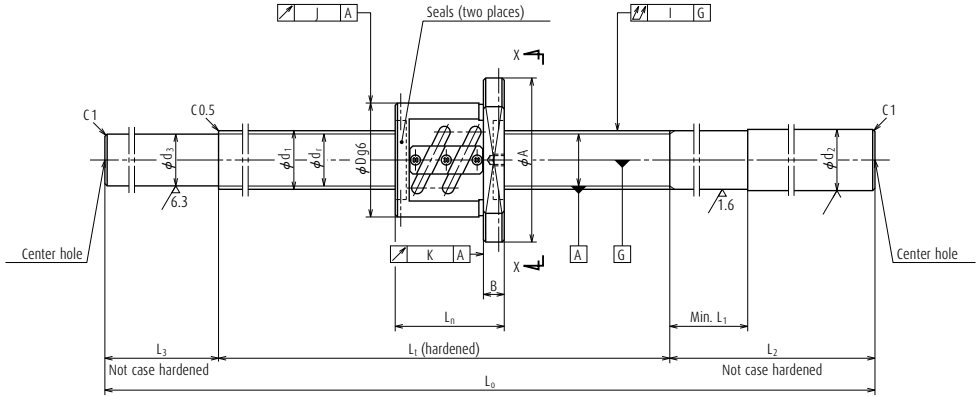

Nut type code: PFT


Ball screw No.	Stroke Max. L _t -L _n	Screw shaft dia. d ₁	Lead l	Ball dia. D _w	Ball circle dia. d _m	Root dia. d _r	Effective ball turns	Basic load rating (N)		Preload (N)	Dynamic friction torque, median (N-cm)	Nut				
								Turns × Circuits	Dynamic C _a			Static C _{0a}	Outside dia.	Flange		
							D			A	G			B	L _n	
W3204SS-1P-C5Z5	344	32	5	3.175	32.5	29.2	2.5×2	13 700	28 000	590	10.8	58	85	32	12	56
W3206SS-1P-C5Z5	544	32	5	3.175	32.5	29.2	2.5×2	13 700	28 000	590	10.8	58	85	32	12	56
W3208SS-1P-C5Z5	744	32	5	3.175	32.5	29.2	2.5×2	13 700	28 000	590	10.8	58	85	32	12	56
W3212SS-1P-C5Z5	1 144	32	5	3.175	32.5	29.2	2.5×2	13 700	28 000	590	10.8	58	85	32	12	56
W3215SS-1P-C5Z5	1 144	32	5	3.175	32.5	29.2	2.5×2	13 700	28 000	590	10.8	58	85	32	12	56
W3206SS-3P-C5Z6	537	32	6	3.969	32.5	28.4	2.5×2	18 300	34 700	780	15.6	62	89	34	12	63
W3210SS-1P-C5Z6	937	32	6	3.969	32.5	28.4	2.5×2	18 300	34 700	780	15.6	62	89	34	12	63
W3215SS-3P-C5Z6	1 437	32	6	3.969	32.5	28.4	2.5×2	18 300	34 700	780	15.6	62	89	34	12	63

Notes

1. Use of NSK support unit is recommended. See page B411 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
3. Permissible rotational speed is determined by d-n value and critical speed. See pages B47 and B299.

Nut model: PFT


Screw shaft ϕ 32
Lead 5, 6

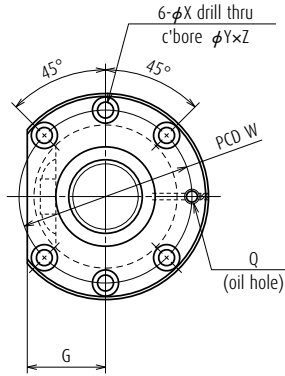

View X-X

Unit: mm

dimensions				Screw shaft dimensions						Lead accuracy			Run-out			Mass	Permissible rotational speed	Internal spatial volume of nut	Standard volume of grease replenishing		
Bolt hole		Oil hole	Threaded length	Shaft end right		Shaft end left		Overall length	Travel compensation	Deviation	Variation	Shaft straightness	Radial run-out								
W	X	Y	Z	Q	L _t	d ₂	L ₁	L ₂	d ₃	L ₃	L ₀	T	e _p	υ _u	I	J	K	(kg)	N (min ⁻¹)	(cm ³)	(cm ³)
71	6.6	11	6.5	M6×1	400	32.3	40	200	29.2	50	650	-0.010	0.025	0.020	0.060	0.019	0.013	4.8	2 180	6.9	3.5
71	6.6	11	6.5	M6×1	600	32.3	40	250	29.2	100	950	-0.014	0.030	0.023	0.075	0.019	0.013	6.5	2 180	6.9	3.5
71	6.6	11	6.5	M6×1	800	32.3	40	250	29.2	100	1 150	-0.019	0.035	0.025	0.090	0.019	0.013	7.7	2 180	6.9	3.5
71	6.6	11	6.5	M6×1	1 200	32.3	40	300	29.2	100	1 600	-0.029	0.046	0.030	0.120	0.019	0.013	10.3	2 180	6.9	3.5
71	6.6	11	6.5	M6×1	1 500	32.3	40	300	29.2	100	1 900	-0.036	0.054	0.035	0.150	0.019	0.013	12.1	2 180	6.9	3.5
75	6.6	11	6.5	M6×1	600	32.3	40	250	28.4	100	950	-0.014	0.030	0.023	0.075	0.019	0.013	6.7	2 180	9.4	4.7
75	6.6	11	6.5	M6×1	1 000	32.3	40	300	28.4	100	1 400	-0.024	0.040	0.027	0.120	0.019	0.013	9.2	2 180	9.4	4.7
75	6.6	11	6.5	M6×1	1 500	32.3	40	300	28.4	100	1 900	-0.036	0.054	0.035	0.150	0.019	0.013	12.1	2 180	9.4	4.7

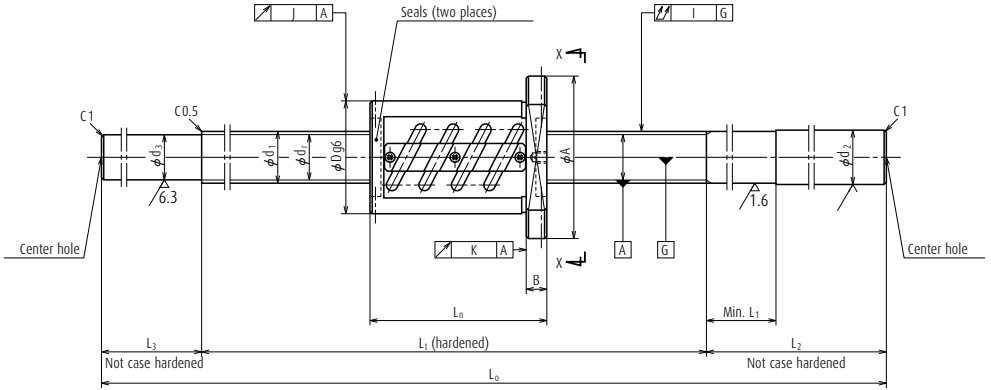

Nut type code: ZFT


Ball screw No.	Stroke Max. L_t-L_n	Screw shaft dia. d_1	Lead l	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective ball turns Turns × Circuits	Basic load rating (N)		Preload (N)	Dynamic friction torque, median (N-cm)	Nut				
								Dynamic C_a	Static C_{0a}			Outside dia. D	Flange			Overall length L_n
													A	G	B	
W3204SS-2Z-C5Z5	314	32	5	3.175	32.5	29.2	2.5×2	21 800	56 000	1 270	22.5	58	85	32	12	86
W3206SS-2Z-C5Z5	514	32	5	3.175	32.5	29.2	2.5×2	21 800	56 000	1 270	22.5	58	85	32	12	86
W3208SS-2Z-C5Z5	714	32	5	3.175	32.5	29.2	2.5×2	21 800	56 000	1 270	22.5	58	85	32	12	86
W3212SS-2Z-C5Z5	1 114	32	5	3.175	32.5	29.2	2.5×2	21 800	56 000	1 270	22.5	58	85	32	12	86
W3215SS-2Z-C5Z5	1 414	32	5	3.175	32.5	29.2	2.5×2	21 800	56 000	1 270	22.5	58	85	32	12	86
W3206SS-4Z-C5Z6	501	32	6	3.969	32.5	28.4	2.5×2	29 100	69 300	1 720	34.5	62	89	34	12	99
W3210SS-2Z-C5Z6	901	32	6	3.969	32.5	28.4	2.5×2	29 100	69 300	1 720	34.5	62	89	34	12	99
W3215SS-4Z-C5Z6	1 401	32	6	3.969	32.5	28.4	2.5×2	29 100	69 300	1 720	34.5	62	89	34	12	99
W3206SS-5Z-C5Z8	518	32	8	4.762	32.5	27.5	2.5×1	20 600	40 900	1 320	30.5	66	100	38	15	82
W3210SS-3Z-C5Z8	918	32	8	4.762	32.5	27.5	2.5×1	20 600	40 900	1 320	30.5	66	100	38	15	82
W3215SS-5Z-C5Z8	1 418	32	8	4.762	32.5	27.5	2.5×1	20 600	40 900	1 320	30.5	66	100	38	15	82

Notes

1. Use of NSK support unit is recommended. See page B411 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
3. Permissible rotational speed is determined by d-n value and critical speed. See pages B47 and B299.

Nut model: ZFT


Screw shaft $\phi 32$
Lead 5, 6, 8



View X-X

Unit: mm

dimensions				Screw shaft dimensions						Lead accuracy			Run-out			Mass	Permissible rotational speed	Internal spatial volume of nut	Standard volume of grease replenishing		
Bolt hole		Oil hole	Threaded length	Shaft end right		Shaft end left		Overall length	Travel compensation	Deviation	Variation	Shaft straightness	Radial run-out								
W	X	Y	Z	Q	L _t	d ₂	L ₁	L ₂	d ₃	L ₃	L ₀	T	e _p	υ _u	I	J	K	(kg)	N (min ⁻¹)	(cm ³)	(cm ³)
71	6.6	11	6.5	M6×1	400	32.3	40	200	29.2	50	650	-0.010	0.025	0.020	0.060	0.019	0.013	5.1	2 180	10	5.0
71	6.6	11	6.5	M6×1	600	32.3	40	250	29.2	100	950	-0.014	0.030	0.023	0.075	0.019	0.013	6.9	2 180	10	5.0
71	6.6	11	6.5	M6×1	800	32.3	40	250	29.2	100	1 150	-0.019	0.035	0.025	0.090	0.019	0.013	8.0	2 180	10	5.0
71	6.6	11	6.5	M6×1	1 200	32.3	40	300	29.2	100	1 600	-0.029	0.046	0.030	0.120	0.019	0.013	10.1	2 180	10	5.0
71	6.6	11	6.5	M6×1	1 500	32.3	40	300	29.2	100	1 900	-0.036	0.054	0.035	0.150	0.019	0.013	12.4	2 180	10	5.0
75	6.6	11	6.5	M6×1	600	32.3	40	250	28.4	—	950	-0.014	0.030	0.023	0.075	0.019	0.013	7.1	2 180	15	7.5
75	6.6	11	6.5	M6×1	1 000	32.3	40	300	28.4	100	1 400	-0.024	0.040	0.027	0.120	0.019	0.013	9.7	2 180	15	7.5
75	6.6	11	6.5	M6×1	1 500	32.3	40	300	28.4	—	1 900	-0.036	0.054	0.035	0.150	0.019	0.013	12.6	2 180	15	7.5
82	9	14	8.5	M6×1	600	32.3	50	250	27.5	—	950	-0.014	0.030	0.023	0.075	0.019	0.013	7.3	2 180	7.9	4.0
82	9	14	8.5	M6×1	1 000	32.3	50	300	27.5	100	1 400	-0.024	0.040	0.027	0.120	0.019	0.013	9.8	2 180	7.9	4.0
82	9	14	8.5	M6×1	1 500	32.3	50	300	27.5	—	1 900	-0.036	0.054	0.035	0.150	0.019	0.013	12.6	2 180	7.9	4.0

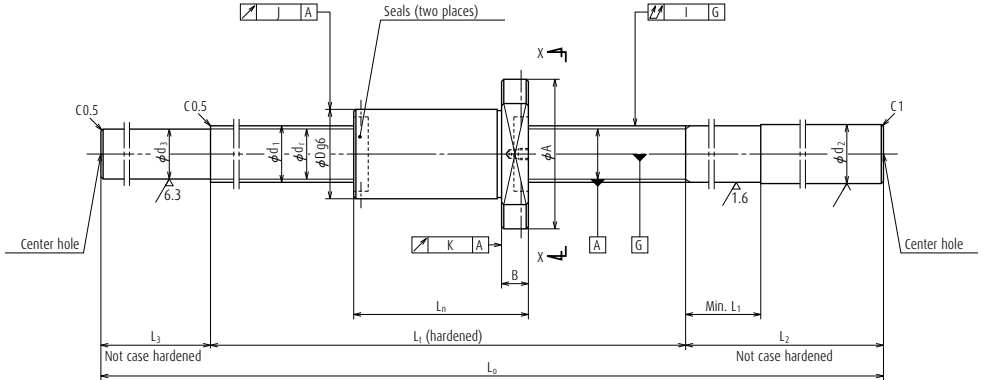

Nut type code: ZFD


Ball screw No.	Stroke Max. L_t-L_n	Screw shaft dia. d_1	Lead I	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective ball turns	Basic load rating (N)		Preload (N)	Dynamic friction torque, median (N-cm)	Nut				
								Turns \times Circuits	Dynamic C_a			Static C_{0a}	Outside dia. D	Flange		
							A			G	B					
W3204SS-3ZY-CSZ5	323	32	5	3.175	32.75	29.4	4	16 800	40 600	1 080	19.6	48	75	29	12	77
W3206SS-6ZY-CSZ5	523	32	5	3.175	32.75	29.4	4	16 800	40 600	1 080	19.6	48	75	29	12	77
W3209SS-1ZY-CSZ5	823	32	5	3.175	32.75	29.4	4	16 800	40 600	1 080	19.6	48	75	29	12	77
W3212SS-3ZY-CSZ5	1 123	32	5	3.175	32.75	29.4	4	16 800	40 600	1 080	19.6	48	75	29	12	77
W3216SS-1ZY-CSZ5	1 523	32	5	3.175	32.75	29.4	4	16 800	40 600	1 080	19.6	48	75	29	12	77
W3205SS-3ZY-CSZ10	380	32	10	6.35	33.75	27.1	3	30 500	52 500	1 860	49.0	54	88	34	15	120
W3207SS-3ZY-CSZ10	580	32	10	6.35	33.75	27.1	3	30 500	52 500	1 860	49.0	54	88	34	15	120
W3210SS-6ZY-CSZ10	880	32	10	6.35	33.75	27.1	3	30 500	52 500	1 860	49.0	54	88	34	15	120
W3214SS-3ZY-CSZ10	1 280	32	10	6.35	33.75	27.1	3	30 500	52 500	1 860	49.0	54	88	34	15	120
W3218SS-3ZY-CSZ10	1 680	32	10	6.35	33.75	27.1	3	30 500	52 500	1 860	49.0	54	88	34	15	120

Notes

1. Use of NSK support unit is recommended. See page B411 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
3. Permissible rotational speed is determined by $d-n$ value and critical speed. See pages B47 and B299.

Nut model: ZFD


Screw shaft ϕ 32
Lead 5, 10



View X-X

Unit: mm

dimensions				Screw shaft dimensions					Lead accuracy			Run-out			Mass	Permissible rotational speed	Internal spatial volume of nut	Standard volume of grease replenishing			
Bolt hole		Oil hole	Threaded length	Shaft end right		Shaft end left		Overall length	Travel compensation	Deviation	Variation	Shaft straightness	Radial run-out								
W	X	Y	Z	Q	L _t	d ₂	L ₁	L ₂	d ₃	L ₃	L ₀	T	e _p	U _u	I	J	K	(kg)	N (min ⁻¹)	(cm ³)	(cm ³)
61	6.6	11	6.5	M6×1	400	32.3	40	200	29.4	50	650	-0.009	0.025	0.020	0.060	0.015	0.011	4.6	2 180	22	11
61	6.6	11	6.5	M6×1	600	32.3	40	250	29.4	100	950	-0.013	0.030	0.023	0.075	0.015	0.011	6.4	2 180	22	11
61	6.6	11	6.5	M6×1	900	32.3	40	250	29.4	100	1 250	-0.021	0.040	0.027	0.090	0.015	0.011	8.1	2 180	22	11
61	6.6	11	6.5	M6×1	1 200	32.3	40	300	29.4	100	1 600	-0.028	0.046	0.030	0.120	0.015	0.011	10.2	2 180	22	11
61	6.6	11	6.5	M6×1	1 600	32.3	40	300	29.4	100	2 000	-0.037	0.054	0.035	0.150	0.015	0.011	12.6	2 180	22	11
70	9	14	8.5	M6×1	500	32.3	60	250	27.1	100	850	-0.010	0.027	0.020	0.075	0.019	0.013	6.2	2 180	23	12
70	9	14	8.5	M6×1	700	32.3	60	250	27.1	100	1 050	-0.015	0.035	0.025	0.090	0.019	0.013	7.3	2 180	23	12
70	9	14	8.5	M6×1	1 000	32.3	60	300	27.1	100	1 400	-0.022	0.040	0.027	0.120	0.019	0.013	9.3	2 180	23	12
70	9	14	8.5	M6×1	1 400	32.3	60	350	27.1	120	1 870	-0.032	0.054	0.035	0.150	0.019	0.013	11.9	2 180	23	12
70	9	14	8.5	M6×1	1 800	32.3	60	350	27.1	120	2 270	-0.041	0.065	0.040	0.200	0.019	0.013	14.1	2 180	23	12

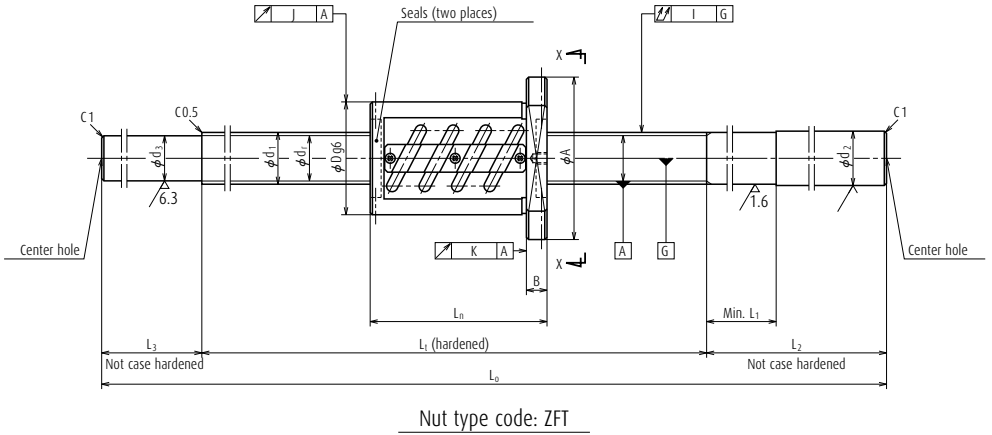


Ball screw No.	Stroke Max. L _t -L _n	Screw shaft dia. d ₁	Lead l	Ball dia. D _w	Ball circle dia. d _m	Root dia. d _r	Effective ball turns Turns × Circuits	Basic load rating (N)		Preload (N)	Dynamic friction torque, median (N-cm)	Nut				
								Dynamic C _a	Static C _{0a}			Outside dia. D	Flange			Overall length L _n
													A	G	B	
W3205SS-1Z-CSZ10	400	32	10	6.350	33	26.4	2.5×1	30 000	55 100	1 960	50	74	108	41	15	100
W3207SS-1Z-CSZ10	600	32	10	6.350	33	26.4	2.5×1	30 000	55 100	1 960	50	74	108	41	15	100
W3210SS-4Z-CSZ10	900	32	10	6.350	33	26.4	2.5×1	30 000	55 100	1 960	50	74	108	41	15	100
W3214SS-1Z-CSZ10	1 300	32	10	6.350	33	26.4	2.5×1	30 000	55 100	1 960	50	74	108	41	15	100
W3218SS-1Z-CSZ10	1 700	32	10	6.350	33	26.4	2.5×1	30 000	55 100	1 960	50	74	108	41	15	100
W3607SS-1Z-CSZ10	597	36	10	6.350	37	30.4	2.5×1	32 000	61 100	2 060	56	75	120	45	18	103
W3612SS-1Z-CSZ10	1 097	36	10	6.350	37	30.4	2.5×1	32 000	61 100	2 060	56	75	120	45	18	103
W3620SS-1Z-CSZ10	1 897	36	10	6.350	37	30.4	2.5×1	32 000	61 100	2 060	56	75	120	45	18	103
W4006SS-1Z-CSZ5	511	40	5	3.175	40.5	37.2	2.5×2	23 900	70 500	1 420	28.5	67	101	39	15	89
W4010SS-1Z-CSZ5	911	40	5	3.175	40.5	37.2	2.5×2	23 900	70 500	1 420	28.5	67	101	39	15	89
W4016SS-1Z-CSZ5	1 511	40	5	3.175	40.5	37.2	2.5×2	23 900	70 500	1 420	28.5	67	101	39	15	89

Notes

1. Use of NSK support unit is recommended. See page B411 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
3. Permissible rotational speed is determined by d-n value and critical speed. See pages B47 and B299.

Nut model: ZFT

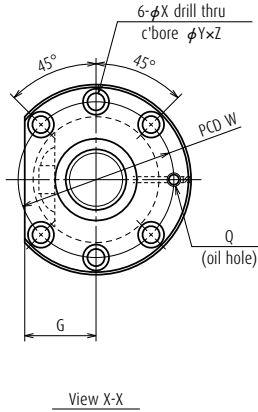

Screw shaft φ 32, φ 36


Lead 10

Screw shaft φ 40

Lead 5

Unit: mm

dimensions				Screw shaft dimensions						Lead accuracy			Run-out			Mass	Per- missible rotational speed	Internal spatial volume of nut	Standard volume of grease re- plenishing		
Bolt hole				Threaded length	Shaft end right		Shaft end left		Overall length	Travel compen- sation	Devia- tion	Vari- ation	Shaft straight- ness	Radial run-out							
W	X	Y	Z	Q	L _t	d ₂	L ₁	L ₂	d ₃	L ₃	L ₀	T	e _p	v _u	I	J	K	(kg)	N (min ⁻¹)	(cm ³)	(cm ³)
90	9	14	8.5	M6×1	500	32.3	60	250	26.4	100	850	-0.012	0.027	0.020	0.075	0.019	0.013	7.5	2 180	22	11
90	9	14	8.5	M6×1	700	32.3	60	250	26.4	100	1 050	-0.017	0.035	0.025	0.090	0.019	0.013	8.5	2 180	22	11
90	9	14	8.5	M6×1	1 000	32.3	60	300	26.4	100	1 400	-0.024	0.040	0.027	0.120	0.019	0.013	10.5	2 180	22	11
90	9	14	8.5	M6×1	1 400	32.3	60	350	26.4	120	1 870	-0.034	0.054	0.035	0.150	0.019	0.013	13.1	2 180	22	11
90	9	14	8.5	M6×1	1 800	32.3	60	350	26.4	120	2 270	-0.043	0.065	0.040	0.200	0.019	0.013	15.2	1 820	22	11
98	11	17.5	11	M6×1	700	36.3	60	300	30.4	100	1 100	-0.017	0.035	0.025	0.065	0.019	0.013	10.9	1 940	27	14
98	11	17.5	11	M6×1	1 200	36.3	60	350	30.4	120	1 670	-0.029	0.046	0.030	0.100	0.019	0.013	14.9	1 940	27	14
98	11	17.5	11	M6×1	2 000	36.3	60	350	30.4	120	2 470	-0.048	0.065	0.040	0.130	0.019	0.013	20.4	1 940	27	14
83	9	14	8.5	Rc1/8	600	40.3	50	300	37.2	100	1 000	-0.014	0.030	0.023	0.050	0.019	0.013	11.1	1 750	14	7.0
83	9	14	8.5	Rc1/8	1 000	40.3	50	300	37.2	100	1 400	-0.024	0.040	0.027	0.080	0.019	0.013	14.8	1 750	14	7.0
83	9	14	8.5	Rc1/8	1 600	40.3	50	350	37.2	100	2 050	-0.038	0.054	0.035	0.130	0.019	0.013	20.8	1 750	14	7.0

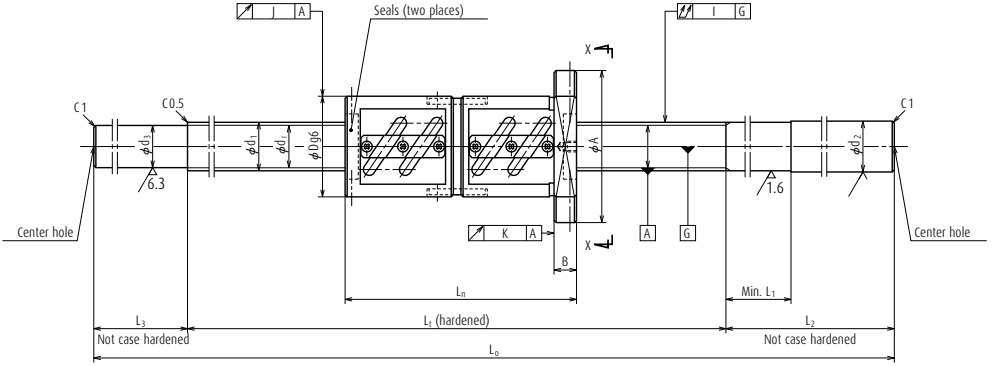

Nut type code: DFT


Ball screw No.	Stroke Max. L_t-L_n	Screw shaft dia. d_1	Lead l	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective ball turns \times Circuits	Basic load rating (N)		Preload (N)	Dynamic friction torque, median (N-cm)	Nut				
								Dynamic C_a	Static C_{0a}			Outside dia. D	Flange			Overall length L_n
													A	G	B	
W3205SS-2D-CSZ10	310	32	10	6.350	33	26.4	2.5×2	54 500	110 000	3 240	83	74	108	41	15	190
W3207SS-2D-CSZ10	510	32	10	6.350	33	26.4	2.5×2	54 500	110 000	3 240	83	74	108	41	15	190
W3210SS-5D-CSZ10	810	32	10	6.350	33	26.4	2.5×2	54 500	110 000	3 240	83	74	108	41	15	190
W3214SS-2D-CSZ10	1 210	32	10	6.350	33	26.4	2.5×2	54 500	110 000	3 240	83	74	108	41	15	190
W3218SS-2D-CSZ10	1 610	32	10	6.350	33	26.4	2.5×2	54 500	110 000	3 240	83	74	108	41	15	190
W3607SS-2D-CSZ10	507	36	10	6.350	37	30.4	2.5×2	58 000	122 000	3 430	93	75	120	45	18	193
W3612SS-2D-CSZ10	1 007	36	10	6.350	37	30.4	2.5×2	58 000	122 000	3 430	93	75	120	45	18	193
W3620SS-2D-CSZ10	1 807	36	10	6.350	37	30.4	2.5×2	58 000	122 000	3 430	93	75	120	45	18	193

Notes

1. Use of NSK support unit is recommended. See page B411 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
3. Permissible rotational speed is determined by d-n value and critical speed. See pages B47 and B299.


Nut model: DFT

Screw shaft $\phi 32, \phi 36$
Lead 10

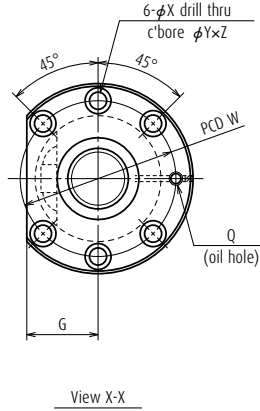

Unit: mm

dimensions				Screw shaft dimensions										Lead accuracy			Run-out			Mass (kg)	Per- missible rotational speed N (min ⁻¹)	Internal spatial volume of nut (cm ³)	Standard volume of grease re- plenishing (cm ³)
Bolt hole				Oil hole	Threaded length	Shaft end right		Shaft end left		Overall length	Travel compen- sation	Devia- tion	Vari- ation	Shaft straight- ness	Radial run-out								
W	X	Y	Z	Q	L _t	d ₂	L ₁	L ₂	d ₃	L ₃	L ₀	T	e _p	v _u	I	J	K						
90	9	14	8.5	M6×1	500	32.3	60	250	26.4	100	850	-0.012	0.027	0.020	0.075	0.019	0.013	9.5	2 180	57	29		
90	9	14	8.5	M6×1	700	32.3	60	250	26.4	100	1 050	-0.017	0.035	0.025	0.090	0.019	0.013	10.6	2 180	57	29		
90	9	14	8.5	M6×1	1 000	32.3	60	300	26.4	100	1 400	-0.024	0.040	0.027	0.120	0.019	0.013	12.5	2 180	57	29		
90	9	14	8.5	M6×1	1 400	32.3	60	350	26.4	120	1 870	-0.034	0.054	0.035	0.150	0.019	0.013	15.1	2 180	57	29		
90	9	14	8.5	M6×1	1 800	32.3	60	350	26.4	120	2 270	-0.043	0.065	0.040	0.200	0.019	0.013	17.2	1 910	57	29		
98	11	17.5	11	M6×1	700	36.3	60	300	30.4	100	1 100	-0.017	0.035	0.025	0.065	0.019	0.013	12.8	1 940	67	34		
98	11	17.5	11	M6×1	1 200	36.3	60	350	30.4	120	1 670	-0.029	0.046	0.030	0.100	0.019	0.013	16.8	1 940	67	34		
98	11	17.5	11	M6×1	2 000	36.3	60	350	30.4	120	2 470	-0.048	0.065	0.040	0.130	0.019	0.013	22.3	1 940	67	34		

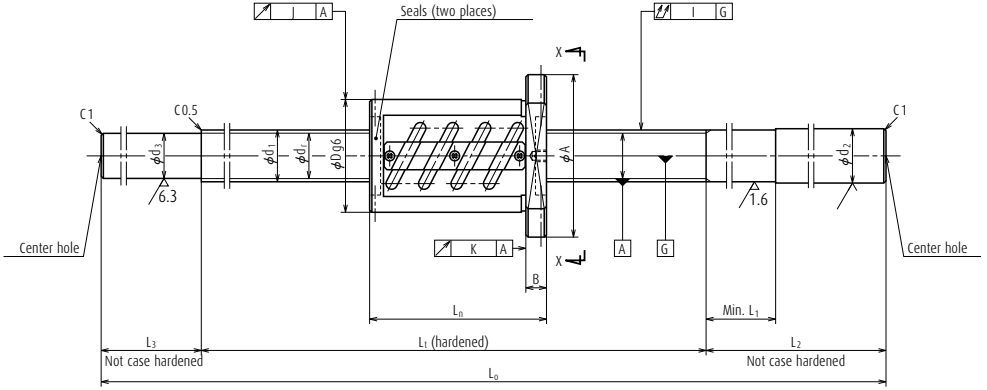

Nut type code: ZFT


Ball screw No.	Stroke Max. L _t -L _n	Screw shaft dia. d ₁	Lead l	Ball dia. D _w	Ball circle dia. d _m	Root dia. d _r	Effective ball turns Turns × Circuits	Basic load rating (N)		Preload (N)	Dynamic friction torque, median (N-cm)	Nut				
								Dynamic C _a	Static C _{0a}			Outside dia. D	Flange			Overall length L _n
													A	G	B	
W4007SS-1Z-CSZ8	570	40	8	4.762	40.5	35.5	2.5×2	41 100	103 000	2 450	64	74	108	41	15	130
W4012SS-1Z-CSZ8	1 070	40	8	4.762	40.5	35.5	2.5×2	41 100	103 000	2 450	64	74	108	41	15	130
W4018SS-1Z-CSZ8	1 670	40	8	4.762	40.5	35.5	2.5×2	41 100	103 000	2 450	64	74	108	41	15	130
W4007SS-2Z-CSZ10	597	40	10	6.350	41	34.4	2.5×1	33 700	68 300	2 160	64	82	124	47	18	103
W4010SS-2Z-CSZ10	897	40	10	6.350	41	34.4	2.5×1	33 700	68 300	2 160	64	82	124	47	18	103
W4014SS-1Z-CSZ10	1 297	40	10	6.350	41	34.4	2.5×1	33 700	68 300	2 160	64	82	124	47	18	103
W4018SS-2Z-CSZ10	1 697	40	10	6.350	41	34.4	2.5×1	33 700	68 300	2 160	64	82	124	47	18	103
W4024SS-1Z-CSZ10	2 297	40	10	6.350	41	34.4	2.5×1	33 700	68 300	2 160	64	82	124	47	18	103
W4010SS-4Z-CSZ12	883	40	12	7.144	41.5	34.1	2.5×1	39 500	77 200	2 550	83	86	128	48	18	117
W4016SS-2Z-CSZ12	1 483	40	12	7.144	41.5	34.1	2.5×1	39 500	77 200	2 550	83	86	128	48	18	117
W4025SS-1Z-CSZ12	2 383	40	12	7.144	41.5	34.1	2.5×1	39 500	77 200	2 550	83	86	128	48	18	117

Notes

1. Use of NSK support unit is recommended. See page B411 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
3. Permissible rotational speed is determined by d-n value and critical speed. See pages B47 and B299.


Nut model: ZFT

Screw shaft $\phi 40$
Lead 8, 10, 12

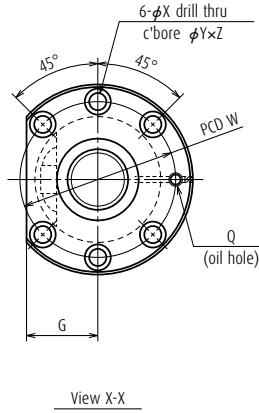

Unit: mm

dimensions					Screw shaft dimensions							Lead accuracy			Run-out			Mass	Permissible rotational speed	Internal spatial volume of nut	Standard volume of grease re-plenishing
Bolt hole					Threaded length	Shaft end right		Shaft end left			Overall length	Travel compensation	Deviation	Variation	Shaft straightness	Radial run-out					
W	X	Y	Z	Q	L _t	d ₂	L ₁	L ₂	d ₃	L ₃	L ₀	T	e _p	v _u	I	J	K	(kg)	N (min ⁻¹)	(cm ³)	(cm ³)
90	9	14	8.5	Rc1/8	700	40.3	50	300	35.5	100	1 100	-0.017	0.035	0.025	0.065	0.019	0.013	13.0	1 750	27	14
90	9	14	8.5	Rc1/8	1 200	40.3	50	350	35.5	100	1 650	-0.029	0.046	0.030	0.100	0.019	0.013	18.0	1 750	27	14
90	9	14	8.5	Rc1/8	1 800	40.3	50	350	35.5	120	2 270	-0.043	0.065	0.040	0.130	0.019	0.013	23.5	1 750	27	14
102	11	17.5	11	Rc1/8	700	40.3	60	300	34.4	100	1 100	-0.017	0.035	0.025	0.065	0.025	0.015	13.3	1 750	30	15
102	11	17.5	11	Rc1/8	1 000	40.3	60	300	34.4	100	1 400	-0.024	0.040	0.027	0.080	0.025	0.015	15.9	1 750	30	15
102	11	17.5	11	Rc1/8	1 400	40.3	60	350	34.4	120	1 870	-0.034	0.054	0.035	0.100	0.025	0.015	20.0	1 750	30	15
102	11	17.5	11	Rc1/8	1 800	40.3	60	350	34.4	120	2 270	-0.043	0.065	0.040	0.130	0.025	0.015	23.4	1 750	30	15
102	11	17.5	11	Rc1/8	2 400	40.3	60	400	34.4	150	2 950	-0.058	0.077	0.046	0.170	0.025	0.015	29.4	1 750	30	15
106	11	17.5	11	Rc1/8	1 000	40.3	70	300	34.1	100	1 400	-0.024	0.040	0.027	0.080	0.025	0.015	16.7	1 750	35	18
106	11	17.5	11	Rc1/8	1 600	40.3	70	350	34.1	150	2 100	-0.038	0.054	0.035	0.130	0.025	0.015	22.9	1 750	35	18
106	11	17.5	11	Rc1/8	2 500	40.3	70	400	34.1	150	3 050	-0.060	0.077	0.046	0.170	0.025	0.015	31.1	1 220	35	18

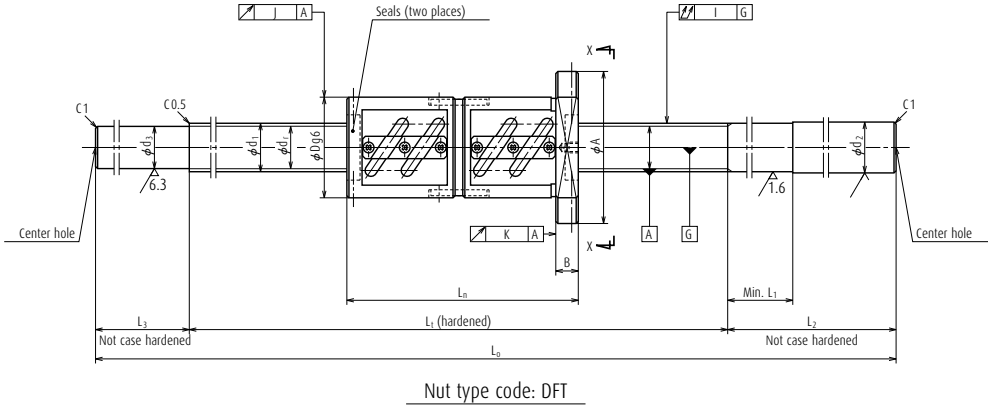


Ball screw No.	Stroke Max. L_1-L_n	Screw shaft dia. d_1	Lead l	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective ball turns \times Circuits	Basic load rating (N)		Preload (N)	Dynamic friction torque, median (N-cm)	Nut				
								Dynamic C_a	Static C_{0a}			Outside dia. D	Flange			Overall length L_n
													A	G	B	
W4007SS-3D-CSZ10	507	40	10	6.350	41	34.4	2.5×2	61 200	137 000	3 630	108	82	124	47	18	193
W4010SS-3D-CSZ10	807	40	10	6.350	41	34.4	2.5×2	61 200	137 000	3 630	108	82	124	47	18	193
W4014SS-2D-CSZ10	1 207	40	10	6.350	41	34.4	2.5×2	61 200	137 000	3 630	108	82	124	47	18	193
W4018SS-3D-CSZ10	1 607	40	10	6.350	41	34.4	2.5×2	61 200	137 000	3 630	108	82	124	47	18	193
W4024SS-2D-CSZ10	2 207	40	10	6.350	41	34.4	2.5×2	61 200	137 000	3 630	108	82	124	47	18	193
W4010SS-5D-CSZ12	775	40	12	7.144	41.5	34.1	2.5×2	71 700	154 000	4 310	138	86	128	48	18	225
W4016SS-3D-CSZ12	1 375	40	12	7.144	41.5	34.1	2.5×2	71 700	154 000	4 310	138	86	128	48	18	225
W4025SS-2D-CSZ12	2 275	40	12	7.144	41.5	34.1	2.5×2	71 700	154 000	4 310	138	86	128	48	18	225

- Notes**
1. Use of NSK support unit is recommended. See page B411 for details.
 2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
 3. Permissible rotational speed is determined by d-n value and critical speed. See pages B47 and B299.


Nut model: DFT

Screw shaft $\phi 40$
Lead 10, 12

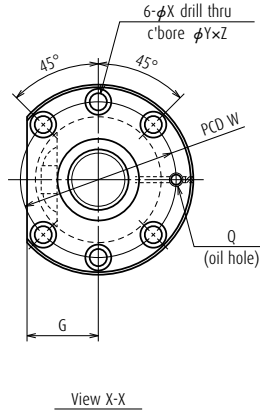

Unit: mm

dimensions				Screw shaft dimensions								Lead accuracy			Run-out			Mass (kg)	Per- missible rotational speed N (min ⁻¹)	Internal spatial volume of nut (cm ³)	Standard volume of grease re- plenishing (cm ³)
Bolt hole				Oil hole	Threaded length	Shaft end right		Shaft end left		Overall length	Travel compen- sation	Devia- tion	Varia- tion	Shaft straight- ness	Radial run-out						
W	X	Y	Z	Q	L _t	d ₂	L ₁	L ₂	d ₃	L ₃	L ₀	T	e _p	v _u	I	J	K				
102	11	17.5	11	Rc1/8	700	40.3	60	300	34.4	100	1 100	-0.017	0.035	0.025	0.065	0.025	0.015	15.5	1 750	74	37
102	11	17.5	11	Rc1/8	1 000	40.3	60	300	34.4	100	1 400	-0.024	0.040	0.027	0.080	0.025	0.015	18.1	1 750	74	37
102	11	17.5	11	Rc1/8	1 400	40.3	60	350	34.4	120	1 870	-0.034	0.054	0.035	0.100	0.025	0.015	22.5	1 750	74	37
106	11	17.5	11	Rc1/8	1 800	40.3	60	350	34.4	120	2 270	-0.043	0.065	0.040	0.130	0.025	0.015	25.6	1 750	74	37
106	11	17.5	11	Rc1/8	2 400	40.3	60	400	34.4	150	2 950	-0.058	0.077	0.046	0.170	0.025	0.015	31.6	1 370	74	37
106	11	17.5	11	Rc1/8	1 000	40.3	70	300	34.1	100	1 400	-0.024	0.040	0.027	0.080	0.025	0.015	19.7	1 750	93	47
106	11	17.5	11	Rc1/8	1 600	40.3	70	350	34.1	150	2 100	-0.038	0.054	0.035	0.130	0.025	0.015	25.8	1 750	93	47
106	11	17.5	11	Rc1/8	2 500	40.3	70	400	34.1	150	3 050	-0.060	0.077	0.046	0.170	0.025	0.015	34.0	1 260	93	47

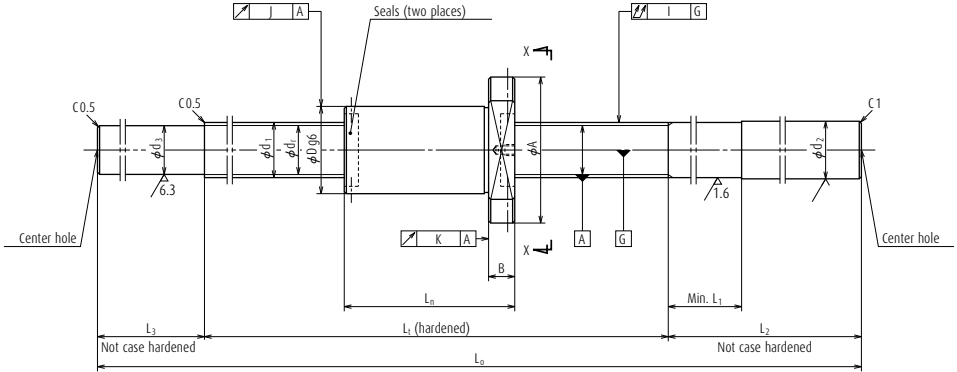

Nut type code: ZFD


Ball screw No.	Stroke Max. L_t-L_n	Screw shaft dia. d_1	Lead l	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective ball turns	Basic load rating (N)		Preload (N)	Dynamic friction torque, median (N-cm)	Nut				
								Dynamic C_a	Static C_{0a}			Outside dia.	Flange			Overall length
													D	A	G	
W4007SS-4ZY-CSZ10	557	40	10	6.350	41.75	35.1	4	45 200	93 100	2 840	83	62	104	40	18	143
W4010SS-6ZY-CSZ10	857	40	10	6.350	41.75	35.1	4	45 200	93 100	2 840	83	62	104	40	18	143
W4014SS-3ZY-CSZ10	1 257	40	10	6.350	41.75	35.1	4	45 200	93 100	2 840	83	62	104	40	18	143
W4018SS-4ZY-CSZ10	1 657	40	10	6.350	41.75	35.1	4	45 200	93 100	2 840	83	62	104	40	18	143
W4024SS-3ZY-CSZ10	2 257	40	10	6.350	41.75	35.1	4	45 200	93 100	2 840	83	62	104	40	18	143
W5007SS-1ZY-CSZ10	557	50	10	6.350	51.75	45.1	4	51 500	122 000	3 240	108	72	114	44	18	143
W5010SS-3ZY-CSZ10	857	50	10	6.350	51.75	45.1	4	51 500	122 000	3 240	108	72	114	44	18	143
W5015SS-3ZY-CSZ10	1 357	50	10	6.350	51.75	45.1	4	51 500	122 000	3 240	108	72	114	44	18	143
W5020SS-3ZY-CSZ10	1 857	50	10	6.350	51.75	45.1	4	51 500	122 000	3 240	108	72	114	44	18	143
W5026SS-3ZY-CSZ10	2 457	50	10	6.350	51.75	45.1	4	51 500	122 000	3 240	108	72	114	44	18	143

Notes

1. Use of NSK support unit is recommended. See page B411 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
3. Permissible rotational speed is determined by d-n value and critical speed. See pages B47 and B299.


Nut model: ZFD

Screw shaft $\phi 40$, $\phi 50$
Lead 10

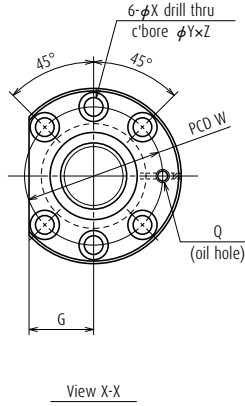

Unit: mm

dimensions				Screw shaft dimensions							Lead accuracy			Run-out			Mass	Permissible rotational speed	Internal spatial volume of nut	Standard volume of grease re-plenishing	
Bolt hole				Threaded length	Shaft end right		Shaft end left			Overall length	Travel compensation	Deviation	Variation	Shaft straightness	Radial run-out						
W	X	Y	Z	Q	L _t	d ₂	L ₁	L ₂	d ₃	L ₃	L ₀	T	e _p	v _u	I	J	K	(kg)	N (min ⁻¹)	(cm ³)	(cm ³)
82	11	17.5	11	Rc1/8	700	40.3	60	300	35.1	100	1 100	-0.015	0.035	0.025	0.065	0.019	0.013	12.1	1 750	32	16
82	11	17.5	11	Rc1/8	1 000	40.3	60	300	35.1	100	1 400	-0.022	0.040	0.027	0.080	0.019	0.013	14.7	1 750	32	16
82	11	17.5	11	Rc1/8	1 400	40.3	60	350	35.1	120	1 870	-0.032	0.054	0.035	0.100	0.019	0.013	18.9	1 750	32	16
82	11	17.5	11	Rc1/8	1 800	40.3	60	350	35.1	120	2 270	-0.041	0.065	0.040	0.130	0.019	0.013	22.5	1 750	32	16
82	11	17.5	11	Rc1/8	2 400	40.3	60	400	35.1	150	2 950	-0.056	0.077	0.046	0.170	0.019	0.013	28.5	1 320	32	16
92	11	17.5	11	Rc1/8	700	50.3	60	300	45.1	100	1 100	-0.015	0.035	0.025	0.065	0.019	0.013	18.3	1 400	39	20
92	11	17.5	11	Rc1/8	1 000	50.3	60	300	45.1	100	1 400	-0.022	0.040	0.027	0.080	0.019	0.013	22.5	1 400	39	20
92	11	17.5	11	Rc1/8	1 500	50.3	60	400	45.1	150	2 050	-0.034	0.054	0.035	0.130	0.019	0.013	31.8	1 400	39	20
92	11	17.5	11	Rc1/8	2 000	50.3	60	400	45.1	150	2 550	-0.046	0.065	0.040	0.170	0.019	0.013	38.9	1 400	39	20
92	11	17.5	11	Rc1/8	2 600	50.3	60	500	45.1	200	3 300	-0.060	0.093	0.054	0.220	0.019	0.013	49.5	1 400	39	20

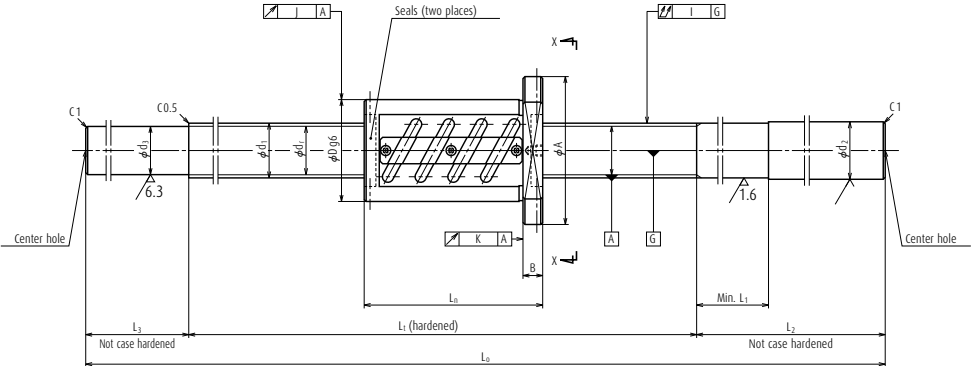

Nut type code: ZFT


Ball screw No.	Stroke Max. L_t-L_n	Screw shaft dia. d_1	Lead l	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective ball turns Turns × Circuits	Basic load rating (N)		Preload (N)	Dynamic friction torque, median (N-cm)	Nut				
								Dynamic C_a	Static C_{0a}			Outside dia. D	Flange			Overall length L_n
													A	G	B	
W4510SS-1Z-CSZ10	897	45	10	6.350	46	39.4	2.5×1	36 300	78 500	2 260	69	88	132	50	18	103
W4516SS-1Z-CSZ10	1 497	45	10	6.350	46	39.4	2.5×1	36 300	78 500	2 260	69	88	132	50	18	103
W4525SS-1Z-CSZ10	2 397	45	10	6.350	46	39.4	2.5×1	36 300	78 500	2 260	69	88	132	50	18	103
W5010SS-1Z-CSZ10	897	50	10	6.350	51	44.4	2.5×1	37 500	87 200	2 450	78	93	135	51	18	103
W5015SS-1Z-CSZ10	1 397	50	10	6.350	51	44.4	2.5×1	37 500	87 200	2 450	78	93	135	51	18	103
W5020SS-1Z-CSZ10	1 897	50	10	6.350	51	44.4	2.5×1	37 500	87 200	2 450	78	93	135	51	18	103
W5026SS-1Z-CSZ10	2 497	50	10	6.350	51	44.4	2.5×1	37 500	87 200	2 450	78	93	135	51	18	103
W5010SS-2Z-CSZ10	837	50	10	6.350	51	44.4	2.5×2	68 100	174 000	4 020	138	93	135	51	18	163
W5015SS-2Z-CSZ10	1 337	50	10	6.350	51	44.4	2.5×2	68 100	174 000	4 020	138	93	135	51	18	163
W5020SS-2Z-CSZ10	1 837	50	10	6.350	51	44.4	2.5×2	68 100	174 000	4 020	138	93	135	51	18	163
W5026SS-2Z-CSZ10	2 437	50	10	6.350	51	44.4	2.5×2	68 100	174 000	4 020	138	93	135	51	18	163

Notes

1. Use of NSK support unit is recommended. See page B389 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
3. Permissible rotational speed is determined by d-n value and critical speed. See pages B47 and B299.

Nut model: ZFT

Screw shaft $\phi 40, \phi 50$
Lead 10



View X-X

Unit: mm

dimensions				Screw shaft dimensions							Lead accuracy			Run-out			Mass	Permissible rotational speed	Internal spatial volume of nut	Standard volume of grease re-plenishing	
Bolt hole				Oil hole	Threaded length	Shaft end right		Shaft end left		Overall length	Travel compensation	Deviation	Variation	Shaft straightness	Radial run-out						
W	X	Y	Z	Q	L _t	d ₂	L ₁	L ₂	d ₃	L ₃	L ₀	T	e _p	v _u	I	J	K	(kg)	N (min ⁻¹)	(cm ³)	(cm ³)
110	11	17.5	11	Rc1/8	1 000	45.3	60	300	39.4	100	1 400	-0.024	0.040	0.027	0.080	0.025	0.015	19.7	1 550	34	17
110	11	17.5	11	Rc1/8	1 600	45.3	60	400	39.4	150	2 150	-0.038	0.054	0.035	0.130	0.025	0.015	28.1	1 550	34	17
110	11	17.5	11	Rc1/8	2 500	45.3	60	450	39.4	150	3 100	-0.060	0.077	0.046	0.170	0.025	0.015	38.8	1 400	34	17
113	11	17.5	11	Rc1/8	1 000	50.3	60	300	44.4	100	1 400	-0.024	0.040	0.027	0.080	0.025	0.015	23.8	1 400	37	19
113	11	17.5	11	Rc1/8	1 500	50.3	60	400	44.4	150	2 050	-0.036	0.054	0.035	0.130	0.025	0.015	32.9	1 400	37	19
113	11	17.5	11	Rc1/8	2 000	50.3	60	400	44.4	150	2 550	-0.048	0.065	0.040	0.170	0.025	0.015	39.8	1 400	37	19
113	11	17.5	11	Rc1/8	2 600	50.3	60	450	44.4	150	3 200	-0.062	0.093	0.054	0.220	0.025	0.015	48.9	1 400	37	19
113	11	17.5	11	Rc1/8	1 000	50.3	60	300	44.4	100	1 400	-0.024	0.040	0.027	0.080	0.025	0.015	25.5	1 400	59	30
113	11	17.5	11	Rc1/8	1 500	50.3	60	400	44.4	150	2 050	-0.036	0.054	0.035	0.130	0.025	0.015	34.6	1 400	59	30
113	11	17.5	11	Rc1/8	2 000	50.3	60	400	44.4	150	2 550	-0.048	0.065	0.040	0.170	0.025	0.015	41.5	1 400	59	30
113	11	17.5	11	Rc1/8	2 600	50.3	60	450	44.4	150	3 200	-0.062	0.093	0.054	0.220	0.025	0.015	50.7	1 400	59	30

B-3-1.6 Ball Screws for Transfer Equipment

1. Features

> Transporting mechanism

A series with accuracy grades of Ct7 and Ct10 only demonstrates high ball screw performance for transporting mechanism of Cartesian type robots and single axis actuators.

The following types are categorized ball screw for transfer equipment. VFA and RMA types have finished shaft ends. RMS type, R Series of RNFTL, RNFBFL, RNCT, RNFLC, and RNSTL types have blank shaft ends.

Table 1 Classifications of ball screws for transfer equipment

Finished shaft end	VFA type, RMA type
Blank shaft end	RMS type
	R Series
	RNFTL type, RNFBFL type
	RNCT type, RNFLC type, RNSTL type

> Interchangeable screw shaft and ball nut

Screw shaft and nut assembly components are sold separately, and randomly-matched. The maximum axial play after assembly is shown in the dimension tables.

2. Specifications

(1) Ball recirculation system

Figs. 1, 2, and 3 show the structures of ball return tube, deflector (bridge type), and end cap ball recirculation systems.

Deflector (bridge type) recirculation system has the feature of compact nut outside diameter for small lead. End cap recirculation system is for screws with high helix lead and multiple start threads. Since the leads are in the range larger than 1.3 times of the screw shaft diameter, it is suitable for high-speed operation.

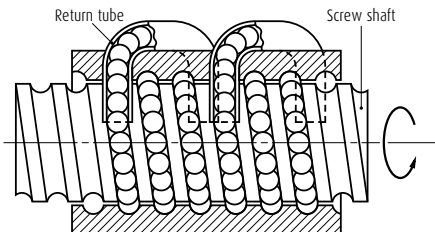


Fig. 1 Structure of return tube recirculation system

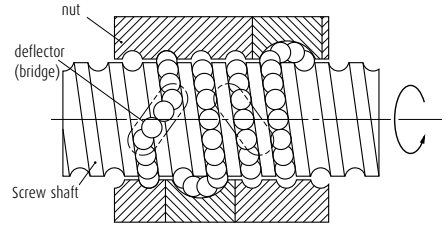


Fig. 2 Structure of deflector (bridge type) recirculation system

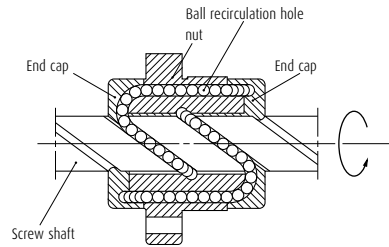


Fig. 3 Structure of end cap recirculation system

(2) Accuracy grade and axial play

Standard lead accuracy and axial play are shown on Table 2. Axial play varies with internal specification. Refer to the dimension tables.

Table 2 Accuracy grade and axial play

Accuracy grade	VFA type, RMA type, RMS type: Ct7 R Series: Ct10
Axial play	See dimension tables

(3) Allowable d-n value and the criterion of maximum rotational speed

Allowable d-n value and the criterion of maximum rotational speed are shown below. Please consult NSK if the rotational speed exceeds the permissible range below.

Table 3 Allowable d-n value and the criterion of maximum rotational speed

Allowable d-n value	50 000 or less
Criterion of maximum rotational speed	3 000 min ⁻¹








d-n value: shaft dia. d [mm] × rotational speed n [min⁻¹]

Note: Please also review the critical speed. See "Technical Description: Permissible Rotational Speed" (page B47) for details.

3. Product categories

Ball screws for transfer equipment have models as follows.

Table 4 Product categories of ball screws for transfer equipment

Nut model	Shape	Flange Shape	Recirculation system	Preload system	Page
VFA		Flanged rectangular	Return tube type	Non-preload Slight axial play	B353 - B358
RMA RMS		Flanged Circular III	Deflector (bridge) type	Non-preload Slight axial play	B359 - B372
RNFTL		Flanged Circular I Projecting tube type	Return tube type	Non-preload Slight axial play	B373 - B378
RNFBL		Flanged Circular II	Return tube type	Non-preload Slight axial play	B379 - B380
RNCT		V-thread (no flange) Projecting tube type	Return tube type	Non-preload Slight axial play	B381 - B382
RNFCL		Flanged Circular III	End cap type	Non-preload Slight axial play	B383 - B386
RNSTL		Square type	Return tube type	Non-preload Slight axial play	B387 - B388


4. Structure of reference number

The followings describe the structure of "Reference number for ball screw".

➤ Reference number for VFA, RMA, and RMS types

VFA 15 10 - C7 S - 500	
Ball screw for transfer equipment: VFA, RMA, RMS	Screw shaft length (mm)
Screw shaft diameter (mm)	Axial play
Lead (mm)	Accuracy grade code

▶ Reference number for R series

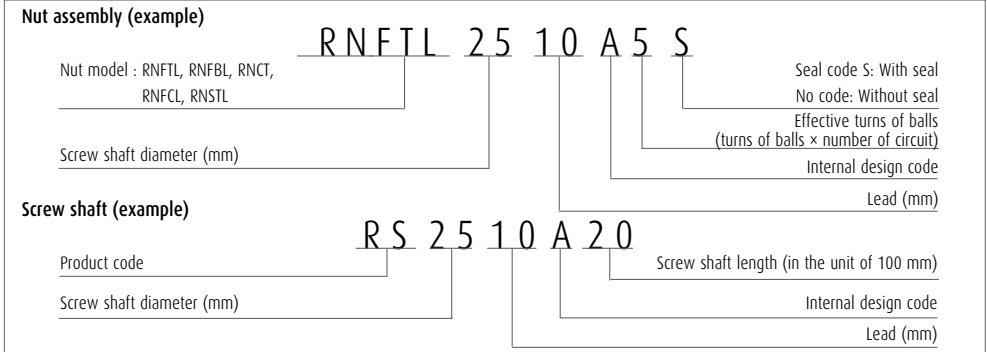

5. Combinations of shaft diameter and lead

Combinations of shaft diameter and lead are shown below. For details of standard stock products, contact NSK.

Table 5 Combinations of shaft diameter and lead for VFA, RMA, RMS types

Screw shaft diameter	Lead					
	5	10	12	16	20	
6	B359, 371					
8	B361, 371	B363, 371	B365, 371			
10			B367, 371			
12			B369, 371	B353		
15				B355	B357	

Table 6 Combinations of shaft diameter and lead for R series

Screw shaft diameter (mm)	3	4	5	6	8	10	12	16	20	25	32	40	50	64	80
	10	○B373 △B381			○B373●B379										
12					○B373●B379		○B377 ◎B383								
14		○B373●B379 △B381□B387	○B373●B379 △B381□B387												
15								◎B383							
16						○B373		○B377 ◎B383			◎B385				
18					○B373●B379 △B381□B387										
20			○B373●B379 △B381□B387			○B373●B379 □B387			○B377 ◎B383			◎B385			
25			○B373●B379 △B381□B387			○B373●B379 △B367□B387				○B377 ◎B383			◎B385		
28				○B375●B379 △B381□B387											
32						○B375●B379 △B381□B387					○B377 ◎B383			◎B385	
36						○B375●B379 △B381□B387									
40						○B375△B381 ●B379					○B377 ◎B383			◎B385	
45							○B375 △B381□B387								
50						○B375 △B381		○B375 △B381					◎B383		

○: RNFTL ●: RNFB △: RNCT ◎: RNFL □: RNSTL

6. Precautions for designing

As shown in the illustration on Page B83 and B103, general precautions for ball screw.

(1) Nut assembly

When delivered, the nut of R series is separated from the screw shaft, and inserted into an arbor shaft. The nut must be inserted to the screw shaft when mounting ball screw.

(a) Consideration to end configuration of screw shaft

The balls may fall out during moving the assembled nut from the arbor to the screw shaft if the sizes and shapes of the arbor and the screw shaft are not appropriate.

If the end of the ball groove can touch the end of the arbor, connect both ends and move the assembled nut from the arbor to the screw shaft (Fig. 4).

If the end face of the arbor cannot connect to the end face of the screw because of configuration of both ends of screw shaft, wrap a tape outside of ball screw shaft so that the layers of tape is equal with the outside diameter of the arbor (Fig. 5)

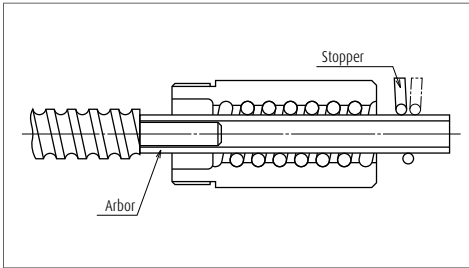


Fig. 4 Inserting nut into screwshaft

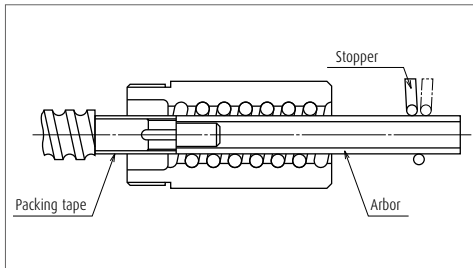


Fig. 5 Arbor and shaft end configuration

If there is a key way or a nick along the way, fill such gaps prior to moving the ball nut.

(b) Installation of arbor

Confirm the correct nut orientation for installation.

Remove the stop ring on the side from where the assembled nut is to be removed. Align the centers of the screw shaft and the arbor while pressing firmly the screw shaft end against the arbor.

(c) Moving the nut

Slide the nut until it lightly touches the shoulder of the ball groove section, and stop it. Turn the ball nut to the direction so that it moves to the ball grooves, while pressing the arbor to the screw shaft. Do not separate the arbor from the screw shaft until the ball groove end appears completely in the ball nut.

(2) Shaft end configuration

RMS type and R series must be machining of blank shaft ends. See page B27, use of NSK support unit.

(a) Cutting screw shaft

Carry out the same process as "(1) Machining of blank shaft ends of precision ball screws" above.

(b) Annealing the shaft end (Heat the section of the shaft end to be machined with an acetylene torch. Then gradually cool it in ambient atmosphere.)

* The area not machined loses hardness if exposed to heat. This may shorten the all screw life. Cool with water the areas where should not be heated to avoid heat conduction.

(c) Turning by lathe

Cut to the length, turn shaft end steps, turn thread screw, and provide the center hole. Refer to JIS B1192 which sets standards for the shaft end accuracy.

(d) Processing by grinding

Apply the same precautions as for cutting for centering, securing nut, and work rest. Grind sections where the bearings and a "Spanning ring" are installed.


(e) Milling processing

Process keyways and tooth seats for lock washers.

(f) Deburring, washing, and rust prevention


Wash with clean white kerosene after processing. Apply lubricant for immediate use. For later use, apply rust preventive agent.

Note: Contact NSK if nut is accidentally removed.

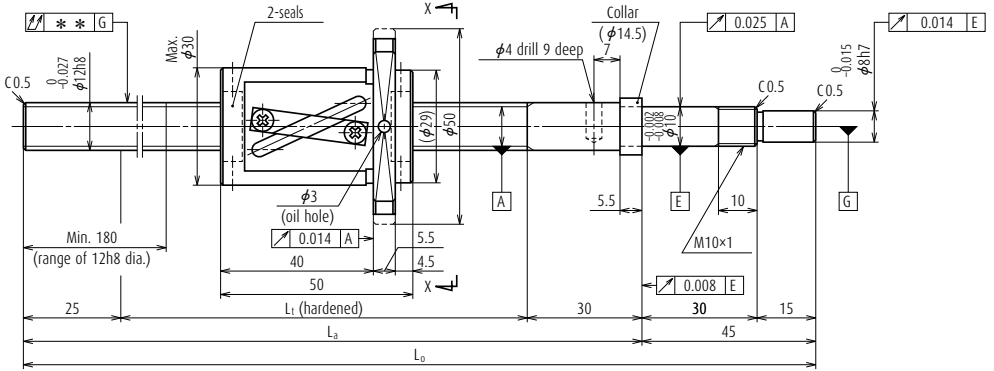

Ball screw No.	Stroke		Screw shaft length		
	Nominal	Maximum (L_t —Nut length)	L_t	L_a	L_o
VFA1210C7S-410	250	260	310	365	410
VFA1210C7S-610	450	460	510	565	610

- Notes**
1. We recommend NSK support units (page B411). WBK12SF-01 (on simple support side) supports ball screw directly on shaft outside diameter.
 2. Use of NSK grease LR3 is recommended. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.
 3. Permissible rotational speed is determined by $d \cdot n$ value and critical speed. See pages B47 and B349.

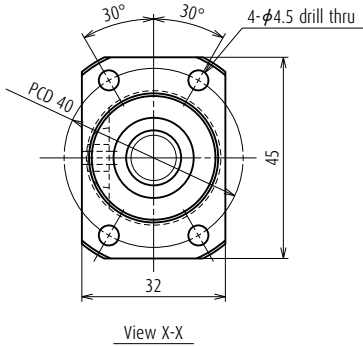

Screw shaft ϕ 12

Lead 10


Unit: mm


Ball screw specifications		
Shaft dia. \times Lead / Direction of turn	12 \times 10 / Right	
Ball recirculation	Return tube	
Ball dia. / Ball circle dia.	2.381 / 12.5	
Screw shaft root dia.	10.0	
Effective turns of balls	2.5 \times 1	
Accuracy grade / Preload / Axial play	Ct7 / S	
Basic load rating (N)	Dynamic C_a	4 430
	Static C_{0a}	6 430
Axial play	0.010 or less	
Dynamic friction torque, (N \cdot cm)	1.5 or less	
Spacer ball	None	
Factory-packed grease	NSK grease LR3	
Internal spatial volume of nut (cm ³)	1.4	
Standard volume of grease replenishing (cm ³)	0.7	

Recommended support unit

For drive side (Fixed)	For drive side (Simple)
WBK10-01A (square)	WBK12SF-01 (square)
WBK10-11 (round)	

Unit: mm


Lead accuracy			Shaft run-out ^{**} 	Mass (kg)	Permissible rotational speed N (min ⁻¹)	
T	e_p	v_u			Supporting condition	
					Fixed - Simple support	Fixed - Free
0	0.085	0.052	0.100	0.56	3 000	3 000
0	0.155	0.052	0.160	0.73	3 000	1 300

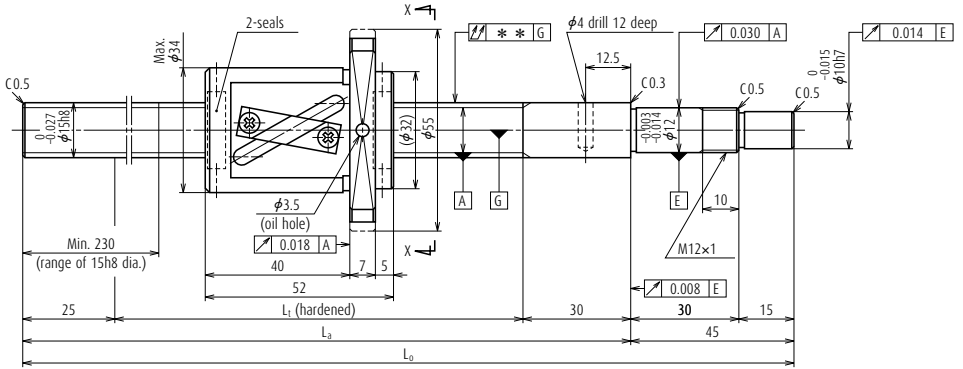

Ball screw No.	Stroke		Screw shaft length		
	Nominal	Maximum (L_t —Nut length)	L_t	L_3	L_0
VFA1510C7S-500	300	348	400	455	500
VFA1510C7S-700	500	548	600	655	700
VFA1510C7S-1000	800	848	900	955	1 000

Notes

1. We recommend NSK support units (page B411). WBK12SF-01 (on simple support side) supports ball screw directly on shaft outside diameter.
2. Use of NSK grease LR3 is recommended. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.
3. Permissible rotational speed is determined by $d \cdot n$ value and critical speed. See pages B47 and B349.

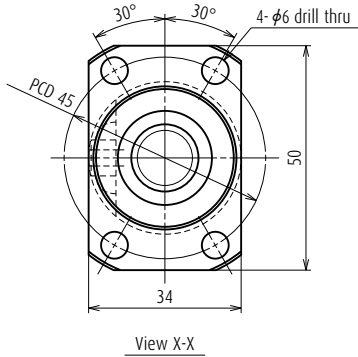

Screw shaft ϕ 15

Lead 10


Unit: mm


Ball screw specifications		
Shaft dia. \times Lead / Direction of turn	15 \times 10 / Right	
Ball recirculation	Return tube	
Ball dia. / Ball circle dia.	3.175 / 15.5	
Screw shaft root dia.	12.2	
Effective turns of balls	2.5 \times 1	
Accuracy grade / Preload / Axial play	Ct7 / S	
Basic load rating (N)	Dynamic C_d	8 140
	Static C_{0a}	12 800
Axial play	0.010 or less	
Dynamic friction torque, (N \cdot cm)	2.5 or less	
Spacer ball	None	
Factory-packed grease	NSK grease LR3	
Internal spatial volume of nut (cm 3)	2.3	
Standard volume of grease replenishing (cm 3)	1.2	

Recommended support unit

For drive side (Fixed)	For drive side (Simple)
WBK12-01A (square)	WBK15SF-01 (square)
WBK12-11 (round)	

Unit: mm

Lead accuracy			Shaft run-out ^{**} 	Mass (kg)	Permissible rotational speed N (min $^{-1}$)	
T	e_p	v_u			Supporting condition	
					Fixed - Simple support	Fixed - Free
0	0.120	0.052	0.075	0.89	3 000	2 600
0	0.195	0.052	0.110	1.1	3 000	1 150
0	0.310	0.052	0.180	1.5	2 340	510

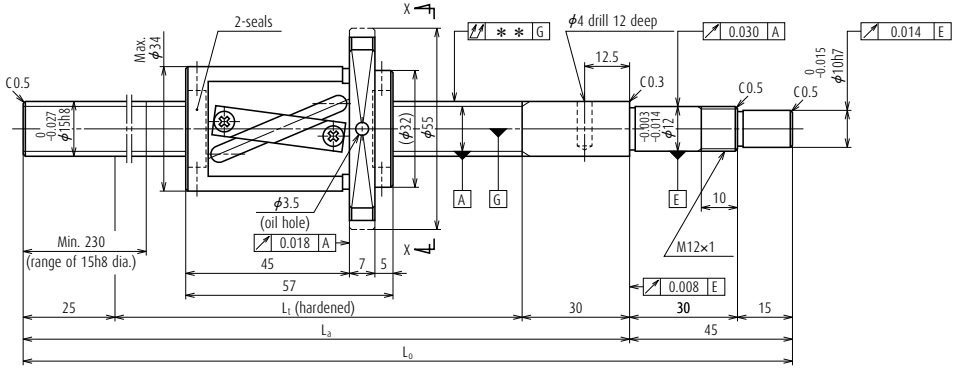


Ball screw No.	Stroke		Screw shaft length		
	Nominal	Maximum (L_t —Nut length)	L_t	L_3	L_0
VFA1520C7S-500	300	343	400	455	500
VFA1520C7S-700	500	543	600	655	700
VFA1520C7S-1000	800	843	900	955	1 000

Notes

1. We recommend NSK support units (page B411). WBK12SF-01 (on simple support side) supports ball screw directly on shaft outside diameter.
2. Use of NSK grease LR3 is recommended. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.
3. Permissible rotational speed is determined by $d \cdot n$ value and critical speed. See pages B47 and B349.

VFA type

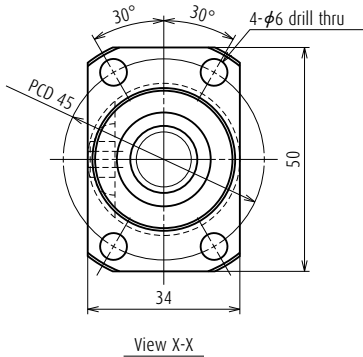

Screw shaft ϕ 15

Lead 20

Unit: mm


Ball screw specifications		
Shaft dia. \times Lead / Direction of turn	15 \times 20 / Right	
Ball recirculation	Return tube	
Ball dia. / Ball circle dia.	3.175 / 15.5	
Screw shaft root dia.	12.2	
Effective turns of balls	1.5 \times 1	
Accuracy grade / Preload / Axial play	Ct7 / S	
Basic load rating (N)	Dynamic C_a	5 080
	Static C_{0a}	7 460
Axial play	0.010 or less	
Dynamic friction torque, (N \cdot cm)	2.5 or less	
Spacer ball	None	
Factory-packed grease	NSK grease LR3	
Internal spatial volume of nut (cm 3)	2.3	
Standard volume of grease replenishing (cm 3)	1.4	

Recommended support unit

For drive side (Fixed)	For drive side (Simple)
WBK12-01A (square)	WBK15SF-01 (square)
WBK12-11 (round)	

Unit: mm


Lead accuracy			Shaft run-out $\uparrow\uparrow$ ^{**}	Mass (kg)	Permissible rotational speed N (min $^{-1}$)	
T	e_p	v_u			Supporting condition	
					Fixed - Simple support	Fixed - Free
0	0.120	0.052	0.075	0.94	3 000	2 630
0	0.195	0.052	0.110	1.2	3 000	1 160
0	0.310	0.052	0.180	1.6	2 350	510

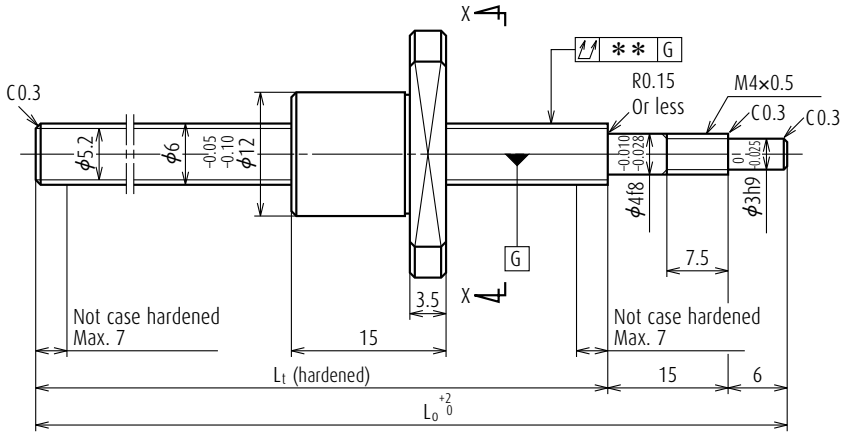

Ball screw No.	Stroke		Screw shaft length	
	Nominal	Maximum (L_t —Nut length)	L_t	L_0
RMA0601C7S-160	100	124	139	160
RMA0601C7S-260	200	224	239	260

Notes

1. We recommend NSK support bearing kit (page B423).
2. **Only rust preventive oil is applied at time of delivery. Please apply lubricant (oil or grease) before use.**
See page D13 for details.
3. Permissible rotational speed is determined by d-n value and critical speed. See pages B47 and B349.

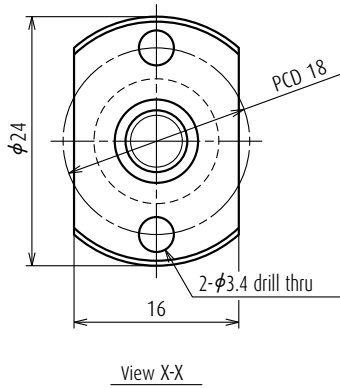

Screw shaft ϕ 6

Lead 1

Unit: mm


Ball screw specifications		
Shaft dia. \times Lead / Direction of turn	6 \times 1 / Right	
Ball recirculation	Deflector (bridge)	
Ball dia. / Ball circle dia.	0.800 / 6.2	
Screw shaft root dia.	5.2	
Effective turns of balls	1 \times 3	
Accuracy grade / Preload / Axial play	Ct7 / S	
Basic load rating (N)	Dynamic C_a	610
	Static C_{0a}	920
Axial play	0.020 or less	
Dynamic friction torque, (N-cm)	1.0 or less	
Spacer ball	None	
Factory-packed grease	See NOTES 2.	

Recommended support unit

For drive side (Fixed)
WBK04R-11 (round)

Unit: mm

Lead accuracy			Shaft run-out** $\uparrow\uparrow$	Mass (kg)	Permissible rotational speed
Target compensation T	Deviation e_p	Variation v_u			N (min ⁻¹)
0	0.052	0.052	0.060	0.045	3 000
0	0.085	0.052	0.090	0.065	3 000

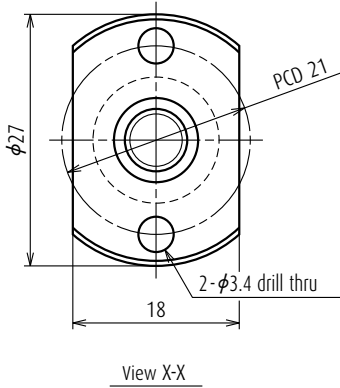

Screw shaft ϕ 8

Lead 1


Unit: mm


Ball screw specifications		
Shaft dia. \times Lead / Direction of turn	8 \times 1 / Right	
Ball recirculation	Deflector (bridge)	
Ball dia. / Ball circle dia.	0.800 / 8.2	
Screw shaft root dia.	7.2	
Effective turns of balls	1 \times 3	
Accuracy grade / Preload / Axial play	Ct7 / S	
Basic load rating (N)	Dynamic C_a	710
	Static C_{0a}	1 290
Axial play	0.020 or less	
Dynamic friction torque, (N-cm)	1.0 or less	
Spacer ball	None	
Factory-packed grease	See NOTES 2.	

Recommended support unit

For drive side (Fixed)
WBK06R-11 (round)

Unit: mm


Lead accuracy			Shaft run-out** 	Mass (kg)	Permissible rotational speed
Target compensation T	Deviation e_p	Variation v_u			N (min ⁻¹)
0	0.052	0.052	0.060	0.085	3 000
0	0.085	0.052	0.090	0.12	3 000

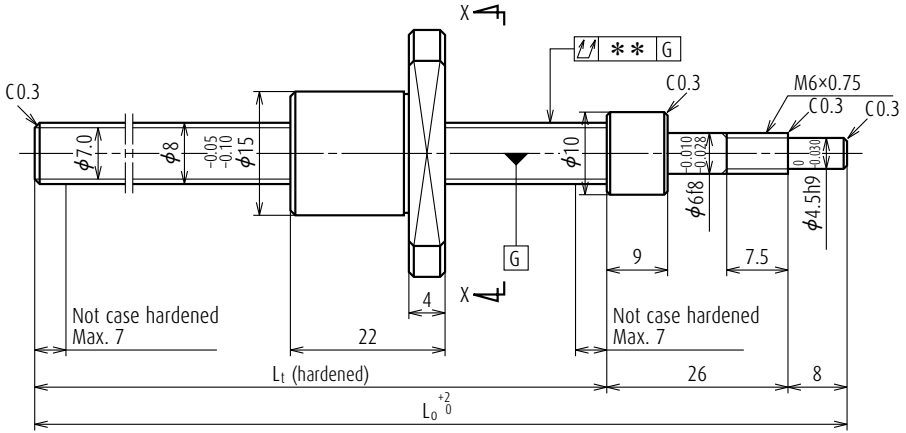

Ball screw No.	Stroke		Screw shaft length	
	Nominal	Maximum (L_t —Nut length)	L_t	L_0
RMA0801.5C75-180	100	124	146	180
RMA0801.5C75-280	200	224	246	280

Notes

1. We recommend NSK support bearing kit (page B423).
2. **Only rust preventive oil is applied at time of delivery. Please apply lubricant (oil or grease) before use.**
See page D13 for details.
3. Permissible rotational speed is determined by d-n value and critical speed. See pages B47 and B349.

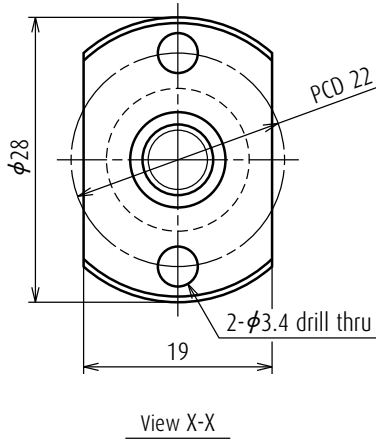

Screw shaft ϕ 8
Lead 1.5

Unit: mm


Ball screw specifications		
Shaft dia. \times Lead / Direction of turn	8 \times 1.5 / Right	
Ball recirculation	Deflector (bridge)	
Ball dia. / Ball circle dia.	1.000 / 8.3	
Screw shaft root dia.	7.0	
Effective turns of balls	1 \times 3	
Accuracy grade / Preload / Axial play	Ct7 / S	
Basic load rating (N)	Dynamic C_a	955
	Static C_{0a}	1 580
Axial play	0.020 or less	
Dynamic friction torque, (N-cm)	1.0 or less	
Spacer ball	None	
Factory-packed grease	See NOTES 2.	

Recommended support unit

For drive side (Fixed)
WBK06R-11 (round)

Unit: mm


Lead accuracy			Shaft run-out** 	Mass (kg)	Permissible rotational speed
Target compensation T	Deviation e_p	Variation v_u			N (min ⁻¹)
0	0.052	0.052	0.060	0.093	3 000
0	0.085	0.052	0.090	0.13	3 000

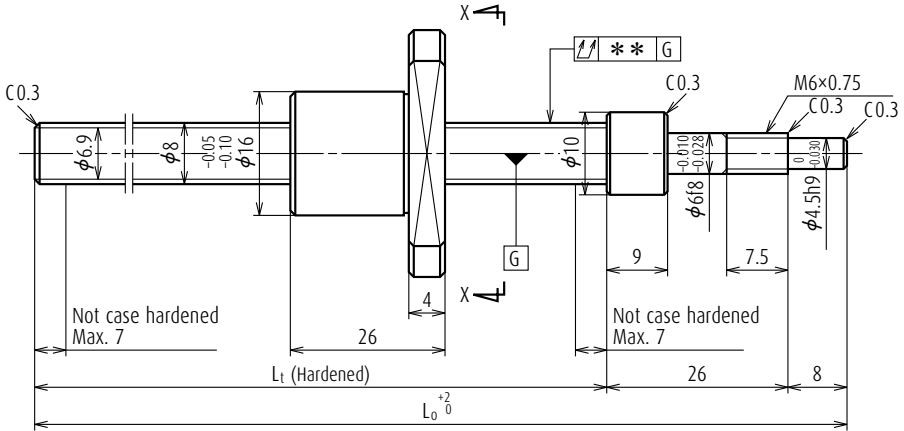

Ball screw No.	Stroke		Screw shaft length	
	Nominal	Maximum (L_t —Nut length)	L_t	L_0
RMA0802C7S-180	100	120	146	180
RMA0802C7S-280	200	220	246	280

Notes

1. We recommend NSK support bearing kit (page B423).
2. **Only rust preventive oil is applied at time of delivery. Please apply lubricant (oil or grease) before use.**
See page D13 for details.
3. Permissible rotational speed is determined by d-n value and critical speed. See pages B47 and B349.

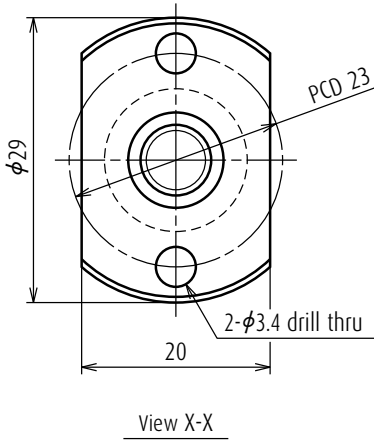

Screw shaft ϕ 8

Lead 2

Unit: mm


Ball screw specifications		
Shaft dia. \times Lead / Direction of turn	8 \times 2 / Right	
Ball recirculation	Deflector (bridge)	
Ball dia. / Ball circle dia.	1.200 / 8.3	
Screw shaft root dia.	6.9	
Effective turns of balls	1 \times 3	
Accuracy grade / Preload / Axial play	Ct7 / S	
Basic load rating (N)	Dynamic C_d	1 260
	Static C_{0a}	1 940
Axial play	0.020 or less	
Dynamic friction torque, (N-cm)	1.0 or less	
Spacer ball	None	
Factory-packed grease	See Notes 2.	

Recommended support unit

For drive side (Fixed)
WBK06R-11 (round)

Unit: mm


Lead accuracy			Shaft run-out** 	Mass (kg)	Permissible rotational speed
Target compensation T	Deviation e_p	Variation v_u			N (min ⁻¹)
0	0.052	0.052	0.060	0.10	3 000
0	0.085	0.052	0.090	0.14	3 000

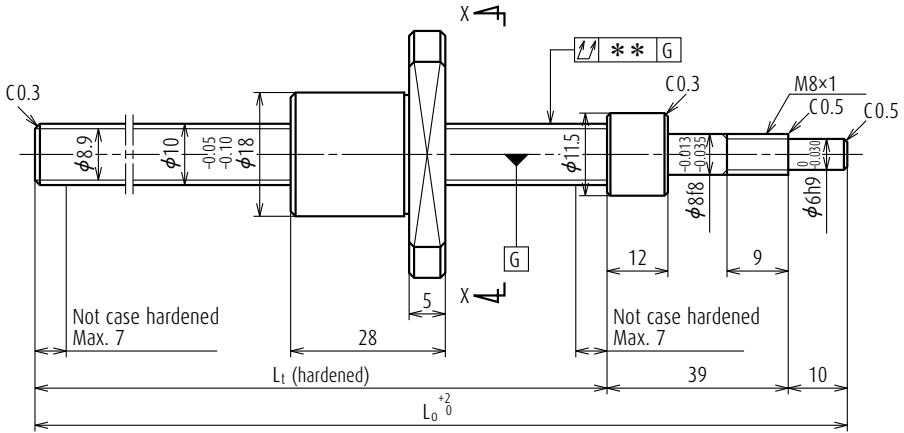

Ball screw No.	Stroke		Screw shaft length	
	Nominal	Maximum (L_t —Nut length)	L_t	L_0
RMA1002C7S-250	150	173	201	250
RMA1002C7S-350	250	273	301	350

Notes

1. We recommend NSK support bearing kit (page B423).
2. **Only rust preventive oil is applied at time of delivery. Please apply lubricant (oil or grease) before use.**
See page D13 for details.
3. Permissible rotational speed is determined by d·n value and critical speed. See pages B47 and B349.

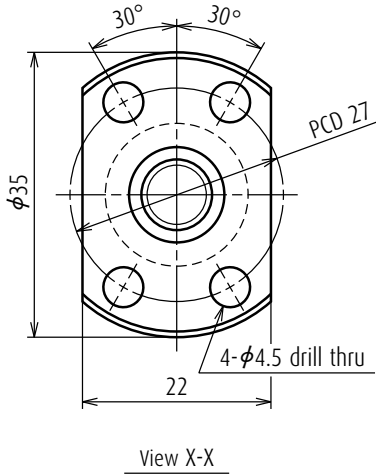

Screw shaft ϕ 10

Lead 2

Unit: mm


Ball screw specifications		
Shaft dia. \times Lead / Direction of turn	10 \times 2 / Right	
Ball recirculation	Deflector (bridge)	
Ball dia. / Ball circle dia.	1.200 / 10.3	
Screw shaft root dia.	8.9	
Effective turns of balls	1 \times 3	
Accuracy grade / Preload / Axial play	Ct7 / S	
Basic load rating (N)	Dynamic C_a	1 460
	Static C_{0a}	2 620
Axial play	0.020 or less	
Dynamic friction torque, (N-cm)	1.0 or less	
Spacer ball	None	
Factory-packed grease	See NOTES 2.	

Recommended support unit

For drive side (Fixed)
WBK08-01A (square)
WBK08-11 (round)

Unit: mm


Lead accuracy			Shaft run-out** $\uparrow\uparrow$	Mass (kg)	Permissible rotational speed
Target compensation T	Deviation e_p	Variation v_u			N (min ⁻¹)
0	0.085	0.052	0.070	0.19	3 000
0	0.085	0.052	0.100	0.25	3 000

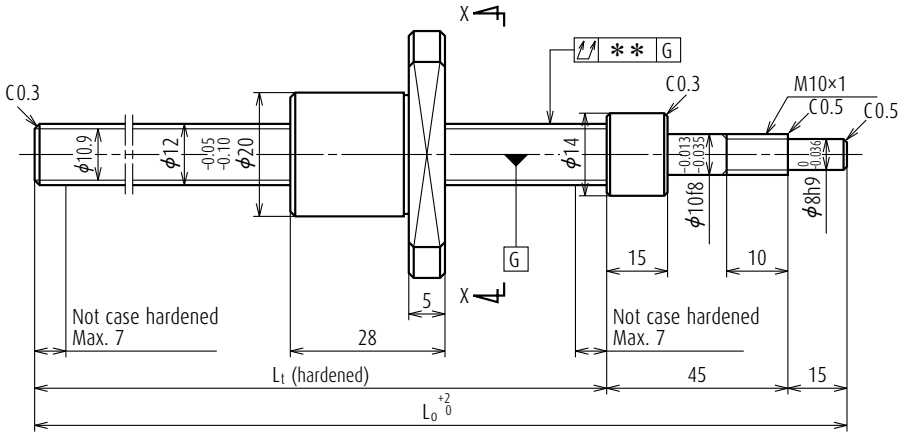

Ball screw No.	Stroke		Screw shaft length	
	Nominal	Maximum (L _t —Nut length)	L _t	L ₀
RMA1202C7S-250	150	162	190	250
RMA1202C7S-350	250	262	290	350

Notes

1. We recommend NSK support bearing kit (page B411).
2. **Only rust preventive oil is applied at time of delivery. Please apply lubricant (oil or grease) before use.**
See page D13 for details.
3. Permissible rotational speed is determined by d-n value and critical speed. See pages B47 and B349.

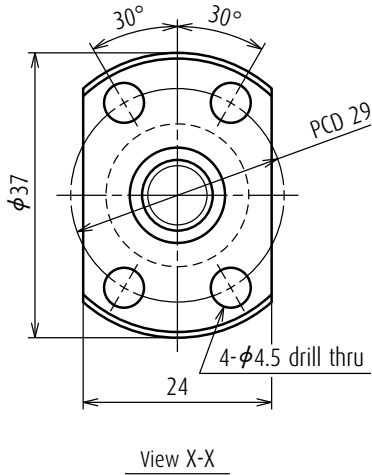

Screw shaft ϕ 12

Lead 2


Unit: mm


Ball screw specifications		
Shaft dia. \times Lead / Direction of turn	12 \times 2 / Right	
Ball recirculation	Deflector (bridge)	
Ball dia. / Ball circle dia.	1.200 / 12.3	
Screw shaft root dia.	10.9	
Effective turns of balls	1 \times 3	
Accuracy grade / Preload / Axial play	Ct7 / S	
Basic load rating (N)	Dynamic C_d	1 590
	Static C_{0a}	3 190
Axial play	0.020 or less	
Dynamic friction torque, (N-cm)	1.0 or less	
Spacer ball	None	
Factory-packed grease	See NOTES 2.	

Recommended support unit

For drive side (Fixed)
WBK10-01A (square)
WBK10-11 (round)

Unit: mm


Lead accuracy			Shaft run-out** 	Mass (kg)	Permissible rotational speed
Target compensation T	Deviation e_p	Variation v_u			N (min ⁻¹)
0	0.060	0.052	0.070	0.26	3 000
0	0.085	0.052	0.100	0.34	3 000

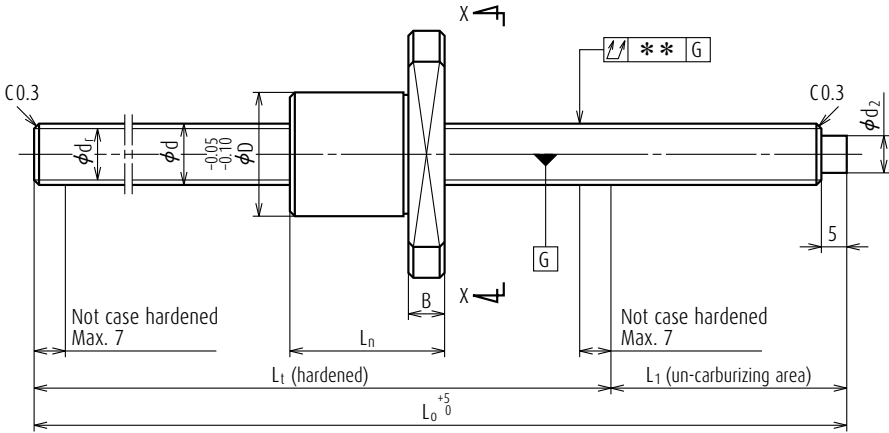

Ball screw No.	Stroke Max. L_t-L_n	Shaft dia. d_1	Lead l	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective ball turns	Basic load rating (N)		Axial play Max.
								Dynamic C_a	Static C_{0a}	
RMS0601C7S-300	235	6	1	0.800	6.2	5.3	3	610	920	0.02
RMS0801C7S-300	234	8	1	0.800	8.2	7.3	3	710	1 290	0.02
RMS0801.5C7S-300	228	8	1.5	1.000	8.3	7.2	3	955	1 580	0.02
RMS0802C7S-300	224	8	2	1.200	8.3	7.0	3	1 260	1 940	0.02
RMS1002C7S-350	262	10	2	1.200	10.3	9.0	3	1 460	2 620	0.02
RMS1202C7S-350	262	12	2	1.200	12.3	11.0	3	1 590	3 190	0.02


- Notes**
1. Use of NSK support unit is recommended. See page B423 for details.
 2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.
 3. Seal is not installed.
 4. Permissible rotational speed is determined by $d \cdot n$ value and critical speed. See pages B47 and B349.

RMS type

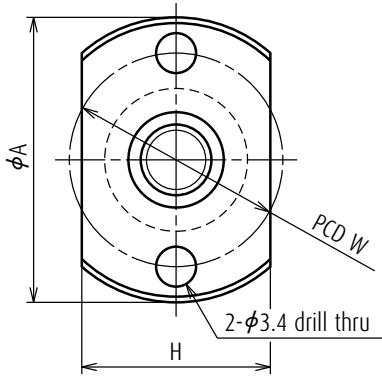

View X-X

(for screw shaft of 6 and 8 dia.)

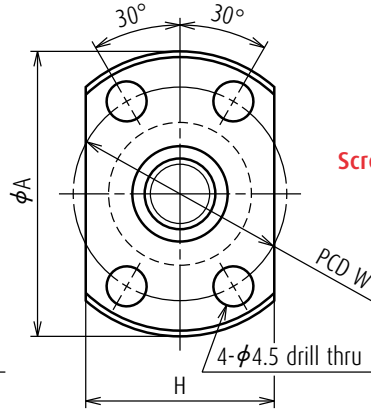

View X-X


(for screw shaft of 10 and 12 dia.)

Screw shaft $\phi 6$
Lead 1
Screw shaft $\phi 8$
Lead 1, 1.5, 2
Screw shaft $\phi 10, \phi 12$
Lead 2

Unit: mm

Nut dimensions						Screw shaft dimensions				Lead accuracy			Shaft run-out **	Mass	Permissible rotational speed
D	A	H	B	L _n	W	Effective thread length L _t	Shaft end L ₁ d ₂		Overall length L ₀	Travel compensation T	Deviation e _p	Variation v _u			
													\uparrow	(kg)	N (min ⁻¹)
12	24	16	3.5	15	18	250	50	4	300	0	0.085	0.052	0.09	0.075	3 000
14	27	18	4	16	21	250	50	6	300	0	0.085	0.052	0.09	0.13	3 000
15	28	19	4	22	22	250	50	6	300	0	0.085	0.052	0.09	0.14	3 000
16	29	20	4	26	23	250	50	6	300	0	0.085	0.052	0.09	0.15	3 000
18	35	22	5	28	27	290	60	8	350	0	0.085	0.052	0.10	0.25	3 000
20	37	24	5	28	29	290	60	10	350	0	0.085	0.052	0.10	0.35	3 000

Ball screws for transfer equipment Tube type, Flanged nut (Fine, Medium lead)

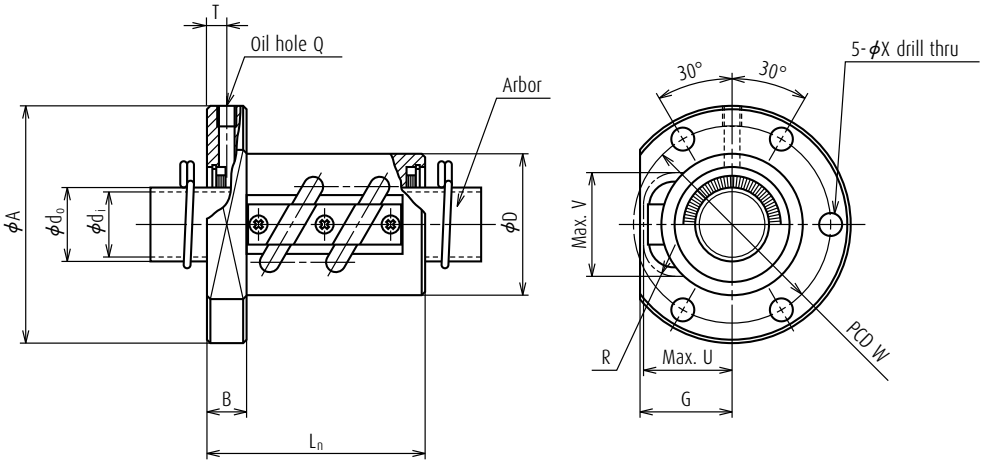

Ball nut No.	Shaft dia. d	Lead l	Ball dia. D _w	Ball circle dia. d _m	Root dia. d _r	Effective balls turns	Basic load rating (N)		Axial play Max.	Ball nut dimensions
							Turns × Circuits	Dynamic C _a		Static C _{0a}
						RNFTL 1003A3.5			10	
RNFTL 1006A2.5S	10	6	2.381	10.65	8.1	2.5 × 1	3 280	4 730	0.10	20
RNFTL 1208A2.5S	12	8	2.778	12.65	9.6	2.5 × 1	4 290	6 610	0.10	25
RNFTL 1404A3.5S	14	4	2.778	14.5	11.5	3.5 × 1	6 310	10 800	0.10	25
RNFTL 1405A2.5S	14	5	3.175	14.5	11.0	2.5 × 1	6 170	9 940	0.10	30
RNFTL 1610A2.5	16	10	3.175	16.75	13.3	2.5 × 1	6 810	11 600	0.10	30
RNFTL 1610A2.5S	16	10	3.175	16.75	13.3	2.5 × 1	6 810	11 600	0.10	30
RNFTL 1808A3.5	18	8	4.762	18.5	13.6	3.5 × 1	15 500	26 200	0.15	34
RNFTL 1808A3.5S	18	8	4.762	18.5	13.6	3.5 × 1	15 500	26 200	0.15	34
RNFTL 2005A2.5	20	5	3.175	20.5	17.0	2.5 × 1	7 500	14 200	0.10	40
RNFTL 2005A2.5S	20	5	3.175	20.5	17.0	2.5 × 1	7 500	14 200	0.10	40
RNFTL 2010A2.5	20	10	4.762	21.25	16.2	2.5 × 1	12 700	21 600	0.15	40
RNFTL 2010A2.5S	20	10	4.762	21.25	16.2	2.5 × 1	12 700	21 600	0.15	40
RNFTL 2505A5	25	5	3.175	25.5	22.0	2.5 × 2	15 100	36 300	0.10	42
RNFTL 2505A5S	25	5	3.175	25.5	22.0	2.5 × 2	15 100	36 300	0.10	42
RNFTL 2510A2.5	25	10	6.35	26	19.0	2.5 × 1	20 500	34 900	0.20	44
RNFTL 2510A2.5S	25	10	6.35	26	19.0	2.5 × 1	20 500	34 900	0.20	44
RNFTL 2510A5	25	10	6.35	26	19.0	2.5 × 2	37 300	69 800	0.20	44
RNFTL 2510A5S	25	10	6.35	26	19.0	2.5 × 2	37 300	69 800	0.20	44

- Notes**
1. Protruding portion of tube does not interfere with ball nut housing if its dimensions corresponding to U and V are large enough.
 2. Actual screw shaft length may become slightly longer than nominal length l_0 due to manufacturing tolerance.
 3. Only ball nut part numbers ending "S" are equipped with seals. External dimensions of those with seals are the same as those without. In ball nut side view drawing, above the center line there is a seal, and beneath it there is no seal.
Seal for those with shaft diameter of 14 mm or less is made of synthetic resin. Seal for those of 16 mm or more is a "Brush" seal.
 4. Nut assembly with arbor and screw shaft are separate at time of delivery.

R series RNFTL type



Unit: mm

Ball nut dimensions												Arbor			Screw shaft				Shaft mass/m	Internal spatial volume of nut	Standard volume of grease re-plenishing
Flange		Length	Bolt hole		Oil hole		Projecting tube			Nut Mass.	Out-side dia.	Bore	Standard length			Screw shaft No.					
A	G	B	L _n	W	X	Q	T	U	V	R	(kg)	d ₀	d ₁	L ₀			(kg)	(cm ³)	(cm ³)		
40	15	6	34	30	4.5	M3×0.5	3.0	15	15	7	0.092	8.1	6.1	400	400	-	RS1003A··	0.50	-	-	
40	15	6	36	30	4.5	M3×0.5	3.5	15	15	5	0.095	8.1	6.1	400	800	-	RS1006A··	0.56	1.1	0.6	
45	19	8	46	35	4.5	M3×0.5	5.5	19	18	7	0.18	9.6	7.6	400	800	-	RS1208A··	0.74	1.8	0.9	
50	19	10	43	40	4.5	M6×1	5.0	19	20	7	0.20	11.5	9.5	500	1 000	-	RS1404A··	1.02	2.0	1.0	
50	22	10	45	40	4.5	M6×1	5.0	22	21	8	0.26	11.0	9.0	500	1 000	-	RS1405A··	1.00	2.4	1.2	
53	23	10	54	41	5.5	M6×1	5.5	23	22.5	8	0.28	13.3	11.3	500	1 000	1 500	RS1610A··	1.37	2.7	1.4	
63	27	12	58	49	6.6	M6×1	6.0	27	27	8	0.43	13.6	11.6	500	1 000	1 500	RS1808A··	1.60	5.2	2.6	
60	28	10	46	50	4.5	M6×1	5.0	28	27	10	0.42	17.0	14.6	500	1 000	2 000	RS2005A··	2.17	3.5	1.8	
67	30	12	59	53	6.6	M6×1	6.0	30	29	12	0.55	16.2	13.8	500	1 000	2 000	RS2010A··	2.18	7.1	3.6	
71	28	12	66	57	6.6	M6×1	6.0	28	31	10	0.62	22.0	19.6	1 000	2 000	2 500	RS2505A··	3.47	6.5	3.3	
80	34	15	62	62	9	M6×1	7.5	34	37	17	0.75	19.0	16.6	1 000	2 000	2 500	RS2501A··	3.13	13	6.5	
80	34	15	92	62	9	M6×1	7.5	34	37	17	0.75	19.0	16.6	1 000	2 000	2 500	RS2501A··	3.13	18	9.0	


5. Value obtained by dividing standard screw shaft length by 100 mm will be entered at end of the part number where marked with ··.

6. Items in stock do not have surface treatment. For details of standard stock products, contact NSK.

7. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.

8. Internal spatial volume of nut and volume of grease to be replenished are values for ball screws with seals. Recommended amount for replenishing is approximately 50% of nut's internal space. For ball screws without seals, apply grease to screw shaft surface or move ball nut by hand while filling them with grease so that grease permeates all areas. See page D16 for details.


Ball screws for transfer equipment Tube type, Flanged nut (Fine, Medium lead)

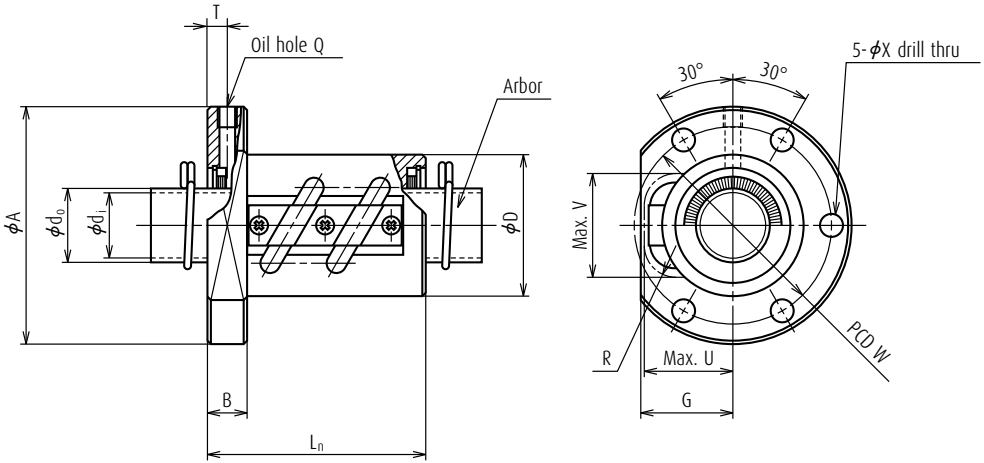

Ball nut No.	Shaft dia. d	Lead l	Ball dia. D _w	Ball circle dia. d _m	Root dia. d _r	Effective balls turns	Basic load rating (N)		Axial play Max.	Ball nut dimensions
							Turns × Circuits	Dynamic C _a		Static C _{0a}
						D				
RNFTL 2806A2.5	28	6	3.175	28.5	25.0	2.5 × 1	8 760	20 200	0.10	50
RNFTL 2806A2.5S	28	6	3.175	28.5	25.0	2.5 × 1	8 760	20 200	0.10	50
RNFTL 2806A5	28	6	3.175	28.5	25.0	2.5 × 2	15 900	40 500	0.10	50
RNFTL 2806A5S	28	6	3.175	28.5	25.0	2.5 × 2	15 900	40 500	0.10	50
RNFTL 3210A5	32	10	6.35	33.75	27.0	2.5 × 2	42 000	91 800	0.20	55
RNFTL 3210A5S	32	10	6.35	33.75	27.0	2.5 × 2	42 000	91 800	0.20	55
RNFTL 3610A2.5	36	10	6.35	37	30.0	2.5 × 1	24 700	50 800	0.20	60
RNFTL 3610A2.5S	36	10	6.35	37	30.0	2.5 × 1	24 700	50 800	0.20	60
RNFTL 3610A5	36	10	6.35	37	30.0	2.5 × 2	44 900	102 000	0.20	60
RNFTL 3610A5S	36	10	6.35	37	30.0	2.5 × 2	44 900	102 000	0.20	60
RNFTL 4010A7	40	10	6.35	41.75	35.0	3.5 × 2	63 100	164 000	0.20	65
RNFTL 4010A7S	40	10	6.35	41.75	35.0	3.5 × 2	63 100	164 000	0.20	65
RNFTL 4512A5	45	12	7.144	46.5	39.0	2.5 × 2	58 500	147 000	0.23	70
RNFTL 4512A5S	45	12	7.144	46.5	39.0	2.5 × 2	58 500	147 000	0.23	70
RNFTL 5010A7	50	10	6.35	51.75	45.0	3.5 × 2	70 100	205 000	0.20	80
RNFTL 5010A7S	50	10	6.35	51.75	45.0	3.5 × 2	70 100	205 000	0.20	80
RNFTL 5016A5	50	16	9.525	52	42.0	2.5 × 2	117 000	299 000	0.23	85
RNFTL 5016A5S	50	16	9.525	52	42.0	2.5 × 2	117 000	299 000	0.23	85

- Notes**
1. Protruding portion of tube does not interfere with ball nut housing if its dimensions corresponding to U and V are large enough.
 2. Actual screw shaft length may become slightly longer than nominal length L₀ due to manufacturing tolerance.
 3. Only ball nut part numbers ending "S" are equipped with seals. External dimensions of those with seals are the same as those without. In ball nut side view drawing, above the center line there is a seal, and beneath it there is no seal.
Seal for those with shaft diameter of 14 mm or less is made of synthetic resin. Seal for those of 16 mm or more is a "Brush" seal.
 4. Nut assembly with arbor and screw shaft are separate at time of delivery.

R series RNFTL type

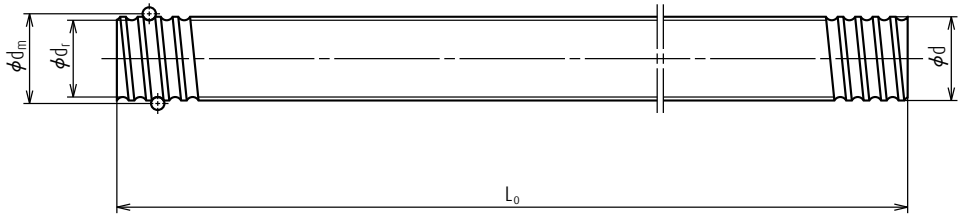

Unit: mm

Ball nut dimensions												Arbor		Screw shaft			Shaft mass/m	Internal spatial volume of nut	Standard volume of grease re-plenishing	
Flange			Length	Bolt hole		Oil hole			Projecting tube			Nut Mass.	Out-side dia.	Bore	Standard length					Screw shaft No.
A	G	B	L_n	W	X	Q	T	U	V	R	(kg)	d_0	d_1	L_0			(kg)	(cm^3)	(cm^3)	
79	33	15	55	65	6.6	M6 × 1	7.5	33	34	10	0.85	25.0	22.6	1 000	2 000	2 500	RS2806A · ·	4.47	5.9	3.0
79	33	15	55	65	6.6	M6 × 1	7.5	33	34	10	0.85	25.0	22.6	1 000	2 000	2 500	RS2806A · ·	4.47	5.9	3.0
79	33	15	79	65	6.6	M6 × 1	7.5	33	34	10	1.07	25.0	22.6	1 000	2 000	2 500	RS2806A · ·	4.47	8.4	4.2
79	33	15	79	65	6.6	M6 × 1	7.5	33	34	10	1.07	25.0	22.6	1 000	2 000	2 500	RS2806A · ·	4.47	8.4	4.2
97	39	18	97	75	11	M6 × 1	9.0	39	42	17	1.55	27.0	24.6	1 000	2 000	3 000	RS3210A · ·	5.53	29	15
97	39	18	97	75	11	M6 × 1	9.0	39	42	17	1.55	27.0	24.6	1 000	2 000	3 000	RS3210A · ·	5.53	29	15
102	42	18	68	80	11	M6 × 1	9.0	42	46	17	1.47	30.0	27.6	1 000	2 000	3 000	RS3601A · ·	6.91	21	11
102	42	18	68	80	11	M6 × 1	9.0	42	46	17	1.47	30.0	27.6	1 000	2 000	3 000	RS3601A · ·	6.91	21	11
102	42	18	98	80	11	M6 × 1	9.0	42	46	17	1.80	30.0	27.6	1 000	2 000	3 000	RS3601A · ·	6.91	33	17
102	42	18	98	80	11	M6 × 1	9.0	42	46	17	1.80	30.0	27.6	1 000	2 000	3 000	RS3601A · ·	6.91	33	17
114	44	20	120	90	14	M6 × 1	10.0	44	50	20	2.49	35.0	31.8	2 000	3 000	4 000	RS4010A · ·	8.87	42	21
114	44	20	120	90	14	M6 × 1	10.0	44	50	20	2.49	35.0	31.8	2 000	3 000	4 000	RS4010A · ·	8.87	42	21
130	47	22	116	100	18	M6 × 1	11.0	47	55	20	3.07	39.0	35.8	2 000	3 000	4 000	RS4512A · ·	11.16	49	25
130	47	22	116	100	18	M6 × 1	11.0	47	55	20	3.07	39.0	35.8	2 000	3 000	4 000	RS4512A · ·	11.16	49	25
140	52	22	122	110	18	M6 × 1	11.0	52	59	20	4.06	45.0	41.8	2 000	3 000	4 000	RS5010A · ·	14.15	53	27
140	52	22	122	110	18	M6 × 1	11.0	52	59	20	4.06	45.0	41.8	2 000	3 000	4 000	RS5010A · ·	14.15	53	27
163	57	28	146	125	22	M6 × 1	14.0	57	63	25	6.42	42.0	38.8	2 000	3 000	4 000	RS5016A · ·	13.48	94	47
163	57	28	146	125	22	M6 × 1	14.0	57	63	25	6.42	42.0	38.8	2 000	3 000	4 000	RS5016A · ·	13.48	94	47


5. Value obtained by diving standard screw shaft length by 100 mm will be entered at end of the part number where marked with · · .

6. Items in stock do not have surface treatment. For details of standard stock products, contact NSK.

7. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.

8. Internal spatial volume of nut and volume of grease to be replenished are values for ball screws with seals. Recommended amount for replenishing is approximately 50% of nut's internal space. For ball screws without seals, apply grease to screw shaft surface or move ball nut by hand while filling them with grease so that grease permeates all areas. See page D16 for details.


Ball screws for transfer equipment Tube type, Flanged nut (Medium, High helix lead)

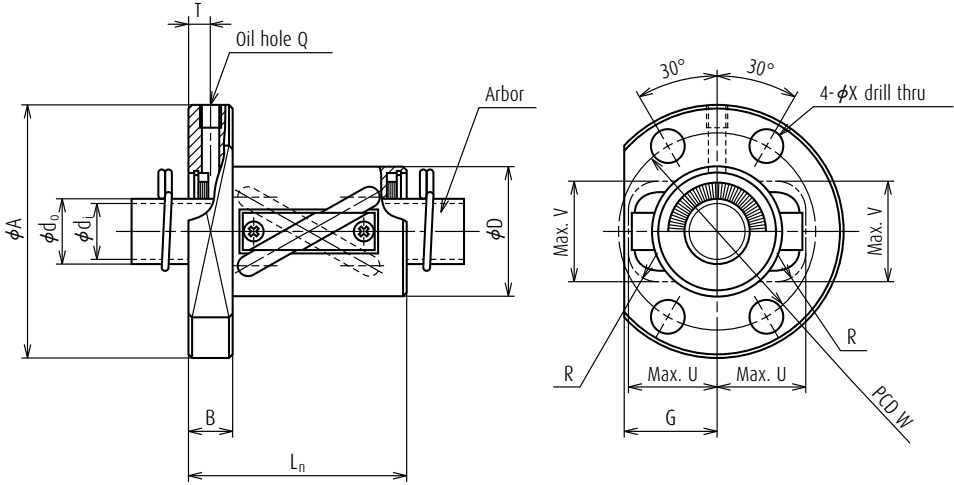

Ball nut No.	Shaft dia. d	Lead l	Ball dia. D _w	Ball circle dia. d _m	Root dia. d _r	Effective balls turns	Basic load rating (N)		Axial play Max.	Ball nut dimensions
							Turns × Circuits	Dynamic C _a		Static C _{0a}
									D	
RNFTL 1212A3	12	12	2.381	12.65	10.1	1.5 × 2	3 900	6 250	0.10	24
RNFTL 1616A3	16	16	2.778	16.65	13.6	1.5 × 2	5 440	9 550	0.10	30
RNFTL 1616A3S	16	16	2.778	16.65	13.6	1.5 × 2	5 440	9 550	0.10	30
RNFTL 2020A3	20	20	3.175	20.75	17.3	1.5 × 2	8 080	15 700	0.10	35
RNFTL 2020A3S	20	20	3.175	20.75	17.3	1.5 × 2	8 080	15 700	0.10	35
RNFTL 2525A3	25	25	3.969	26	22.0	1.5 × 2	12 100	24 500	0.12	45
RNFTL 2525A3S	25	25	3.969	26	22.0	1.5 × 2	12 100	24 500	0.12	45
RNFTL 3232A3	32	32	4.762	33.25	28.0	1.5 × 2	17 600	37 700	0.15	55
RNFTL 3232A3S	32	32	4.762	33.25	28.0	1.5 × 2	17 600	37 700	0.15	55
RNFTL 4040A3	40	40	6.35	41.75	35.0	1.5 × 2	28 100	62 900	0.20	70
RNFTL 4040A3S	40	40	6.35	41.75	35.0	1.5 × 2	28 100	62 900	0.20	70

- Notes**
1. Protruding portion of tube does not interfere with ball nut housing if its dimensions corresponding to U and V are large enough.
 2. Actual screw shaft length may become slightly longer than nominal length L₀ due to manufacturing tolerance.
 3. Only ball nut part numbers ending "S" are equipped with seals. External dimensions of those with seals are the same as those without.
In ball nut side view drawing, above the center line there is a seal, and beneath it there is no seal.
Seal for those with shaft diameter of 14 mm or less is made of synthetic resin. Seal for those of 16 mm or more is a "Brush" seal.
 4. Nut assembly with arbor and screw shaft are separate at time of delivery.

R series RNFTL type

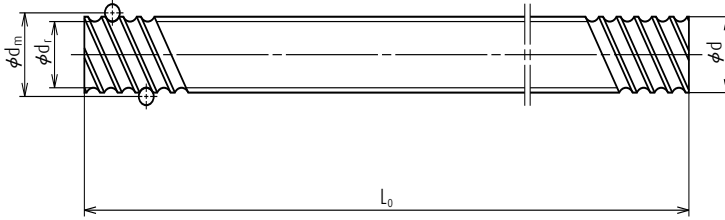

Unit: mm

Ball nut dimensions												Arbor		Screw shaft				Shaft mass/m	Internal spatial volume of nut	Standard volume of grease re-plenishing
Flange			Length		Bolt hole		Oil hole			Projecting tube		Nut Mass.	Out-side dia.	Bore	Standard length					
A	G	B	L_n	W	X	Q	T	U	V	R	(kg)				d_0	d_1	L_0			
44	17	8	44	34	4.5	M6 × 0.5	4.0	17	16	5	0.16	10.1	8.1	400	800	-	RS1212A··	0.74	1.7	0.9
55	22	10	50	43	6.6	M6 × 1	5.0	22	22	7	0.29	13.6	11.6	500	1 000	1 500	RS1616A··	1.37	2.8	1.4
55	22	10	50	43	6.6	M6 × 1	5.0	22	22	7	0.29	13.6	11.6	500	1 000	1 500	RS1616A··	1.37	2.8	1.4
68	25	12	59	52	9	M6 × 1	6.0	25	27	8	0.49	17.3	14.9	500	1 000	2 000	RS2020A··	2.19	4.9	2.5
68	25	12	59	52	9	M6 × 1	6.0	25	27	8	0.49	17.3	14.9	500	1 000	2 000	RS2020A··	2.19	4.9	2.5
80	31	12	69	63	9	M6 × 1	6.0	31	32	10	0.80	22.0	19.6	1 000	2 000	2 500	RS2525A··	3.43	9.1	4.6
80	31	12	69	63	9	M6 × 1	6.0	31	32	10	0.80	22.0	19.6	1 000	2 000	2 500	RS2525A··	3.43	9.1	4.6
100	37	15	84	80	11	M6 × 1	7.5	37	40	12	1.46	28.0	25.6	1 000	2 000	3 000	RS3232A··	5.71	19	9.5
100	37	15	84	80	11	M6 × 1	7.5	37	40	12	1.46	28.0	25.6	1 000	2 000	3 000	RS3232A··	5.71	19	9.5
120	46	18	103	95	14	M6 × 1	9.0	46	49	15	2.69	35.0	31.8	2 000	3 000	4 000	RS4040A··	8.82	39	20
120	46	18	103	95	14	M6 × 1	9.0	46	49	15	2.69	35.0	31.8	2 000	3 000	4 000	RS4040A··	8.82	39	20

5. Value obtained by dividing standard screw shaft length by 100 mm will be entered at end of the part number where marked with ···.


6. Items in stock do not have surface treatment. For details of standard stock products, contact NSK.

7. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.

8. Internal spatial volume of nut and volume of grease to be replenished are values for ball screws with seals. Recommended amount for replenishing is approximately 50% of nut's internal space. For ball screws without seals, apply grease to screw shaft surface or move ball nut by hand while filling them with grease so that grease permeates all areas. See page D16 for details.

Ball screws for transfer equipment


Tube type, embedded -tube, Flanged (Fine, Medium lead)

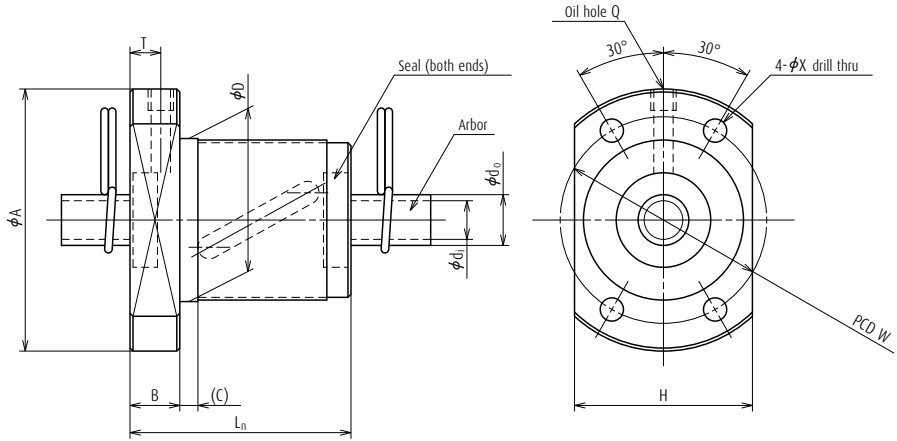

Ball nut No.	Shaft dia. d	Lead l	Ball dia. D _w	Ball circle dia. d _m	Root dia. d _r	Effective balls turns	Basic load rating (N)		Axial play Max.	Ball nut dimensions
							Turns × Circuits	Dynamic C _a		Static C _{0a}
						D				
RNFBL 1006A2.5S	10	6	2.381	10.65	8.1	2.5 × 1	3 280	4 730	0.10	26
RNFBL 1208A2.5S	12	8	2.778	12.65	9.6	2.5 × 1	4 290	6 610	0.10	29
RNFBL 1404A3.5S	14	4	2.778	14.5	11.5	3.5 × 1	6 310	10 800	0.10	31
RNFBL 1405A2.5S	14	5	3.175	14.5	11.0	2.5 × 1	6 170	9 940	0.10	32
RNFBL 1808A3.5S	18	8	4.762	18.5	13.6	3.5 × 1	15 500	26 200	0.15	50
RNFBL 2005A2.5S	20	5	3.175	20.5	17.0	2.5 × 1	7 500	14 200	0.10	40
RNFBL 2010A2.5S	20	10	4.762	21.25	16.2	2.5 × 1	12 700	21 600	0.15	52
RNFBL 2505A2.5S	25	5	3.175	25.5	22.0	2.5 × 1	8 340	18 100	0.10	43
RNFBL 2505A5S	25	5	3.175	25.5	22.0	2.5 × 2	15 100	36 300	0.10	43
RNFBL 2510A2.5S	25	10	6.35	26	19.0	2.5 × 1	20 500	34 900	0.20	60
RNFBL 2510A5S	25	10	6.35	26	19.0	2.5 × 2	37 300	69 800	0.20	60
RNFBL 2806A2.5S	28	6	3.175	28.5	25.0	2.5 × 1	8 760	20 200	0.10	50
RNFBL 2806A5S	28	6	3.175	28.5	25.0	2.5 × 2	15 900	40 500	0.10	50
RNFBL 3210A2.5S	32	10	6.35	33.75	27.0	2.5 × 1	23 100	45 900	0.20	67
RNFBL 3210A5S	32	10	6.35	33.75	27.0	2.5 × 2	42 000	91 800	0.20	67
RNFBL 3610A2.5S	36	10	6.35	37	30.0	2.5 × 1	24 700	50 800	0.20	70
RNFBL 3610A5S	36	10	6.35	37	30.0	2.5 × 2	44 900	102 000	0.20	70
RNFBL 4010A5S	40	10	6.35	41.75	35.0	2.5 × 2	47 200	116 000	0.20	76

- Notes**
1. Actual screw shaft length may become slightly longer than nominal length L₀ due to manufacturing tolerance.
 2. Nut assembly with arbor and screw shaft are separate at time of delivery.
 3. Value obtained by diving standard screw shaft length by 100 mm will be entered at end of the part number where marked with ∙ ∙.

R series RNFBL type

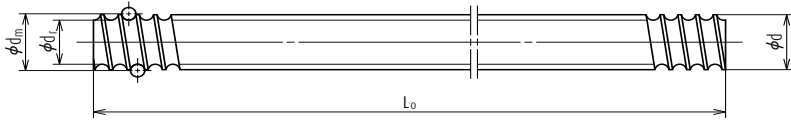

Unit: mm

Ball nut dimensions										Arbor		Screw shaft				Shaft mass/m	Internal spatial volume of nut	Standard volume of grease re-plenishing
Flange			Overall length		Bolt hole		Oil hole			Nut Mass. (kg)	Outside dia. d ₀	Bore d ₁	Standard length					
A	H	B	L _n	(C)	W	X	Q	T	L ₀				(kg)	d ₀	d ₁	L ₀	(kg)	(cm ³)
42	29	8	36	3	34	4.5	M3×0.5	5.0	0.16	8.1	6.1	400	800	-	RS1006A··	0.56	1.1	0.6
45	32	8	44	3	37	4.5	M3×0.5	5.5	0.21	9.6	7.6	400	800	-	RS1208A··	0.81	1.6	0.8
50	37	10	40	4	40	4.5	M6 × 1	5.0	0.25	11.5	9.5	500	1 000	-	RS1404A··	1.02	2.4	1.2
50	38	10	40	4	40	4.5	M6 × 1	5.0	0.26	11.0	9.0	500	1 000	-	RS1405A··	1.00	1.9	1.0
80	60	12	61	4	65	6.6	M6 × 1	6.0	1.00	13.6	11.6	500	1 000	1 500	RS1808A··	1.60	5.8	2.9
60	46	10	40	4	50	4.5	M6 × 1	5.0	0.37	17.0	14.6	500	1 000	2 000	RS2005A··	2.17	2.8	1.4
82	64	12	61	5	67	6.6	M6 × 1	6.0	1.05	16.2	13.8	500	1 000	2 000	RS2010A··	2.18	7.6	3.8
67	50	10	40	4	55	5.5	M6 × 1	5.0	0.40	22.0	19.6	1 000	2 000	2 500	RS2505A··	3.47	3.5	1.8
67	50	10	55	4	55	5.5	M6 × 1	5.0	0.50	22.0	19.6	1 000	2 000	2 500	RS2505A··	3.47	4.7	2.4
96	72	15	66	5	78	9.0	M6 × 1	7.5	1.52	19.0	16.6	1 000	2 000	2 500	RS2510A··	3.13	14	7.0
96	72	15	96	5	78	9.0	M6 × 1	7.5	1.99	19.0	16.6	1 000	2 000	2 500	RS2510A··	3.13	19	9.5
80	60	12	47	5	65	6.6	M6 × 1	6.0	0.70	25.0	22.6	1 000	2 000	2 500	RS2806A··	4.47	4.5	2.3
80	60	12	65	5	65	6.6	M6 × 1	6.0	0.87	25.0	22.6	1 000	2 000	2 500	RS2806A··	4.47	7.6	3.8
103	78	15	67	5	85	9.0	M6 × 1	7.5	1.72	27.0	24.6	1 000	2 000	3 000	RS3210A··	5.53	20	10
103	78	15	97	5	85	9.0	M6 × 1	7.5	2.25	27.0	24.6	1 000	2 000	3 000	RS3210A··	5.53	28	14
110	82	17	69	5	90	11.0	M6 × 1	8.5	1.97	30.0	27.6	1 000	2 000	3 000	RS3610A··	6.91	21	11
110	82	17	99	5	90	11.0	M6 × 1	8.5	2.53	30.0	27.6	1 000	2 000	3 000	RS3610A··	6.91	29	15
116	88	17	99	5	96	11.0	M6 × 1	8.5	2.86	35.0	31.8	2 000	3 000	4 000	RS4010A··	8.87	36	18

4. Items in stock do not have surface treatment. For details of standard stock products, contact NSK.


5. Seal for those with shaft diameter of 14 mm or less is made of synthetic resin. Seal for those of 16 mm or more is a "Brush" seal.

6. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.

7. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.

Ball screws for transfer equipment


Return tube type, Nut with V-thread, (Fine lead)

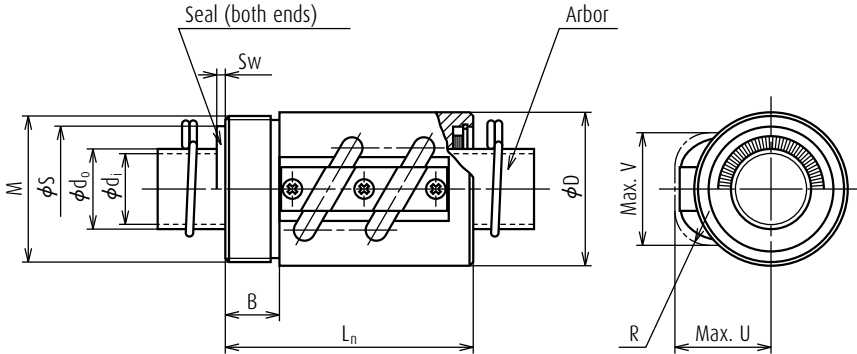

Ball nut No.	Shaft dia. d	Lead l	Ball dia. D _w	Ball circle dia. d _m	Root dia. d _r	Effective balls turns	Basic load rating (N)		Axial play Max.	Ball nut dimensions
							Turns × Circuits	Dynamic C _a		Static C _{0a}
						D				
RNCT 1003A3.5	10	3	2.381	10.65	8.1	3.5 × 1	4 440	6 700	0.10	20
RNCT 1404A3.5S	14	4	2.778	14.5	11.5	3.5 × 1	6 310	10 800	0.10	25
RNCT 1405A2.5S	14	5	3.175	14.5	11.0	2.5 × 1	6 170	9 940	0.10	30
RNCT 1808A3.5	18	8	4.762	18.5	13.6	3.5 × 1	15 500	26 200	0.15	34
RNCT 1808A3.5S	18	8	4.762	18.5	13.6	3.5 × 1	15 500	26 200	0.15	34
RNCT 2005A2.5	20	5	3.175	20.5	17.0	2.5 × 1	7 500	14 200	0.10	40
RNCT 2005A2.5S	20	5	3.175	20.5	17.0	2.5 × 1	7 500	14 200	0.10	40
RNCT 2505A5	25	5	3.175	25.5	22.0	2.5 × 2	15 100	36 300	0.10	42
RNCT 2505A5S	25	5	3.175	25.5	22.0	2.5 × 2	15 100	36 300	0.10	42
RNCT 2510A5	25	10	6.35	26	19.0	2.5 × 2	37 300	69 800	0.20	44
RNCT 2510A5S	25	10	6.35	26	19.0	2.5 × 2	37 300	69 800	0.20	44
RNCT 2806A5	28	6	3.175	28.5	25.0	2.5 × 2	15 900	40 500	0.10	50
RNCT 2806A5S	28	6	3.175	28.5	25.0	2.5 × 2	15 900	40 500	0.10	50
RNCT 3210A5	32	10	6.35	33.75	27.0	2.5 × 2	42 000	91 800	0.20	55
RNCT 3210A5S	32	10	6.35	33.75	27.0	2.5 × 2	42 000	91 800	0.20	55
RNCT 3610A5	36	10	6.35	37	30.0	2.5 × 2	44 900	102 000	0.20	60
RNCT 3610A5S	36	10	6.35	37	30.0	2.5 × 2	44 900	102 000	0.20	60
RNCT 4010A7	40	10	6.35	41.75	35.0	3.5 × 2	63 100	164 000	0.20	65
RNCT 4010A7S	40	10	6.35	41.75	35.0	3.5 × 2	63 100	164 000	0.20	65
RNCT 4512A5	45	12	7.144	46.5	39.0	2.5 × 2	58 500	147 000	0.23	70
RNCT 4512A5S	45	12	7.144	46.5	39.0	2.5 × 2	58 500	147 000	0.23	70
RNCT 5010A7	50	10	6.35	51.75	45.0	3.5 × 2	70 100	205 000	0.20	80
RNCT 5010A7S	50	10	6.35	51.75	45.0	3.5 × 2	70 100	205 000	0.20	80
RNCT 5016A5	50	16	9.525	52	42.0	2.5 × 2	117 000	299 000	0.23	85
RNCT 5016A5S	50	16	9.525	52	42.0	2.5 × 2	117 000	299 000	0.23	85

- Notes**
1. Protruding portion of tube does not interfere with ball nut housing if its dimensions corresponding to U and V are large enough.
 2. Actual screw shaft length may become slightly longer than nominal length L₀ due to manufacturing tolerance.
 3. Only ball nut part numbers ending "S" are equipped with seals. External dimensions of those with seals are the same as those without. In ball nut side view drawing, above the center line there is a seal, and beneath it there is no seal. Seal for those with shaft diameter of 14 mm or less is made of synthetic resin. Seal for those of 16 mm or more is a "Brush" seal.
 4. Nut assembly with arbor and screw shaft are separate at time of delivery.

R series RNCT type

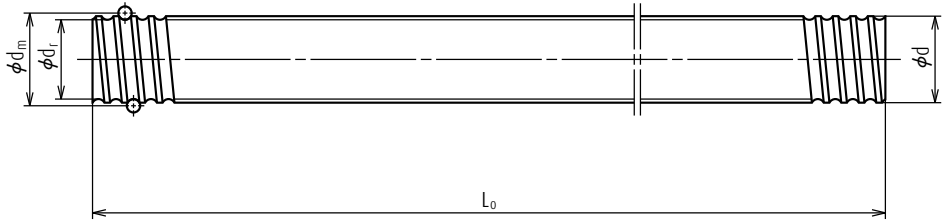

Unit: mm

Ball nut dimensions						Seal dimensions			Arbor		Screw shaft				Shaft mass/m	Internal spatial volume of nut	Standard volume of grease re-plenishing
V-thread		Length				Nut Mass.	Dia-meter	Thick-ness	Outside dia.	Bore	Standard length		Screw shaft No.				
M	B	L_n	U	V	R						L_0						
						(kg)	S	S_w	d_0	d_1				(kg)	(cm ³)	(cm ³)	
M18 × 1	10	38	15	15	7	0.049	-	-	8.1	6.1	400	800	-	RS1003A··	0.50	-	-
M24 × 1	10	43	19	20	7	0.083	-	-	11.5	9.5	500	1 000	-	RS1404A··	1.02	2.7	1.4
M26 × 1.5	10	45	22	21	8	0.15	-	-	11.0	9.0	500	1 000	-	RS1405A··	1.00	3.1	1.6
M32 × 1.5	12	58	27	27	8	0.21	28.5	2.5	13.6	11.6	500	1 000	1 500	RS1808A··	1.60	6.6	3.3
M32 × 1.5	12	58	27	27	8	0.21	28.5	2.5	13.6	11.6	500	1 000	1 500	RS1808A··	1.60	6.6	3.3
M36 × 1.5	12	48	28	27	10	0.28	29.5	2.5	17.0	14.6	500	1 000	2 000	RS2005A··	2.17	4.8	2.4
M36 × 1.5	12	48	28	27	10	0.28	29.5	2.5	17.0	14.6	500	1 000	2 000	RS2005A··	2.17	4.8	2.4
M40 × 1.5	15	69	28	31	10	0.38	34.5	2.5	22.0	19.6	1 000	2 000	2 500	RS2505A··	3.47	8.4	4.2
M40 × 1.5	15	69	28	31	10	0.38	34.5	2.5	22.0	19.6	1 000	2 000	2 500	RS2505A··	3.47	8.4	4.2
M42 × 1.5	15	92	34	37	17	0.49	38.5	2.5	19.0	16.6	1 000	2 000	2 500	RS2510A··	3.13	21	1
M42 × 1.5	15	92	34	37	17	0.49	38.5	2.5	19.0	16.6	1 000	2 000	2 500	RS2510A··	3.13	21	1
M45 × 1.5	15	79	33	34	10	0.68	37.5	2.5	25.0	22.6	1 000	2 000	2 500	RS2806A··	4.47	9.7	4.9
M45 × 1.5	15	79	33	34	10	0.68	37.5	2.5	25.0	22.6	1 000	2 000	2 500	RS2806A··	4.47	9.7	4.9
M50 × 1.5	18	97	39	42	17	0.79	45.5	2.5	27.0	24.6	1 000	2 000	3 000	RS3210A··	5.53	32	16
M50 × 1.5	18	97	39	42	17	0.79	45.5	2.5	27.0	24.6	1 000	2 000	3 000	RS3210A··	5.53	32	16
M55 × 2	18	98	42	46	17	0.97	50.5	3.0	30.0	27.6	1 000	2 000	3 000	RS3610A··	6.91	32	16
M55 × 2	18	98	42	46	17	0.97	50.5	3.0	30.0	27.6	1 000	2 000	3 000	RS3610A··	6.91	32	16
M60 × 2	25	125	44	50	20	1.37	54.5	3.0	35.0	31.8	2 000	3 000	4 000	RS4010A··	8.87	51	26
M60 × 2	25	125	44	50	20	1.37	54.5	3.0	35.0	31.8	2 000	3 000	4 000	RS4010A··	8.87	51	26
M65 × 2	30	124	47	55	20	1.42	60.5	3.0	39.0	35.8	2 000	3 000	4 000	RS4512A··	11.16	60	30
M65 × 2	30	124	47	55	20	1.42	60.5	3.0	39.0	35.8	2 000	3 000	4 000	RS4512A··	11.16	60	30
M75 × 2	40	140	52	59	20	2.41	64.5	3.0	45.0	41.8	2 000	3 000	4 000	RS5010A··	14.15	76	38
M75 × 2	40	140	52	59	20	2.41	64.5	3.0	45.0	41.8	2 000	3 000	4 000	RS5010A··	14.15	76	38
M80 × 2	40	158	57	63	25	3.14	68.5	3.0	42.0	38.8	2 000	3 000	4 000	RS5016A··	13.48	114	57
M80 × 2	40	158	57	63	25	3.14	68.5	3.0	42.0	38.8	2 000	3 000	4 000	RS5016A··	13.48	114	57

5. Value obtained by dividing standard screw shaft length by 100 mm will be entered at end of the part number where marked with ···.


6. Items in stock do not have surface treatment. For details of standard stock products, contact NSK.

7. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.

8. Internal spatial volume of nut and volume of grease to be replenished are values for ball screws with seals. Recommended amount for replenishing is approximately 50% of nut's internal space. For ball screws without seals, apply grease to screw shaft surface or move ball nut by hand while filling them with grease so that grease permeates all areas. See page D16 for details.

Ball screws for transfer equipment


End cap type, Flanged nut (Medium, Hige helix lead)

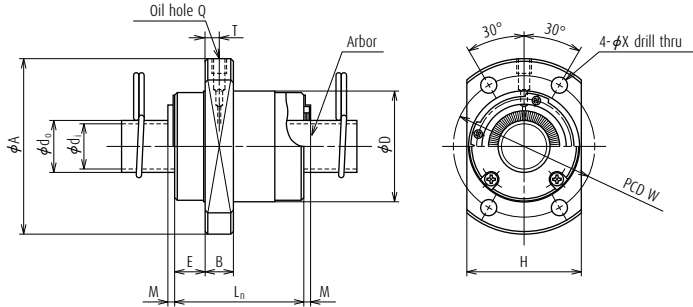

Ball nut No.	Shaft dia. d	Lead l	Ball dia. D _w	Ball circle dia. d _m	Root dia. d _r	Effective balls turns Turns × Circuits	Basic load rating (N)		Axial play Max.	Ball nut dimensions
							Dynamic C _a	Static C _{0a}		Outside dia. D
						RNFL 1212A3	12	12	2.381	12.65
RNFL 1212A6	12	12	2.381	12.65	10.1	1.7 × 4	7 890	13 200	0.10	26
RNFL 1520A3	15	20	3.175	15.5	12.2	1.7 × 2	7 510	12 300	0.10	33
RNFL 1520A3S	15	20	3.175	15.5	12.2	1.7 × 2	7 510	12 300	0.10	33
RNFL 1616A3	16	16	2.778	16.65	13.5	1.7 × 2	6 060	10 300	0.10	32
RNFL 1616A3S	16	16	2.778	16.65	13.5	1.7 × 2	6 060	10 300	0.10	32
RNFL 1616A6	16	16	2.778	16.65	13.5	2.5 × 1	11 000	20 500	0.10	32
RNFL 1616A6S	16	16	2.778	16.65	13.5	2.5 × 2	11 000	20 500	0.10	32
RNFL 2020A3	20	20	3.175	20.75	17.3	1.7 × 2	9 000	16 700	0.10	39
RNFL 2020A3S	20	20	3.175	20.75	17.3	1.7 × 2	9 000	16 700	0.10	39
RNFL 2020A6	20	20	3.175	20.75	17.3	1.7 × 4	16 300	33 400	0.10	39
RNFL 2020A6S	20	20	3.175	20.75	17.3	1.7 × 4	16 300	33 400	0.10	39
RNFL 2525A3	25	25	3.969	26	22.0	1.7 × 2	13 400	26 100	0.12	47
RNFL 2525A3S	25	25	3.969	26	22.0	1.7 × 2	13 400	26 100	0.12	47
RNFL 2525A6	25	25	3.969	26	22.0	1.7 × 4	24 400	52 200	0.12	47
RNFL 2525A6S	25	25	3.969	26	22.0	1.7 × 4	24 400	52 200	0.12	47
RNFL 3232A3	32	32	4.762	33.25	28.0	1.7 × 2	19 600	39 800	0.15	58
RNFL 3232A3S	32	32	4.762	33.25	28.0	1.7 × 2	19 600	39 800	0.15	58
RNFL 3232A6	32	32	4.762	33.25	28.0	1.7 × 4	35 600	79 600	0.15	58
RNFL 3232A6S	32	32	4.762	33.25	28.0	1.7 × 4	35 600	79 600	0.15	58
RNFL 4040A3	40	40	6.35	41.75	35.0	1.7 × 2	31 300	66 800	0.20	73
RNFL 4040A3S	40	40	6.35	41.75	35.0	1.7 × 2	31 300	66 800	0.20	73
RNFL 4040A6	40	40	6.35	41.75	35.0	1.7 × 4	56 900	134 000	0.20	73
RNFL 4040A6S	40	40	6.35	41.75	35.0	1.7 × 4	56 900	134 000	0.23	73
RNFL 5050A3	50	50	7.938	52.25	44.0	1.7 × 2	46 800	104 000	0.25	90
RNFL 5050A3S	50	50	7.938	52.25	44.0	1.7 × 2	46 800	104 000	0.25	90
RNFL 5050A6	50	50	7.938	52.25	44.0	1.7 × 4	85 000	209 000	0.25	90
RNFL 5050A6S	50	50	7.938	52.25	44.0	1.7 × 4	85 000	209 000	0.25	90

- Notes**
1. Actual screw shaft length may become slightly longer than nominal length L_0 due to manufacturing tolerance.
 2. Nut assembly with arbor and screw shaft are separate at time of delivery.
 3. Value obtained by dividing the standard screw shaft length by 100 mm will be entered at end of the part number where marked with . . .
 4. Items in stock do not have surface treatment. For details of standard stock products, contact NSK.

R series RNFL type

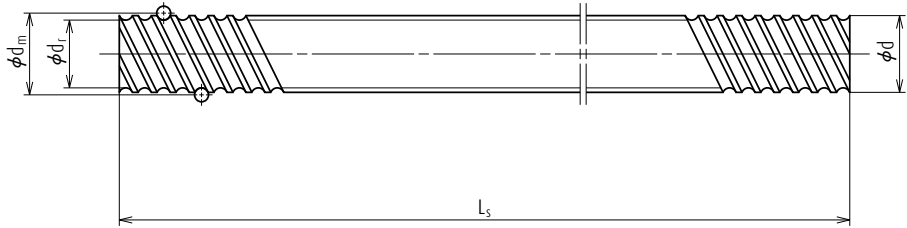

Unit: mm

Ball nut dimensions											Arbor			Screw shaft				Shaft mass/m	Internal spatial volume of nut	Standard volume of grease replenishing
V-thread		Length			Bolt hole		Oil hole		Nut Mass. (kg)	Outside dia. d_0	Bore d_1	Standard length			Screw shaft No.					
A	H	B	E	L_n	M	W	X	Q				T	L_0				(kg)	(cm^3)	(cm^3)	
44	28	6	9	30	-	35	4.5	M3 × 0.5	3.0	0.12	10.1	8.1	400	800	-	RS1212A · ·	0.74	-	-	
44	28	6	9	30	-	35	4.5	M3 × 0.5	3.0	0.12	10.1	8.1	400	800	-	RS1212A · ·	0.74	-	-	
51	35	10	11	45	-	42	4.5	M6 × 1	5.0	0.28	12.2	10.2	500	1 000	1 500	RS1520A · ·	1.15	3.3	1.7	
51	35	10	11	45	3	42	4.5	M6 × 1	5.0	0.28	12.2	10.2	500	1 000	1 500	RS1520A · ·	1.15	3.3	1.7	
53	34	10	10	38	-	42	4.5	M6 × 1	5.0	0.23	13.5	11.5	500	1 000	1 500	RS1616A · ·	1.37	2.6	1.3	
53	34	10	10	38	3	42	4.5	M6 × 1	5.0	0.23	13.5	11.5	500	1 000	1 500	RS1616A · ·	1.37	2.6	1.3	
53	34	10	10	38	-	42	4.5	M6 × 1	5.0	0.23	13.5	11.5	500	1 000	1 500	RS1616A · ·	1.37	2.6	1.3	
53	34	10	10	38	3	42	4.5	M6 × 1	5.0	0.23	13.5	11.5	500	1 000	1 500	RS1616A · ·	1.37	2.6	1.3	
62	41	10	11.5	46	-	50	5.5	M6 × 1	5.0	0.37	17.3	14.9	500	1 000	2 000	RS2020A · ·	2.19	4.4	2.2	
62	41	10	11.5	46	3	50	5.5	M6 × 1	5.0	0.37	17.3	14.9	500	1 000	2 000	RS2020A · ·	2.19	4.4	2.2	
62	41	10	11.5	46	-	50	5.5	M6 × 1	5.0	0.37	17.3	14.9	500	1 000	2 000	RS2020A · ·	2.19	4.9	2.5	
62	41	10	11.5	46	3	50	5.5	M6 × 1	5.0	0.37	17.3	14.9	500	1 000	2 000	RS2020A · ·	2.19	4.9	2.5	
74	49	12	13	55	-	60	6.6	M6 × 1	6.0	0.62	22.0	19.6	1 000	2 000	2 500	RS2806A · ·	3.43	8.2	4.1	
74	49	12	13	55	3	60	6.6	M6 × 1	6.0	0.62	22.0	19.6	1 000	2 000	2 500	RS3210A · ·	3.43	8.2	4.1	
74	49	12	13	55	-	60	6.6	M6 × 1	6.0	0.62	22.0	19.6	1 000	2 000	2 500	RS2525A · ·	3.43	8.9	4.5	
74	49	12	13	55	3	60	6.6	M6 × 1	6.0	0.62	22.0	19.6	1 000	2 000	2 500	RS2525A · ·	3.43	8.9	4.5	
92	60	12	16	70	-	74	9	M6 × 1	5.5	1.10	28.0	25.6	1 000	2 000	3 000	RS3232A · ·	5.71	16	8.0	
92	60	12	16	70	3	74	9	M6 × 1	5.5	1.10	28.0	25.6	1 000	2 000	3 000	RS3232A · ·	5.71	16	8.0	
92	60	12	16	70	-	74	9	M6 × 1	5.5	1.10	28.0	25.6	1 000	2 000	3 000	RS3232A · ·	5.71	17	8.5	
92	60	12	16	70	3	74	9	M6 × 1	5.5	1.10	28.0	25.6	1 000	2 000	3 000	RS3232A · ·	5.71	17	8.5	
114	75	15	19.5	85	-	93	11	M6 × 1	6.5	2.09	35.0	31.8	2 000	3 000	4 000	RS4040A · ·	8.82	32	16	
114	75	15	19.5	85	3.5	93	11	M6 × 1	6.5	2.09	35.0	31.8	2 000	3 000	4 000	RS4040A · ·	8.82	32	16	
114	75	15	19.5	85	-	93	11	M6 × 1	6.5	2.09	35.0	31.8	2 000	3 000	4 000	RS4040A · ·	8.82	33	17	
114	75	15	19.5	85	3.5	93	11	M6 × 1	6.5	2.09	35.0	31.8	2 000	3 000	4 000	RS4040A · ·	8.82	33	17	
135	92	20	21.5	107	-	112	14	M6 × 1	7.0	3.90	44.0	40.8	2 000	3 000	4 000	RS5050A · ·	13.81	64	32	
135	92	20	21.5	107	3.5	112	14	M6 × 1	7.0	3.90	44.0	40.8	2 000	3 000	4 000	RS5050A · ·	13.81	64	32	
135	92	20	21.5	107	-	112	14	M6 × 1	7.0	3.90	44.0	40.8	2 000	3 000	4 000	RS5050A · ·	13.81	68	34	
135	92	20	21.5	107	3.5	112	14	M6 × 1	7.0	3.90	44.0	40.8	2 000	3 000	4 000	RS5050A · ·	13.81	68	34	


5. Length of nut becomes longer (2 × M) for those with "brush" seals.

6. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.

7. Internal spatial volume of nut and volume of grease to be replenished are values for ball screws with seals. Recommended amount for replenishing is approximately 50% of nut's internal space. For ball screws without seals, apply grease to screw shaft surface or move ball nut by hand while filling them with grease so that grease permeates all areas. See page D16 for details.

Ball screws for transfer equipment


End cap type, Flanged nut (Ultra high helix lead)

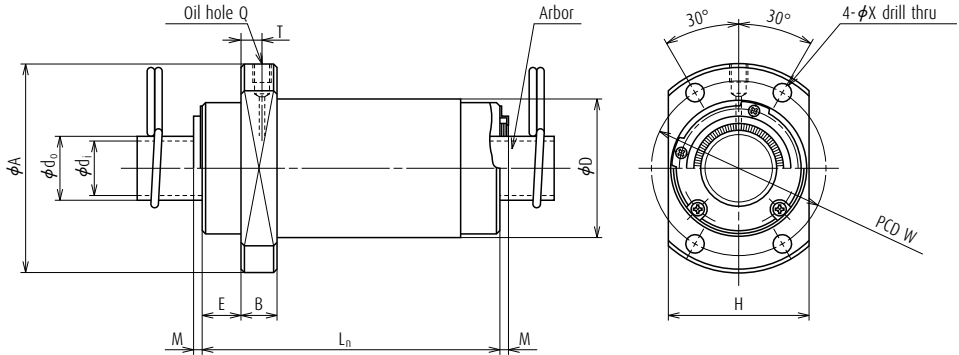

Ball nut No.	Shaft dia. d	Lead l	Ball dia. D _w	Ball circle dia. d _m	Root dia. d _r	Effective balls turns	Basic load rating (N)		Axial play Max.	Ball nut dimensions
							Dynamic C _a	Static C _{0a}		Outside dia.
						Turns × Circuits				
RNFCL 1632A2	16	32	2.778	16.65	13.5	0.7 × 4	4 880	8 330	0.10	32
RNFCL 1632A2S	16	32	2.778	16.65	13.5	0.7 × 4	4 880	8 330	0.10	32
RNFCL 1632A3	16	32	2.778	16.65	13.5	1.7 × 2	5 760	10 300	0.10	32
RNFCL 1632A3S	16	32	2.778	16.65	13.5	1.7 × 2	5 760	10 300	0.10	32
RNFCL 1632A6	16	32	2.778	16.65	13.5	1.7 × 4	10 500	20 500	0.10	32
RNFCL 1632A6S	16	32	2.778	16.65	13.5	1.7 × 4	10 500	20 500	0.10	32
RNFCL 2040A2	20	40	3.175	20.75	17.3	0.7 × 4	7 170	13 200	0.10	38
RNFCL 2040A2S	20	40	3.175	20.75	17.3	0.7 × 4	7 170	13 200	0.10	38
RNFCL 2040A3	20	40	3.175	20.75	17.3	1.7 × 2	8 480	16 500	0.10	38
RNFCL 2040A3S	20	40	3.175	20.75	17.3	1.7 × 2	8 480	16 500	0.10	38
RNFCL 2040A6	20	40	3.175	20.75	17.3	1.7 × 4	15 400	33 100	0.10	38
RNFCL 2040A6S	20	40	3.175	20.75	17.3	1.7 × 4	15 400	33 100	0.10	38
RNFCL 2550A2	25	50	3.969	26	22.0	0.7 × 4	10 700	20 700	0.12	46
RNFCL 2550A2S	25	50	3.969	26	22.0	0.7 × 4	10 700	20 700	0.12	46
RNFCL 2550A3	25	50	3.969	26	22.0	1.7 × 2	12 700	26 500	0.12	46
RNFCL 2550A3S	25	50	3.969	26	22.0	1.7 × 2	12 700	26 500	0.12	46
RNFCL 2550A6	25	50	3.969	26	22.0	1.7 × 4	23 000	53 000	0.12	46
RNFCL 2550A6S	25	50	3.969	26	22.0	1.7 × 4	23 000	53 000	0.12	46
RNFCL 3264A3	32	64	4.762	33.25	28.0	1.7 × 2	17 900	40 200	0.15	58
RNFCL 3264A3S	32	64	4.762	33.25	28.0	1.7 × 2	17 900	40 200	0.15	58
RNFCL 3264A6	32	64	4.762	33.25	28.0	1.7 × 4	32 400	80 300	0.15	58
RNFCL 3264A6S	32	64	4.762	33.25	28.0	1.7 × 4	32 400	80 300	0.15	58
RNFCL 4080A3	40	80	6.350	41.75	35.0	1.7 × 2	29 500	67 900	0.20	73
RNFCL 4080A3S	40	80	6.350	41.75	35.0	1.7 × 2	29 500	67 900	0.20	73
RNFCL 4080A6	40	80	6.350	41.75	35.0	1.7 × 4	53 600	136 000	0.20	73
RNFCL 4080A6S	40	80	6.350	41.75	35.0	1.7 × 4	53 600	136 000	0.20	73

- Notes**
1. Actual screw shaft length may become slightly longer than nominal length L0 due to manufacturing tolerance.
 2. Nut assembly with arbor and screw shaft are separate at time of delivery.
 3. Value obtained by dividing the standard screw shaft length by 100 mm will be entered at end of the part number where marked with . . .
 4. Items in stock do not have surface treatment. For details of standard stock products, contact NSK.

R series RNFL type

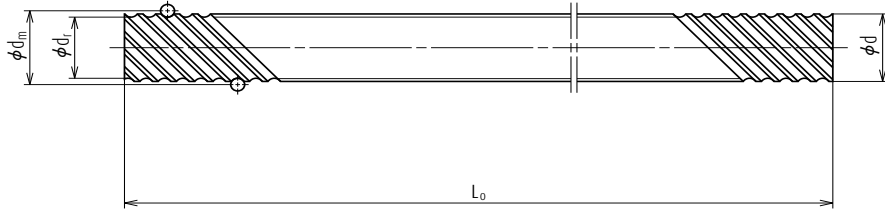

Unit: mm

Ball nut dimensions											Arbor			Screw shaft				Shaft mass/m	Internal spatial volume of nut	Standard volume of grease re-plenishing
V-thread			Length		Bolt hole			Oil hole		Nut Mass.	Outside dia.	Bore	Standard length			Screw shaft No.				
A	H	B	E	L _n	M	W	X	Q	T				(kg)	d ₀	d ₁		L ₀			(kg)
50	34	10	10	34	-	41	4.5	M6 × 1	5.5	0.21	13.5	11.5	500	1 000	1 500	-	RS1632A··	1.34	2.4	1.2
50	34	10	10	34	3	41	4.5	M6 × 1	5.5	0.21	13.5	11.5	500	1 000	1 500	-	RS1632A··	1.34	2.4	1.2
50	34	10	10	66	-	41	4.5	M6 × 1	5.5	0.33	13.5	11.5	500	1 000	1 500	-	RS1632A··	1.34	3.9	2.0
50	34	10	10	66	3	41	4.5	M6 × 1	5.5	0.33	13.5	11.5	500	1 000	1 500	-	RS1632A··	1.34	3.9	2.0
50	34	10	10	66	-	41	4.5	M6 × 1	5.5	0.33	13.5	11.5	500	1 000	1 500	-	RS1632A··	1.34	4.1	2.1
50	34	10	10	66	3	41	4.5	M6 × 1	5.5	0.33	13.5	11.5	500	1 000	1 500	-	RS1632A··	1.34	4.1	2.1
58	40	10	11	41	-	48	5.5	M6 × 1	5.5	0.31	17.3	14.9	500	1 000	1 500	2 000	RS2040A··	2.15	4.1	2.1
58	40	10	11	41	3	48	5.5	M6 × 1	5.5	0.31	17.3	14.9	500	1 000	1 500	2 000	RS2040A··	2.15	4.1	2.1
58	40	10	11	81	-	48	5.5	M6 × 1	5.5	0.53	17.3	14.9	500	1 000	1 500	2 000	RS2040A··	2.15	6.3	3.2
58	40	10	11	81	3	48	5.5	M6 × 1	5.5	0.53	17.3	14.9	500	1 000	1 500	2 000	RS2040A··	2.15	6.3	3.2
58	40	10	11	81	-	48	5.5	M6 × 1	5.5	0.53	17.3	14.9	500	1 000	1 500	2 000	RS2040A··	2.15	7.0	3.5
58	40	10	11	81	3	48	5.5	M6 × 1	5.5	0.53	17.3	14.9	500	1 000	1 500	2 000	RS2040A··	2.15	7.0	3.5
70	48	12	13	50	-	58	6.6	M6 × 1	7.0	0.53	22.0	19.6	1 000	2 000	2 500	-	RS2550A··	3.37	8.4	4.2
70	48	12	13	50	3	58	6.6	M6 × 1	7.0	0.53	22.0	19.6	1 000	2 000	2 500	-	RS2550A··	3.37	8.4	4.2
70	48	12	13	100	-	58	6.6	M6 × 1	7.0	0.91	22.0	19.6	1 000	2 000	2 500	-	RS2550A··	3.37	14	7.0
70	48	12	13	100	3	58	6.6	M6 × 1	7.0	0.91	22.0	19.6	1 000	2 000	2 500	-	RS2550A··	3.37	14	7.0
70	48	12	13	100	-	58	6.6	M6 × 1	7.0	0.91	22.0	19.6	1 000	2 000	2 500	-	RS2550A··	3.37	15	7.5
70	48	12	13	100	3	58	6.6	M6 × 1	7.0	0.91	22.0	19.6	1 000	2 000	2 500	-	RS2550A··	3.37	15	7.5
92	60	12	15.5	126	-	74	9	M6 × 1	7.5	1.76	28.0	25.6	1 000	2 000	3 000	4 000	RS3264A··	5.63	24	12
92	60	12	15.5	126	3	74	9	M6 × 1	7.5	1.76	28.0	25.6	1 000	2 000	3 000	4 000	RS3264A··	5.63	24	12
92	60	12	15.5	126	-	74	9	M6 × 1	7.5	1.76	28.0	25.6	1 000	2 000	3 000	4 000	RS3264A··	5.63	26	13
92	60	12	15.5	126	3	74	9	M6 × 1	7.5	1.76	28.0	25.6	1 000	2 000	3 000	4 000	RS3264A··	5.63	26	13
114	75	15	19	158	-	93	11	M6 × 1	10.0	3.44	35.0	31.8	2 000	3 000	4 000	5 000	RS4080A··	8.69	52	26
114	75	15	19	158	3.5	93	11	M6 × 1	10.0	3.44	35.0	31.8	2 000	3 000	4 000	5 000	RS4080A··	8.69	52	26
114	75	15	19	158	-	93	11	M6 × 1	10.0	3.44	35.0	31.8	2 000	3 000	4 000	5 000	RS4080A··	8.69	55	28
114	75	15	19	158	3.5	93	11	M6 × 1	10.0	3.44	35.0	31.8	2 000	3 000	4 000	5 000	RS4080A··	8.69	55	28


5. Length of nut becomes longer (2 × M) for those with "brush" seals.

6. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.

7. Internal spatial volume of nut and volume of grease to be replenished are values for ball screws with seals. Recommended amount for replenishing is approximately 50% of nut's internal space. For ball screws without seals, apply grease to screw shaft surface or move ball nut by hand while filling them with grease so that grease permeates all areas. See page D16 for details.

Ball screws for transfer equipment


Return tube type, Square nut (Fine, Medium lead)

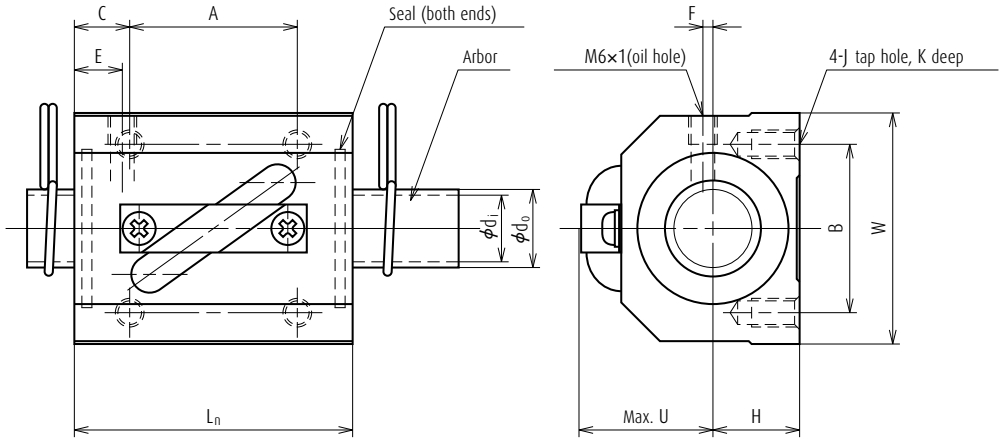

Ball nut No.	Shaft dia. d	Lead l	Ball dia. D _w	Ball circle dia. d _m	Root dia. d _r	Effective balls turns	Basic load rating (N)		Axial play Max.	Ball nut dimensions
							Turns × Circuits	Dynamic C _a		Static C _{0a}
						L _n				
RNSTL 1404A3.5S	14	4	2.778	14.5	11.5	3.5 × 1	6 310	10 800	0.10	38
RNSTL 1405A2.5S	14	5	3.175	14.5	11.0	2.5 × 1	6 170	9 940	0.10	38
RNSTL 1808A3.5S	18	8	4.762	18.5	13.6	3.5 × 1	15 500	26 200	0.15	56
RNSTL 2005A2.5S	20	5	3.175	20.5	17.0	2.5 × 1	7 500	14 200	0.10	38
RNSTL 2010A2.5S	20	10	4.762	21.25	16.2	2.5 × 1	12 700	21 600	0.15	58
RNSTL 2505A2.5S	25	5	3.175	25.5	22.0	2.5 × 1	8 340	18 100	0.10	35
RNSTL 2510A5S	25	10	6.35	26	19.0	2.5 × 2	37 300	69 800	0.20	94
RNSTL 2806A2.5S	28	6	3.175	28.5	25.0	2.5 × 1	8 760	20 200	0.10	42
RNSTL 2806A5S	28	6	3.175	28.5	25.0	2.5 × 2	15 900	40 500	0.10	67
RNSTL 3210A2.5S	32	10	6.35	33.75	27.0	2.5 × 1	23 100	45 900	0.20	64
RNSTL 3210A5S	32	10	6.35	33.75	27.0	2.5 × 2	42 000	91 800	0.20	94
RNSTL 3610A2.5S	36	10	6.35	37	30.0	2.5 × 1	24 700	50 800	0.20	64
RNSTL 3610A5S	36	10	6.35	37	30.0	2.5 × 2	44 900	102 000	0.20	96
RNSTL 4512A5S	45	12	7.144	46.5	39.0	2.5 × 2	58 500	147 000	0.23	115

- Notes**
1. Actual screw shaft length may become slightly longer than nominal length L₀ due to manufacturing tolerance.
 2. Nut assembly with arbor and screw shaft are separate at time of delivery.
 3. Value obtained by dividing the standard screw shaft length by 100 mm will be entered at end of the part number where marked with . . .

R series RNSTL type

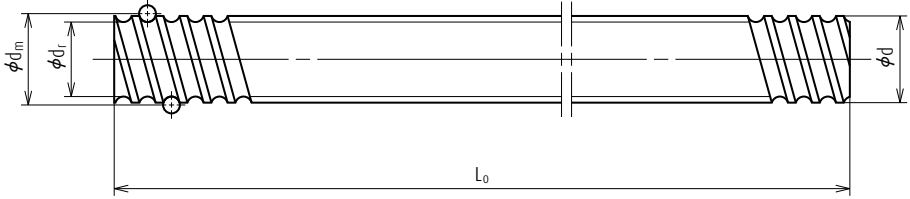

Unit: mm

Ball nut dimensions											Arbor		Screw shaft				Shaft mass/m	Internal spatial volume of nut	Standard volume of grease re-plenishing
Width	Center height	Bolt hole					Oil hole				Nut Mass. (kg)	Outside dia. d_0	Bore d_1	Standard length					
		W	H	A	B	C	J	K	E	F				U	L_0				
34	13	22	26	8	M4	7	7	3	20	0.20	11.5	9.5	500	1 000	-	RS1404A	1.02	1.6	0.8
34	13	22	26	8	M4	7	7	3	21	0.20	11.0	9.0	500	1 000	-	RS1405A	1.00	1.8	0.9
48	17	35	35	10.5	M6	10	8	3	26	0.31	13.6	11.6	500	1 000	1 500	RS1808A	1.60	3.4	1.7
48	17	22	35	8	M6	9	6	2	27	0.24	17.0	14.6	500	1 000	2 000	RS2005A	2.17	2.5	1.3
48	18	35	35	11.5	M6	10	10	2	28	0.35	16.2	13.8	500	1 000	2 000	RS2010A	2.18	6.3	3.2
60	20	22	40	6.5	M8	10	6	0	27	0.31	22.0	19.6	1 000	2 000	2 500	RS2505A	3.47	2.6	1.3
60	23	60	40	17	M8	12	10	0	32	1.32	19.0	16.6	1 000	2 000	2 500	RS2510A	3.13	18	9.0
60	22	18	40	12	M8	12	8	0	32	0.65	25.0	22.6	1 000	2 000	2 500	RS2806A	4.47	3.5	1.8
60	22	40	40	13.5	M8	12	8	0	32	1.04	25.0	22.6	1 000	2 000	2 500	RS2806A	4.47	7.0	3.5
70	26	45	50	9.5	M8	12	10	0	38	1.12	27.0	24.6	1 000	2 000	3 000	RS3210A	5.53	18	9.0
70	26	45	50	17	M8	12	10	0	38	1.75	27.0	24.6	1 000	2 000	3 000	RS3210A	5.53	27	14
86	29	45	60	9.5	M10	16	11	0	41	1.76	30.0	27.6	1 000	2 000	3 000	RS3610A	6.91	18	9.0
86	29	60	60	18	M10	16	11	0	41	2.64	30.0	27.6	1 000	2 000	3 000	RS3610A	6.91	27	14
100	36	75	75	20	M12	20	13	0	46	1.22	39.0	35.8	2 000	3 000	4 000	RS4512A	11.16	47	24

4. Items in stock do not have surface treatment. For details of standard stock products, contact NSK.

5. Seal for those with shaft diameter of 14 mm or less is made of synthetic resin. Seal for those of 16 mm or more is a "Brush" seal.

6. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.

7. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.

Precision Rolled Ball Screws

Compact ball nut heralding in the next generation standard.

Extended maintenance free operation with NSK K1™ lubrication unit and new grease retaining seal. Suitable for high speed and long stroke operation.


A 25% reduction in the ball nut diameter compared to the current series

No backlash, high speed and long stroke operation is possible.

Extended maintenance free operation achieved with **NSK K1™** lubrication unit and new grease retaining seal, thus contributing to total cost reduction.


Compact ball nut

- › Saves assembly space
- › Suitable for rotating ball nut application because of its low inertia and balanced design

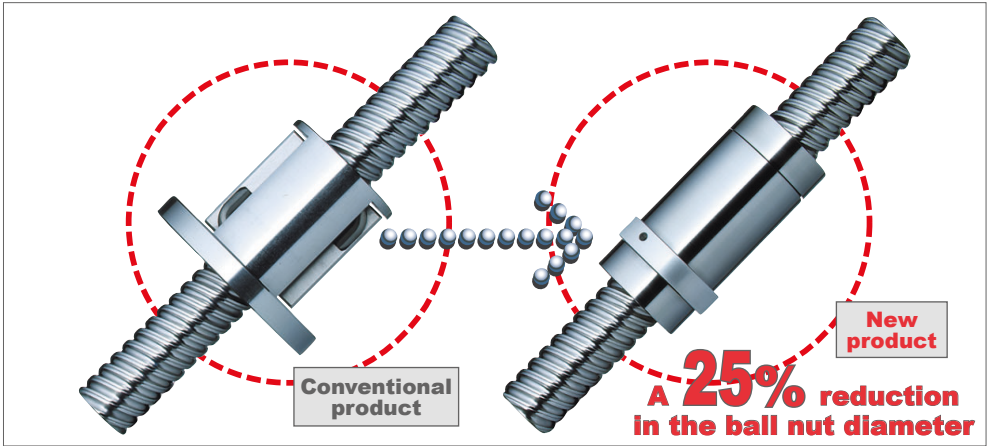

Remarkable improvement in sealing performance (introduction of grease retaining seal)

- › Grease retention capabilities substantially enhanced
- › Assists clean environment maintenance due to minimum grease scattering
- › Superb sealing capabilities in contaminated environments

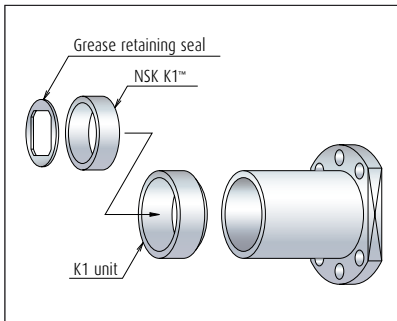

Maintenance free (equipped with NSK K1™ lubrication unit as a standard feature)


NSK K1™ lubrication unit, that is molded from resin and is impregnated with lubrication oil, supplies fresh oil onto the ball rolling surfaces.

In unison with grease it retains the lubricating ability for an extended period of time. Since its first appearance on the market in 1996, it has been widely accepted in many industrial fields.

PR Series/LPR Series

Accuracy Grade

Accuracy grade of Ct7 is available.

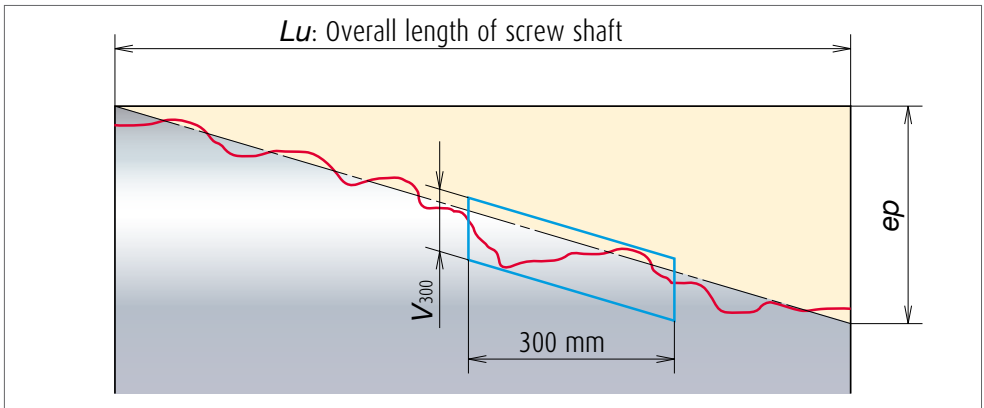

Grade	Ct7
ep: Tolerance on specified travel	$ep = \pm \frac{2 \cdot L_u}{300} \cdot V_{300} \text{ (mm)}$ L_u : Overall length of screw shaft
Travel variation in a 300 mm range (anywhere in useful travel)	0.052 mm

Options

Support unit (sold separately)

NSK provides the support bearing units to accompany the ball screw shafts.


For further details, please refer to the NSK catalog: Precision Machine Components (CAT. No. E3162h).

The bearing journal configurations of the screw shaft are provided on the following pages.

Applications


Woodworking machines, general transporting equipment, feeders, robots, etc.

Precision Rolled Ball Screws

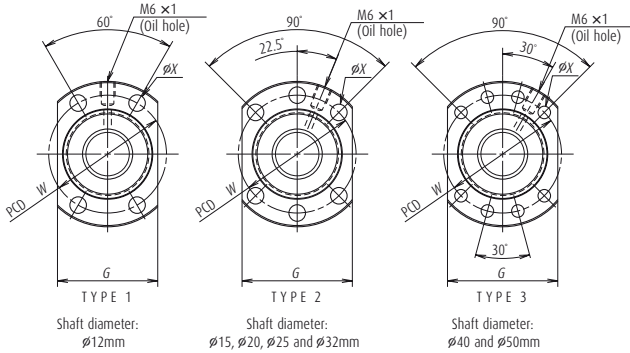

Modell-No.	Shaft dia. d	Lead l	Effective turns of balls	Basic load rating (N)		Dimensions				
				Dynamic load rating C_a	Static load rating C_{0a}	D	A	G	B	L
PR1205	12	5	2.7x1	3200	5860	24	40	26	11	30
PR1505	15	5	2.7x1	5460	10200	28	48	40	11	30
PR1510	15	10	2.7x1	5460	10200	28	48	40	11	43
PR2005	20	5	2.7x1	8790	18500	36	58	44	13	31
PR2010	20	10	2.7x1	8790	18500	36	58	44	13	45
PR2505	25	5	4.7x1	15700	40900	40	62	48	12	42
PR2510	25	10	3.7x1	12800	32300	40	62	48	12	56
PR3210	32	10	3.7x1	19000	51500	50	80	62	12	59
PR3220	32	20	3.7x1	19000	51500	50	80	62	12	98
PR4010	40	10	3.7x1	33800	89900	63	93	70	14	60

Modell-No.	Shaft dia. d	Lead l	Effective turns of balls	Basic load rating (N)		Dimensions				
				Dynamic load rating C_a	Static load rating C_{0a}	D	A	G	B	L
LPR2020	20	20	1.7x2	9890	21600	36	58	44	13	54
LPR2525	25	25	1.7x2	11000	27500	40	62	48	12	63
LPR3232	32	32	1.7x2	16300	43900	50	80	62	14	79
LPR4040	40	40	1.7x2	29000	76200	63	93	70	16	94
LPR5050	50	50	1.7x2	32200	96200	75	110	85	18	115

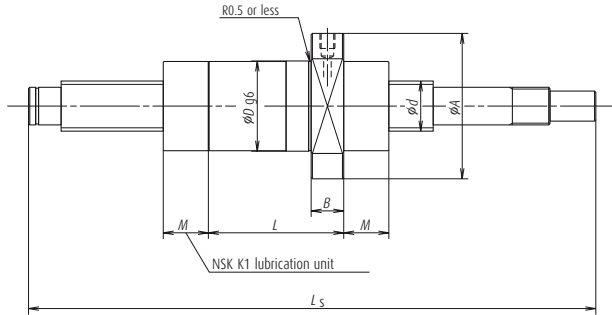

Unit: mm

Dimensions				Maximum screw shaft length	
				Ct7	
Type	W	X	M	Standard	On request
1	32	4.5	(18)	200 - 900	-1500
2	38	5.5	(18)	200 - 1200	-1500
2	38	5.5	(18)	200 - 1200	-1500
2	47	6.6	(18)	300 - 1600	-2000
2	47	6.6	(18)	300 - 1600	-2000
2	51	6.6	(21)	300 - 3200	-
2	51	6.6	(21)	300 - 3200	-
2	65	9	(21)	300 - 3200	-4000
2	65	9	(21)	300 - 3200	-4000
3	78	9	(21)	500 - 3200	-

Unit: mm


Dimensions				Maximum screw shaft length	
				Ct7	
Type	W	X	M	Standard	On request
2	47	6.6	(18)	300 - 1600	-2000
2	51	6.6	(21)	300 - 3200	-
2	65	9	(21)	300 - 3200	-4000
3	78	9	(21)	500 - 4500	-6500
3	93	11	(21)	500 - 4500	-6500

Precision Rolled Ball Screws

1. Precision Rolled Ball Screws PR Series/LPR Series

1.1 Specification number

For ordering, please quote the specification number.

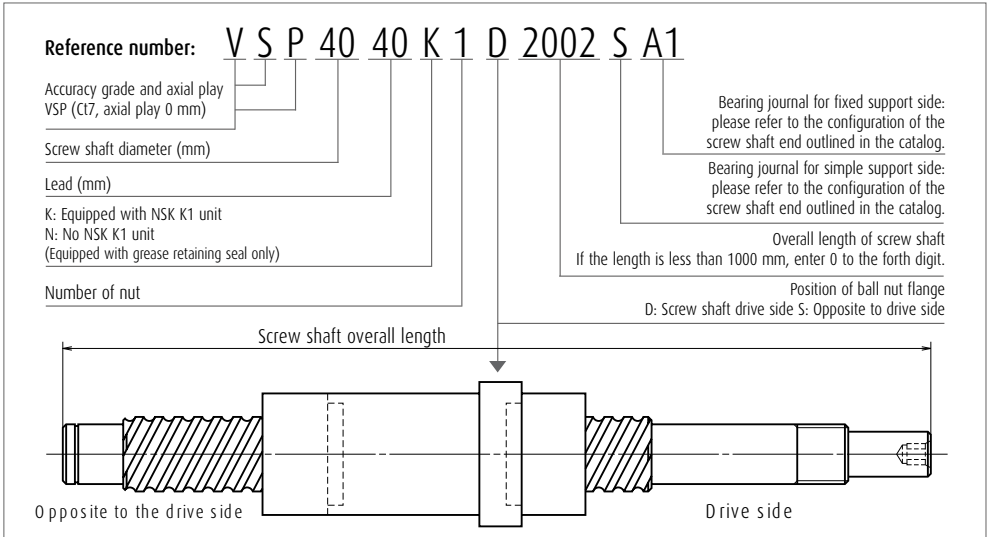

1.2 Permissible rotational speed of precision rolled ball screws

We strongly recommend reviewing the allowable speed of the screw shaft.

The allowable rotational speed of the ball screw shall be checked on the following:

› **Permissible d·n value**


d·n value, which is involved in damaging the ball re-circulation components
(where, d: shaft diameter measured in mm, n: rotational speed measured in min⁻¹)
Preferably $d \cdot n \leq 150\,000$. Please consult with NSK if your ball screw exceeds the limitation.

› **Critical speed**

Critical speed of the screw shaft (caused by the resonance of the screw shaft)
See the chart below. For detailed calculations, please refer to the catalog: Precision Machine Components
(CAT No. E3162h).

Please consult NSK if the maximum rotational speed exceeds 5 000 min⁻¹, even both the critical speed of the screw shaft rotation and the d·n value are in ranges of the allowable limit.

Permissible rotational speed vs. critical speed.

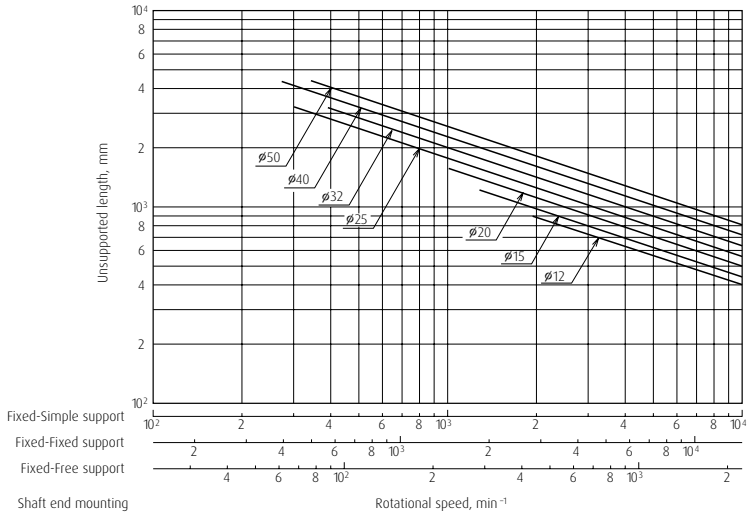

2. Recommendation of Screw Shaft End Configuration

2.1 Opposite to drive side shaft end: P

Unit: mm

Screw shaft Diameter d
12
15
20
25
32
40
50

2.2 Opposite to drive side shaft end: R

Unit: mm

Screw shaft Diameter d	Tap hole	
	Size M	Depth H
12	M3x0.5	9
15	M4x0.7	10
20	M6x1	12
25	M6x1	12
32	M6x1	12
40	M8x1.25	16
50	M8x1.25	16

2.3 Opposite to drive side shaft end: S

Unit: mm

Support unit	Screw shaft	Bearing journal	Snap ring groove			
Reference No.	Diameter d	Diameter d ₃ g6	Length L ₃	Width n Tolerance	Diameter dn Tolerance	Position nL
WBK085-01	12	6	9	0.8 ^{+0.1} ₀	5.7 ⁰ _{-0.06}	6.8
WBK125-01	15	10	12	1.15 ^{+0.14} ₀	9.6 ⁰ _{-0.09}	9.15
WBK155-01	20	15	13	1.15 ^{+0.14} ₀	14.3 ⁰ _{-0.11}	10.15
WBK205-01	25	20	19	1.35 ^{+0.14} ₀	19 ⁰ _{-0.21}	15.35
WBK255-01	32	25	20	1.35 ^{+0.14} ₀	23.9 ⁰ _{-0.21}	16.35
(6206)	40	30	22	1.75 ^{+0.14} ₀	28.6 ⁰ _{-0.21}	17.75
(6207)	50	35	25	1.75 ^{+0.14} ₀	33 ⁰ _{-0.21}	18.75

(): Reference number of bearing

Precision Rolled Ball Screws

2.4 Opposite to drive side shaft end: T

Unit: mm

Support unit	Screw shaft	Bearing journal		Snap ring groove			Tap hole	
Reference No.	Diameter d	Diameter d_3 g6	Length L_3	Width n Tolerance	Diameter d_n Tolerance	Position nL	Size M	Depth H
WBK08S-01	12	6	9	$0.8^{+0.1}_0$	$5.7^{0}_{-0.06}$	6.8	-	-
WBK12S-01	15	10	12	$1.15^{+0.14}_0$	$9.6^{0}_{-0.09}$	9.15	M3x0.5	9
WBK15S-01	20	15	13	$1.15^{+0.14}_0$	$14.3^{0}_{-0.11}$	10.15	M5x0.8	10
WBK20S-01	25	20	19	$1.35^{+0.14}_0$	$19^{0}_{-0.21}$	15.35	M6x1	12
WBK25S-01	32	25	20	$1.35^{+0.14}_0$	$23.9^{0}_{-0.21}$	16.35	M6x1	12
(6206)	40	30	22	$1.75^{+0.14}_0$	$28.6^{0}_{-0.21}$	17.75	M8x1.25	16
(6207)	50	35	25	$1.75^{+0.14}_0$	$33^{0}_{-0.21}$	18.75	M8x1.25	16

(): Reference number of bearing

2.5 Opposite to drive side shaft end: U


Unit: mm

Support unit		Spacer	Screw shaft	Bearing journal	
Reference No.	Reference No.	Reference No.	Diameter d	Diameter d_3 g6	Length L_3
WBK08-01A	WBK08-11	WBK08K	12	8	32
WBK12-01A	WBK12-11	WBK12K	15	12	35
WBK15-01A	WBK15-11	WBK15K	20	15	50
WBK20-01	WBK20-11	WBK20K	25	20	64
WBK25-01	WBK25-11	WBK25K	32	25	76
WBK30DF-31		-	40	30	89
WBK35DF-31		-	50	35	92

2.6 Opposite to drive side shaft end: V


Unit: mm

Support unit		Screw shaft	Bearing journal	
Reference No.	Reference No.	Diameter d	Diameter d_3 g6	Length L_3
WBK08-01A	WBK08-11	12	8	32
WBK12-01A	WBK12-11	15	12	35
WBK15-01A	WBK15-11	20	15	50
WBK20-01	WBK20-11	25	20	64
WBK25-01	WBK25-11	32	25	76
WBK30DF-31		40	30	89
WBK35DF-31		50	35	92




Unit: mm

Lock nut thread		Hexagon hole	
Nominal m_3	Length mL_3	Width across the flats $B^{+0.2}_0$	Depth H
M8x1	9	-	-
M12x1	10	4	6
M15x1	15	5	7
M20x1	16	6	8
M25x1.5	20	8	10
M30x1.5	26	10	12
M35x1.5	30	12	14

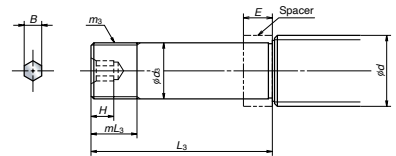

Unit: mm

Lock nut thread		Key seat			
Nominal m_3	Length mL_3	Width K N9	Position P	Depth $Y^{+0.1}_0$	Length F
M8x1	9	2	3	1.2	14
M12x1	10	4	3	2.5	20
M15x1	15	5	3	3	25
M20x1	16	6	4	3.5	30
M25x1.5	20	8	4	4	40
M30x1.5	26	8	5	4	40
M35x1.5	30	10	5	5	50

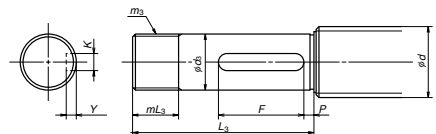

Precision Rolled Ball Screws

2.7 Drive side shaft end: A1

Unit: mm

Support unit		Spacer	Screw shaft	Bearing journal		Lock nut thread	
Reference No.		Reference No.	Diameter d	Diameter d_1 g6	Length L_1	Nominal m_1	Length mL_1
WBK08-01A	WBK08-11	WBK08K	12	8	32	M8x1	9
WBK12-01A	WBK12-11	WBK12K	15	12	35	M12x1	10
WBK15-01A	WBK15-11	WBK15K	20	15	50	M15x1	15
WBK20-01	WBK20-11	WBK20K	25	20	64	M20x1	16
WBK25-01	WBK25-11	WBK25K	32	25	76	M25x1.5	20
WBK30DF-31		-	40	30	89	M30x1.5	26
WBK35DF-31		-	50	35	92	M35x1.5	30

2.8 Drive side shaft end: A3

Unit: mm

Support unit		Spacer	Screw shaft	Bearing journal		Lock nut thread		Drive section		D	
Reference No.		Reference No.	Diameter d	Diameter d_1 g6	Length L_1	Nominal m_1	Length mL_1	Diameter d_2 h7	Length L_2	Position P	Depth W
WBK08-01A	WBK08-11	WBK08K	12	8	32	M8x1	9	6	10	2	5.5
WBK12-01A	WBK12-11	WBK12K	15	12	35	M12x1	10	10	15	3	9
WBK15-01A	WBK15-11	WBK15K	20	15	50	M15x1	15	12	20	3	11
WBK20-01	WBK20-11	WBK20K	25	20	64	M20x1	16	15	27	4	14
WBK25-01	WBK25-11	WBK25K	32	25	76	M25x1.5	20	20	33	4	19
WBK30DF-31		-	40	30	89	M30x1.5	26	25	61	5	24
WBK35DF-31		-	50	35	92	M35x1.5	30	30	63	5	29

2.9 Drive side shaft end: A4


Unit: mm

Support unit		Spacer	Screw shaft	Bearing journal		Lock nut thread		Drive section		Key seat		
Reference No.		Reference No.	Diameter d	Diameter d_1 g6	Length L_1	Nominal m_1	Length mL_1	Diameter d_2 h7	Length L_2	Width K N9	Position P	Depth $Y^{+0.1}_0$
WBK08-01A	WBK08-11	WBK08K	12	8	32	M8x1	9	6	10	-	-	-
WBK12-01A	WBK12-11	WBK12K	15	12	35	M12x1	10	10	15	2	3	1.2
WBK15-01A	WBK15-11	WBK15K	20	15	50	M15x1	15	12	20	4	3	2.5
WBK20-01	WBK20-11	WBK20K	25	20	64	M20x1	16	15	27	5	4	3
WBK25-01	WBK25-11	WBK25K	32	25	76	M25x1.5	20	20	33	6	4	3.5
WBK30DF-31		-	40	30	89	M30x1.5	26	25	61	8	5	4
WBK35DF-31		-	50	35	92	M35x1.5	30	30	63	8	5	4

PR Series/LPR Series


Unit: mm

Drive section		Hexagon hole	
Diameter d_2 h_7	Length L_2	Width across the flats $B^{+0.2}_0$	Depth H
6	10	-	-
10	15	4	6
12	20	5	7
15	27	6	8
20	33	8	10
25	61	10	12
30	63	12	14

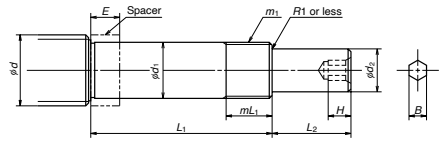


Unit: mm

Wrench flats		
Width across the flats U Tolerance	Position T	Length S
10 $^{0}_{-0.2}$	4	5.5
12 $^{0}_{-0.25}$	6	6.5
17 $^{0}_{-0.25}$	6	8.5
22 $^{0}_{-0.3}$	10	11
32 $^{0}_{-0.3}$	10	15
36 $^{0}_{-0.3}$	16	16
41 $^{0}_{-0.3}$	16	18

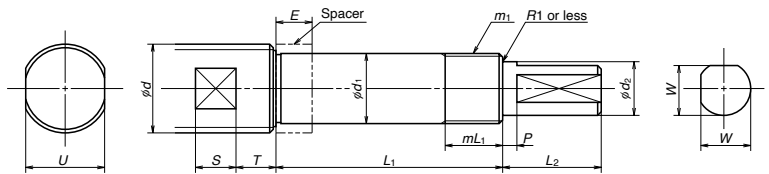

Unit: mm

Wrench flats		
Width across the flats U Tolerance	Position T	Length S
10 $^{0}_{-0.2}$	4	5.5
12 $^{0}_{-0.25}$	6	6.5
17 $^{0}_{-0.25}$	6	8.5
22 $^{0}_{-0.3}$	10	11
32 $^{0}_{-0.3}$	10	15
36 $^{0}_{-0.3}$	16	16
41 $^{0}_{-0.3}$	16	18

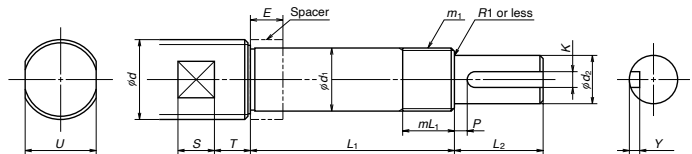

Precision Rolled Ball Screws

2.10 Drive side shaft end: A5


Unit: mm

Support unit		Spacer	Screw shaft	Bearing journal		Lock nut thread		Drive section	
Reference No.		Reference No.	Diameter d	Diameter d_1 g6	Length L_1	Nominal m_1	Length mL_1	Diameter d_2 h7	Length L_2
WBK08-01A	WBK08-11	WBK08K	12	8	32	M8x1	9	6	10
WBK12-01A	WBK12-11	WBK12K	15	12	35	M12x1	10	10	15
WBK15-01A	WBK15-11	WBK15K	20	15	50	M15x1	15	12	20
WBK20-01	WBK20-11	WBK20K	25	20	64	M20x1	16	15	27
WBK25-01	WBK25-11	WBK25K	32	25	76	M25x1.5	20	20	33
WBK30DF-31		-	40	30	89	M30x1.5	26	25	61
WBK35DF-31		-	50	35	92	M35x1.5	30	30	63

2.11 Spacer


Unit: mm

Reference No.	Bearing journal	Spacer dimensions		
	Diameter d	Bore d_1	Diameter D	Width E
WBK08K	8	8	11.5	5.5
WBK12K	12	12	14.5	5.5
WBK15K	15	15	19.5	10
WBK20K	20	20	25.5	11
WBK25K	25	25	32	14



Unit: mm

Key seat				Wrench flats	
Width <i>K N9</i>	Position <i>P</i>	Depth $Y^{+0.1}_0$	Length <i>F</i>	Width across the flats $B^{+0.2}_0$	Depth <i>H</i>
-	-	-	-	-	-
4	3	2.5	7	5	6
5	4	3	10	6	8
6	4	3.5	15	8	10
8	5	4	40	10	12
8	5	4	40	12	14

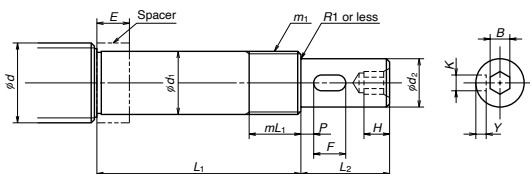

Ball Screws – Interchangeable


NSK developed the 'Ball screws – interchangeable' series based on many years of experience and with the help of the most advanced technology. The series complies 100% with DIN 69051. The spindle nut and spindle shaft are available separately and are universally exchangeable. The new 'Ball screws – interchangeable' series features an extreme reduction in noise and can be used in high-speed applications. As an option, the NSK K1 lubrication unit, proven in use over many years, can be integrated.

Features

- › Nut and shaft are completely interchangeable
- › 100% DIN-compliant
- › High-speed/low-noise nut design (d-n = 160.000, max 5000 1/min)

Remarkable improvement in sealing performance (introduction of grease-retaining seal)

- › Grease retention capabilities substantially enhanced
- › Assists clean environment maintenance due to minimum grease scattering
- › Superb sealing capabilities in contaminated environments

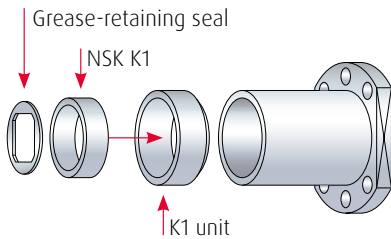


Maintenance-free long-term with NSK K1 lubrication unit (sold separately)

- › NSK K1 is a lubrication unit which combines oil and resin in a single unit
- › The porous resin contains a large amount of lubrication oil
- › The NSK K1 contacts the shaft raceway, giving a constant supply of fresh oil which seeps from the resin
- › NSK K1 lubrication has been accepted in many industrial fields since 1996

Accuracy grade


- › An accuracy grade of Ct7 is available

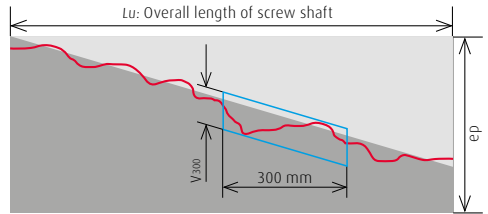

ep: Tolerance on specified travel	$ep = \pm \frac{Lu}{300} \cdot V_{300}$ (mm) Lu: Overall length of screw shaft
Travel variation in a 300 mm range (anywhere in useful travel)	0.052 mm
Clearance	0.020 mm to light preload

Options

- › NSK provides the support bearing units which go with the ball screw shafts, which are sold separately.
- › Possible bearing journal configurations of the shaft are provided on the following pages as suggestion



Ball Screws – Interchangeable




New Product

Please use the following designation, if you order a **shaft**:

Reference No.:


F C S 15 10 S A 1 4 8 6

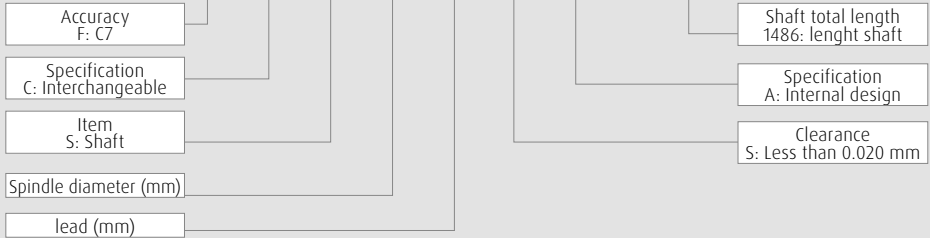

Please use the following designation, if you order a **nut**:


Reference No.:

F C N 15 10 S D 3

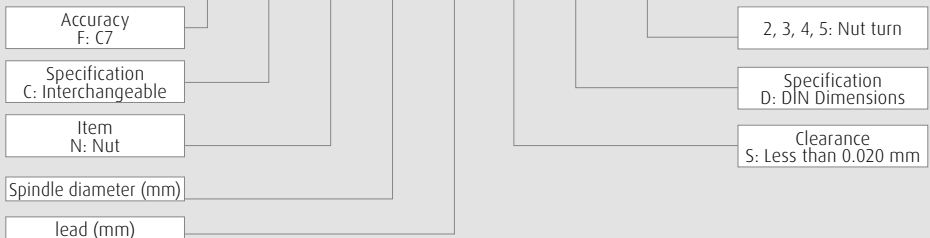


Ball Screws – Interchangeable


Ball nut dimensions



Shaft diameter:
ø12 mm



Shaft diameter:
ø15, ø20 ø25 and ø32 mm




Shaft diameter:
ø40 and ø50 mm

Specification number

Model No.	Shaft OD [mm]	lead [mm]	Turns	Ca [N]	Coa [N]	D [mm]	A [mm]	G [mm]	B [mm]	L [mm]
FCN1205	12	5	3	3 750	5 810	24	40	26	11	30
FCN1210	12	10	3	3 750	5 780	24	40	26	11	43
FCN1505	15	5	3	6 410	10 100	28	48	40	11	30
FCN1510	15	10	3	6 530	10 200	28	48	40	11	43
FCN1520	15	20	2	5 660	8 700	32	52	40	11	54
FCN2005	20	5	3	10 400	18 500	36	58	44	13	31
FCN2010	20	10	3	10 200	18 600	36	58	44	13	45
FCN2020	20	20	2	6 790	11 800	36	58	44	13	54
FCN2505	25	5	5	18 500	40 900	40	62	48	12	42
FCN2510	25	10	4	15 000	32 400	40	62	48	12	56
FCN2520	25	20	2	7 650	14 800	40	62	48	12	54
FCN2525	25	25	2	7 490	14 600	40	62	48	12	63
FCN3205	32	5	4	16 800	41 700	50	80	62	12	41
FCN3210	32	10	4	23 000	51 300	50	80	62	12	59
FCN3220	32	20	4	22 600	51 100	50	80	62	12	98
FCN4010	40	10	4	39 800	90 700	63	93	70	14	60


Recommended screw shaft end configuration

Basic 1



to use WBK							
Screw shaft d	lead l	Support unit		Bearing journal		Lock nut thread	
		fix side	support side	d ₁ g6	L ₁	m ₁	mL ₁
12	all	WBK08-01A	WBK08-11	8	27	M8x1	9
15	all	WBK12-01A	WBK12-11	12	30	M12x1	10
20	all	WBK15-01A	WBK15-11	15	40	M15x1	15
25	all	WBK20-01	WBK20-11	20	53	M20x1	16
32	all	WBK25-01	WBK25-11	25	89	M25x1.5	20
40	10	WBK30DFD-31H	6206	30	104	M30x1.5	30

Basic 2

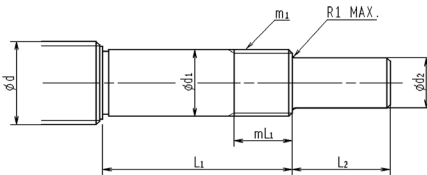

to use WBK							
Screw shaft d	lead l	Support unit		Bearing journal		Lock nut thread	
		fix side	support side	d ₁ g6	L ₁	m ₁	mL ₁
12	all	WBK08-01A	WBK08-11	8	27	M8x1	9
15	all	WBK12-01A	WBK12-11	12	30	M12x1	10
20	all	WBK15-01A	WBK15-11	15	40	M15x1	15
25	all	WBK20-01	WBK20-11	20	53	M20x1	16
32	all	WBK25-01	WBK25-11	25	89	M25x1.5	20
40	10	WBK30DFD-31H	6206	30	104	M30x1.5	30


Recommended screw shaft end configuration

to use BSBD						
Screw shaft d	lead l	Bearing journal			Lock nut thread	
		d ₁ g6	L ₁ (single BSF/BSN)	L ₁ (DT BSF/BSN)	m ₁	mL ₁
12	all	-	-	-	-	-
15	all	12	33	-	M12x1	10
20	all	15	38	-	M15x1	15
25	all	20	42	-	M20x1	16
32	all	25	46	-	M25x1.5	20
40	10	30	52	80	M30x1.5	26

to use BSBD								
Screw shaft d	lead l	Bearing journal			Lock nut thread		Drive section	
		d ₁ g6	L ₁ (single BSF/BSN)	L ₁ (DT BSF/BSN)	m ₁	mL ₁	d ₂ h7	L ₂
12	all	-	-	-	-	-	-	-
15	all	12	33	-	M12x1	10	10	15
20	all	15	38	-	M15x1	15	12	20
25	all	20	42	-	M20x1	16	15	27
32	all	25	46	-	M25x1.5	20	20	33
40	10	30	52	80	M30x1.5	26	25	61

Recommended screw shaft end configuration

Basic 3



Screw shaft
d

12

15


20

25

32

40


Basic 4



Screw shaft d	Snap ring groove			Bearing journal	
	n	d _n	nL	d ₃ g6	L ₃
12	0.8 ^{+0.1} ₀	5.7 ⁰ _{-0.06}	6.8	6	9
15	1.15 ^{+0.14} ₀	9.6 ⁰ _{-0.09}	9.15	10	12
20	1.15 ^{+0.14} ₀	14.3 ⁰ _{-0.11}	10.15	15	13
25	1.35 ^{+0.14} ₀	19 ⁰ _{-0.21}	15.35	20	19
32	1.35 ^{+0.14} ₀	23.9 ⁰ _{-0.21}	16.35	25	20
40	1.75 ^{+0.14} ₀	28.6 ⁰ _{-0.21}	17.75	30	22


Recommended screw shaft end configuration

Option 1




d	M	H
12	M3x0.5	9
15	M4x0.7	10
20	M6x1	12
25	M6x1	12
32	M6x1	12
40	M8x1.25	16

Option 2



Screw shaft d	Hexagon hole	
	$B^{+0.2}_0$	H
12	-	-
15	4	6
20	5	7
25	6	8
32	8	10
40	10	12


Option 3

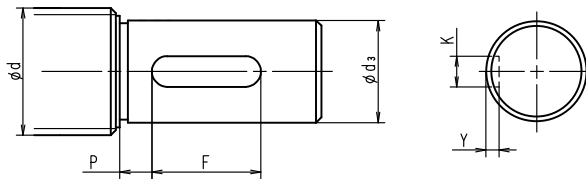

Screw shaft d	Key way				
	K N9	$P^{+0.1}_0$	Y	F	d_3 g6
12	-	-	-	-	-
15	4	3	2.5	20	12
20	5	3	3	25	15
25	6	4	3.5	30	20
32	8	4	4	40	25
40	8	5	4	40	30


Recommended screw shaft end configuration

Option 4



Screw shaft d	Bearing journal d ₃ g6	Snap ring groove			Tap hole		L ₃
		n	dn	nL	M	H	
12	6	0.8 ^{+0.1} ₀	5.7 ⁰ _{-0.06}	6.8	M3x0.5	9	9
15	10	1.15 ^{+0.14} ₀	9.6 ⁰ _{-0.09}	9.15	M4x0.7	10	12
20	15	1.15 ^{+0.14} ₀	14.3 ⁰ _{-0.11}	10.15	M6x1	12	13
25	20	1.35 ^{+0.14} ₀	19 ⁰ _{-0.21}	15.35	M6x1	12	19
32	25	1.35 ^{+0.14} ₀	23.9 ⁰ _{-0.21}	16.35	M6x1	12	20
40	30	1.75 ^{+0.14} ₀	28.6 ⁰ _{-0.21}	17.75	M8x1.25	16	22

Option 5



Screw shaft d	Bearing Journal d ₃ g6	Snap ring groove			Hexagon hole		L ₃
		n	dn	nL	B ^{+0.2} ₀	H	
12	6	0.8 ^{+0.1} ₀	5.7 ⁰ _{-0.06}	6.8	-	-	9
15	10	1.15 ^{+0.14} ₀	9.6 ⁰ _{-0.09}	9.15	4	6	12
20	15	1.15 ^{+0.14} ₀	14.3 ⁰ _{-0.11}	10.15	5	7	13
25	20	1.35 ^{+0.14} ₀	19 ⁰ _{-0.21}	15.35	6	8	19
32	25	1.35 ^{+0.14} ₀	23.9 ⁰ _{-0.21}	16.35	8	10	20
40	30	1.75 ^{+0.14} ₀	28.6 ⁰ _{-0.21}	17.75	10	12	22

Recommended screw shaft end configuration

Screw shaft end configuration service

It is possible to have customised modifications of our ball screws implemented quickly and reliably by our service.

The following services can be provided as an alternative:

- › Modification of ball screws based on a desired configuration
- › End machining
- › Change in preload
- › Fitting of wipers and lubrication systems
- › Fit holes
- › Tap holes
- › Coatings
- › Special packing
- › Production even in the smallest lot sizes of 1-50 units
- › Individual and special production

Please request these optional services from NSK separately.






Accessories

B-3-1.7 Accessories

Accessories to use with NSK ball screws are available.

Table 1 Support unit categories

Application		Shape	Support side	Bearing in use	Bearing bore, Bearing seat diameter	Page
Small equipment, light load	Square	WBK**S-01* 	Fixed support side	Angular contact ball bearing	$\phi 4 - \phi 25$	B417 -
Small equipment, light load	Square	WBK**S-01* 	Simple support side	Deep groove ball bearing	$\phi 6 - \phi 25$	B421 -
Small equipment, light load	Square	WBK**SF-01 	Simple support side	Deep groove ball bearing	$\phi 12, \phi 15$ (exclusive for VFA type)	B421

1. Classification

Ball screw support units are classified into categories by their shape (Table 1). Select the type that best suits your particular needs.

2. Features

› Bearings and seals

On the fixed support side, the angular contact ball bearing is used. It has great rigidity and low friction torque, which match the rigidity of the ball screw. The thrust angular contact ball bearing with high precision and great rigidity is another choice for the fixed support side.




An oil seal is installed to the fixed support side used with an angular contact ball bearing. Fine clearance may occur with this seal.

A deep-groove ball bearing with a shield on both sides is used on the simple support side.

› Lock nut is provided.


A lock nut with fine grade finish is provided to fix the bearing with high precision.

The lock nuts are designed to be difficult to loosen, but they can still loosen if subjected to strong mechanical vibration. If necessary, this should be prevented by applying threadlocking adhesive or taking similar precautions.


Application		Shape	Support side	Bearing in use	Bearing bore, Bearing seat diameter	Page
Small equipment, light load	Round	WBK**R-11 (Support kit) 	Fixed support side	Deep groove ball bearing (arranged to have angular contact)	$\phi 4, \phi 6$ (exclusive for RMA and RMS types)	B423
Small equipment, light load	Round	WBK**-11* 	Fixed support side	Angular contact ball bearing	$\phi 4 - \phi 25$	B419 -
Machine tools, high speed, heavy load	Round	WBK**DF ^o -31H 	Fixed support side	Thrust angular contact ball bearing	$\phi 17 - \phi 40$	B429 -

Accessories

3. Reference number coding

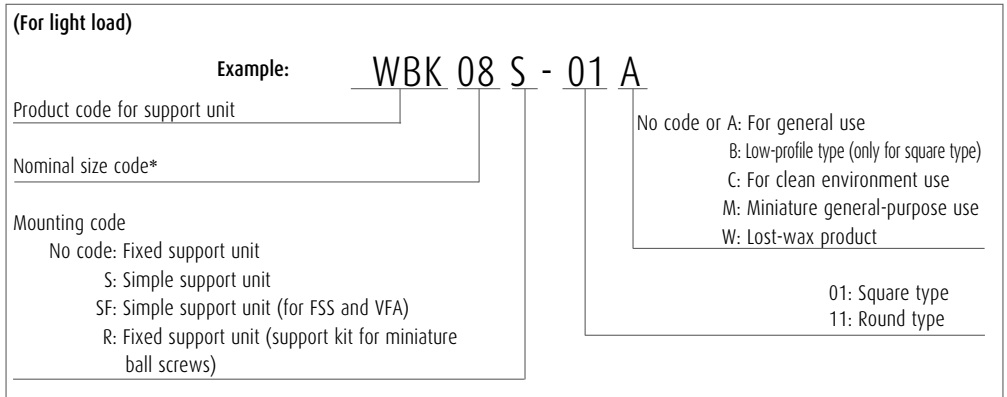

*) In case of simple support unit, please note that the nominal size code of 12 or less does not strictly represent internal bore of bearing in millimeters. Please refer to the dimensional table for internal bore of bearing.

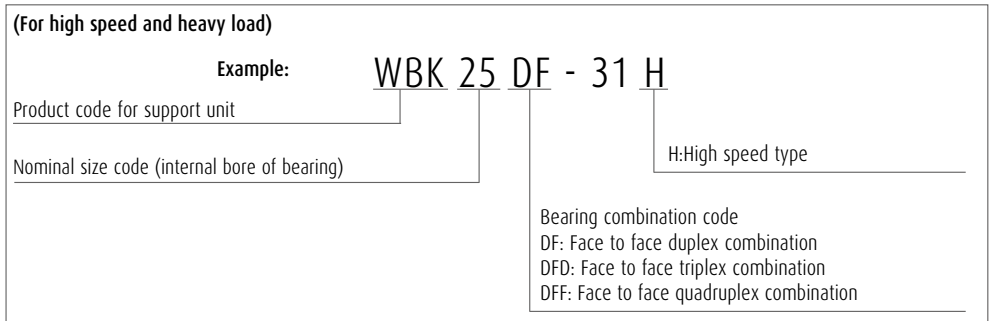

(1) Support Units for Light Load and Small Equipment

Support units for light load and small equipment provide both fixed and support side bearing assemblies to support screw shafts. They provide all required parts such as bearing locknuts so that you can mount them directly to NSK standard ball screws, of which shaft ends are machined. Please refer to the dimensions listed on the dimension table for the configuration of standard screw shaft ends for NSK standard ball screws with blank shaft ends. For ball screws for transfer equipment, you require optional spacers when mounting fixed support side support units.

(a) Features

- › Prompt delivery
Support units are standard products.
- › Best selection of bearings for your application
General use support units for fixed support side are equipped with highly rigid angular contact ball bearings that have been assembled with proper preload, and packed with the appropriate volume of grease. On the other hand, clean support units for fixed support side uses low dust emission grease, and low torque special bearings. Sealed deep groove ball bearings are used for simple support side units for both general and clean environment use.


Accessories

> Accessories

Support units provide everything necessary for mounting ball screws to machines.

(Please refer to the table below.)

* Do not disassemble fixed support side units as they are equipped with bearings and oil seals.

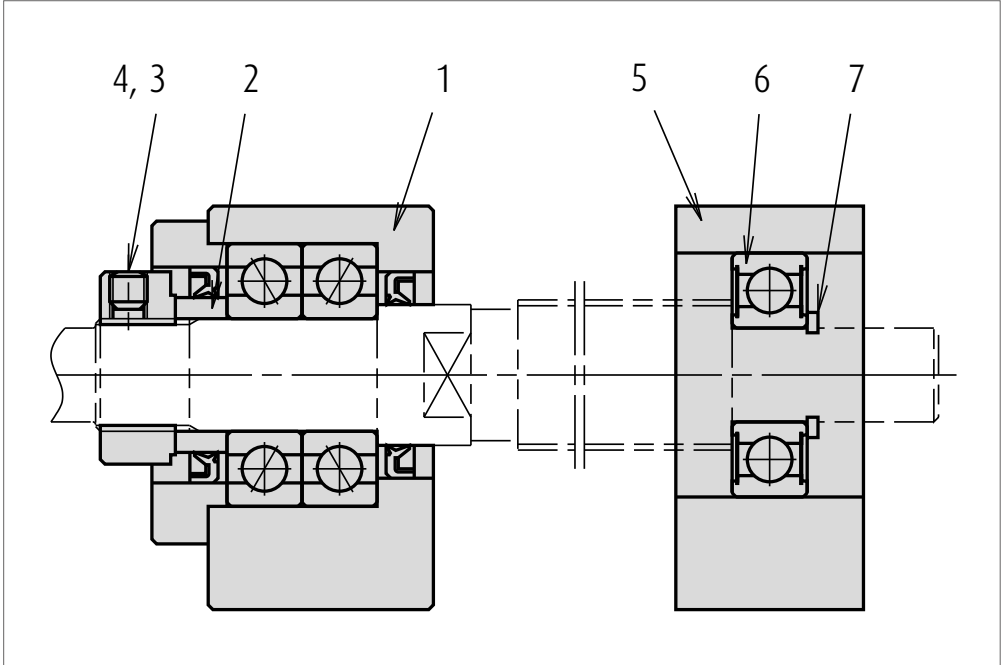

> Antirust treatment

The table on the right shows the surface treatment for the bearing housing, and material of small parts.



Fixed support side		Simple support side	
Part No.	Name of parts	Part No.	Name of parts
1	Bearing housing	5	Bearing housing
2	Spacer	6	Bearing
3	Locknut	7	Snap ring
4	Set screw with brass pad		

	General support unit
Bearings and grease	Angular contact ball bearings, PS2
Surface treatment	Black oxide
Screws and snap rings	Standard material





(b) Features of Clean Support Unit

- > Outstanding low dust emission
Clean support unit uses "NSK clean grease LG2" which has a proven feature of low dust emission. It reduces dust emission to 1/10 of general support units.
- > Low torque
It features low torque characteristics because of special bearings. (50% lower than general support unit.)
- > High antirust specification
Low temperature chrome plating is applied to bearing housings, retaining plates, locknuts and spacers to improve antirust properties. Moreover, bolts and snap rings are made of stainless steel.
The table below shows the surface treatment of the bearing housing and material of small parts.

	Clean support unit
Bearing • grease	Special bearings, LG2
Surface treatment	Low temperature chrome plating
Set screw and snap ring material	Stainless steel

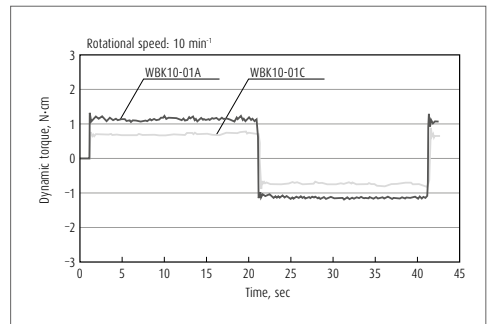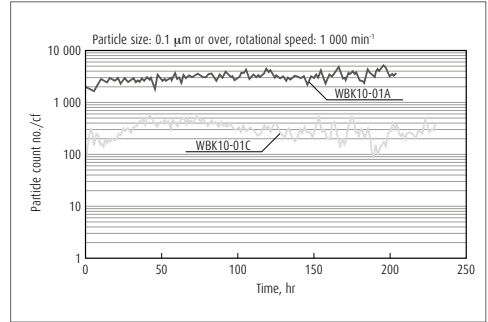

Support Units for Light Load and Small Equipment

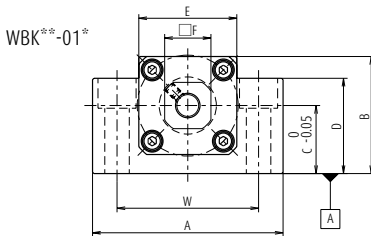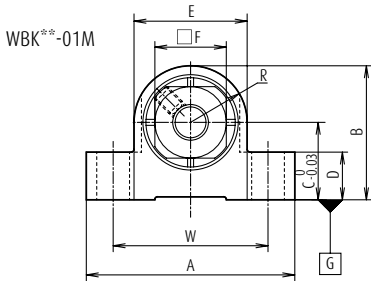



Fixed support side support unit (square type)

Reference No.	Use	d ₁	A	B	C	D	E	F	L	J	K	R
WBK04-01M	General	4	27	17	10	6	14	10	—	14	5.5	7
WBK06-01M	General	6	35	22.5	13	8	19	12	—	17	7.5	9.5
WBK06-01A*1	General	6	42	25	13	20	18	12	20	20	5.5	—
WBK08-01A*1	General	8	52	32	17	26	25	14	23	23	7	—
WBK08-01B	Low type	8	62	31	15.5	31	—	14	21.5	25.5	4.5	—
WBK08-01C*1	Clean environment	8	52	32	17	26	25	14	23	23	7	—
WBK10-01A	General	10	70	43	25	35	36	17	24	30	5.5	—
WBK10-01B	Low type	10	70	38	20	38	—	17	24	30	5.5	—
WBK10-01C	Clean environment	10	70	43	25	35	36	17	24	30	5.5	—
WBK12-01A	General	12	70	43	25	35	36	19	24	30	5.5	—
WBK12-01B	Low type	12	70	38	20	38	—	19	24	30	5.5	—
WBK12-01C	Clean environment	12	70	43	25	35	36	19	24	30	5.5	—
WBK15-01A	General	15	80	50	30	40	41	22	25	31	12	—
WBK15-01B	Low type	15	80	42	22	42	—	22	25	31	12	—
WBK15-01C	Clean environment	15	80	50	30	40	41	22	25	31	12	—
WBK17-01A	General	17	86	64	39	55	50	24	35	44	7	—
WBK20-01	General	20	95	58	30	45	56	30	42	52	10	—
WBK25-01W	General	25	105	68	35	25	66	36	48	61	13	—


Notes

1. Use datum surface A for mounting to machine base.
2. Tighten set screw after locknut has been adjusted and tightened.
3. Insert brass pad provided with unit into locknut set screw hole, then insert and tighten the set screw.
4. Deep groove ball bearing and snap ring are also provided for simple support side.
(except WBK04-01M, WBK06-01M and WBK06-01A)


Support Unit (Support Units for Light Load and Small Equipment)



View S (WBK25)



View S (WBK06 - 15)



View S (WBK17 - 20)

Reference No.	Tightening torque (reference) [N·cm]	
	Locknut	Set screw
WBK04- ⁰¹⁰	100	69 (M3)
WBK06- ⁰¹⁰	190	69 (M3)
WBK08- ⁰¹⁰	230	69 (M3)
WBK10- ⁰¹⁰	280	147 (M4)
WBK12- ⁰¹⁰	630	147 (M4)
WBK15- ⁰¹⁰	790	147 (M4)
WBK17- ⁰¹⁰	910	147 (M4)
WBK20- ⁰¹⁰	1670	147 (M4)
WBK25- ⁰¹⁰	2060	490 (M6)

Unit: mm

T	U	N	Counterbore dimensions							Mass (kg)	Locknut screw M	Attached bearing for support side
			H	P	Q	W	X	Y	Z			
9	2.5	2	7	—	—	21	3.5	—	—	0.03	M4×0.5	—
12	2.5	2.5	8.5	—	—	26	5.5	—	—	0.05	M6×0.75	—
—	—	3.5	10	—	—	30	5.5	9.5	11	0.15	M6×0.75	—
—	—	4	11.5	—	—	38	6.6	11	12	0.25	M8×1	606ZZ
—	—	3.5	11	—	—	46	9	14	18	0.3	M8×1	606ZZ
—	—	4	11.5	—	—	38	6.6	11	12	0.25	M8×1	606ZZ
—	—	6	12	—	—	52	9	14	11	0.5	M10×1	608ZZ
—	—	6	12	—	—	52	9	14	19	0.45	M10×1	608ZZ
—	—	6	12	—	—	52	9	14	11	0.5	M10×1	608VV
—	—	6	12	—	—	52	9	14	11	0.5	M12×1	6000ZZ
—	—	6	12	—	—	52	9	14	19	0.4	M12×1	6000ZZ
—	—	6	12	—	—	52	9	14	11	0.5	M12×1	6000VV
—	—	5	12.5	—	—	60	11	17	15	0.7	M15×1	6002ZZ
—	—	5	12.5	—	—	60	11	17	23	0.6	M15×1	6002ZZ
—	—	5	12.5	—	—	60	11	17	15	0.7	M15×1	6002VV
—	—	7	—	19	8	68	9	14	11	1.3	M17×1	6203ZZ
—	—	10	—	22	10	75	11	17	15	1.4	M20×1	6204ZZ
—	—	14	—	30	9	85	11	—	—	1.9	M25×1.5	6205ZZ



5. Bearings for WBK04-01M and WBK06-01M are equipped with non-contact metal shield.

*1) For retaining cover side of WBK06-01A, WBK08-01A, and WBK08-01C, there are no seals.



6. Contact NSK if the rotational speed is 50 min⁻¹ and below.

Accessories

WBK** -11M



WBK** -11*



View X-X (example 1)


Fixed support side support unit (round type)

Reference No.	Use	d ₁	A	C	D ₁	D ₂	E	H	L	K	F	N
WBK04-11M	General	4	14	26	14	14	13.5	8.5	7	1.5	5.5	6.6
WBK06-11M	General	6	19	34	19	18.5	17	12	9.5	2.5	7.5	8
WBK06-11*	General	6	28	35	22	—	20	13	9.5	3.5	5.5	6.5
WBK08-11B	High-load type	8	42	52	34	—	25.5	15.5	12	3.5	4.5	7
WBK08-11*	General	8	35	43	28	—	23	14	10	4	7	8
WBK08-11C*	Clean environment	8	35	43	28	—	23	14	10	4	7	8
WBK10-11	General	10	42	52	34	—	27	17	12	5	7.5	8.5
WBK10-11C	Clean environment	10	42	52	34	—	27	17	12	5	7.5	8.5
WBK12-11	General	12	44	54	36	—	27	17	12	5	7.5	8.5
WBK12-11C	Clean environment	12	44	54	36	—	27	17	12	5	7.5	8.5
WBK15-11	General	15	52	63	40	—	32	17	11	6	12	14
WBK15-11C	Clean environment	15	52	63	40	—	32	17	11	6	12	14
WBK20-11	General	20	68	85	57	—	52	30	20	10	10	14
WBK25-11	General	25	79	98	63	—	57	30	20	10	13	20

Notes

1. Tighten set screw after locknut has been adjusted and tightened.
2. Insert brass pad provided with unit into locknut set screw hole, then insert and tighten the set screw.
3. Deep groove ball bearing and snap ring are also provided for simple support side.
(except WBK04-11M, WBK06-11M and WBK06-11)

Support Unit (Support Units for Light Load and Small Equipment)

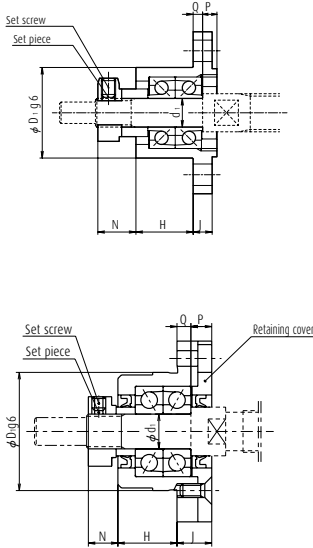

(example 2)

Reference No.	Tightening torque (reference) [N·cm]	
	Locknut	Set screw
WBK04- ^{01M}	100	69 (M3)
WBK06- ^{01M}	190	69 (M3)
WBK08- ^{01M}	230	69 (M3)
WBK10- ^{01M}	280	147 (M4)
WBK12- ^{01M}	630	147 (M4)
WBK15- ^{01M}	790	147 (M4)
WBK17- ^{01M}	910	147 (M4)
WBK20- ^{01M}	1670	147 (M4)
WBK25- ^{01M}	2060	490 (M6)

Unit: mm


U	P	Q	Counterbore dimensions					Mass (kg)	Locknut screw M	Attached bearing for support side
			J	W	X	Y	Z			
0	2.6	2.4	3	20	3.5	—	—	0.02	M4×0.5	—
12	3	2	4	26	4.5	—	—	0.04	M6×0.75	—
12	4.5	2.5	7	28	2.9	5.5	3.5	0.1	M6×0.75	—
14	6	4	10	42	4.5	8	4	0.2	M8×1	606ZZ
14	5	4	9	35	3.4	6.5	4	0.15	M8×1	606ZZ
14	5	4	9	35	3.4	6.5	4	0.15	M8×1	606VV
17	6	4	10	42	4.5	8	4	0.2	M10×1	608ZZ
17	6	4	10	42	4.5	8	4	0.2	M10×1	608VV
19	6	4	10	44	4.5	8	4	0.25	M12×1	6000ZZ
19	6	4	10	44	4.5	8	4	0.25	M12×1	6000VV
22	8	7	15	50	5.5	9.5	6	0.4	M15×1	6002ZZ
22	8	7	15	50	5.5	9.5	6	0.4	M15×1	6002VV
30	14	8	22	70	6.6	11	10	1.1	M20×1	6204ZZ
36	17	10	27	80	9	15	13	1.5	M25×1.5	6205ZZ

4. Bearings for WBK04-01M and WBK06-01M are equipped with non-contact metal shield.

*For retaining cover side of WBK06-01A, WBK08-01A, and WBK08-01C, there are no seals.

5. Contact NSK if the rotational speed is 50 min⁻¹ and below.

Accessories

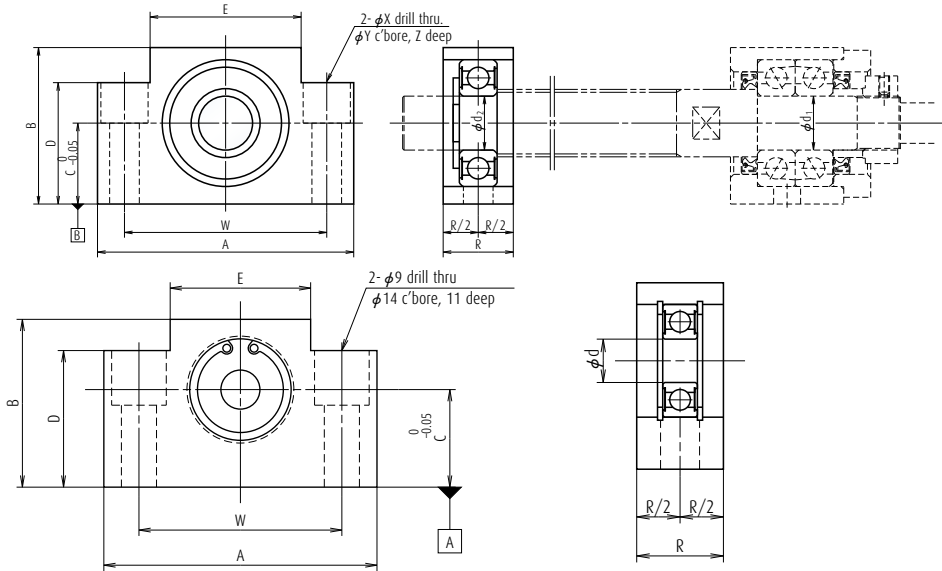

Simple support side support unit (square type)

Unit: mm

Reference No.	Use	d ₂	A	B	C	D	E	R	Counterbore dimensions				Mass (kg)
									W	X	Y	Z	
WBK08S-01	General	6	52	32	17	26	25	15	38	6.6	11	12	0.15
WBK08S-01B	Low type	6	62	31	15.5	31	—	16	46	9	14	18	0.2
WBK08S-01C	Clean environment	6	52	32	17	26	25	15	38	6.6	11	12	0.15
WBK10S-01	General	8	70	43	25	35	36	20	52	9	14	11	0.4
WBK10S-01C	Clean environment	8	70	43	25	35	36	20	52	9	14	11	0.4
WBK12S-01	General	10	70	43	25	35	36	20	52	9	14	11	0.35
WBK12S-01B	Low type	10	70	38	20	38	—	20	52	9	14	19	0.4
WBK12S-01C	Clean environment	10	70	43	25	35	36	20	52	9	14	11	0.35
WBK12SF-01 ^{*2}	General	12	70	43	25	35	36	20	52	9	14	11	0.3
WBK12SF-01B ^{*1}	Low type	12	62	31	15.5	31	—	18	46	9	14	18	0.2
WBK15S-01	General	15	80	50	30	40	41	20	60	9	14	11	0.45
WBK15S-01B	Low type	15	80	42	22	42	—	20	60	9	14	23	0.4
WBK15S-01C	Clean environment	15	80	50	30	40	41	20	60	9	14	11	0.45
WBK15SF-01 ^{*2}	General	15	70	43	25	35	36	20	52	9	14	11	0.3
WBK15SF-01B ^{*1}	Low type	15	70	38	20	38	—	18	52	9	14	19	0.3
WBK17S-01	General	17	86	64	39	55	50	23	68	9	14	11	0.8
WBK20S-01	General	20	95	58	30	45	56	26	75	11	17	15	0.8
WBK20SF-01B	Low type	20	80	42	22	42	—	22	60	11	17	23	0.4
WBK25S-01W	General	25	105	68	35	25	66	30	85	11	—	—	0.9
WBK25SF-01 ^{*1}	General	25	95	58	30	45	56	22	75	11	17	15	0.55

Notes

1. Use datum surface B for mounting to machine base.
2. For reference No. 12 or lower numbers, note that the reference numbers and inner dimensions of the bearing are different.
3. WBK ** SF is a type supporting screw shaft OD.
4. See page B422 for bearing reference number and the basic dynamic load rating in the radial direction.
5. *1 is exclusive for FSS type.
6. *2 is exclusive for VFA type.

Support Unit (Support Units for Light Load and Small Equipment)

Specifications of support unit

Fixed support side support unit						Reference No.	Bearing reference No.	Radial direction Basic dynamic load rating C [N]
Reference No.	Use	Axial direction			Maximum starting torque [N·cm]			
		Basic dynamic load rating Ca [N]	Load limit [N]	Rigidity [N/μm]				
WBK04-01M	General	1 470	464	39	0.2	—	—	—
WBK04-11M	General	1 470	464	39	0.2	—	—	—
WBK06-01A	General	2 670	1 040	28	0.49	—	—	—
WBK06-01M	General	2 760	854	60	0.35	—	—	—
WBK06-11	General	2 670	1 040	28	0.49	—	—	—
WBK06-11M	General	2 760	854	60	0.35	—	—	—
WBK08-01A	General	4 400	1 450	49	0.88	WBK08S-01	606ZZ	2 260
WBK08-01B	Low type	6 600	2 730	94	1.9	WBK08S-01B	606ZZ	2 260
WBK08-01B	Low type	6 600	2 730	94	1.9	WBK12SF-01B*1	6801ZZ	1 920
WBK08-01C	Clean environment	3 100	1 100	36	0.52	WBK08S-01C	606VV	2 260
WBK08-11	General	4 400	1 450	49	0.88	WBK08S-01	606ZZ	2 260
WBK08-11B	High load	6 600	2 730	94	1.9	—	606ZZ	2 260
WBK08-11C	Clean environment	3 100	1 100	36	0.52	WBK08S-01C	606VV	2 260
WBK10-01A	General	6 600	2 730	94	1.9	WBK10S-01	608ZZ	3 300
WBK10-01A	General	6 600	2 730	94	1.9	WBK12SF-01*2	6001ZZ	5 100
WBK10-01B	Low type	6 600	2 730	94	1.9	—	608ZZ	3 300
WBK10-01C	Clean environment	4 250	1 364	50	1.1	WBK10S-01C	608VV	3 300
WBK10-11	General	6 600	2 730	94	1.9	WBK10S-01	608ZZ	3 300
WBK10-11C	Clean environment	4 250	1 364	50	1.1	WBK10S-01C	608VV	3 300
WBK12-01A	General	7 100	3 040	104	2.1	WBK12S-01	6000ZZ	4 550
WBK12-01A	General	7 100	3 040	104	2.1	WBK15SF-01*2	6902ZZ	4 350
WBK12-01B	Low type	7 100	3 040	104	2.1	WBK12S-01B	6000ZZ	4 550
WBK12-01B	Low type	7 100	3 040	104	2.1	WBK15SF-01B*1	6902ZZ	4 350
WBK12-01C	Clean environment	4 700	2 443	57	1.2	WBK12S-01C	6000VV	4 550
WBK12-11	General	7 100	3 040	104	2.1	WBK12S-01	6000ZZ	4 550
WBK12-11C	Clean environment	4 700	2 443	57	1.2	WBK12S-01C	6000VV	4 550
WBK15-01A	General	7 600	3 380	113	2.4	WBK15S-01	6002ZZ	5 600
WBK15-01B	Low type	7 600	3 380	113	2.4	WBK15S-01B	6002ZZ	5 600
WBK15-01B	Low type	7 600	3 380	113	2.4	WBK20SF-01B*1	6804ZZ	4 000
WBK15-01C	Clean environment	5 100	2 757	63	1.3	WBK15S-01C	6002VV	5 600
WBK15-11	General	7 600	3 380	113	2.4	WBK15S-01	6002ZZ	5 600
WBK15-11C	Clean environment	5 100	2 757	63	1.3	WBK15S-01C	6002VV	5 600
WBK17-01A	General	13 400	5 800	120	3.5	WBK17S-01	6203ZZ	9 550
WBK20-01	General	17 900	8 240	155	6.2	WBK20S-01	6204ZZ	12 800
WBK20-01	General	17 900	8 240	155	6.2	WBK25SF-01*1	6005ZZ	10 100
WBK20-11	General	17 900	8 240	155	6.2	WBK20S-01	6204ZZ	12 800
WBK25-01W	General	20 200	10 000	192	7.2	WBK25S-01W	6205ZZ	14 000
WBK25-11	General	20 200	10 000	192	7.2	WBK25S-01W	6205ZZ	14 000
WBK04R-11	General	615	490	6.5	0.59	—	—	—
WBK06R-11	General	1 280	930	9	0.59	—	—	—

1. *1: Exclusive for FSS type.

2. *2: Exclusive for VFA type.


3. Permissible axial load is 0.7 times of limiting axial load.

Accessories

Support kits for ball screws for transfer equipment

Support kits are for RMA type ball screw.

In case of RMA1002 or larger rolled ball screws, please use support units for general use.

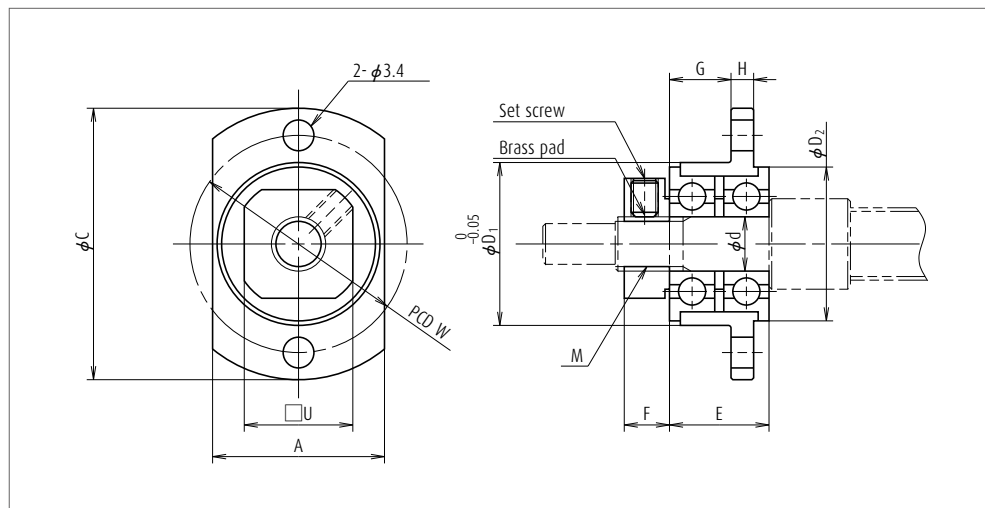

Units: mm

Reference No.	A	C	d	D ₁	D ₂	E	F	G	H	W	U	M	Mass (kg)
WBK04R-11	14	25	4	13	12.5	9	5	5	2.5	19	10	M4×0.5	0.13
WBK06R-11	19	30	6	18	17	11	5	6.8	2.5	24	12	M6×0.75	0.23

Reference No.	Applicable ball screw	Locknut tightening torque (reference) [N·cm]	Set screw tightening torque (reference) [N·cm]
WBK04R-11	RMA0601	100	38 (M2.5)
WBK06R-11	RMA0801	190	69 (M3)
WBK06R-11	RMA0801.5	190	69 (M3)
WBK06R-11	RMA0802	190	69 (M3)


- Notes**
1. Oscillate bearings slowly so that they fall into place in which run-out of mounting surface is minimal, and then tighten locknut.
 2. Support kit is on provisional shaft (bolt) during shipping.
 3. When securing support unit on shaft, insert brass pad that is provided with support unit into lock nut hole, and then tighten set screw.

Support Unit (Support Units for Light Load and Small Equipment)

Spacer

When using a fixed support unit, it may require an optional spacer to have an effective shoulder surface at where the ball thread is threaded to the end of the shoulder. This is common for the R series for transporting ball screws.

Units: mm

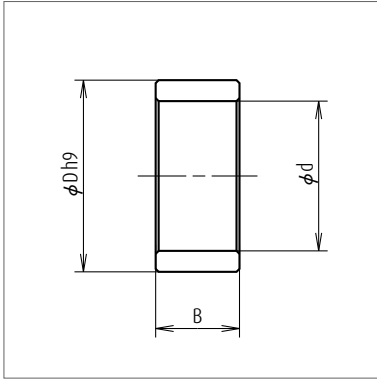


Reference No.	Internal diameter, d	Outside diameter, d	Width B	Mass (g)	Applicable support unit
WBK06K	6	9.5	5.0	2	WBK06- ^{**}
WBK08K	8	11.5	5.5	2	WBK08- ^{**}
WBK10K	10	14.5	5.5	4	WBK10- ^{**}
WBK12K	12	15.0	5.6	3	WBK12- ^{**}
WBK15K	15	19.5	10.0	10	WBK15- ^{**}
WBK17K	17	24.4	7.0	13	WBK17- ^{**}
WBK20K	20	25.5	11.0	17	WBK20- ^{**}
WBK25K	25	32.0	14.0	34	WBK25- ^{**}

Accessories

Screw shaft end configuration

Dimensions of the shaft end configurations for light load and small equipment support units are shown in the table below. When using a spacer with a ball screw for transporting equipment, add the width of the spacer (B from the table of spacer dimensions on page B424) to L_1 dimension below.

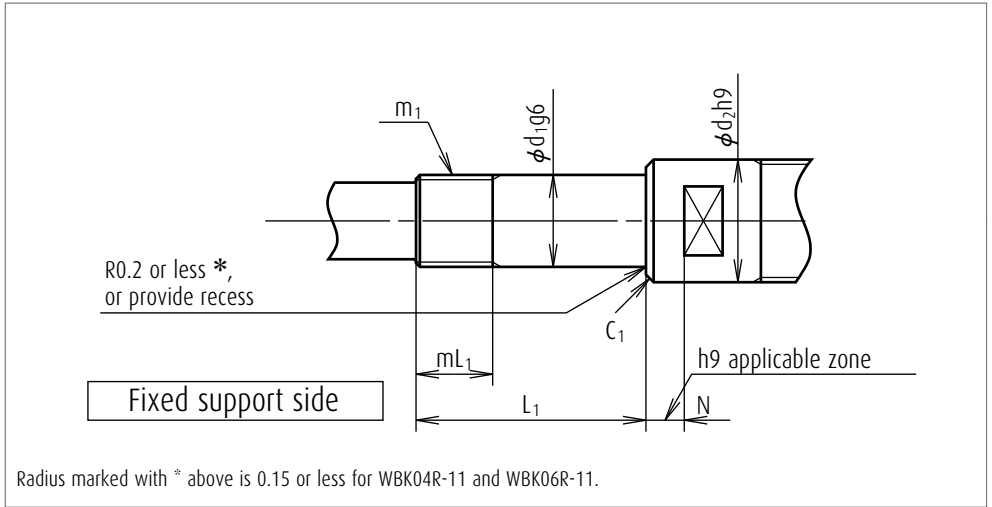


Units: mm

Fixed support side

Reference No.	Bearing journal		Locknut thread		Sealing part		Chamfer
	d_1	L_1	m_1	mL_1	d_2	N	C_1
WBK06- ^{**}	6	22.5	M6×0.75	7	9.5	3.5	0.2
WBK08- ^{**}	8	27	M8×1	9	11.5	4	0.2
WBK10- ^{**}	10	30	M10×1	10	14	6	0.2
WBK12- ^{**}	12	30	M12×1	10	15	6	0.2
WBK15- ^{**}	15	40	M15×1	15	19.5	5	0.3
WBK17- ^{**}	17	46	M17×1	17	24	7	0.3
WBK20- ^{**}	20	53	M20×1	16	25	10	0.3
WBK25- ^{**}	25	62	M25×1.5	20	32	14	0.5
WBK04R-11	4	15	M4×0.5	7.5	—	—	0.3
WBK06R-11	6	17	M6×0.75	7.5	—	—	0.3

Support Unit (Support Units for Light Load and Small Equipment)

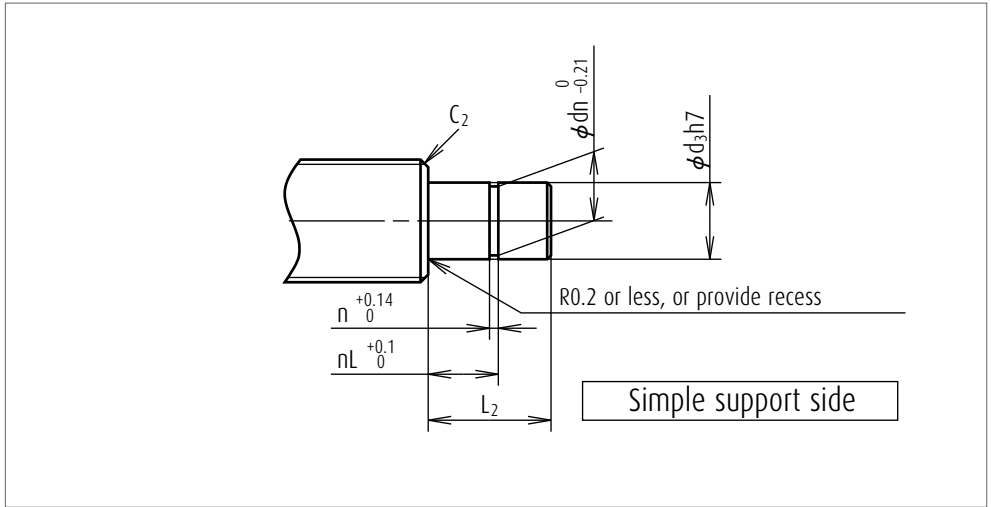

Units: mm


Simple support side

Reference No.	Bearing journal		Locknut thread			Chamfer
	d_3	L_2	n	dn	nL	C_2
WBK08S [※]	6	9	0.8	5.7	6.8	0.2
WBK10S [※]	8	10	0.9	7.6	7.9	0.2
WBK12S [※]	10	22	1.15	9.6	9.15	0.5
WBK15S [※]	15	25	1.15	14.3	10.15	0.5
WBK17S [※]	17	16	1.15	16.2	13.15	0.5
WBK20S [※]	20	19	1.35	19	15.35	0.5
WBK25S [※]	25	20	1.35	23.9	16.35	0.5


Accessories

(2) Dimensions of support unit for ball screws for high-speed and heavy-load machine tools


Support units for high-speed and heavy-load machine tools use the ball screw support bearings NSKHPS BSBD series. This series has very suitable functions and structure as a ball screw support bearing. There are three bearing combinations as shown below.

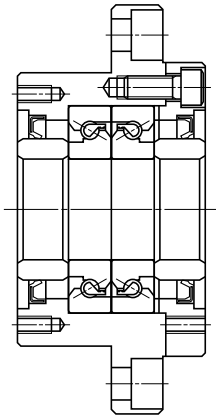

DF combination

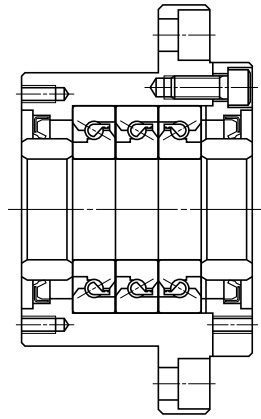


DFD combination

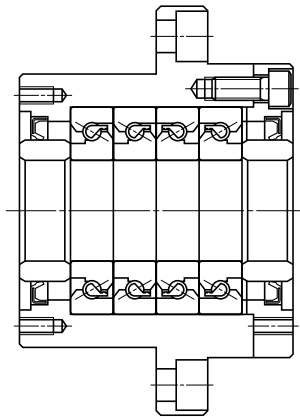

DFF combination

Support Unit (For high-speed and heavy-load machine tools)

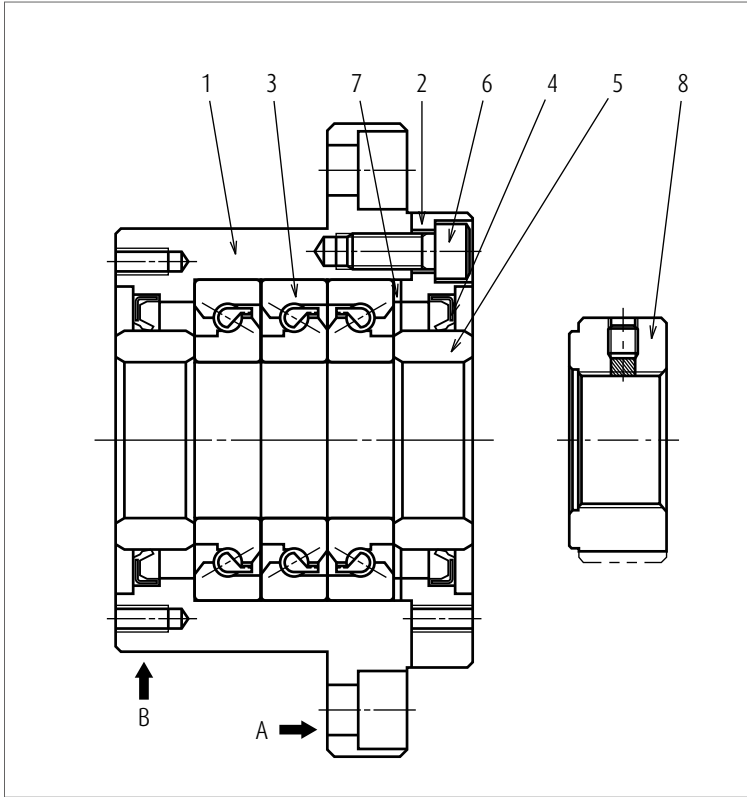


Parts list

Part No.	Part name	Quantity
1	Housing	1
2	Retaining cover	1
3	High accuracy thrust angular contact ball bearing	One set
4	Dust seal	2
5	Collar	2
6	Preload bolt	6 or 8
7	Shim	One set
8	Lock nut	1

Notes

1. Surface A and B are the datum surfaces to mount a support unit to machine housing.
2. NSK support units are precisely preloaded and adjusted. Do not disassemble the components 1, 2, 3, 4, 5, 6 and 7.
3. Grease is packed into the bearings.
4. Lock nut 8 is exclusively prepared for ball screws. End surface of nut is in strict control being precisely perpendicular to the V thread. Secure lock nut using set screw. Lock nut is also available as accessory. (See page B431.)
5. See page B437 as well for NSKTAC C Series angular contact thrust ball bearings for ball screw support.


Accessories

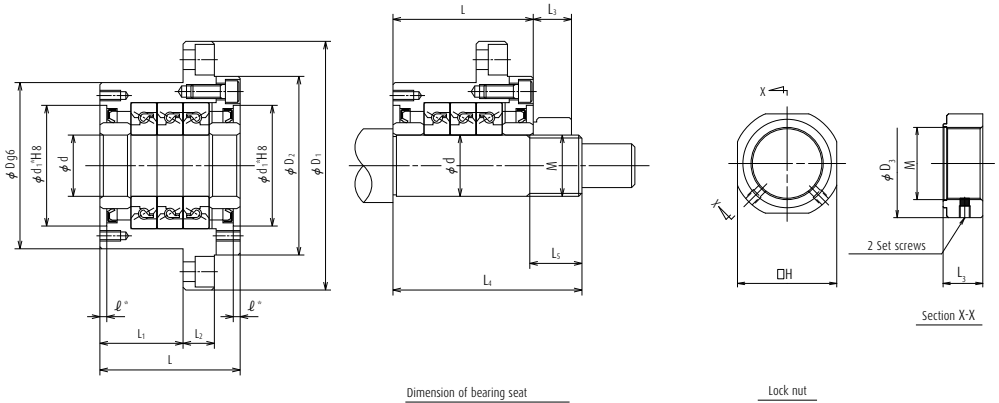

Support unit No.	Support unit																Basic dynamic load rating	Limiting axial load	
	d	D	D ₁	D ₂	L	L ₁	L ₂	A	W	X	Y	Z	d ₁ *	* ^o	V*	P*	Q*	C ₀ [N]	[N]
WBK17DF-31H	17	70	106	72	60	32	15	80	88	9	14	8.5	45	3	58	M5	10	23 000	26 600
WBK20DF-31H	20	70	106	72	60	32	15	80	88	9	14	8.5	45	3	58	M5	10	23 000	26 600
WBK25DF-31H	25	85	130	90	66	33	18	100	110	11	17.5	11	57	4	70	M6	12	29 900	40 500
WBK25DFD-31H	25	85	130	90	81	48	18	100	110	11	17.5	11	57	4	70	M6	12	48 500 (29 900)	81 500 (40 500)
WBK30DF-31H	30	85	130	90	66	33	18	100	110	11	17.5	11	57	4	70	M6	12	30 500	43 000
WBK30DFD-31H	30	85	130	90	81	48	18	100	110	11	17.5	11	57	4	70	M6	12	50 000 (30 500)	86 000 (43 000)
WBK35DF-31H	35	95	142	102	66	33	18	106	121	11	17.5	11	69	4	80	M6	12	32 500	50 000
WBK35DFD-31H	35	95	142	102	81	48	18	106	121	11	17.5	11	69	4	80	M6	12	53 000 (32 500)	100 000 (50 000)
WBK35DFF-31H	35	95	142	102	96	48	18	106	121	11	17.5	11	69	4	80	M6	12	53 000	100 000
WBK40DF-31H	40	95	142	102	66	33	18	106	121	11	17.5	11	69	4	80	M6	12	33 500	52 000
WBK40DFD-31H	40	95	142	102	81	48	18	106	121	11	17.5	11	69	4	80	M6	12	54 000 (33 500)	104 000 (52 000)
WBK40DFF-31H	40	95	142	102	96	48	18	106	121	11	17.5	11	69	4	80	M6	12	54 000	104 000

- Notes**
- Rigidity
Values in the table are theoretical values obtained from the elastic deformation between ball groove and balls.
 - Starting torque
Starting torque indicates torque due to the preload of the bearing. It does not include seal torque.
 - The tolerance of the shaft bearing seat
We recommend h5 class of the fits tolerance.
 - Values in parentheses of basic dynamic load rating and permissible axial load are the values when axial load is applied in a line.

Support Unit (Support Units for Light Load and Small Equipment)

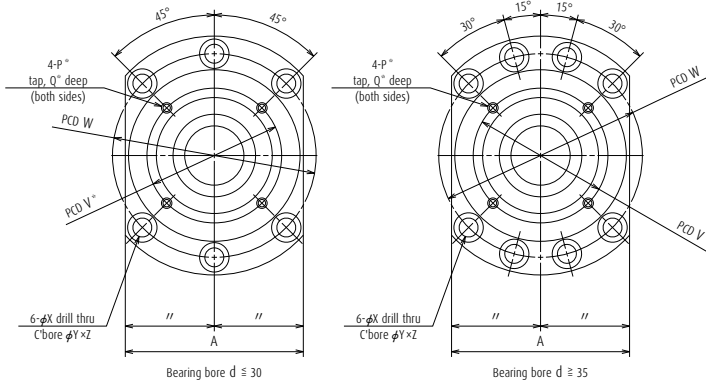

Unit: mm

Preload	Axial rigidity	Starting torque	Lock nut					Screwing torque	Bearing seat for unit			Permissible rotational speed	Mass
			Dimension						d	L ₄	L ₅		
C _s [N]	[N/μm]	[N · cm]	M	H	D ₃	L ₃	[N · cm]	d	L ₄	L ₅	[min ⁻¹]	[kg]	
1 450	630	14	M17×1.0	32	37	18	4 100	17	81	23	6 900	1.9	
1 450	630	14	M17×1.0	36	40	18	4 500	20	81	23	6 900	1.9	
2 280	850	21	M25×1.5	41	45	20	8 500	25	89	26	5 200	3.1	
3 100	1 250	28	M25×1.5	41	45	20	8 500	25	104	26	5 200	3.4	
2 400	890	23	M30×1.5	46	50	20	10 100	30	89	26	4 900	3.0	
3 260	1 310	30	M30×1.5	46	50	20	10 100	30	104	26	4 900	3.3	
2 750	1 030	27	M35×1.5	50	55	22	13 800	35	92	30	4 100	3.4	
3 740	1 500	34	M35×1.5	50	55	22	13 800	35	107	30	4 100	4.3	
5 490	2 060	43	M35×1.5	50	55	22	13 800	35	122	30	4 100	5.0	
2 860	1 080	28	M40×1.5	55	60	22	15 500	40	92	30	4 100	3.6	
3 900	1 590	36	M40×1.5	55	60	22	15 500	40	107	30	4 100	4.2	
5 730	2 150	46	M40×1.5	55	60	22	15 500	40	122	30	4 100	4.7	

5. Dimensions with * (asterisk) mark

*Pilot diameter and tapped screws marked with asterisk are used for seal unit installation for NSK standard hollow shaft ball screws. They also can be used for dust cover and damper installation.

6. Grease is packed into bearing. It is not necessary to apply grease before use.

7. Allowable axial load is 0.7 times of load limit.


8. Contact NSK if the rotational speed is 50 min⁻¹ and below.

Accessories

In addition to the support units, NSK has other components for ball screws as shown below.

(3) Lock nuts

Ball screw support bearings must be installed with minimum inclination against ball screw center. NSK lock nuts exclusive for ball screw support bearings help to reduce this inclination.

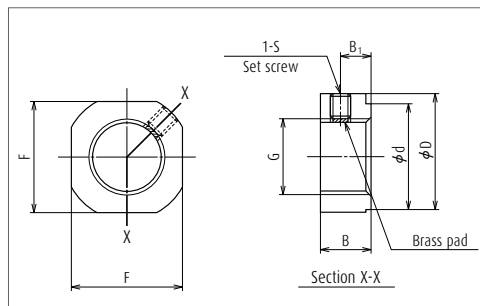

Light load Shapes and dimensions

Light load lock nuts

Light load lock nuts


Lock nut reference No.	G	D	F	B	d
WBK04L-01	M4×0.5	11.5	10	5	6
WBK06L-01	M6×0.75	14.5	12	5	10
WBK08L-01	M8×1	17	14	6.5	13
WBK10L-01	M10×1	20	17	8	16
WBK12L-01	M12×1	22	19	8	17
WBK15L-01	M15×1	25	22	10	21
WBK17L-01	M17×1	29	24	13	24
WBK20L-01	M20×1	35	30	13	26
WBK25L-01	M25×1.5	42	36	16	34

Note Insert brass pad and then tighten securing set screw.

High speed and heavy load lock nuts

Lock nut reference No.	G	D ^{0,-0.1}	B	d ₁	d ₂
WBK17L-31H	M17×1	37	18	30	18
WBK20L-31H	M20×1	40	18	30	21
WBK25L-31H	M25×1.5	45	20	40	26
WBK30L-31H	M30×1.5	50	20	40	31
WBK35L-31H	M35×1.5	55	22	49	36
WBK40L-31H	M40×1.5	60	22	49	41

Lock nut

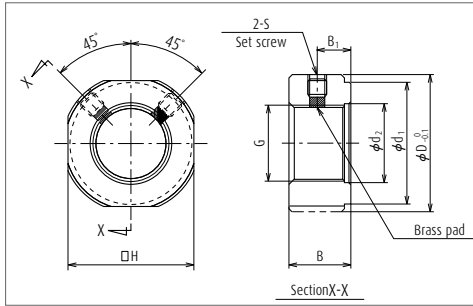

High speed and heavy load Shapes and dimensions



High speed and heavy load lock nuts

Unit: mm

B ₁	S	Tightening torque (reference) [N · cm]	Set screw tightening torque (reference) [N · cm]	Mass (g)
2.75	M3, with a brass pad	100	69 (M2.5)	3.0
2.75	M3, with a brass pad	190	69 (M3)	3.8
4	M3, with a brass pad	230	69 (M3)	6.4
5	M4, with a brass pad	280	147 (M4)	11.2
5	M4, with a brass pad	630	147 (M4)	12.8
6	M4, with a brass pad	790	147 (M4)	20.0
8	M4, with a brass pad	910	147 (M4)	33.1
8	M4, with a brass pad	1 670	147 (M4)	50.0
10	M6, with a brass pad	2 060	490 (M6)	87.0

Unit: mm


B ₁	H	S	Tightening torque (reference) [N · cm]	Set screw tightening torque (reference) [N · cm]	Mass (g)
10	32	M6	4 100	490 (M6)	100.9
10	36	M6	4 500	490 (M6)	117.3
11	41	M6	8 500	490 (M6)	163.8
11	46	M6	10 100	490 (M6)	186.7
12	50	M6	13 800	490 (M6)	233.4
12	55	M6	15 500	490 (M6)	258.8

Accessories


Installation of Ball Screw and Support Unit

The illustrations below show typical installation procedures for a standard ball screw and a support unit.


1) Assembly of support unit

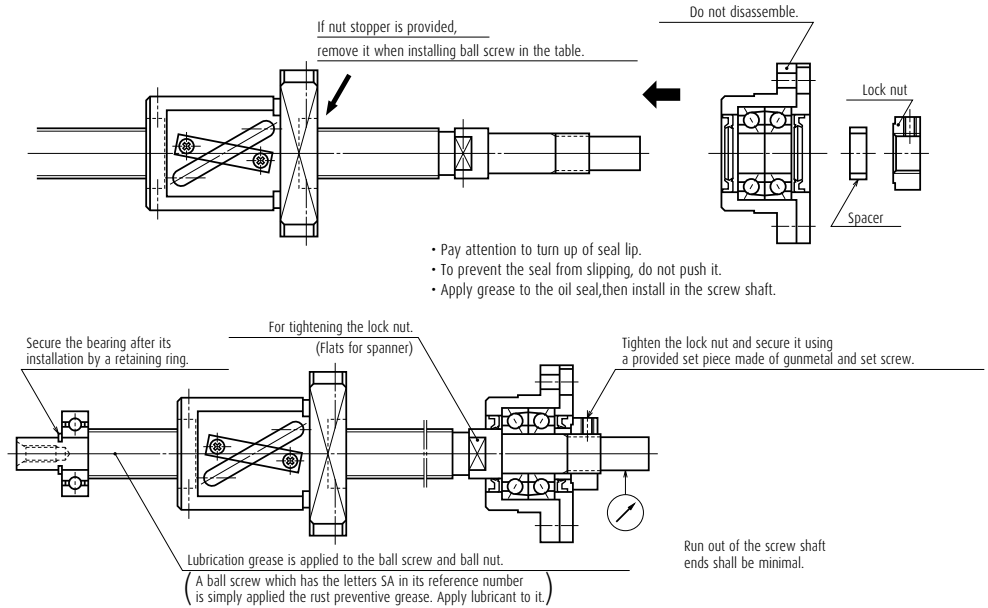


2) Installation of ball nut to the table

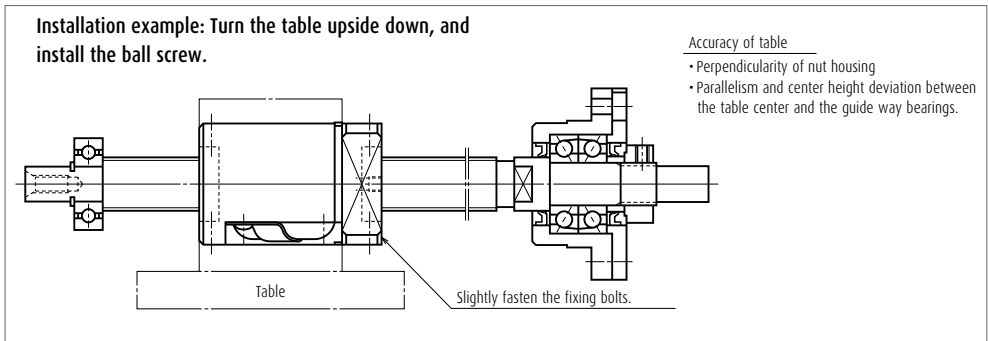


3) Base and the support unit installation on the fixed support side

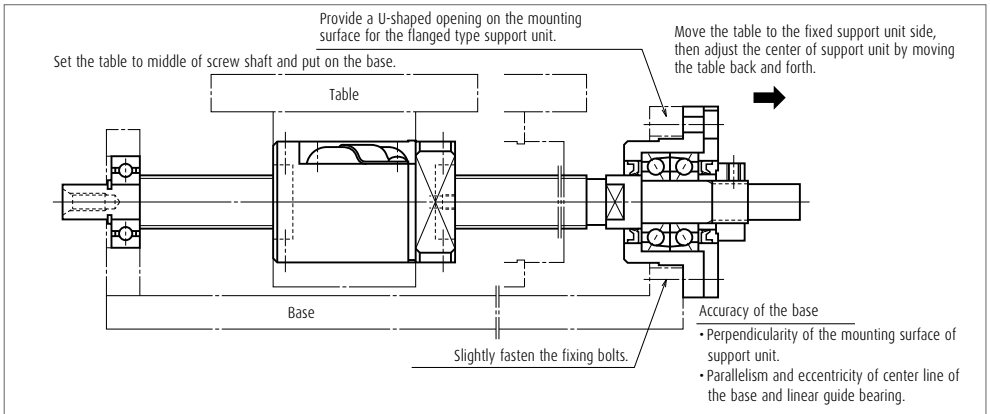

4) Base and bearing installation on simple support side, and confirming assembling accuracy.

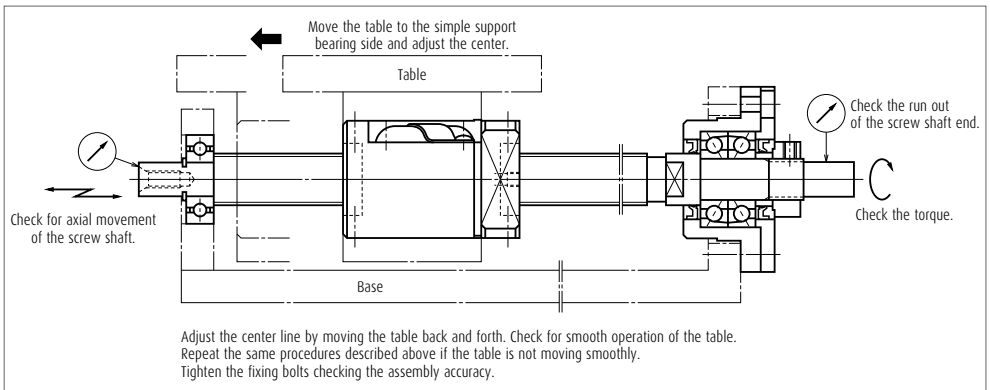

5) Assembly completed.

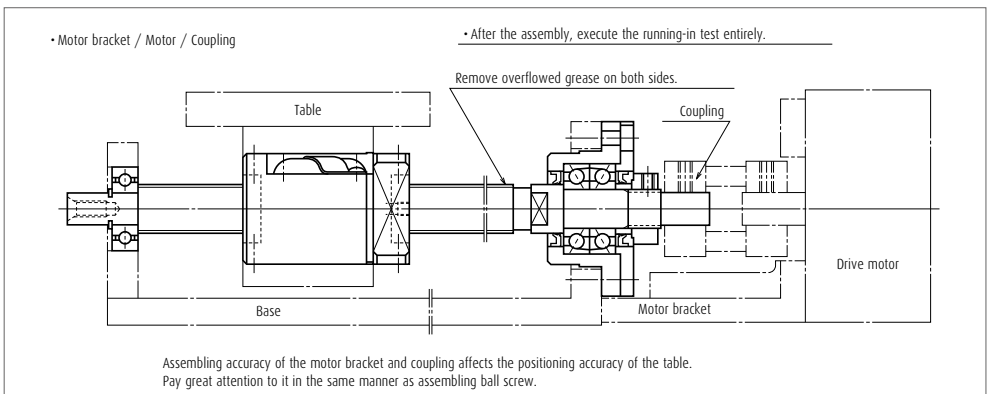

Accessories

(4) Grease unit

NSK has numerous grease types that are exclusive for ball screw lubrication. They come in bellows-shaped tubes, which can be attached to a hand grease pump quickly. For details of grease types, see page D13 and for a hand grease pump and nozzles, see page D19.



NSK greases

Lubricant greases


Name	Use	Base oil viscosity mm ² /s (40°C)
NSK Grease AS2	For heavy load	130
NSK Grease PS2	High-speed, light load	15
NSK Grease LR3	High-speed, medium load	30
NSK Grease LG2	Clean environment	30
NSK Grease LGU	Clean environment	100

Grease unit, and travel stopper

(5) Travel stopper (made-to-order)

A travel stopper is installed in some cases to prevent the ball nut from overrunning to the end of ball thread due to a malfunction of the safety system of the equipment or by a human error. NSK has several series of shock-absorbing travel stoppers. The travel stopper is not sold as a single item since it is not for general use.

Also, a travel stopper cannot be used for ball screw with the end cap type ball recirculation system, because the stopper would come directly into contact with the component for ball recirculation. Please request NSK for the installation of the travel stoppers when ordering a ball screw.

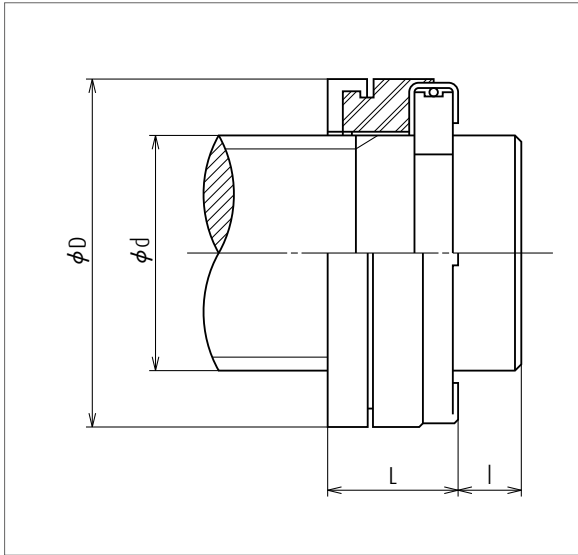

Unit: mm

Stopper No.	Applicable shaft dia. d	Outer dia. D	Length L	Shaft end width (Min.) I
BSR 20	20	32	16	5
BSR 25	25	38	16	5
BSR 32	32	46	20	6
BSR 40	40	60	22	6
BSR 50	50	72	24	7
BSR 63	63	85	25	7

Note This stopper is patented by NSK Ltd.



Shock-absorbing travel stopper

(6) Ball screw support bearings NSKHPS TAC-C series

1) Features

This is highly rigid and accurate ball screw support bearing often used for the machine tools driving mechanism.

NSKHPS:Reliability has been improved by focusing on material cleanliness, which has the biggest impact on bearing life, by employing NSK's proprietary material evaluation technology. The dynamic load rating has been improved by 5% compared with that of conventional bearings.

The NSKTAC C Series features high axial rigidity and is suitable for machine tool feeding mechanisms, while the NSKTAC O3 Series with its high axial load capacity is well suited for the support of large ball screws in high-load drive applications such as electric injection molding machines. With these series users can achieve much lower torque and higher accuracy than with roller bearings.

- (a) High axial rigidity
The axial rigidity is high because of a higher contact angle of 60°
- (b) Low starting torque
Compared with tapered roller bearings or cylindrical roller bearings, this type has lower starting torque; so smoother rotation is possible with driving force.
- (c) Easy Installation
The clearance in each individual bearing in a combination is adjusted to obtain the optimum preload. With universal combination bearings (combination symbol SU), a specific preload is obtained when used with others having the same bearing number in any combination (DB, DF, and others).
- (d) Structural simplicity
Since this type can sustain both axial and radial loads, the surrounding structure is simpler and more compact than when using a combination of radial and thrust bearings.

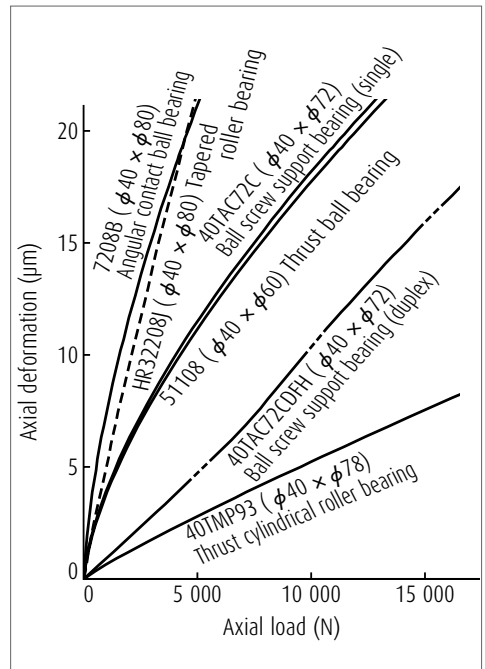


Fig. 1 Axial rigidity of various bearings

- (e) Easy handling
Since the Inner and outer rings are inseparable, handling is easy.

Table 2 Comparison with other types of bearings

Bearing type	Bearing rigidity (See Fig. 1)	Starting torque	Preload adjustment	Installation structure
Ball screw support bearings	High	Low	Not required	Simple
Combined angular contact ball bearing	Low	Low	Not required	Simple
Tapered roller bearing	Low	High	Complicated	Simple
Thrust ball bearing and radial bearing	High	Low	Complicated	Complicated
Thrust cylindrical roller bearing and radial bearing	Extremely high	Extremely high	Complicated	Complicated

Note Consult NSK when you use these bearings other than the purpose of ball screw support.

Ball screw support bearings NSKTAC C series


2. Bearing combinations

Angular contact thrust ball bearings for ball screw support are generally used in two or more rows with preload applied.

Universal Combination Bearings

NSK manufactures universal combination bearings which have been controlled to have the same amount of stand-out (offset) on their front and back faces. That way, for bearings with the same bearing number, users will achieve the specified amount for each standard preload, regardless of which combination they chose. Each universal combination bearing comes with a V-shaped mark on the surface of the outer ring to simplify identification of the correct direction when mounting and to ensure that the correct combination is achieved. The V-shaped mark points to the direction of the axial load that the inner ring supports (contact angle).

Combination Mark and Matching Method for Universal Combination Bearings

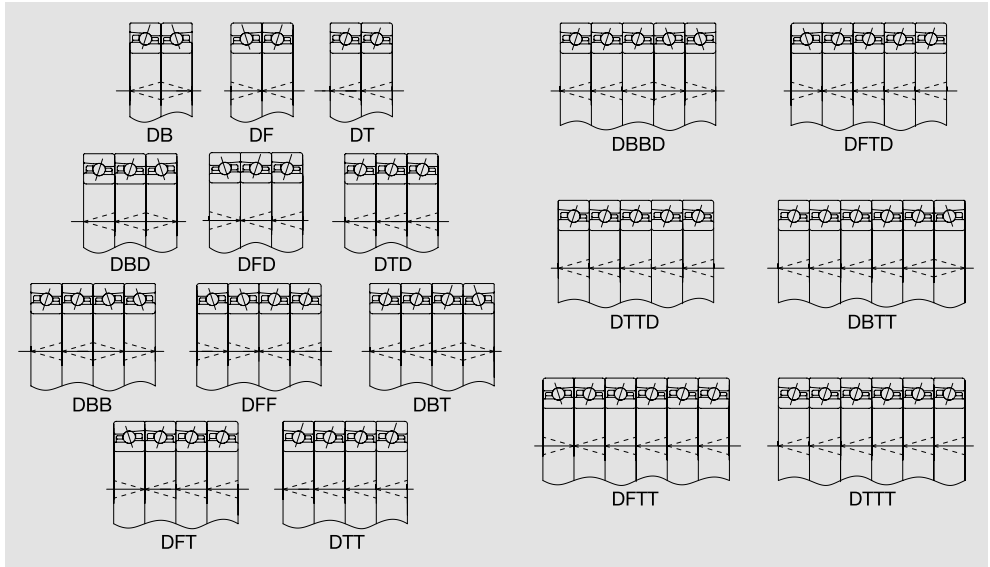

3. Permissible Axial Load for Angular Contact Ball Bearings

NSK has defined the limiting static axial load as the smaller of the two values listed below:

- (1) Limiting axial load that produces shoulder override
The limiting load at which the contact ellipse generated between the ball and the raceway overrides the shoulder of the raceway groove (Fig. 2)
- (2) Limiting axial load in terms of surface pressure
The limiting load at which the contact stress at the center of the contact area between the ball and the raceway groove reaches a level that leaves an indentation as defined in the basic static load rating (Fig. 3)

To maintain optimal bearing performance, NSK has defined permissible static axial load values by applying a safety factor to the limiting axial load based on many years of experience. The formula for calculating the basic static axial load rating C_{0a} does not take the shoulder height of the raceway groove into account. Therefore, in some cases the C_{0a} value may exceed the limiting axial load that produces shoulder override.

In such cases, the maximum load that the bearing can sustain is lower than the C_{0a} value, making the C_{0a} value unsuitable (Fig. 4). Therefore, instead of C_{0a} values, we have listed limiting axial load values in the bearing tables where necessary, particularly for angular contact thrust ball bearings as they are usually used to support heavy axial loads.

4. Rolling contact fatigue life

The relationship between basic load rating, bearing load, and basic rating life for the rolling bearing is presented in the following formula.

$$L_h = \frac{10^6}{60n} \left(\frac{C_a}{P} \right)^3$$

- Where,
- L_h : Basic rating life (h)
 - C_a : Basic dynamic load rating (N)
 - P : Dynamic equivalent load (N)
 - n : Rotational speed (min⁻¹)

See the right table for dynamic equivalent load in each combination.

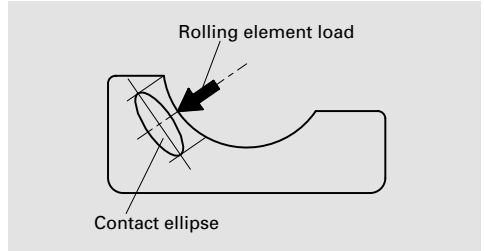


Fig. 2 Ride-over limit axial load

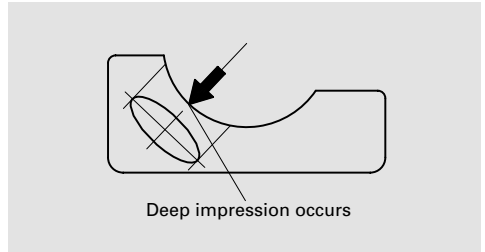


Fig. 3 Contact pressure limit axial load

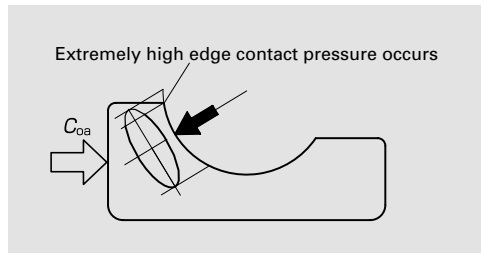


Fig. 4 C_{0a} and limit axial load

Dynamic equivalent load $P_a = XF_r + YF_a$

Bearing configuration Combination code Number of the row that reverses axial load	Duplex		Triplex			Quadruplet			
	DF	DT	DFD	DTD	DFT	DFE	DFT		
$e = 2.17$	One row	Two rows	One row	Two rows	Three rows	One row	Two rows	Three rows	
$F_a/F_r \leq e$	X	1.9	-	1.43	2.33	-	1.17	1.9	2.53
	Y	0.55	-	0.77	0.35	-	0.89	0.55	0.26
$F_a/F_r > e$	X	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
	Y	1	1	1	1	1	1	1	1

Ball screw support bearings NSKTAC C series

5. Fits

Recommended interference values for standard operating conditions of ball screws are listed in Tables 3.

When using angular contact thrust ball bearings for high-load drive ball screw support, in cases where a single end is supported and moment loads are high, it is advisable to increase shaft interference, for example by choosing k5 etc. as required.

Table 3 Tolerances for Shaft and Housing Bore Diameters

Unit: μm

Shaft Outer Diameter, Housing Bore Diameter (mm)		Tolerance of shaft outer diameter						Tolerance of housing bore diameter		
		Angular contact thrust ball bearings for high-rigidity applications			Angular contact thrust ball bearings for high-load drive applications					
		Over	Incl.	Min.	Max.	Min.	Max.			
10	18	h5	-8	0	js5	-4	4	H6	-	-
18	30		-9	0		-4.5	4.5		-	-
30	50		-10	0		-5.5	5.5		0	16
50	80		-13	0		-6.5	6.5		0	19
80	120		-	-		-7.5	7.5		0	22
120	180		-	-		-9.0	9.0		0	25
180	250		-	-		-	-		0	29
250	315		-	-		-	-		0	32
315	400	-	-	-	-	0	36			

6. Bearing Accuracy

Table 4 to 6 shows accuracy for angular contact thrust ball bearings for ball screw support.

Table 4 Tolerances for angular contact thrust ball bearings NSKTAC C for high-rigidity ball screw support (Class PN7C ⁽¹⁾)

Unit: μm

Nominal bore or outside diameter (mm)		Single plane mean bore dia. deviation Δdmp		Deviation of single bore diameter Δds		Single plane mean outside dia. deviation ΔDmp		Deviation of single bore diameter ΔDs		Deviation of single inner ring width ΔBs		Inner ring (outer ring) face runout with raceway Sia (Sea)
over	incl.	High	Low	High	Low	High	Low	High	Low	High	Low	Max.
10	18	0	-4	0	-4	-	-	-	-	0	-120	2.5
18	30	0	-5	0	-5	-	-	-	-	0	-120	2.5
30	50	0	-6	0	-6	0	-6	0	-6	0	-120	2.5
50	80	0	-7	0	-7	0	-7	0	-7	0	-150	2.5
80	120	0	-8	0	-8	0	-8	0	-8	0	-200	2.5

Note: 1. NSK specification

Table 5 Tolerances for angular contact thrust ball bearings NSKTAC 03 for high-load drive applications ball screw support (Class PN5D ⁽²⁾)

Unit: μm

Nominal Bore (or outer diameter) (mm)		Single Plane Mean Bore Diameter Deviation Δdmp		Single Plane Mean Outside Diameter Deviation ΔDmp		Deviation of Single Inner Ring Width ΔBs		Inner ring (Outer Ring) Face Runout with Raceway Sia (Sea)
Over	Incl.	High	Low	High	Low	High	Low	Max.
10	18	0	-5	-	-	0	-80	5
18	30	0	-6	-	-	0	-120	5
30	50	0	-8	0	-7	0	-120	5
50	80	0	-9	0	-9	0	-150	8
80	120	0	-10	0	-10	0	-200	8
120	150	0	-13	0	-11	0	-250	10
150	180	0	-13	0	-13	0	-250	10
180	250	-	-	0	-15	-	-	10
250	315	-	-	0	-18	-	-	11
315	400	-	-	0	-20	-	-	13

Note: 2. NSK specification

Table 6 Tolerances for BSBD Series double-row bearings (Class P2B ⁽³⁾ of BSF and BSN series)

Unit: μm

Nominal Bore Diameter (mm)		Single Plane Mean Bore Diameter Deviation Δdmp		Single Plane Mean Outside Diameter Deviation ΔDmp		Inner Ring Face Runout with Raceway Sia	Radial Runout of Inner Ring Kia	Width Tolerance	
Over	Incl.	High	Low	High	Low	Max.	Max.	High	Low
10	18	0	-5	0	-10	1.5	1.5	0	-250
18	30	0	-5	0	-10	2.5	2.5	0	-250
30	50	0	-5	0	-10	2.5	2.5	0	-250
50	80	0	-8	0	-15	2.5	2.5	0	-250

Note: 3. NSK specification

Accessories

NSKTAC C Angular Contact Thrust Ball Bearings for Ball Screw Support in High-Rigidity Applications

A larger number of balls and a 60° contact angle provide high axial rigidity and make these bearings ideally suited for machine tool feeding mechanisms.


The “DDG” seals used for the sealed bearings of this series are light-contact seals for high-speed capability; a strong sealing effect is achieved by a labyrinth between the seal lip and the seal groove of the inner ring. This ensures that no foreign particles can get into the bearing and no grease can leak out, thus helping to keep the surrounding area clean. Some bearings from this series are also available as non-contact sealed bearings for even lower torque and lower heat generation.

For ease of handling and increased efficiency, NSKTAC C bearings come prepacked with “WPH” grease that resists high temperatures and is less likely to soften and leak.

NSKTAC 03 Angular Contact Thrust Ball Bearings for Ball Screw Support in High-Load Drive Applications


Optimized internal design has led to a higher limiting axial load. The number of rows may be reduced, contributing to smaller sized devices. We also offer bearings with special bore diameters. That way, bearings with higher load capacity may be employed without any need to modify the shaft diameter, allowing for more compact screw shaft ends.

For the validity of this series for industries except injection molding machines and machine tools, please ask NSK.

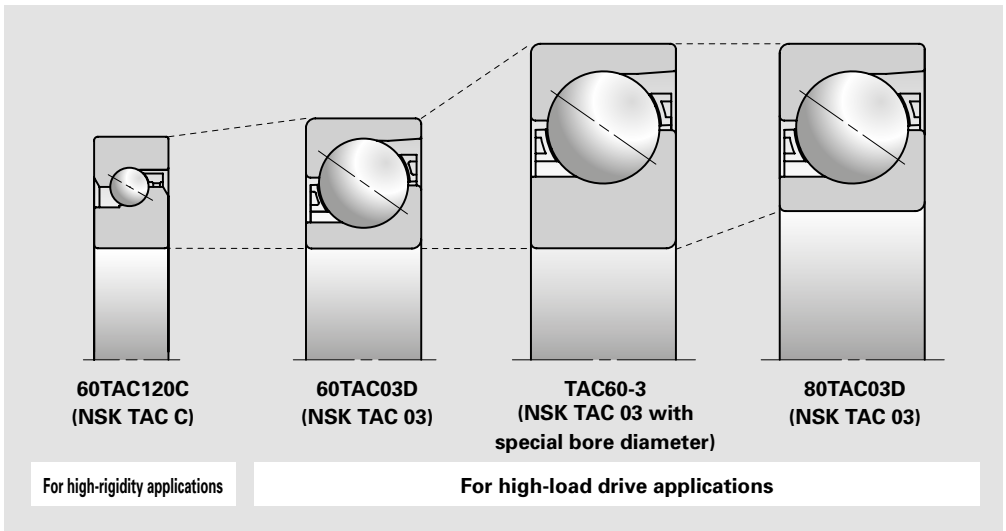


Ball screw support bearings

Numbering System of NSK TAC C Angular Contact Thrust Ball Bearings for Ball Screw Support in High-Rigidity Applications

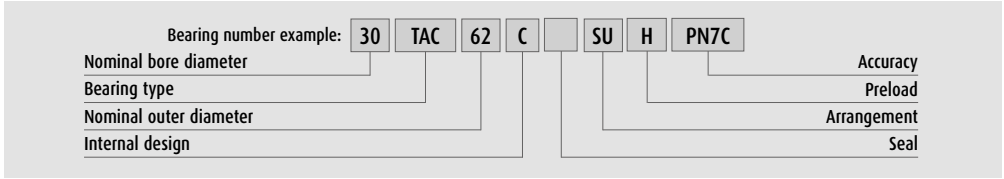

30	Nominal bore diameter	Bore diameter (mm)
TAC	Bearing type	Angular contact thrust ball bearing
62	Nominal outer diameter	Outer diameter (mm)
C	Internal design	Contact angle 60°
	Seal	No symbol: Open type DDG: Contact rubber seal V1V: Non-contact rubber seal
SU	Arrangement	SU: Universal arrangement (single-row)
H	Preload	H: Heavy preload (standard in the HPS Series)
PN7C	Accuracy	PN7C: NES Class 7C (axial runout equivalent to P2)

Numbering System of NSK TAC 03 Angular Contact Thrust Ball Bearings for Ball Screw Support in High-Load Drive Applications

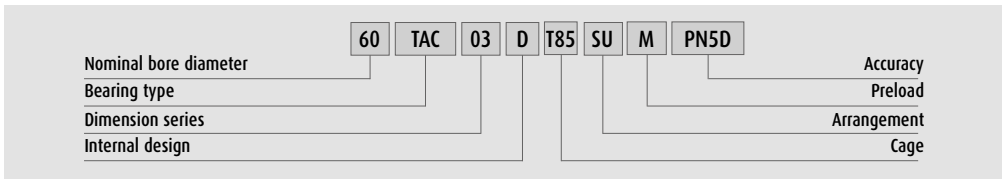


60	Nominal bore diameter	Bore diameter (mm)
TAC	Bearing type	Angular contact thrust ball bearing
03	Dimension series	02: 02 Series 03: 03 Series
D	Internal design	Contact angle 55°
T85	Cage	T85: Polyamide cage M: Brass Cage
SU	Arrangement	SU: Universal arrangement (single-row)
M	Preload	M: Medium preload EL: Extra light preload
PN5D	Accuracy	PN5D: Standard accuracy (equivalent to ISO Class 5)


NSKHPS is not applicable for TAC160-3 and 180TAC03D.

Accessories


for High-Rigidity



Open Type



Sealed type DDG



(Open type)

Bearing Numbers	Boundary Dimensions (mm)					Abutment and Fillet Dimensions (mm)				Recommended Grease Quantities (cc)	Contact angle (degree)	Limiting Speeds(2) (min-1)		Mass (kg) (approx.)
	d	D	B	r (Min.)	r1 (Min.)	Db (Max.)	da (Min.)	Da (Max.)	db (Min.)			Grease	Oil	
15TAC47C	15	47	15	1	0.6	42	19.5	41	19.5	2.2	60	6 900	9 200	0.146
17TAC47C	17	47	15	1	0.6	42	23	41	23	2.2	60	6 900	9 200	0.140
20TAC47C	20	47	15	1	0.6	42	25	41	25	2.2	60	6 900	9 200	0.135
25TAC62C	25	62	15	1	0.6	57	31	56	31	3.0	60	5 200	6 900	0.252
30TAC62C	30	62	15	1	0.6	57	36	56	36	3.2	60	4 900	6 400	0.224
35TAC72C	35	72	15	1	0.6	67	42	66	42	3.8	60	4 100	5 800	0.310
40TAC72C	40	72	15	1	0.6	67	47	66	47	3.9	60	4 100	5 500	0.275
40TAC90C	40	90	20	1	0.6	85	48	84	48	8.8	60	3 500	4 600	0.674
45TAC75C	45	75	15	1	0.6	68	54	67	54	4.2	60	3 700	4 900	0.270
45TAC100C	45	100	20	1	0.6	93	55	92	55	9.7	60	3 000	4 100	0.842
50TAC100C	50	100	20	1	0.6	92	60	91	60	10.2	60	3 000	3 900	0.778
55TAC100C	55	100	20	1	0.6	92	63	91	63	10.2	60	3 000	3 900	0.714
55TAC120C	55	120	20	1	0.6	112	63	111	63	12	60	2 500	3 500	1.23
60TAC120C	60	120	20	1	0.6	112	70	111	70	12	60	2 500	3 500	1.16


(Sealed Type)

Bearing Numbers(1)	Boundary Dimensions (mm)					Abutment and Fillet Dimensions (mm)				Contact angle (degree)	Limiting Speeds(2) (min-1)	Mass (kg) (approx.)
	d	D	B	r (Min.)	r1 (Min.)	Db (Max.)	da (Min.)	Da (Max.)	db (Min.)		Grease	
* 15TAC47CDDG	15	47	15	1	0.6	42	19.5	41	19.5	60	6 900	0.146
* 17TAC47CDDG	17	47	15	1	0.6	42	22	41	22	60	6 900	0.140
* 20TAC47CDDG	20	47	15	1	0.6	42	25	41	25	60	6 900	0.135
* 25TAC62CDDG	25	62	15	1	0.6	57	30	56	30	60	5 200	0.252
30TAC62CDDG	30	62	15	1	0.6	57	36	56	36	60	4 900	0.224
35TAC72CDDG	35	72	15	1	0.6	67	41	66	41	60	4 100	0.310
40TAC72CDDG	40	72	15	1	0.6	67	46	66	46	60	4 100	0.275
40TAC90CDDG	40	90	20	1	0.6	85	47	84	47	60	3 500	0.674
45TAC100CDDG	45	100	20	1	0.6	93	54	92	54	60	3 000	0.842
50TAC100CDDG	50	100	20	1	0.6	92	59	91	59	60	3 000	0.778
55TAC100CDDG	55	100	20	1	0.6	92	63	91	63	60	3 000	0.714

Note

1. An asterisk (*) indicates bearings that are also available as non-contact sealed bearings.
2. Limiting speeds are based on high preload (H). The values shown are valid for all types of bearing arrangement.
3. To calculate permissible axial load, multiply limiting axial load by 0.7.

Ball screw support bearings NSK TAC C series



Calculation of preload, axial rigidity and starting torque for bearing arrangements
Multiply by factors in table B.

Table B	DFD	DFE	DFT
	DBD	DBE	DBT
	DBD	DBE	DBT
Preload factor	1.36	2.00	1.57
Axial rigidity	1.49	2.00	1.89
Starting torque	1.35	2.00	1.55

Preload (DB and DF Arrangement) (N)	Axial Rigidity (DB and DF Arrangement) (N/ μ m)	Starting Torque (DB and DF Arrangement)(4)(N·m) (reference)	Basic dynamic load rating Ca by number of rows sustaining Fa			Limiting axial load by number of rows sustaining Fa(3)		
			1 row (kN)	2 rows (kN)	3 rows (kN)	1 row (kN)	2 rows (kN)	3 rows (kN)
H	H	H						
1 450	630	0.09	23.0	37.5	49.5	26.6	53.0	79.5
1 450	630	0.09	23.0	37.5	49.5	26.6	53.0	79.5
1 450	630	0.09	23.0	37.5	49.5	26.6	53.0	79.5
2 280	850	0.15	29.9	48.5	64.5	40.5	81.5	122
2 400	890	0.16	30.5	50.0	66.0	43.0	86.0	129
2 750	1 030	0.18	32.5	53.0	70.5	50.0	100	150
2 860	1 080	0.19	33.5	54.0	72.0	52.0	104	157
3 450	1 150	0.29	62.0	101	134	89.5	179	269
3 100	1 170	0.20	34.5	56.0	74.5	57.0	114	170
4 440	1 340	0.40	64.5	105	140	99.0	198	298
4 650	1 410	0.42	66.0	107	142	104	208	310
4 650	1 410	0.42	66.0	107	142	104	208	310
5 450	1 660	0.49	70.5	115	153	123	246	370
5 450	1 660	0.49	70.5	115	153	123	246	370


Preload (DB and DF Arrangement) (N)	Axial Rigidity (DB and DF Arrangement) (N/ μ m)	Starting Torque (DB and DF Arrangement)(4) (N·m) (reference)	Basic dynamic load rating Ca by number of rows sustaining Fa			Limiting axial load by number of rows sustaining Fa(3)		
			1 row (kN)	2 rows (kN)	3 rows (kN)	1 row (kN)	2 rows (kN)	3 rows (kN)
H	H	H						
1 450	630	0.09	23.0	37.5	49.5	26.6	53.0	79.5
1 450	630	0.09	23.0	37.5	49.5	26.6	53.0	79.5
1 450	630	0.09	23.0	37.5	49.5	26.6	53.0	79.5
2 280	850	0.15	29.9	48.5	64.5	40.5	81.5	122
2 400	890	0.16	30.5	50.0	66.0	43.0	86.0	129
2 750	1 030	0.18	32.5	53.0	70.5	50.0	100	150
2 860	1 080	0.19	33.5	54.0	72.0	52.0	104	157
3 450	1 150	0.29	62.0	101	134	89.5	179	269
4 440	1 340	0.40	64.5	105	140	99.0	198	298
4 650	1 410	0.42	66.0	107	142	104	208	310
4 650	1 410	0.42	66.0	107	142	104	208	310

4. The starting torque values in the table apply to grease lubricated bearings. Contact seal torque is not included. For oil lubricated bearings, multiply by 1.4.

5. Abutment and fillet dimensions are recommendable values for the use of standard Machine tool applications. For heavy load applications, please ask NSK

Accessories

for High-Load Drive Applications



Bearing Numbers(1)	Boundary Dimensions (mm)					Reference Dimensions (mm)				Recommended Grease Quantities (cc/row)	Contact angle (degree)	Limiting Speeds(2) (min-1)		Mass (kg) (approx.)
	d	D	B	r (Min.)	r1 (Min.)	d1	d2	D1	D2			Grease	Oil	
15TAC02D	15	35	11	0.6	0.3	19.1	24.5	26	31.9	1	55	12 000	14 800	0.047
20TAC03D	20	52	15	1.1	0.6	27.2	35.3	37.5	46.1	2.7	55	8 300	10 300	0.155
25TAC02D	25	52	15	1	0.6	30.8	38.1	39.6	47.3	3	55	7 700	9 700	0.137
TAC35-3	35	90	23	1.5	1	50.4	64.2	67.1	81.7	14	55	4 600	6 000	0.712
40TAC03D	40	90	23	1.5	1	50.4	64.2	67.1	81.7	14	55	4 600	5 700	0.659
TAC40-3	40	110	27	2	1	62	79.1	82.4	100.6	25	55	3 700	5 000	1.28
45TAC03D	45	100	25	1.5	1	56.5	71.7	74.7	90.8	18	55	4 100	5 200	0.877
TAC45-3	45	110	27	2	1	62	79.1	82.4	100.6	25	55	3 700	4 800	1.21
50TAC03D	50	110	27	2	1	62	79.1	82.4	100.6	25	55	3 700	4 700	1.14
TAC50-3	50	130	31	2.1	1.1	73.9	93.8	98	119	40	55	3 100	4 200	2.00
55TAC03D	55	120	29	2	1	68	86.4	90.2	109.7	32	55	3 400	4 300	1.44
60TAC03D	60	130	31	2.1	1.1	73.9	93.8	98	119	40	55	3 100	3 900	1.80
TAC60-3	60	170	39	2.1	1.1	98.5	123.6	128.7	157.5	85	55	2 400	3 300	4.47
70TAC03D	70	150	35	2.1	1.1	86.3	108.6	113.4	137.8	59	55	2 700	3 400	2.67
75TAC03D	75	160	37	2.1	1.1	92.4	116.2	121	146.2	67	55	2 500	3 200	3.20
80TAC03D	80	170	39	2.1	1.1	98.5	123.6	128.7	157.5	85	55	2 400	3 000	3.80
TAC80-3	80	215	47	3	1.1	124	154.9	160.4	194.5	156	55	1 900	2 600	8.66
100TAC03D	100	215	47	3	1.1	124	154.9	160.4	194.5	156	55	1 900	2 400	7.54
TAC100-3	100	260	55	3	1.1	150.5	186.9	193.4	231.7	254	55	1 500	2 100	14.8
120TAC03D	120	260	55	3	1.1	150.5	186.9	193.4	231.7	254	55	1 500	2 000	13.3
* TAC120-3M	120	300	62	4	1.5	170.8	215.3	224.1	265.7	336	55	1 300	1 800	24.5
* 140TAC03DM	140	300	62	4	1.5	170.8	215.3	224.1	265.7	336	55	1 300	1 700	22.5
* TAC140-3M	140	340	68	4	1.5	197.5	246.2	254.3	298.8	442	55	1 200	1 600	34.5
* 160TAC03DM	160	340	68	4	1.5	197.5	246.2	254.3	298.8	442	55	1 200	1 500	32.0
* TAC160-3M	160	380	75	4	1.5	221.1	275.6	284.9	334.9	624	55	1 000	1 400	46.8
* 180TAC03DM	180	380	75	4	1.5	221.1	275.6	284.9	334.9	624	55	1 000	1 400	43.7

- Note**
1. An asterisk (*) indicates bearings that are also available equipped with screw holes for mounting bolts.
 2. Limiting speeds are based on the standard preload of each bearing. The values shown are valid for all types of bearing arrangement.
 3. Preload values for bearings with a bore diameter of 100mm or more as well as for TAC80-3 are based on EL preload.

Ball screw support bearings NSK TAC 03 series

Multi-row combination calculations

Calculation of preload, axial rigidity and starting torque for bearing arrangements
Multiply by factors in table B.

Table B

Number of load-sustaining rows	2 rows		3 rows			4 rows		5 rows
	DFD ⊗/⊗	DFF ⊗/⊗/⊗	DFT ⊗/⊗/⊗	DFFD ⊗/⊗/⊗/⊗	DFFF ⊗/⊗/⊗/⊗/⊗	DFTD ⊗/⊗/⊗/⊗	DFFT ⊗/⊗/⊗/⊗/⊗	DFTT ⊗/⊗/⊗/⊗/⊗
	DBD ⊗/⊗/⊗	DBB ⊗/⊗/⊗/⊗	DBT ⊗/⊗/⊗/⊗	DBBD ⊗/⊗/⊗/⊗/⊗	DBBB ⊗/⊗/⊗/⊗/⊗/⊗	DBTD ⊗/⊗/⊗/⊗/⊗	DBBT ⊗/⊗/⊗/⊗/⊗/⊗	DBTT ⊗/⊗/⊗/⊗/⊗/⊗/⊗
Preload factor	1.36	2.00	1.57	2.42	3.00	1.72	2.72	1.83
Axial rigidity	1.49	2.00	1.89	2.51	3.00	2.24	2.97	2.57
Starting torque	1.35	2.00	1.55	2.41	3.00	1.68	2.71	1.77

Preload(3) (DB and DF Arrangement) (N)	Axial Rigidity(3) (DB and DF Arrangement) (N/μm)	Starting Torque(4) (DB and DF Arrangement) (N·m)	Basic dynamic load rating Ca by number of rows sustaining Fa					Limiting axial load by number of rows sustaining Fa(5)				
			1 row (kN)	2 rows (kN)	3 rows (kN)	4 rows (kN)	5 rows (kN)	1 row (kN)	2 rows (kN)	3 rows (kN)	4 rows (kN)	5 rows (kN)
400	290	0.017	21.0	34.0	45.0	55.5	64.5	18.6	37.5	56.0	74.5	93.0
830	430	0.026	42.5	69.5	92.0	113	132	38.5	77.0	116	154	193
690	430	0.036	37.0	60.0	79.5	97.5	114	36.0	72.5	109	145	181
2 500	780	0.26	113	184	244	299	350	118	235	355	470	590
2 500	780	0.26	113	184	244	299	350	118	235	355	470	590
3 900	970	0.50	166	270	360	440	515	181	360	540	720	905
2 800	830	0.31	133	216	287	350	410	142	283	425	565	710
3 900	970	0.50	166	270	360	440	515	181	360	540	720	905
3 900	970	0.50	166	270	360	440	515	181	360	540	720	905
5 200	1 120	0.78	218	355	470	575	670	242	485	725	965	1 210
4 280	1 060	0.68	190	310	410	500	585	210	420	630	840	1 050
5 200	1 120	0.78	218	355	470	575	670	242	485	725	965	1 210
8 050	1 400	1.5	305	495	660	805	940	390	775	1 170	1 550	1 940
6 400	1 250	1.1	262	425	565	690	810	305	615	920	1 230	1 530
7 230	1 330	1.3	283	460	610	750	875	345	690	1 040	1 380	1 730
8 050	1 400	1.5	305	495	660	805	940	390	775	1 170	1 550	1 940
1 240	880	0.15	420	685	910	1 110	1 300	510	1 020	1 530	2 040	2 550
1 240	880	0.15	420	685	910	1 110	1 300	510	1 020	1 530	2 040	2 550
1 620	1 050	0.21	520	850	1 130	1 380	1 610	680	1 360	2 040	2 720	3 400
1 620	1 050	0.21	520	850	1 130	1 380	1 610	680	1 360	2 040	2 720	3 400
1 710	1 130	0.24	640	1 040	1 380	1 680	1 970	794	1 590	2 380	3 200	3 950
1 710	1 130	0.24	640	1 040	1 380	1 680	1 970	794	1 590	2 380	3 200	3 950
1 850	1 240	0.27	725	1 180	1 570	1 920	2 240	1 040	2 080	3 100	4 150	5 200
1 850	1 240	0.27	725	1 180	1 570	1 920	2 240	1 040	2 080	3 100	4 150	5 200
1 940	1 310	0.30	815	1 330	1 760	2 150	2 520	1 360	2 720	4 100	5 450	6 800
1 940	1 310	0.30	815	1 330	1 760	2 150	2 520	1 360	2 720	4 100	5 450	6 800

- The starting torque values in the table apply to grease lubrication.
- To calculate permissible axial load, multiply limiting axial load by 0.7.

Accessories

NSKHPS™ BSBD Series

The BSBD Series are double-row bearing units for the support of ball screws that can accurately and quickly position a work piece or a spindle unit.



BSF Type

The BSF type of bearings is equivalent to the BSN range of bearings, with bolt holes on the outer ring for easy direct mounting. Two lubrication holes – one in the outer surface and one in the face of the outer ring – allow for relubrication during operation if required. If not used, these holes are closed off with set screws. An extraction groove on the outer surface of the outer ring aids removal of the bearing.

Note: BSF type bearings are supplied with seal and set screws included. Mounting bolts are not included.

BSN Type Single product

Bearing Numbers	Boundary Dimensions (mm)				Dimensions (mm)			Contact Angle (°)	Basic Load Rating (kN)		Limiting ⁽¹⁾ Axial Load (kN)	Preload (N)	Axial Rigidity (N/μm)	Mass (kg)	Allowable rotating speed (min ⁻¹)	Starting torque (N·m)	Recommended nut tightening force (N)
	d	D	B	r	r ₁	φ d _a	φ d _b		C _a	C _{0a}					Greased	H ⁽²⁾	
	(min)	(min)	(min)	(max)	(min)	(max)	(Dynamic)		(Static)								
BSN1242	12	42	25	0.6	0.3	15	33	60	18.5	24.0	17.6	720	375	0.20	8 000	0.038	4 030
BSN1545	15	45	25	0.6	0.3	19	35	60	19.4	26.9	19.4	675	400	0.22	7 100	0.034	4 050
BSN1747	17	47	25	0.6	0.6	21	37	60	20.3	29.7	21.2	880	450	0.23	6 700	0.05	4 400
BSN2052	20	52	28	0.6	0.6	24	43	60	26.4	41.0	29.3	1 885	650	0.31	5 800	0.13	7 600
BSN2557	25	57	28	0.6	0.6	29	48	60	28.3	48.0	34.0	2 245	750	0.36	5 100	0.16	8 100
BSN3062	30	62	28	0.6	0.6	34	53	60	30.0	55.5	38.5	2 625	850	0.40	4 500	0.19	8 600
BSN3072	30	72	38	0.6	0.6	35	64	60	60.5	94.0	66.5	4 855	950	0.74	3 900	0.59	11 100
BSN3572	35	72	34	0.6	0.6	40	62	60	42.0	77.5	52.0	2 630	900	0.66	3 800	0.21	13 500
BSN4075	40	75	34	0.6	0.6	46	67	60	44.5	88.0	58.5	3 065	1 000	0.65	3 500	0.24	14 100
BSN4090	40	90	46	0.6	0.6	46	80	60	78.5	135	91.0	7 220	1 200	1.38	3 100	1.02	18 700
BSN5090	50	90	34	0.6	0.6	56	82	60	48.0	110	71.5	4 020	1 250	0.93	2 800	0.33	15 400
BSN50110	50	110	54	0.6	0.6	57	98	60	116	219	149	7 435	1 400	2.46	2 500	1.06	19 100
BSN60110	60	110	45	0.6	0.6	68	100	60	86.5	187	126	4 780	1 300	1.82	2 400	0.50	20 900



- Notes**
1. Permissible axial load is 0.7 times of limiting axial load.
 2. The values indicate starting torque of preloaded bearings, not including seal torque.

Features

The bearings of this series are double-row angular contact thrust ball bearings with a 60° contact angle and a single outer ring. The specifications are the same as those of the NSKTAC bearings, both series being optimized for the support of ball screws in machine tools. All BSBD Series bearings are equipped with a rubber contact seal and prepacked with high performance grease.

BSN Type

The BSN type of ball screw support bearings are double row angular contact thrust ball bearings in a back-to-back arrangement, with a single outer ring. The bearings are prepacked with high performance grease. Lubrication holes allow for relubrication during operation if necessary. The contact seal offers minimized friction and temperature rise while providing excellent sealing performance.



Unit: mm

BSBD Series Bearings for ball screw support


NSKHPS BSBD Series

Bearing number Example: BS F 30 80 DDU H P2B DT		
Bearing type		Arrangement
F: Flange type N: No Flange type		Accuracy
Bore diameter		Preload
Outer diameter		Seal type

Note: P2B is an accuracy class specific to the BSBD Series, indicating the following:
Running accuracy: ISO Class 2
Others: NSK-specific


> Seal

Rubber contact seal on both sides. Triple lip structure provides high grease sealing performance and dust resistance.




> Matched DT pairs

BSBD bearings are available in matched DT pairs for applications with large external loads or where high rigidity and long life are required. The mating surfaces of the 2-row bearing set are controlled for offset, so as to have no impact on the preload of each individual bearing.



Distance between mating surfaces has been adjusted.

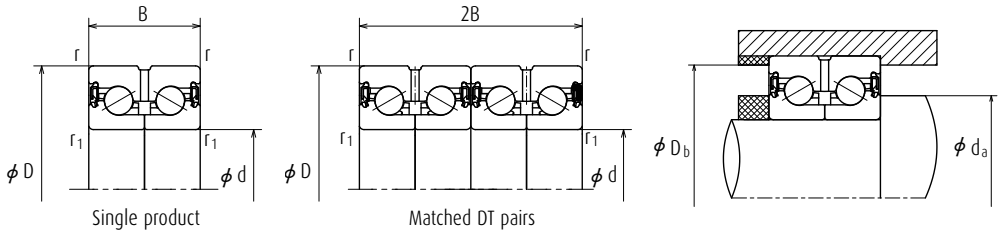

BSN Type matched DT pairs

Bearing Numbers	Boundry Dimensions (mm)				Dimensions (mm)		Contact Angle (°)	Basic Load Rating (kN)		Limiting ⁽¹⁾ Axial Load (kN)	Axial Rigidity (N/μm)	Mass (kg)	Allowable rotating speed (min ⁻¹)	Starting torque (N·m)	Recommended nut tightening force (N)	
	d	D	2B	r (min)	r ₁ (min)	φ d _a (min)		φ D _b (max)	C ₀ (Dynamic)							C _{0a} (Static)
BSN1747-DT	17	47	50	0.6	0.6	21	37	60	33.0	59.5	42.5	790	0.46	6 700	0.10	4 400
BSN2052-DT	20	52	56	0.6	0.6	24	43	60	43.0	82.0	58.5	1 180	0.62	5 800	0.26	7 600
BSN2557-DT	25	57	56	0.6	0.6	29	48	60	46.0	96.0	68.0	1 370	0.71	5 100	0.32	8 100
BSN3062-DT	30	62	56	0.6	0.6	34	53	60	49.0	111	77.0	1 580	0.80	4 500	0.37	8 600
BSN3072-DT	30	72	76	0.6	0.6	35	64	60	98.0	188	133	1 800	1.47	3 900	1.17	11 100
BSN3572-DT	35	72	68	0.6	0.6	40	62	60	68.0	155	104	1 630	1.32	3 800	0.41	13 500
BSN4075-DT	40	75	68	0.6	0.6	46	67	60	72.0	176	117	1 850	1.30	3 500	0.49	14 100
BSN4090-DT	40	90	92	0.6	0.6	46	80	60	128	269	182	2 300	2.76	3 100	2.03	18 700
BSN5090-DT	50	90	68	0.6	0.6	56	82	60	78.0	220	143	2 330	1.86	2 800	0.66	15 400
BSN50110-DT	50	110	108	0.6	0.6	57	98	60	188	440	299	2 690	4.92	2 500	2.11	19 100


3. Inner rings can be separable easily. Please push or pull bearings by clamping innering at mounting and dismounting.

4. Abutment and fillet dimensions are recommendable values for the use of standard Machine tool applications.

For heavy load applications, please ask NSK.

Accessories

BSBD Series

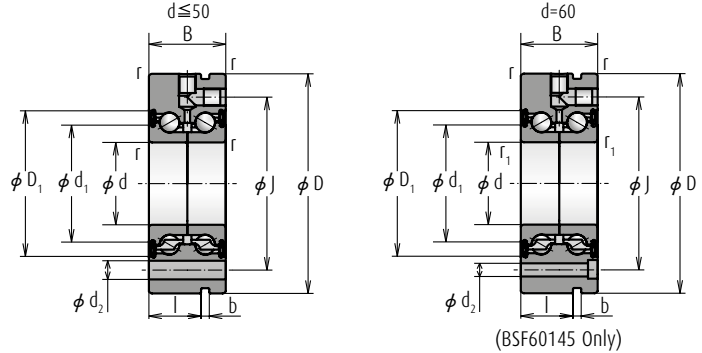

BSF Type Single product

Bearing Numbers	Boundry Dimensions (mm)					Basic Load Rating (kN)		Limiting ⁽¹⁾ Axial Load (kN)	Axial Rigidity (N/μm)	Mass (kg)	Allowable rotating speed (min ⁻¹) Grease Lubrication
	d	D	B	r (min)	r ₁ (min)	C _a (Dynamic)	C _{0a} (Static)				
BSF1255	12	55	25	0.6	0.3	18.5	24.0	17.6	375	0.37	8 000
BSF1560	15	60	25	0.6	0.3	19.4	26.9	19.4	400	0.44	7 100
BSF1762	17	62	25	0.6	0.6	20.3	29.7	21.2	450	0.46	6 700
BSF2068	20	68	28	0.6	0.6	26.4	41.0	29.3	650	0.61	5 800
BSF2575	25	75	28	0.6	0.6	28.3	48.0	34.0	750	0.73	5 100
BSF3080	30	80	28	0.6	0.6	30.0	55.5	38.5	850	0.79	4 500
BSF30100	30	100	38	0.6	0.6	60.5	94	66.5	950	1.71	3 900
BSF3590	35	90	34	0.6	0.6	42.0	77.5	52.0	900	1.20	3 800
BSF40100	40	100	34	0.6	0.6	44.5	88.0	58.5	1 000	1.49	3 500
BSF40115	40	115	46	0.6	0.6	78.5	135	91.0	1 200	2.56	3 100
BSF50115	50	115	34	0.6	0.6	48.0	110	71.5	1 250	1.89	2 800
BSF50140	50	140	54	0.6	0.6	116	219	149	1 400	4.46	2 500
BSF60145	60	145	45	0.6	0.6	86.5	187	126	1 300	4.06	2 400



BSF Type matched pairs

Bearing Numbers	Boundry Dimensions (mm)					Basic Load Rating (kN)		Limiting ⁽¹⁾ Axial Load (kN)	Axial Rigidity (N/μm)	Mass (kg)	Allowable rotating speed (min ⁻¹) Grease Lubrication
	d	D	2B	r (min)	r ₁ (min)	C _a (Dynamic)	C _{0a} (Static)				
BSF1762-DT	17	62	50	0.6	0.6	33.0	59.5	42.5	790	0.890	6 700
BSF2068-DT	20	68	56	0.6	0.6	43.0	82.0	58.5	1 180	1.17	5 800
BSF2575-DT	25	75	56	0.6	0.6	46.0	96.0	68.0	1 370	1.46	5 100
BSF3080-DT	30	80	56	0.6	0.6	49.0	111	77.0	1 580	1.58	4 500
BSF30100-DT	30	100	76	0.6	0.6	98.0	188	133	1 800	3.41	3 900
BSF3590-DT	35	90	68	0.6	0.6	68.0	155	104	1 630	2.30	3 800
BSF40100-DT	40	100	68	0.6	0.6	72.0	176	117	1 850	2.88	3 500
BSF40115-DT	40	115	92	0.6	0.6	128	269	182	2 300	5.12	3 100
BSF50115-DT	50	115	68	0.6	0.6	78.0	220	143	2 330	3.78	2 800
BSF50140-DT	50	140	108	0.6	0.6	188	440	299	2 690	8.92	2 500

Notes

1. Permissible axial load equals 0.7 times of limiting axial load.
The values refer to the limiting load of the bearing only, without taking the mounting bolts into account.
2. The values indicate starting torque of preloaded bearings, not including seal torque.
3. Inner rings can be separable easily. Please push or pull bearings by clamping inner ring at mounting and dismounting.


BSBD Series Bearings for ball screw support

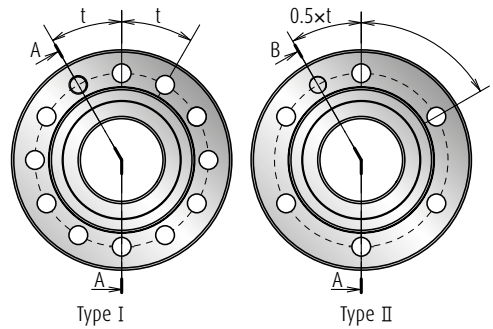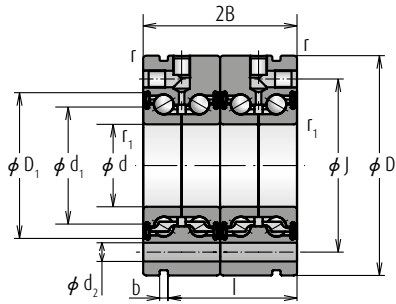

Reference Dimensions (mm)							Type	Mounting Bolts		Preload (N)	Starting torque ⁽²⁾ (N-m)	Recommended nut Clamping Force (N)
d	D ₁	J	d ₂	I	b	t		Bolt Dia.	Number of Bolts		H	
23.7	32.7	42	6.8	17	3	3 × 120°	II	M6	3	720	0.038	4 030
26.7	35.7	46	6.8	17	3	3 × 120°	II	M6	3	675	0.034	4 050
28.1	37.7	48	6.8	17	3	3 × 120°	II	M6	3	890	0.05	4 400
32.6	43	53	6.8	19	3	4 × 90°	II	M6	4	1 885	0.13	7 600
37.6	48	58	6.8	19	3	4 × 90°	II	M6	4	2 245	0.16	8 100
42.6	53	63	6.8	19	3	6 × 60°	II	M6	6	2 625	0.19	8 600
49.1	64.4	80	8.8	30	3	8 × 45°	II	M8	8	4 855	0.59	11 100
53.1	62.2	75	8.8	25	3	4 × 90°	II	M8	4	2 630	0.21	13 500
55.1	67.2	80	8.8	25	3	4 × 90°	II	M8	4	3 065	0.24	14 100
63.1	80.1	94	8.8	36	3	12 × 30°	II	M8	12	7 220	1.02	18 700
70.1	82.2	94	8.8	25	3	6 × 60°	II	M8	6	4 020	0.33	15 400
78.1	97.5	113	11	45	3	12 × 30°	II	M10	12	7 435	1.06	19 100
83.1	99.3	120	8.8	35	3	8 × 45°	II	M8	8	4 780	0.50	20 900

Reference Dimensions (mm)							Type	Mounting Bolts		Starting torque ⁽²⁾ (N-m)	Recommended nut Clamping Force (N)
d	D ₁	J	d ₂	I	b	t		Bolt Dia.	Number of Bolts	H	
28.1	37.7	48	6.8	42	3	6 × 60°	I	M6	5	0.10	4 400
32.6	43	53	6.8	47	3	8 × 45°	I	M6	7	0.26	7 600
37.6	48	58	6.8	47	3	8 × 45°	I	M6	7	0.32	8 100
42.6	53	63	6.8	47	3	12 × 30°	I	M6	11	0.37	8 600
49.1	64.4	80	8.8	68	3	8 × 45°	II	M8	8	1.17	11 100
53.1	62.2	75	8.8	59	3	8 × 45°	I	M8	7	0.41	13 500
55.1	67.2	80	8.8	59	3	8 × 45°	I	M8	7	0.49	14 100
63.1	80.1	94	8.8	82	3	12 × 30°	II	M8	12	2.03	18 700
70.1	82.2	94	8.8	59	3	12 × 30°	I	M8	11	0.66	15 400
78.1	97.5	113	11	99	3	12 × 30°	II	M10	12	2.11	19 100

B-3-2 Dimension Table and Reference Number of Standard Nut Ball Screws



End Deflector Type	Page
Tube Type.....	B453
Deflector(bridge) Type.....	B459
End Cap Type	B491
	B505

B-3-2.1 End Deflector Type Ball Screws

This product is being applied for a patent.

1. Features

▶ Low and less offensive noise

The average noise level is reduced by more than 6dB(A) compared with our existing products. At low-speed rotation, the ball screws are nearly silent, while their noise is unprecedentedly low at high-speed rotation.

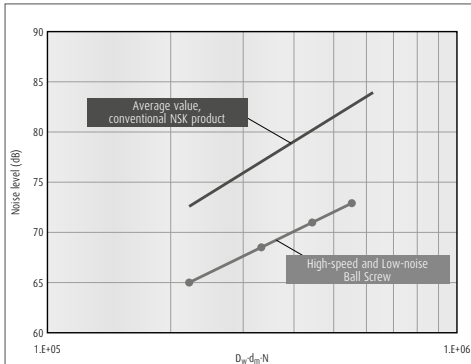


Fig. 1 Comparison of noise level

▶ High-speed operation

Realizes the d-n of 180 000, outstanding for ball screws and far surpassing the 100 000 d-n performance of existing return tube type products. For high-lead ball screws, high-speed operation at over 200 m/min is also possible.

▶ Compact

The external diameter of the ball nut is 30% smaller than our existing models. Compact configurations are possible for low-profile XY tables as well as for other devices and equipment.

▶ Grease fitting provided as standard equipment

The ball screws with shaft diameters equal to or less than $\phi 25$ are equipped with a grease fitting (M5 \times 0.8) as a standard. Lubrication ports are provided in 2 places for ease of maintenance. The ball screws can be easily connected to an integrated lubrication system.

2. Specifications

(1) Ball recirculation system

Fig. 2 shows the structure of the end-deflector recirculation system.

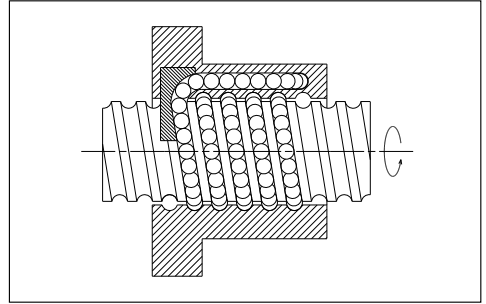


Fig. 2 Structure of end-deflector recirculation system

(2) Accuracy grade and axial play

The available standard accuracy grade and axial play are as follows. Please consult NSK for other grades.

Table 1 Accuracy grade and axial play

Accuracy grade	C0, C1, C2, C3, C5, C17
Axial play	Z, 0 mm (preloaded); T, 0.005 mm or less; S, 0.020 mm or less; N, 0.050 mm or less

(3) Accuracy grade and axial play

Allowable d-n value and the criterion of maximum rotational speed are shown below.

Please consult NSK if the rotational speed exceeds the permissible range below.

Allowable d-n value : 180 000 or less

Standard of rotational speed : 5 000 min⁻¹

Note: Please also review the critical speed. See "Technical Description: Permissible Rotational Speed" (page B47) for details.

(4) Seal

A compact and thin plastic seal is used. Nut outside diameter is compact compare with the return tube recirculation system.

(5) Option

Optional NSK K1 lubrication unit, molded from resin and impregnated with lubrication oil, supplies fresh oil onto ball rolling surfaces, ensuring long-term, maintenance-free operation. Please contact NSK when using NSK K1.

3. Design precautions

When designing the shaft end of a ball screw which diameter is 25 mm or less, or 32 mm or over, and the lead is the same as its shaft diameter, one end of the screw must meet either one of the following conditions. If not, we

cannot install the ball nut on the screw shaft.


- › Cut the ball groove through to the shaft end.
- › The diameters of bearing journals and the gear or pulley seat must be less than the root diameter of ball groove "dr" specified on the dimension table.

For general precautions regarding ball screws, refer to "Design Precautions"(page B83) and "Handling Precautions"(page B103).

4. Product categories

End deflector type ball screws have the model as follows.


Table 2 End-deflector type ball screw product categories

Nut model	Shape	Flang shape	Nut shape	Preload system
BSS		Circular II, III	Circular	Non-preload, Slight axial play P-preload (light preload)


5. Structure of model number and reference number

The following describe the structure of "Model number" and "Reference number for ball screw".


› Model Number

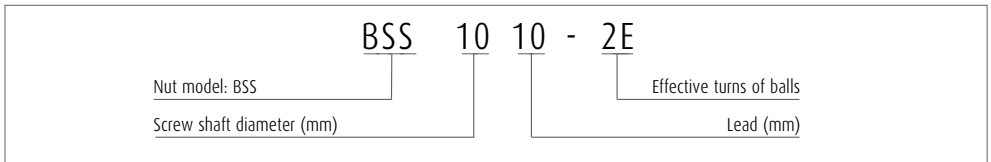

› Reference number for ball screw

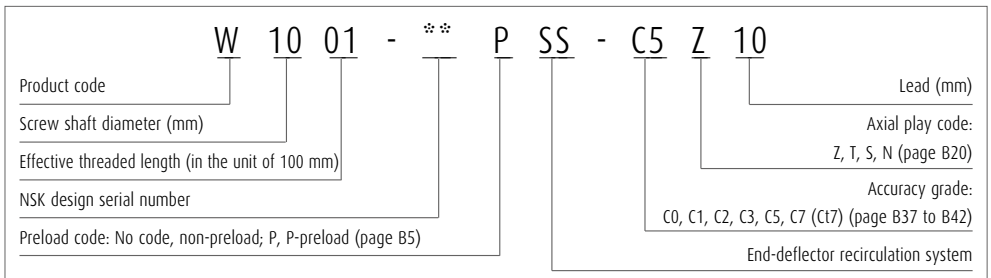


End deflector type

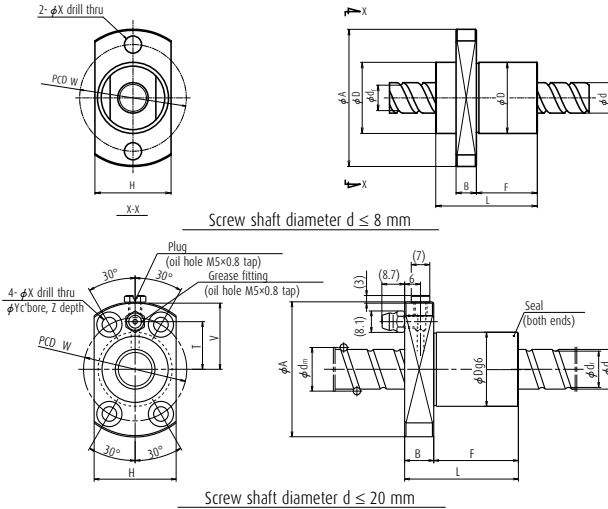

Model No.	Shaft dia. d	Lead l	Ball dia. D _w	Ball circle dia. d _m	Root dia. d _r	Effective turns of balls	Basic load rating (N)		Axial rigidity K (N/μm)
							Dynamic C _a	Static C _{0a}	
BSS0608-2E	6	8	1.2	6.2	4.9	2	620	725	32
BSS0608-4E	6	8	1.2	6.2	4.9	2	1 330	1 750	75
BSS0612-2E	6	12	1.2	6.2	4.9	2	600	720	29
BSS0612-4E	6	12	1.2	6.2	4.9	2	1 280	1 770	69
BSS0810-2E	8	10	1.588	8.3	6.6	2	1 040	1 280	43
BSS0810-4E	8	10	1.588	8.3	6.6	2	2 220	3 090	99
BSS0815-2E	8	15	1.588	8.3	6.6	2	1 010	1 290	40
BSS0815-4E	8	15	1.588	8.3	6.6	2	2 170	3 170	93
BSS1005-3E	10	5	2.000	10.3	8.2	3	3 420	4 840	133
BSS1010-2E	10	10	2.000	10.3	8.2	2	2 290	2 980	81
BSS1205-3E	12	5	2.000	12.3	10.2	3	3 750	5 810	154
BSS1210-3E	12	10	2.000	12.3	10.2	3	3 760	5 780	150
BSS1210-3E	12	20	2.000	12.3	10.2	2	2 330	3 600	86
BSS1230-2E	12	30	2.000	12.3	10.2	2	2 190	3 650	75
BSS1505-3E	15	5	2.778	15.5	12.6	3	6 410	10 100	193
BSS1510-3E	15	10	2.778	15.5	12.6	3	6 530	10 200	192
BSS1520-2E	15	20	3.175	15.5	12.2	2	5 660	8 700	132
BSS1530-2E	15	30	3.175	15.5	12.2	2	5 500	8 580	119
BSS2005-3E	20	5	3.175	20.5	17.2	3	10 400	18 500	284
BSS2010-3E	20	10	3.175	20.5	17.2	3	10 200	18 600	281
BSS2020-2E	20	20	3.175	20.5	17.2	2	6 790	11 800	175
BSS2030-2E	20	30	3.175	20.5	17.2	2	6 550	11 800	164
BSS2040-2E	20	40	3.175	20.5	17.2	2	6 380	11 600	151
BSS2060-2E	20	60	3.175	20.5	17.2	2	5 680	11 800	126
BSS2505-3E	25	5	3.175	25.5	22.2	3	11 500	23 500	343
BSS2510-4E	25	10	3.175	25.5	22.2	4	15 000	32 400	460
BSS2520-2E	25	20	3.175	25.5	22.2	2	7 650	14 800	214
BSS2525-2E	25	25	3.175	25.5	22.2	2	7 490	14 600	206
BSS2530-2E	25	30	3.175	25.5	22.2	2	7 490	14 600	203
BSS2550-2E	25	50	3.175	25.5	22.2	2	6 910	14 700	180

Note 1) The axial rigidity K in the table above is a theoretical value derived from elastic displacement between screw grooves and balls when axial load is applied to a ball nut for which preload is set at 3% of the basic dynamic load rating (C_a). For ball screws with shaft diameters less than φ 25, the standard Compact FA PSS type can be available.

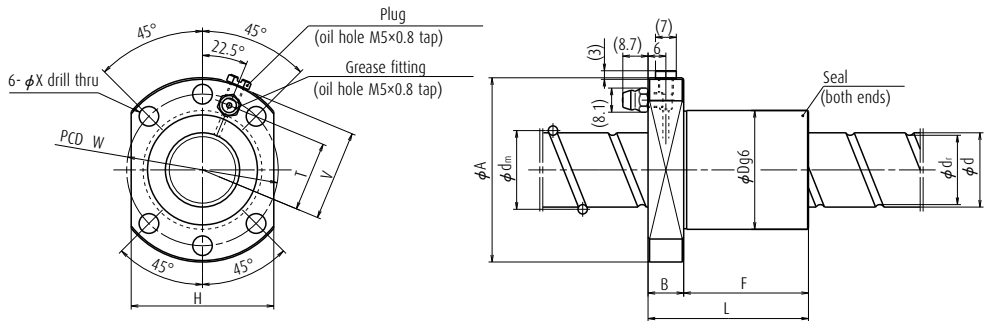

Screw shaft diameter $d = 25$ mm



Unit: mm

Nut entire length L	Nut diameter D	Flange diameter A	Flange width B	Nut length F	Flange dimension		Bolt hole PCD W	Basic load rating (N)			Oil hole distance T
					H	V		X	Y	Z	
16	14	27	4	8	15 (10)	—	21	3.4	—	—	—
24	14	27	4	16	15 (10)	—	21	3.4	—	—	—
20	14	27	4	16	15 (10)	—	21	3.4	—	—	—
32	14	27	4	16	15 (10)	—	21	3.4	—	—	—
18	18	31	4	10	19 (13)	—	25	3.4	—	—	—
28	18	31	4	20	19 (13)	—	25	3.4	—	—	—
22	18	31	4	14	19 (13)	—	25	3.4	—	—	—
37	18	31	4	29	19 (13)	—	25	3.4	—	—	—
29	23	43	11	18	26	21	33	4.5	8	4.5	14
32	23	43	11	21	26	21	33	4.5	8	4.5	14
30	24	44	11	19	27	21.5	34	4.5	8	4.5	14.5
43	24	44	11	32	27	21.5	34	4.5	8	4.5	14.5
50	24	44	11	39	27	21.5	34	4.5	8	4.5	14.5
70	24	44	11	59	27	21.5	34	4.5	8	4.5	14.5
30	28	51	11	19	31	25	39	5.5	9.5	5.5	18
43	28	51	11	32	31	25	39	5.5	9.5	5.5	18
51	32	55	11	40	33	27	43	5.5	9.5	5.5	20
71	32	55	11	60	33	27	43	5.5	9.5	5.5	20
31	36	62	13	18	38	30.5	49	6.6	11	6.5	23.5
45	36	62	13	32	38	30.5	49	6.6	11	6.5	23.5
54	36	62	13	41	38	30.5	49	6.6	11	6.5	23.5
74	36	62	13	61	38	30.5	49	6.6	11	6.5	23.5
92	36	62	13	79	38	30.5	49	6.6	11	6.5	23.5
129	36	62	13	116	38	30.5	49	6.6	11	6.5	23.5
32	40	62	12	20	48	30.5	51	6.6	—	—	23.5
56	40	62	12	44	48	30.5	51	6.6	—	—	23.5
54	40	62	12	42	48	30.5	51	6.6	—	—	23.5
63	40	62	12	51	48	30.5	51	6.6	—	—	23.5
74	40	62	12	62	48	30.5	51	6.6	—	—	23.5
114	40	62	12	102	48	30.5	51	6.6	—	—	23.5

2) The axial play of $\phi 6$ mm and $\phi 8$ mm shaft diameter is only for T=0.005mm max.

3) Dimensions in parentheses are for flat nut configurations.



End deflector type

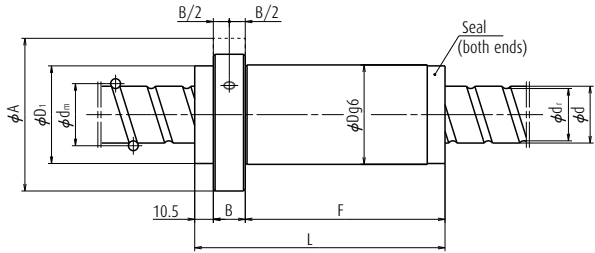

Screw shaft diameter $d = 32$ mm

Model No.	Shaft dia. d	Lead l	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective turns of balls	Basic load rating (N)		Axial rigidity K (N/ μ m)
							Dynamic C_a	Static C_{0a}	
BSS3205-4E	32	5	3.175	32.5	29.2	4	16 800	41 700	566
BSS3210-6E	32	10	5.556	33	27.2	6	50 900	110 000	907
BSS3212-5E	32	12	5.556	33	27.2	5	43 000	91 300	755
BSS3216-5E	32	16	5.556	33	27.2	5	44 300	90 800	756
BSS3220-5E	32	20	5.556	33	27.2	5	43 900	91 200	752
BSS3232-2E	32	32	5.556	33	27.2	2	17 700	32 900	274
BSS3264-2E	32	64	5.556	33	27.2	2	16 800	32 900	240
BSS3605-3E	36	5	3.175	36.5	33.2	3	13 500	34 100	459
BSS3610-6E	36	10	6.35	37	30.4	6	65 000	141 000	018
BSS3612-6E	36	12	6.35	37	30.4	6	64 800	141 000	014
BSS3616-6E	36	16	6.35	37	30.4	6	64 500	142 000	012
BSS3620-6E	36	20	6.35	37	30.4	6	64 000	141 000	001
BSS4010-5E	40	10	6.35	41	34.4	5	58 100	130 000	924
BSS4012-5E	40	12	6.35	41	34.4	5	58 000	130 000	922
BSS4016-5E	40	16	6.35	41	34.4	5	57 700	131 000	921
BSS4020-5E	40	20	6.35	41	34.4	5	57 400	130 000	913
BSS4025-4E	40	25	6.35	41	34.4	4	46 300	102 000	720
BSS4030-3E	40	30	6.35	41	34.4	3	36 100	74 800	533
BSS4040-2E	40	40	6.35	41	34.4	2	23 700	47 100	334
BSS4080-2E	40	80	6.35	41	34.4	2	22 200	46 600	289
BSS4510-5E	45	10	6.35	46	39.4	5	62 400	147 000	026
BSS4512-5E	45	12	6.35	46	39.4	5	62 300	147 000	023
BSS4516-5E	45	16	6.35	46	39.4	5	62 100	147 000	018
BSS4520-5E	45	20	6.35	46	39.4	5	61 800	146 000	011
BSS4525-5E	45	25	6.35	46	39.4	5	61 400	147 000	006
BSS4530-4E	45	30	6.35	46	39.4	4	49 600	115 000	790
BSS5010-4E	50	10	6.35	51	44.4	4	52 600	129 000	883
BSS5012-4E	50	12	6.35	51	44.4	4	52 500	129 000	881
BSS5016-4E	50	16	6.35	51	44.4	4	52 400	128 000	878
BSS5020-4E	50	20	6.35	51	44.4	4	52 200	129 000	879
BSS5025-4E	50	25	6.35	51	44.4	4	51 900	129 000	871
BSS5030-4E	50	30	6.35	51	44.4	4	51 500	128 000	861
BSS5050-2E	50	50	6.35	51	44.4	2	26 100	58 300	394
BSS50100-2E	50	100	6.35	51	44.4	2	24 100	58 900	343

Note The axial rigidity K in the table above is a theoretical value derived from elastic displacement between screw grooves and balls when axial load is applied to a ball nut for which preload is set at 3% of the basic dynamic load rating (C_a).

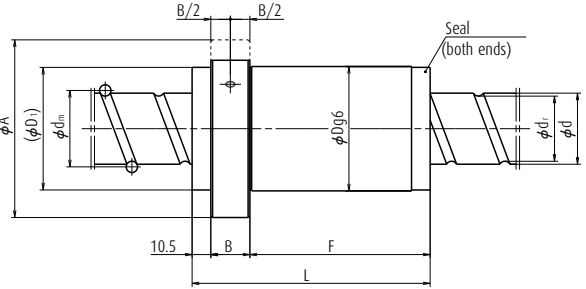

Screw shaft diameter $d \geq 36$ mm

Unit: mm

Nut entire length L	Nut diameter D	Seal section diameter D ₁	Flange diameter A	Flange width B	Nut length F	Notched flange G	Bolt hole PCD W	Bolt hole dimension X
55	56	(55)	86	12	32.5	34	71	9
104	56	(55)	86	18	75.5	34	71	9
103	56	(55)	86	18	74.5	34	71	9
122	56	(55)	86	18	93.5	34	71	9
141	56	(55)	86	18	112.5	34	71	9
94	56	(55)	86	18	65.5	34	71	9
153	56	(55)	86	18	124.5	34	71	9
50	65	(64)	95	12	27.5	36	80	9
109	65	(64)	95	22	76.5	36	80	9
120	65	(64)	95	22	87.5	36	80	9
143	65	(64)	95	22	110.5	36	80	9
166	65	(64)	95	22	133.5	36	80	9
99	70	(69)	100	22	66.5	38.5	85	9
108	70	(69)	100	22	75.5	38.5	85	9
127	70	(69)	100	22	94.5	38.5	85	9
146	70	(69)	100	22	113.5	38.5	85	9
145	70	(69)	100	22	112.5	38.5	85	9
134	70	(69)	100	22	101.5	38.5	85	9
110	70	(69)	100	22	77.5	38.5	85	9
184	70	(69)	100	22	151.5	38.5	85	9
99	75	(74)	110	22	66.5	43	93	11
108	75	(74)	110	22	75.5	43	93	11
127	75	(74)	110	22	94.5	43	93	11
146	75	(74)	110	22	113.5	43	93	11
170	75	(74)	110	22	137.5	43	93	11
164	75	(74)	110	22	131.5	43	93	11
89	82	(81)	118	22	56.5	46	100	11
96	82	(81)	118	22	63.5	46	100	11
111	82	(81)	118	22	78.5	46	100	11
126	82	(81)	118	22	93.5	46	100	11
145	82	(81)	118	22	112.5	46	100	11
164	82	(81)	118	22	131.5	46	100	11
130	82	(81)	118	22	97.5	46	100	11
224	82	(81)	118	22	191.5	46	100	11

B-3-2.2 Return Tube Type Ball Screws

1. Features

Return tube type is a standard way of ball recirculation system for ball screws. It has various combinations of shaft diameter and lead.

2. Specifications

(1) Ball recirculation system

The structure of return tube recirculation system is shown below.

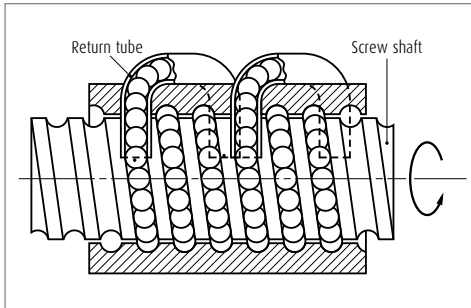


Fig.1 Structure of return tube recirculation system

Table 1 Accuracy grade and axial play

Accuracy grade	SFT, PFT, ZFT, DFT: C0, C1, C2, C3, C5, C7 LSFT, LPFT, LDFT: C1, C2, C3, C5, C7 (C7 is not included in DFT, LDFT)
Axial play	Z, 0 mm (preloaded); T, 0.005 mm or less; S, 0.020 mm or less; N, 0.050 mm or less

Table 2 Return tube type ball screws product categories

Nut model	Shape	Flange shape	Nut shape	Preload system
SFT		Flanged d=16mm or under Rectangle d=20mm or over Circular I, II	Circle dia.	Non-preload, Slight axial play
PFT				P-preload (light preload) Spacer ball 1:1
ZFT		Flanged Circular I, II	Circle dia.	Z-preload (medium preload)

(2) Accuracy grade and axial play

The available standard accuracy grade and axial play are shown in Table 1. Please consult NSK for other grades.

(3) Allowable d-n value and the criterion of maximum rotational speed

Allowable d-n value and the criterion of maximum rotational speed are shown below. Please consult NSK if the rotational speed exceeds the permissible range below. Basic measures must be taken for the high-speed ball screws respectively.

Allowable d-n value :

Standard specification ; 70 000 or less
High-speed specification ; 100 000 or less

Standard of rotational speed : 3 000 min⁻¹

Note: Please also review the critical speed. Refer to "Technical Description: Permissible Rotational Speed" (page B47) for details.

(4) Option




A type equipped with NSK K1 lubrication unit is also available.

(5) Other specifications

Please consult NSK for other specifications not listed in the dimension tables.

3. Product categories

There are four different preloaded systems with several models. Since the leads are in the range from 1/2 to the same length of the shaft


Nut model	Shape	Flange shape	Nut shape	Preload system
DFT		Flanged Circular I, II	Circular	D-preload (medium preload) (heavy preload)
LSFT		Flanged d=20mm or under Rectangle d=25mm or over Circular II	d=20mm or under Circular d=25mm or over Tube- projecting type	Non-preload, Slight axial play
LPFT				P-preload (light preload) Spacer ball 1:1
LDFT		Flanged Circular II	Circular	D-preload (medium preload) (heavy preload)

diameter (medium-high helix lead), LSFT, LPFT, LDFT Type ball screws are suitable for high-speed operation.

4. Structure of model number and reference number


The followings describe the structure of "Model number" and "Reference number for ball screw".

> Model number

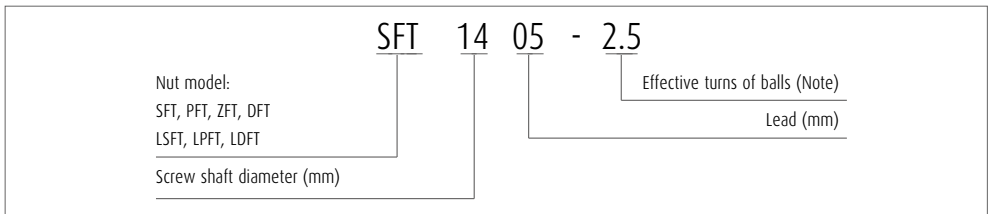


Note: In case of Z-preload, the number here is twice as large as the effective turns of balls.

> Reference number for ball screw

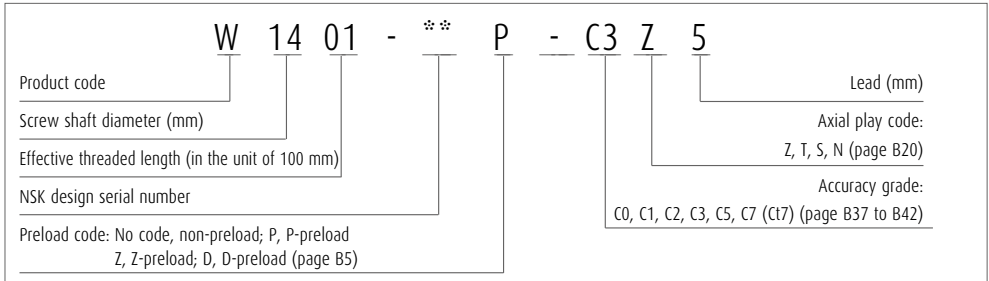


Return tube type

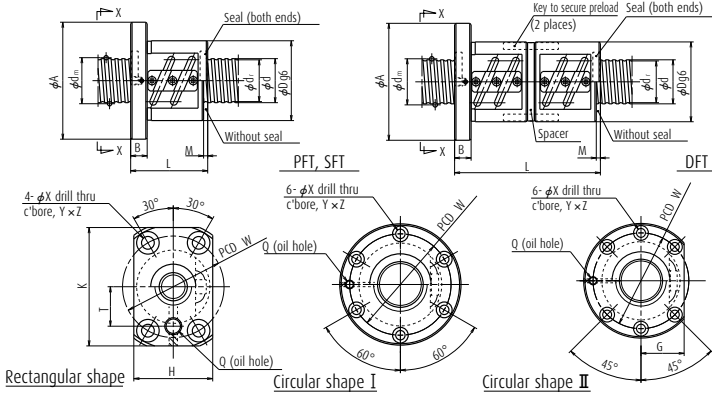

Model No.	Preload system	Shaft dia. d	Lead l	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective turns of balls \times Circuits	Basic load rating (N)		Axial rigidity K (N/ μ m)
								Dynamic C_a	Static C_{0a}	
PFT 1605-3	P	16	5	3.175	16.5	13.2	1.5 \times 2	6 350	8 070	166
SFT 1605-2.5	Clearance	16	5	3.175	16.5	13.2	2.5 \times 1	8 620	13 800	168
DFT 1605-2.5	D	16	5	3.175	16.5	13.2	2.5 \times 1	8 620	13 800	330
PFT 1605-5	P	16	5	3.175	16.5	13.2	2.5 \times 2	9 850	13 800	270
SFT 1605-3	Clearance	16	5	3.175	16.5	13.2	1.5 \times 2	10 100	16 100	197
DFT 1605-3	D	16	5	3.175	16.5	13.2	1.5 \times 2	10 100	16 100	387
SFT 1605-5	Clearance	16	5	3.175	16.5	13.2	2.5 \times 2	15 600	27 600	326
DFT 1605-5	D	16	5	3.175	16.5	13.2	2.5 \times 2	15 600	27 600	639
PFT 1606-2.5	P	16	6	3.175	16.5	13.2	2.5 \times 1	5 410	6 880	139
SFT 1606-2.5	Clearance	16	6	3.175	16.5	13.2	2.5 \times 1	8 590	13 800	168
DFT 1606-2.5	D	16	6	3.175	16.5	13.2	2.5 \times 1	8 590	13 800	329
SFT 1606-3	Clearance	16	6	3.175	16.5	13.2	1.5 \times 2	10 100	16 100	197
DFT 1606-3	D	16	6	3.175	16.5	13.2	1.5 \times 2	10 100	16 100	386
* LPFT 1616-1.5	P	16	16	3.175	16.75	13.4	1.5 \times 1	4 180	5 390	107
LSFT 1616-1.5	Clearance	16	16	3.175	16.75	13.4	1.5 \times 1	5 480	8 080	98
SFT 2004-2.5	Clearance	20	4	2.381	20.3	17.8	2.5 \times 1	5 730	10 900	171
DFT 2004-2.5	D	20	4	2.381	20.3	17.8	2.5 \times 1	5 730	10 900	336
* PFT 2004-5	P	20	4	2.381	20.3	17.8	2.5 \times 2	6 550	10 900	276
SFT 2004-5	Clearance	20	4	2.381	20.3	17.8	2.5 \times 2	10 400	21 800	332
DFT 2004-5	D	20	4	2.381	20.3	17.8	2.5 \times 2	10 400	21 800	651
PFT 2005-3	P	20	5	3.175	20.5	17.2	1.5 \times 2	7 140	10 300	201
SFT 2005-2.5	Clearance	20	5	3.175	20.5	17.2	2.5 \times 1	9 690	17 100	201
DFT 2005-2.5	D	20	5	3.175	20.5	17.2	2.5 \times 1	9 690	17 100	393
* PFT 2005-5	P	20	5	3.175	20.5	17.2	2.5 \times 2	11 100	17 100	327
SFT 2005-3	Clearance	20	5	3.175	20.5	17.2	1.5 \times 2	11 300	20 500	238
DFT 2005-3	D	20	5	3.175	20.5	17.2	1.5 \times 2	11 300	20 500	467
SFT 2005-5	Clearance	20	5	3.175	20.5	17.2	2.5 \times 2	17 600	34 200	388
DFT 2005-5	D	20	5	3.175	20.5	17.2	2.5 \times 2	17 600	34 200	762



- Notes**
1. Nut flange for shaft diameter 20 mm or larger comes in circular shape I and circular shape II. Select a flange that is suitable for the space available for nut installation.
 2. If there is no seal for PFT, SFT, and DFT, the nut length "L" is shortened by dimension "M".
 3. Seals are equipped as a standard for LSFT and LPFT of shaft diameter 20 mm or smaller. The outside dimensions are the same as those of without seals.
 4. The right turn screw is standard. "L" is added to the end of the model code for the left turn screw.

Return tube type

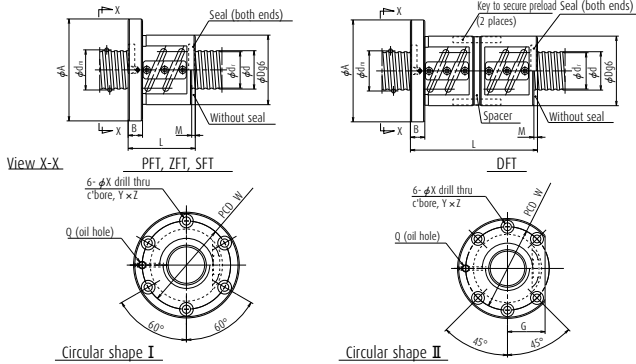

Model No.	Preload system	Shaft dia. d	Lead l	Ball dia. D _w	Ball circle dia. d _m	Root dia. d _r	Effective turns of balls turns × Circuits	Basic load rating (N)		Axial rigidity K (N/μm)
								Dynamic C _a	Static C _{0a}	
PFT 2006-2.5	P	20	6	3.969	20.5	16.4	2.5×1	8 120	10 500	172
PFT 2006-3	P	20	6	3.969	20.5	16.4	1.5×2	9 500	12 600	204
SFT 2006-2.5	Clearance	20	6	3.969	20.5	16.4	2.5×1	12 900	21 000	204
DFT 2006-2.5	D	20	6	3.969	20.5	16.4	2.5×1	12 900	21 000	401
SFT 2006-3	Clearance	20	6	3.969	20.5	16.4	1.5×2	15 100	25 200	243
DFT 2006-3	D	20	6	3.969	20.5	16.4	1.5×2	15 100	25 200	477
PFT 2008-2.5	P	20	8	3.969	20.5	16.4	2.5×1	8 080	10 500	170
SFT 2008-2.5	Clearance	20	8	3.969	20.5	16.4	2.5×1	12 800	20 900	203
DFT 2008-2.5	D	20	8	3.969	20.5	16.4	2.5×1	12 800	20 900	397
SFT 2008-3	Clearance	20	8	3.969	20.5	16.4	1.5×2	15 000	25 100	241
DFT 2008-3	D	20	8	3.969	20.5	16.4	1.5×2	15 000	25 100	473
* LPFT 2010-2.5	P	20	10	3.969	21.0	16.9	2.5×1	8 350	11 000	177
LSFT 2010-2.5	Clearance	20	10	3.969	21.0	16.9	2.5×1	13 300	21 900	211
LPFT 2016-2.5	P	20	16	3.969	21.0	16.9	2.5×1	8 170	10 800	171
LSFT 2016-2.5	Clearance	20	16	3.969	21.0	16.9	2.5×1	13 000	21 600	203
* LPFT 2020-1.5	P	20	20	3.969	21.0	16.9	1.5×1	6 250	8 760	132
LSFT 2020-1.5	Clearance	20	20	3.969	21.0	16.9	1.5×1	8 190	13 100	123
SFT 2504-2.5	Clearance	25	4	2.381	25.3	22.8	2.5×1	6 220	13 600	203
ZFT 2504-5	Z	25	4	2.381	25.3	22.8	2.5×1	6 220	13 600	399
* PFT 2504-5	P	25	4	2.381	25.3	22.8	2.5×2	7 110	13 600	328
SFT 2504-5	Clearance	25	4	2.381	25.3	22.8	2.5×2	11 300	27 200	394
ZFT 2504-10	Z	25	4	2.381	25.3	22.8	2.5×2	11 300	27 200	773
PFT 2505-3	P	25	5	3.175	25.5	22.2	1.5×2	7 940	12 800	235
SFT 2505-2.5	Clearance	25	5	3.175	25.5	22.2	2.5×1	10 800	21 800	243
ZFT 2505-5	Z	25	5	3.175	25.5	22.2	2.5×1	10 800	21 800	477
* PFT 2505-5	P	25	5	3.175	25.5	22.2	2.5×2	12 300	21 800	391
SFT 2505-3	Clearance	25	5	3.175	25.5	22.2	1.5×2	12 600	25 600	285
DFT 2505-3	D	25	5	3.175	25.5	22.2	1.5×2	12 600	25 600	558
PFT 2505-7.5	P	25	5	3.175	25.5	22.2	2.5×3	17 500	32 700	576
SFT 2505-5	Clearance	25	5	3.175	25.5	22.2	2.5×2	19 600	43 600	470
ZFT 2505-10	Z	25	5	3.175	25.5	22.2	2.5×2	19 600	43 600	923
SFT 2505-7.5	Clearance	25	5	3.175	25.5	22.2	2.5×3	27 700	65 400	692

- Notes**
1. Nut flange for shaft diameter 16 mm or smaller comes in rectangular shape. It comes in circular shape I and circular shape II for shaft diameter 20 mm or larger. Select a flange that is suitable for the space available for nut installation.
 2. If there is no seal for PFT, SFT, and DFT, the nut length "L" is shortened by dimension "M".
 3. Seals are equipped as a standard for LSFT and LPFT of shaft diameter 20 mm or smaller. The outside dimensions are the same as those of without seals.
 4. The right turn screw is standard. "L" is added to the end of the model code for the left turn screw.

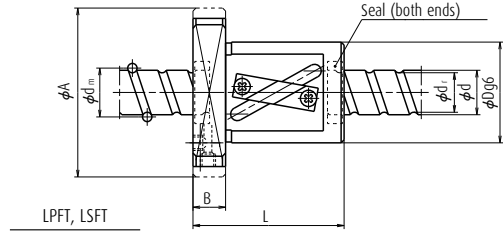

Unit: mm

Ball nut dimensions

Nut entire length L	Nut diameter D	Flanged diameter A	Flanged width B	Notched flange G	Rectangle flanged diameter		Seal dimension M	Bolt hole dimension			Bolt hole PCD W	Oil hole length T	Oil hole Q
					H	K		X	Y	Z			
44	48	71	11	27	—	—	3	5.5	9.5	5.5	59	—	M6×1
56	48	71	11	27	—	—	3	5.5	9.5	5.5	59	—	M6×1
44	48	71	11	27	—	—	3	5.5	9.5	5.5	59	—	M6×1
86	48	71	11	27	—	—	3	5.5	9.5	5.5	59	—	M6×1
56	48	71	11	27	—	—	3	5.5	9.5	5.5	59	—	M6×1
110	48	71	11	27	—	—	3	5.5	9.5	5.5	59	—	M6×1
54	48	75	13	28	—	—	5	6.6	11	6.5	61	—	M6×1
54	48	75	13	28	—	—	5	6.6	11	6.5	61	—	M6×1
102	48	75	13	28	—	—	5	6.6	11	6.5	61	—	M6×1
64	48	75	13	28	—	—	5	6.6	11	6.5	61	—	M6×1
120	48	75	13	28	—	—	5	6.6	11	6.5	61	—	M6×1
54	46	74	13	—	46	66	—	6.6	11	6.5	59	24	M6×1
54	46	74	13	—	46	66	—	6.6	11	6.5	59	24	M6×1
72	46	74	13	—	46	66	—	6.6	11	6.5	59	24	M6×1
72	46	74	13	—	46	66	—	6.6	11	6.5	59	24	M6×1
63	46	74	13	—	46	66	—	6.6	11	6.5	59	24	M6×1
63	46	74	13	—	46	66	—	6.6	11	6.5	59	24	M6×1
36	46	69	11	26	—	—	3	5.5	9.5	5.5	57	—	M6×1
48	46	69	11	26	—	—	3	5.5	9.5	5.5	57	—	M6×1
48	46	69	11	26	—	—	3	5.5	9.5	5.5	57	—	M6×1
48	46	69	11	26	—	—	3	5.5	9.5	5.5	57	—	M6×1
72	46	69	11	26	—	—	3	5.5	9.5	5.5	57	—	M6×1
52	50	73	11	28	—	—	3	5.5	9.5	5.5	61	—	M6×1
40	50	73	11	28	—	—	3	5.5	9.5	5.5	61	—	M6×1
55	50	73	11	28	—	—	3	5.5	9.5	5.5	61	—	M6×1
55	50	73	11	28	—	—	3	5.5	9.5	5.5	61	—	M6×1
52	50	73	11	28	—	—	3	5.5	9.5	5.5	61	—	M6×1
102	50	73	11	28	—	—	3	5.5	9.5	5.5	61	—	M6×1
70	50	73	11	28	—	—	3	5.5	9.5	5.5	61	—	M6×1
55	50	73	11	28	—	—	3	5.5	9.5	5.5	61	—	M6×1
85	50	73	11	28	—	—	3	5.5	9.5	5.5	61	—	M6×1
70	50	73	11	28	—	—	3	5.5	9.5	5.5	61	—	M6×1



5. The axial rigidity K in the table above is a theoretical value obtained from the elastic deformation between screw groove and ball when the axial load is 30% of the basic dynamic load rating (C_0) with non-preload, 10% with D-preload, and 5% with P-preload. Refer to "Technical Description" (page B37) if the axial load and preload differ from the conditions above, or when the deformation of the ball nut body must be considered.

6. For PFT and LPFT, the basic load ratings differ from the other models as the spacer balls are installed.

7. The models marked with * (asterisk) are available in the FA or SA type standard ball screws with finished shaft end.

8. Preload system: P, Oversize ball preload; Z, Offset preload; D, Double nut preload (See page B5.)


Return tube type

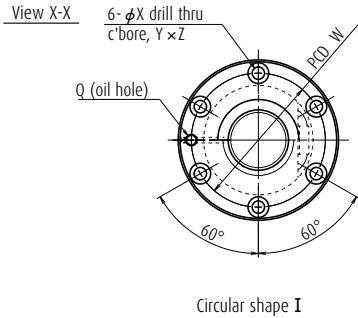


Model No.	Preload system	Shaft dia. d	Lead l	Ball dia. D _w	Ball circle dia. d _m	Root dia. d _r	Effective turns of balls × Circuits	Basic load rating (N)		Axial rigidity K (N/μm)
								Dynamic C _a	Static C _{0a}	
PFT 2506-3	P	25	6	3.969	25.5	21.4	1.5×2	10 700	16 000	247
SFT 2506-2.5	Clearance	25	6	3.969	25.5	21.4	2.5×1	14 500	26 700	247
ZFT 2506-5	Z	25	6	3.969	25.5	21.4	2.5×1	14 500	26 700	485
* PFT 2506-5	P	25	6	3.969	25.5	21.4	2.5×2	16 600	26 700	402
SFT 2506-3	Clearance	25	6	3.969	25.5	21.4	1.5×2	17 000	32 000	294
DFT 2506-3	D	25	6	3.969	25.5	21.4	1.5×2	17 000	32 000	577
SFT 2506-5	Clearance	25	6	3.969	25.5	21.4	2.5×2	26 300	53 400	478
ZFT 2506-10	Z	25	6	3.969	25.5	21.4	2.5×2	26 300	53 400	938
PFT 2508-2.5	P	25	8	4.762	25.5	20.5	2.5×1	11 700	15 900	213
PFT 2508-3	P	25	8	4.762	25.5	20.5	1.5×2	13 700	18 900	245
SFT 2508-2.5	Clearance	25	8	4.762	25.5	20.5	2.5×1	18 500	31 800	253
ZFT 2508-5	Z	25	8	4.762	25.5	20.5	2.5×1	18 500	31 800	495
SFT 2508-3	Clearance	25	8	4.762	25.5	20.5	1.5×2	21 700	37 900	299
DFT 2508-3	D	25	8	4.762	25.5	20.5	1.5×2	21 700	37 900	587
PFT 2510-2.5	P	25	10	4.762	25.5	20.5	2.5×1	11 600	15 900	211
ZFT 2510-3	Z	25	10	4.762	25.5	20.5	1.5×1	11 900	18 900	301
PFT 2510-3	P	25	10	4.762	25.5	20.5	1.5×2	13 600	18 900	243
SFT 2510-2.5	Clearance	25	10	4.762	25.5	20.5	2.5×1	18 500	31 700	251
DFT 2510-2.5	D	25	10	4.762	25.5	20.5	2.5×1	18 500	31 700	493
SFT 2510-3	Clearance	25	10	4.762	25.5	20.5	1.5×2	21 600	37 800	297
DFT 2510-3	D	25	10	4.762	25.5	20.5	1.5×2	21 600	37 800	583
SFT 2510-3.5	Clearance	25	10	4.762	25.5	20.5	3.5×1	24 700	44 600	347
DFT 2510-3.5	D	25	10	4.762	25.5	20.5	3.5×1	24 700	44 600	681

Notes

1. Nut flange for shaft diameter 16 mm or smaller comes in rectangular shape. It comes in circular shape I and circular shape II for shaft diameter 20 mm or larger. Select a flange that is suitable for the space available for nut installation.
2. If there is no seal for PFT, ZFT, SFT, and DFT, the nut length "L" is shortened by dimension "M".
3. The right turn screw is standard. "L" is added to the end of the model code for the left turn screw.

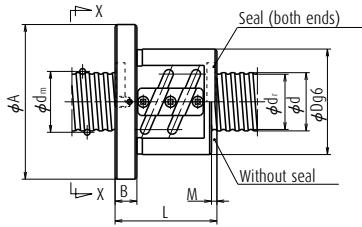

PFT, ZFT, SFT

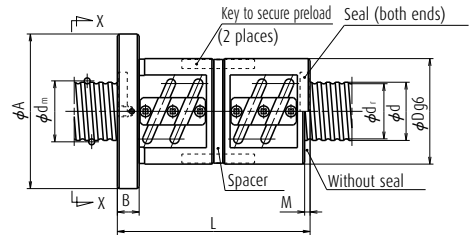

DFT


Unit: mm

Ball nut dimensions


Nut entire length L	Nut diameter D	Flanged diameter A	Flanged width B	Notched flange G	Seal dimension M	Bolt hole dimension			Bolt hole PCD W	Oil hole Q
						X	Y	Z		
56	53	76	11	29	3	5.5	9.5	5.5	64	M6×1
44	53	76	11	29	3	5.5	9.5	5.5	64	M6×1
62	53	76	11	29	3	5.5	9.5	5.5	64	M6×1
62	53	76	11	29	3	5.5	9.5	5.5	64	M6×1
56	53	76	11	29	3	5.5	9.5	5.5	64	M6×1
110	53	76	11	29	3	5.5	9.5	5.5	64	M6×1
62	53	76	11	29	3	5.5	9.5	5.5	64	M6×1
98	53	76	11	29	3	5.5	9.5	5.5	64	M6×1
56	58	85	13	32	5	6.6	11	6.5	71	M6×1
69	58	85	13	32	5	6.6	11	6.5	71	M6×1
56	58	85	13	32	5	6.6	11	6.5	71	M6×1
80	58	85	13	32	5	6.6	11	6.5	71	M6×1
69	58	85	13	32	5	6.6	11	6.5	71	M6×1
133	58	85	13	32	5	6.6	11	6.5	71	M6×1
67	58	85	15	32	8	6.6	11	6.5	71	M6×1
81	58	85	15	32	8	6.6	11	6.5	71	M6×1
81	58	85	15	32	8	6.6	11	6.5	71	M6×1
67	58	85	15	32	8	6.6	11	6.5	71	M6×1
127	58	85	15	32	8	6.6	11	6.5	71	M6×1
81	58	85	15	32	8	6.6	11	6.5	71	M6×1
151	58	85	15	32	8	6.6	11	6.5	71	M6×1
77	58	85	15	32	8	6.6	11	6.5	71	M6×1
147	58	85	15	32	8	6.6	11	6.5	71	M6×1

- The axial rigidity K in the table above is a theoretical value obtained from the elastic deformation between screw groove and ball when the axial load is 30% of the basic dynamic load rating (C_0) with non-preload, 10% with D-preload, and 5% with P-preload. Refer to "Technical Description" (page B37) if the axial load and preload differ from the conditions above, or when the deformation of the ball nut body must be considered.
- For PFT, the basic load ratings differ from the other models as the spacer balls are installed.
- The models marked with * (asterisk) are available in the SA type standard ball screws with finished shaft end.
- Preload system: P, Oversize ball preload; Z, Offset preload; D, Double nut preload (See page B5).


Return tube type

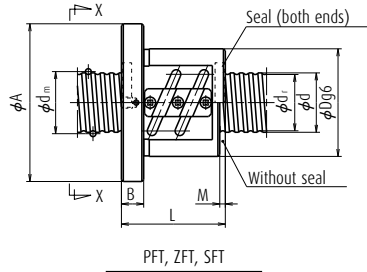

View X-X




Circular shape I




Circular shape II

Model No.	Preload system	Shaft dia. d	Lead l	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective turns of balls Turns \times Circuits	Basic load rating (N)		Axial rigidity K (N/ μ m)	Nut entire length L
								Dynamic C_a	Static C_{0a}		
LPFT 2516-2.5	P	25	16	4.762	26.25	21.3	2.5 \times 1	11 400	16 500	213	84
LPFT 2516-3	P	25	16	4.762	26.25	21.3	1.5 \times 2	13 400	19 500	251	100
LSFT 2516-2.5	Clearance	25	16	4.762	26.25	21.3	2.5 \times 1	18 100	33 000	253	84
LDFT 2516-2.5	D	25	16	4.762	26.25	21.3	2.5 \times 1	18 100	33 000	496	152
LSFT 2516-3	Clearance	25	16	4.762	26.25	21.3	1.5 \times 2	21 200	39 000	298	100
LDFT 2516-3	D	25	16	4.762	26.25	21.3	1.5 \times 2	21 200	39 000	584	181
* LPFT 2520-2.5	P	25	20	4.762	26.25	21.3	2.5 \times 1	11 700	16 300	211	96
LPFT 2520-3	P	25	20	4.762	26.25	21.3	1.5 \times 2	13 700	19 300	248	116
LSFT 2520-2.5	Clearance	25	20	4.762	26.25	21.3	2.5 \times 1	18 600	32 600	251	96
LDFT 2520-2.5	D	25	20	4.762	26.25	21.3	2.5 \times 1	18 600	32 600	492	177
LSFT 2520-3	Clearance	25	20	4.762	26.25	21.3	1.5 \times 2	21 800	38 600	296	116
LDFT 2520-3	D	25	20	4.762	26.25	21.3	1.5 \times 2	21 800	38 600	580	217
* LPFT 2525-1.5	P	25	25	4.762	26.25	21.3	1.5 \times 1	7 400	9 860	124	90
LDFT 2525-1.5	D	25	25	4.762	26.25	21.3	1.5 \times 1	11 700	19 700	297	166
LSFT 2525-1.5	Clearance	25	25	4.762	26.25	21.3	1.5 \times 1	11 700	19 700	151	90
SFT 2805-2.5	Clearance	28	5	3.175	28.5	25.2	2.5 \times 1	11 300	24 400	265	41
ZFT 2805-5	Z	28	5	3.175	28.5	25.2	2.5 \times 1	11 300	24 400	519	56
PFT 2805-5	P	28	5	3.175	28.5	25.2	2.5 \times 2	13 000	24 400	432	56
SFT 2805-5	Clearance	28	5	3.175	28.5	25.2	2.5 \times 2	20 600	48 700	514	56
* ZFT 2805-10	Z	28	5	3.175	28.5	25.2	2.5 \times 2	20 600	48 700	1007	86



- Notes**
1. Nut flange for shaft diameter 20 mm or larger comes in circular shape I and circular shape II. Select a flange that is suitable for the space available for nut installation.
 2. If there is no seal for PFT, ZFT, and SFT, the nut length "L" is shortened by dimension "M".
 3. If there is no seal for LSFT and LDFT of shaft diameter 25 mm or larger, the nut length "L" is shortened by dimension "M" and "C".
 4. The right turn screw is standard. "L" is added to the end of the model code for the left turn screw.

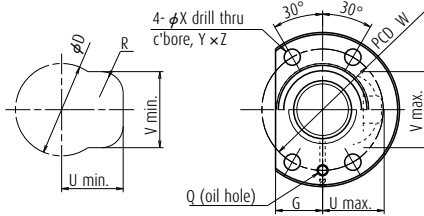

Housing hole and its clearance

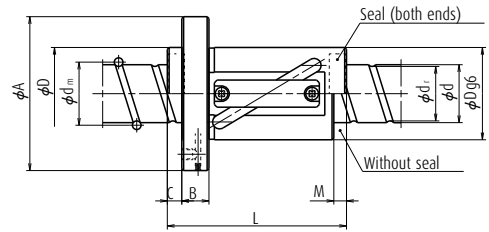

LPFT, LSFT

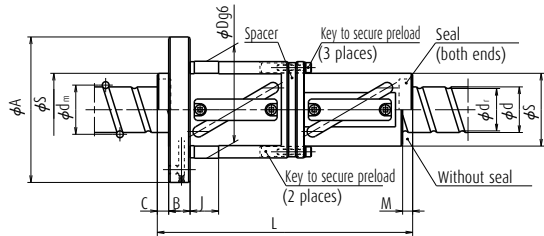

LDFT

Unit: mm

Ball nut dimensions

Nut diameter	Flanged diameter	Flanged width	Notched flange	Tube projecting type			Seal dimension		Diameter g6			Bolt hole dimension			Bolt hole PCD	Oil hole Q
				U	V	R	M	C	J	X	Y	Z				
D	S	A	B	G	U	V	R	M	C	J	X	Y	Z	W		
44	—	71	12	23	31	35	12	6	8	—	6.6	—	—	57	M6×1	
44	—	71	12	23	31	35	12	6	8	—	6.6	—	—	57	M6×1	
44	—	71	12	23	31	35	12	6	8	—	6.6	—	—	57	M6×1	
44	44	89	12	34	—	—	—	6	8	18	6.6	—	—	75	M6×1	
44	—	71	12	23	31	35	12	6	8	—	6.6	—	—	57	M6×1	
44	44	89	12	34	—	—	—	6	8	18	6.6	—	—	75	M6×1	
44	—	71	12	23	31	35	12	7	8	—	6.6	—	—	57	M6×1	
44	—	71	12	23	31	35	12	7	8	—	6.6	—	—	57	M6×1	
44	—	71	12	23	31	35	12	7	8	—	6.6	—	—	57	M6×1	
62	44	89	12	34	—	—	—	7	8	18	6.6	—	—	75	M6×1	
44	—	71	12	23	31	35	12	7	8	—	6.6	—	—	57	M6×1	
62	44	89	12	34	—	—	—	7	8	18	6.6	—	—	75	M6×1	
44	—	71	12	23	32	34	12	10	10	—	6.6	—	—	57	M6×1	
62	44	89	12	34	—	—	—	10	10	18	6.6	—	—	75	M6×1	
44	—	71	12	23	32	34	12	10	10	—	6.6	—	—	57	M6×1	
55	—	85	12	31	—	—	—	3	—	—	6.6	11	6.5	69	M6×1	
55	—	85	12	31	—	—	—	3	—	—	6.6	11	6.5	69	M6×1	
55	—	85	12	31	—	—	—	3	—	—	6.6	11	6.5	69	M6×1	
55	—	85	12	31	—	—	—	3	—	—	6.6	11	6.5	69	M6×1	
55	—	85	12	31	—	—	—	3	—	—	6.6	11	6.5	69	M6×1	

5. The axial rigidity K in the table above is a theoretical value obtained from the elastic deformation between screw groove and ball when the axial load is 30% of the basic dynamic load rating (C_d) with non-preload, 10% with D-preload, and 5% with P-preload. Refer to "Technical Description" (page B37) if the axial load and preload differ from the conditions above, or when the deformation of the ball nut body must be considered.


6. For PFT and LPFT, the basic load ratings differ from the other models as the spacer balls are installed.

7. The models marked with * (asterisk) are available in the FA or SA type standard ball screws with finished shaft end.


8. Preload system: P, Oversize ball preload; Z, Offset preload; D, Double nut preload (See page B5.)

Return tube type

View X-X




Circular shape I




Circular shape II

Model No.	Preload system	Shaft dia. d	Lead l	Ball dia. D _w	Ball circle dia. d _m	Root dia. d _r	Effective turns of balls × Circuits	Basic load rating (N)		Axial rigidity K (N/μm)
								Dynamic C _a	Static C _{0a}	
PFT 2806-3	P	28	6	3.175	28.5	25.2	1.5×2	8 350	14 600	265
SFT 2806-2.5	Clearance	28	6	3.175	28.5	25.2	2.5×1	11 300	24 300	265
ZFT 2806-5	Z	28	6	3.175	28.5	25.2	2.5×1	11 300	24 300	519
* PFT 2806-5	P	28	6	3.175	28.5	25.2	2.5×2	12 900	24 300	430
SFT 2806-3	Clearance	28	6	3.175	28.5	25.2	1.5×2	13 200	29 200	315
DFT 2806-3	D	28	6	3.175	28.5	25.2	1.5×2	13 200	29 200	617
SFT 2806-5	Clearance	28	6	3.175	28.5	25.2	2.5×2	20 600	48 700	513
* ZFT 2806-10	Z	28	6	3.175	28.5	25.2	2.5×2	20 600	48 700	1006
PFT 2810-2.5	P	28	10	4.762	28.5	23.5	2.5×1	12 300	17 900	229
ZFT 2810-3	Z	28	10	4.762	28.5	23.5	1.5×1	12 600	21 400	332
PFT 2810-3	P	28	10	4.762	28.5	23.5	1.5×2	14 400	21 400	275
SFT 2810-2.5	Clearance	28	10	4.762	28.5	23.5	2.5×1	19 600	35 800	277
DFT 2810-2.5	D	28	10	4.762	28.5	23.5	2.5×1	19 600	35 800	543
SFT 2810-3	Clearance	28	10	4.762	28.5	23.5	1.5×2	22 900	42 700	328
DFT 2810-3	D	28	10	4.762	28.5	23.5	1.5×2	22 900	42 700	643
SFT 3204-2.5	Clearance	32	4	2.381	32.3	29.8	2.5×1	6 850	17 500	247
ZFT 3204-5	Z	32	4	2.381	32.3	29.8	2.5×1	6 850	17 500	485
PFT 3204-5	P	32	4	2.381	32.3	29.8	2.5×2	7 840	17 500	403
SFT 3204-5	Clearance	32	4	2.381	32.3	29.8	2.5×2	12 400	35 000	479
ZFT 3204-10	Z	32	4	2.381	32.3	29.8	2.5×2	12 400	35 000	939
PFT 3205-3	P	32	5	3.175	32.5	29.2	1.5×2	8 850	16 800	296
SFT 3205-2.5	Clearance	32	5	3.175	32.5	29.2	2.5×1	12 000	28 000	296
ZFT 3205-5	Z	32	5	3.175	32.5	29.2	2.5×1	12 000	28 000	580
* PFT 3205-5	P	32	5	3.175	32.5	29.2	2.5×2	13 700	28 000	481
SFT 3205-3	Clearance	32	5	3.175	32.5	29.2	1.5×2	14 000	33 600	351
DFT 3205-3	D	32	5	3.175	32.5	29.2	1.5×2	14 000	33 600	689
PFT 3205-7.5	P	32	5	3.175	32.5	29.2	2.5×3	19 500	42 000	709
SFT 3205-5	Clearance	32	5	3.175	32.5	29.2	2.5×2	21 800	56 000	572
* ZFT 3205-10	Z	32	5	3.175	32.5	29.2	2.5×2	21 800	56 000	1 123
SFT 3205-7.5	Clearance	32	5	3.175	32.5	29.2	2.5×3	30 900	84 000	843
DFT 3205-7.5	D	32	5	3.175	32.5	29.2	2.5×3	30 900	84 000	1 652

- Notes**
1. Nut flange for shaft diameter 20 mm or larger comes in circular shape I and circular shape II. Select a flange that is suitable for the space available for nut installation.
 2. If there is no seal for PFT, ZFT, SFT, and DFT, the nut length "L" is shortened by dimension "M".
 3. The right turn screw is standard. "L" is added to the end of the model code for the left turn screw.

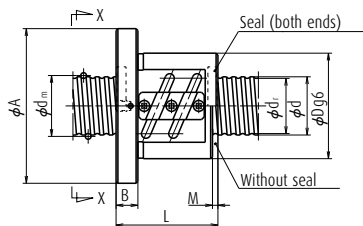

PFT, ZFT, SFT

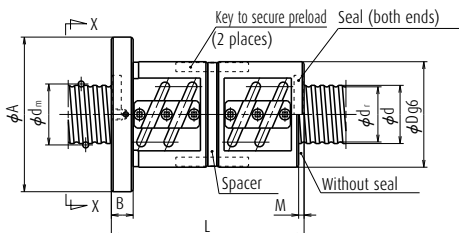

DFT


Unit: mm

Ball nut dimensions


Nut entire length L	Nut diameter D	Flanged diameter A	Flanged width B	Notched flange G	Seal dimension M	Bolt hole dimension			Bolt hole PCD W	Oil hole Q
						X	Y	Z		
57	55	85	12	31	3	6.6	11	6.5	69	M6×1
45	55	85	12	31	3	6.6	11	6.5	69	M6×1
63	55	85	12	31	3	6.6	11	6.5	69	M6×1
63	55	85	12	31	3	6.6	11	6.5	69	M6×1
57	55	85	12	31	3	6.6	11	6.5	69	M6×1
111	55	85	12	31	3	6.6	11	6.5	69	M6×1
63	55	85	12	31	3	6.6	11	6.5	69	M6×1
99	55	85	12	31	3	6.6	11	6.5	69	M6×1
68	60	94	15	36	7	9	14	8.5	76	M6×1
82	60	94	15	36	7	9	14	8.5	76	M6×1
82	60	94	15	36	7	9	14	8.5	76	M6×1
68	60	94	15	36	7	9	14	8.5	76	M6×1
128	60	94	15	36	7	9	14	8.5	76	M6×1
82	60	94	15	36	7	9	14	8.5	76	M6×1
152	60	94	15	36	7	9	14	8.5	76	M6×1
37	54	81	12	31	3	6.6	11	6.5	67	M6×1
49	54	81	12	31	3	6.6	11	6.5	67	M6×1
49	54	81	12	31	3	6.6	11	6.5	67	M6×1
49	54	81	12	31	3	6.6	11	6.5	67	M6×1
73	54	81	12	31	3	6.6	11	6.5	67	M6×1
53	58	85	12	32	3	6.6	11	6.5	71	M6×1
41	58	85	12	32	3	6.6	11	6.5	71	M6×1
56	58	85	12	32	3	6.6	11	6.5	71	M6×1
56	58	85	12	32	3	6.6	11	6.5	71	M6×1
53	58	85	12	32	3	6.6	11	6.5	71	M6×1
103	58	85	12	32	3	6.6	11	6.5	71	M6×1
71	58	85	12	32	3	6.6	11	6.5	71	M6×1
56	58	85	12	32	3	6.6	11	6.5	71	M6×1
86	58	85	12	32	3	6.6	11	6.5	71	M6×1
71	58	85	12	32	3	6.6	11	6.5	71	M6×1
136	58	85	12	32	3	6.6	11	6.5	71	M6×1

- The axial rigidity K in the table above is a theoretical value obtained from the elastic deformation between screw groove and ball when the axial load is 30% of the basic dynamic load rating (C_a) with non-preload, 10% with D-preload, and 5% with P-preload. Refer to "Technical Description" (page B37) if the axial load and preload differ from the conditions above, or when the deformation of the ball nut body must be considered.
- For PFT, the basic load ratings differ from the other models as the spacer balls are installed.
- The models marked with * (asterisk) are available in the SA type standard ball screws with finished shaft end.
- Preload system: P, Oversize ball preload; Z, Offset preload; D, Double nut preload (See page B5).

Return tube type




Circular shape I




Circular shape II

Model No.	Preload system	Shaft dia. d	Lead l	Ball dia. D _w	Ball circle dia. d _m	Root dia. d _r	Effective turns of balls Turns × Circuits	Basic load rating (N)		Axial rigidity K (N/μm)
								Dynamic C _B	Static C _{0a}	
PFT 3206-3	P	32	6	3.969	32.5	28.4	1.5×2	11 800	20 600	300
SFT 3206-2.5	Clearance	32	6	3.969	32.5	28.4	2.5×1	16 000	34 700	302
ZFT 3206-5	Z	32	6	3.969	32.5	28.4	2.5×1	16 000	34 700	592
PFT 3206-5	P	32	6	3.969	32.5	28.4	2.5×2	18 300	34 700	491
SFT 3206-3	Clearance	32	6	3.969	32.5	28.4	1.5×2	18 800	41 200	357
DFT 3206-3	D	32	6	3.969	32.5	28.4	1.5×2	18 800	41 200	700
SFT 3206-5	Clearance	32	6	3.969	32.5	28.4	2.5×2	29 100	69 300	585
* ZFT 3206-10	Z	32	6	3.969	32.5	28.4	2.5×2	29 100	69 300	1 146
PFT 3208-3	P	32	8	4.762	32.5	27.5	1.5×2	15 100	24 700	308
SFT 3208-2.5	Clearance	32	8	4.762	32.5	27.5	2.5×1	20 600	40 900	307
ZFT 3208-5	Z	32	8	4.762	32.5	27.5	2.5×1	20 600	40 900	602
PFT 3208-5	P	32	8	4.762	32.5	27.5	2.5×2	23 500	40 900	493
SFT 3208-3	Clearance	32	8	4.762	32.5	27.5	1.5×2	24 000	49 400	366
ZFT 3208-6	Z	32	8	4.762	32.5	27.5	1.5×2	24 000	49 400	718
SFT 3208-5	Clearance	32	8	4.762	32.5	27.5	2.5×2	37 300	81 800	594
DFT 3208-5	D	32	8	4.762	32.5	27.5	2.5×2	37 300	81 800	1 164
ZFT 3208-10	Z	32	8	4.762	32.5	27.5	2.5×2	37 300	81 800	1 164
PFT 3210-2.5	P	32	10	6.35	33.0	26.4	2.5×1	18 900	27 600	266
ZFT 3210-3	Z	32	10	6.35	33.0	26.4	1.5×1	19 300	32 300	381
PFT 3210-3	P	32	10	6.35	33.0	26.4	1.5×2	22 100	32 300	316
SFT 3210-2.5	Clearance	32	10	6.35	33.0	26.4	2.5×1	30 000	55 100	322
* ZFT 3210-5	Z	32	10	6.35	33.0	26.4	2.5×1	30 000	55 100	631
PFT 3210-5	P	32	10	6.35	33.0	26.4	2.5×2	34 300	55 100	515
SFT 3210-3	Clearance	32	10	6.35	33.0	26.4	1.5×2	35 100	64 500	376
DFT 3210-3	D	32	10	6.35	33.0	26.4	1.5×2	35 100	64 500	738
SFT 3210-3.5	Clearance	32	10	6.35	33.0	26.4	3.5×1	40 100	76 600	441
DFT 3210-3.5	D	32	10	6.35	33.0	26.4	3.5×1	40 100	76 600	865
SFT 3210-5	Clearance	32	10	6.35	33.0	26.4	2.5×2	54 500	110 000	623
* DFT 3210-5	D	32	10	6.35	33.0	26.4	2.5×2	54 500	110 000	1 222
ZFT 3210-10	Z	32	10	6.35	33.0	26.4	2.5×2	54 500	110 000	1 222
PFT 3212-2.5	P	32	12	6.35	33.0	26.4	2.5×1	18 800	27 500	265
ZFT 3212-3	Z	32	12	6.35	33.0	26.4	1.5×1	19 300	32 200	380
PFT 3212-3	P	32	12	6.35	33.0	26.4	1.5×2	22 000	32 200	315
SFT 3212-2.5	Clearance	32	12	6.35	33.0	26.4	2.5×1	29 900	55 000	320
DFT 3212-2.5	D	32	12	6.35	33.0	26.4	2.5×1	29 900	55 000	628
SFT 3212-3	Clearance	32	12	6.35	33.0	26.4	1.5×2	35 000	64 400	375
DFT 3212-3	D	32	12	6.35	33.0	26.4	1.5×2	35 000	64 400	735

- Notes**
1. Nut flange for shaft diameter 20 mm or larger comes in circular shape I and circular shape II. Select a flange that is suitable for the space available for nut installation.
 2. If there is no seal for PFT, ZFT, SFT, and DFT, the nut length "L" is shortened by dimension "M".
 3. The right turn screw is standard. "L" is added to the end of the model code for the left turn screw.



PFT, ZFT, SFT

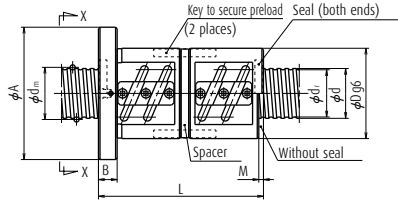

DFT


Unit: mm

Ball nut dimensions

Nut entire length L	Nut diameter D	Flanged diameter A	Flanged width B	Notched flange G	Seal dimension M	Bolt hole dimension			Bolt hole PCD W	Oil hole Q
						X	Y	Z		
57	62	89	12	34	3	6.6	11	6.5	75	M6×1
45	62	89	12	34	3	6.6	11	6.5	75	M6×1
63	62	89	12	34	3	6.6	11	6.5	75	M6×1
63	62	89	12	34	3	6.6	11	6.5	75	M6×1
57	62	89	12	34	3	6.6	11	6.5	75	M6×1
111	62	89	12	34	3	6.6	11	6.5	75	M6×1
63	62	89	12	34	3	6.6	11	6.5	75	M6×1
99	62	89	12	34	3	6.6	11	6.5	75	M6×1
71	66	100	15	38	5	9	14	8.5	82	M6×1
58	66	100	15	38	5	9	14	8.5	82	M6×1
82	66	100	15	38	5	9	14	8.5	82	M6×1
82	66	100	15	38	5	9	14	8.5	82	M6×1
71	60	100	15	36	5	9	14	8.5	82	M6×1
111	66	100	15	38	5	9	14	8.5	82	M6×1
82	66	100	15	38	5	9	14	8.5	82	M6×1
154	66	100	15	38	5	9	14	8.5	82	M6×1
130	66	100	15	38	5	9	14	8.5	82	M6×1
70	74	108	15	41	7	9	14	8.5	90	M6×1
87	74	108	15	41	7	9	14	8.5	90	M6×1
87	74	108	15	41	7	9	14	8.5	90	M6×1
70	74	108	15	41	7	9	14	8.5	90	M6×1
100	74	108	15	41	7	9	14	8.5	90	M6×1
100	74	108	15	41	7	9	14	8.5	90	M6×1
87	74	108	15	41	7	9	14	8.5	90	M6×1
167	74	108	15	41	7	9	14	8.5	90	M6×1
80	74	108	15	41	7	9	14	8.5	90	M6×1
150	74	108	15	41	7	9	14	8.5	90	M6×1
100	74	108	15	41	7	9	14	8.5	90	M6×1
190	74	108	15	41	7	9	14	8.5	90	M6×1
160	74	108	15	41	7	9	14	8.5	90	M6×1
81	74	108	18	41	9	9	14	8.5	90	M6×1
97	74	108	18	41	9	9	14	8.5	90	M6×1
97	74	108	18	41	9	9	14	8.5	90	M6×1
81	74	108	18	41	9	9	14	8.5	90	M6×1
153	74	108	18	41	9	9	14	8.5	90	M6×1
97	74	108	18	41	9	9	14	8.5	90	M6×1
181	74	108	18	41	9	9	14	8.5	90	M6×1


- The axial rigidity K in the table above is a theoretical value obtained from the elastic deformation between screw groove and ball when the axial load is 30% of the basic dynamic load rating (C_a) with non-preload, 10% with D-preload, and 5% with P-preload. Refer to "Technical Description" (page B37) if the axial load and preload differ from the conditions above, or when the deformation of the ball nut body must be considered.
- For PFT, the basic load ratings differ from the other models as the spacer balls are installed.
- The models marked with * (asterisk) are available in the SA type standard ball screws with finished shaft end.
- Preload system: P, Oversize ball preload; Z, Offset preload; D, Double nut preload (See page B5).

Return tube type


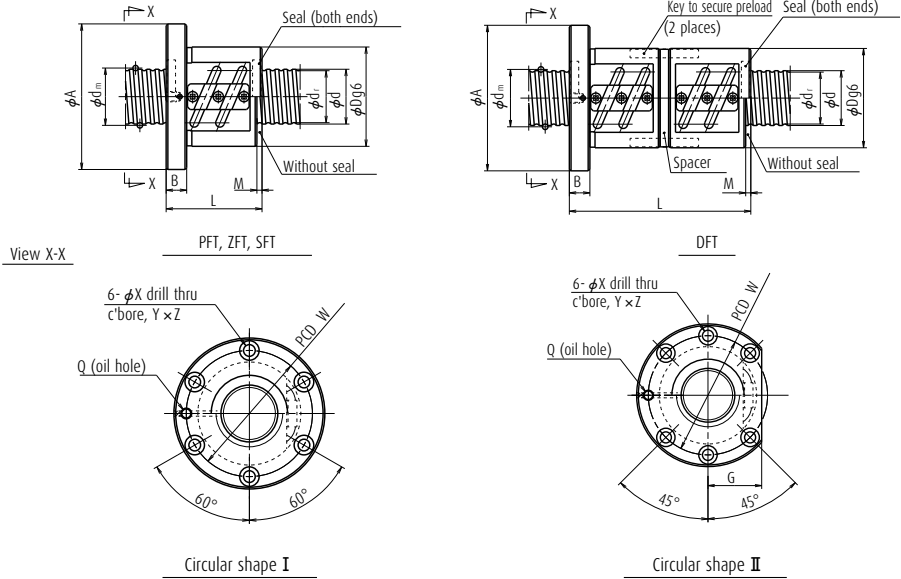


Model No.	Preload system	Shaft dia. d	Lead I	Ball dia. D _w	Ball circle dia. d _m	Root dia. d _r	Effective turns of balls Turns × Circuits	Basic load rating (N)		Axial rigidity K (N/μm)	Nut entire length L
								Dynamic C _a	Static C _{0a}		
LPFT 3220-2.5	P	32	20	4.762	33.25	28.3	2.5×1	13 000	20 900	255	99
LPFT 3220-3	P	32	20	4.762	33.25	28.3	1.5×2	15 300	25 100	301	119
LSFT 3220-2.5	Clearance	32	20	4.762	33.25	28.3	2.5×1	20 700	41 900	307	99
LDFT 3220-2.5	D	32	20	4.762	33.25	28.3	2.5×1	20 700	41 900	603	179
LSFT 3220-3	Clearance	32	20	4.762	33.25	28.3	1.5×2	24 200	50 200	366	119
LDFT 3220-3	D	32	20	4.762	33.25	28.3	1.5×2	24 200	50 200	717	219
* LPFT 3225-2.5	P	32	25	4.762	33.25	28.3	2.5×1	12 900	21 100	256	117
LPFT 3225-3	P	32	25	4.762	33.25	28.3	1.5×2	15 100	24 900	295	142
LSFT 3225-2.5	Clearance	32	25	4.762	33.25	28.3	2.5×1	20 400	42 200	304	117
LDFT 3225-2.5	D	32	25	4.762	33.25	28.3	2.5×1	20 400	42 200	597	218
LSFT 3225-3	Clearance	32	25	4.762	33.25	28.3	1.5×2	23 900	49 700	358	142
LDFT 3225-3	D	32	25	4.762	33.25	28.3	1.5×2	23 900	49 700	702	268
* LPFT 3232-1.5	P	32	32	4.762	33.25	28.3	1.5×1	8 360	12 600	155	109
LSFT 3232-1.5	Clearance	32	32	4.762	33.25	28.3	1.5×1	13 300	25 200	184	109
LDFT 3232-1.5	D	32	32	4.762	33.25	28.3	1.5×1	13 300	25 200	361	205
ZFT 3605-5	Z	36	5	3.175	36.5	33.2	2.5×1	12 600	31 600	637	59
PFT 3605-5	P	36	5	3.175	36.5	33.2	2.5×2	14 400	31 600	529	59
PFT 3605-7.5	P	36	5	3.175	36.5	33.2	2.5×3	20 400	47 500	779	74
SFT 3605-5	Clearance	36	5	3.175	36.5	33.2	2.5×2	22 900	63 300	630	59
ZFT 3605-10	Z	36	5	3.175	36.5	33.2	2.5×2	22 900	63 300	1 235	89
SFT 3605-7.5	Clearance	36	5	3.175	36.5	33.2	2.5×3	32 400	94 900	926	74
DFT 3605-7.5	D	36	5	3.175	36.5	33.2	2.5×3	32 400	94 900	1 817	139


- Notes**
1. Nut flange for shaft diameter 20 mm or larger comes in circular shape I and circular shape II. Select a flange that is suitable for the space available for nut installation.
 2. If there is no seal for PFT, ZFT, and SFT, the nut length "L" is shortened by dimension "M".
 3. If there is no seal for LSFT and LDFT of shaft diameter 25 mm or larger, the nut length "L" is shortened by dimension "M" and "C".
 4. The right turn screw is standard. "L" is added to the end of the model code for the left turn screw.

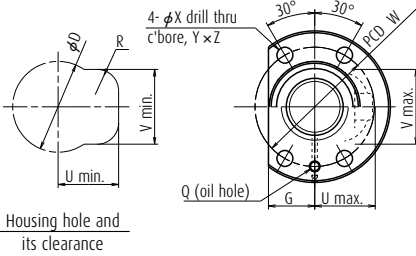

LPFT, LSFT

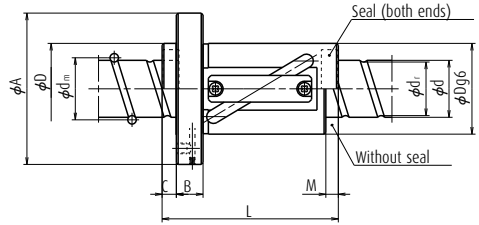

LDFT

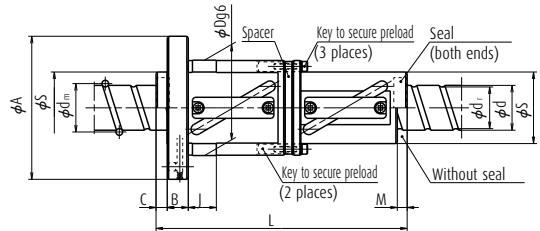


Unit: mm

Ball nut dimensions


Nut diameter	Flanged diameter		Flanged width B	Notched flange G	Tube projecting type			Seal dimension		Diameter g6	Bolt hole dimension			Bolt hole PCD W	Oil hole Q
	D	S			A	U	V	R	M		C	J	X		
51	—	85	15	26	34	42	12	7	8	—	9	—	—	67	M6×1
51	—	85	15	26	34	42	12	7	8	—	9	—	—	67	M6×1
51	—	85	15	26	34	42	12	7	8	—	9	—	—	67	M6×1
68	51	102	15	39	—	—	—	7	8	20	9	—	—	84	M6×1
51	—	85	15	26	34	42	12	7	8	—	9	—	—	67	M6×1
68	51	102	15	39	—	—	—	7	8	20	9	—	—	84	M6×1
51	—	85	15	26	34	42	12	10	10	—	9	—	—	67	M6×1
51	—	85	15	26	34	42	12	10	10	—	9	—	—	67	M6×1
51	—	85	15	26	34	42	12	10	10	—	9	—	—	67	M6×1
68	51	102	15	39	—	—	—	10	10	20	9	—	—	84	M6×1
51	—	85	15	26	34	42	12	10	10	—	9	—	—	67	M6×1
68	51	102	15	39	—	—	—	10	10	20	9	—	—	84	M6×1
51	—	85	15	26	34	42	12	13	12	—	9	—	—	67	M6×1
51	—	85	15	26	34	42	12	13	12	—	9	—	—	67	M6×1
68	51	102	15	39	—	—	—	13	12	20	9	—	—	84	M6×1
65	—	100	15	38	—	—	—	3	—	—	9	14	8.5	82	M6×1
65	—	100	15	38	—	—	—	3	—	—	9	14	8.5	82	M6×1
65	—	100	15	38	—	—	—	3	—	—	9	14	8.5	82	M6×1
65	—	100	15	38	—	—	—	3	—	—	9	14	8.5	82	M6×1
65	—	100	15	38	—	—	—	3	—	—	9	14	8.5	82	M6×1
65	—	100	15	38	—	—	—	3	—	—	9	14	8.5	82	M6×1
65	—	100	15	38	—	—	—	3	—	—	9	14	8.5	82	M6×1

- The axial rigidity K in the table above is a theoretical value obtained from the elastic deformation between screw groove and ball when the axial load is 30% of the basic dynamic load rating (C_a) with non-preload, 10% with D-preload, and 5% with P-preload. Refer to "Technical Description" (page B37) if the axial load and preload differ from the conditions above, or when the deformation of the ball nut body must be considered.
- For PFT and LPFT, the basic load ratings differ from the other models as the spacer balls are installed.
- The models marked with * (asterisk) are available in the FA type standard ball screws with finished shaft end.
- Preload system: P, Oversize ball preload; Z, Offset preload; D, Double nut preload (See page B5).

Return tube type




Circular shape I




Circular shape II

Model No.	Preload system	Shaft dia. d	Lead l	Ball dia. D _w	Ball circle dia. d _m	Root dia. d _r	Effective turns of balls Turns × Circuits	Basic load rating (N)		Axial rigidity K (N/μm)
								Dynamic C _a	Static C _{0a}	
ZFT 3606-5	Z	36	6	3.969	36.5	32.4	2.5×1	17 200	39 200	656
PFT 3606-5	P	36	6	3.969	36.5	32.4	2.5×2	19 700	39 200	545
PFT 3606-7.5	P	36	6	3.969	36.5	32.4	2.5×3	27 900	58 800	802
SFT 3606-5	Clearance	36	6	3.969	36.5	32.4	2.5×2	31 300	78 400	648
ZFT 3606-10	Z	36	6	3.969	36.5	32.4	2.5×2	31 300	78 400	1 271
SFT 3606-7.5	Clearance	36	6	3.969	36.5	32.4	2.5×3	44 400	118 000	954
DFT 3606-7.5	D	36	6	3.969	36.5	32.4	2.5×3	44 400	118 000	1 872
PFT 3610-2.5	P	36	10	6.35	37.0	30.4	2.5×1	20 100	30 500	290
ZFT 3610-3	Z	36	10	6.35	37.0	30.4	1.5×1	20 600	36 600	422
PFT 3610-3	P	36	10	6.35	37.0	30.4	1.5×2	23 600	36 600	342
SFT 3610-2.5	Clearance	36	10	6.35	37.0	30.4	2.5×1	32 000	61 100	350
* ZFT 3610-5	Z	36	10	6.35	37.0	30.4	2.5×1	32 000	61 100	687
PFT 3610-5	P	36	10	6.35	37.0	30.4	2.5×2	36 600	61 100	562
SFT 3610-3	Clearance	36	10	6.35	37.0	30.4	1.5×2	37 400	73 300	417
DFT 3610-3	D	36	10	6.35	37.0	30.4	1.5×2	37 400	73 300	817
PFT 3610-7.5	P	36	10	6.35	37.0	30.4	2.5×3	51 800	91 600	826
SFT 3610-5	Clearance	36	10	6.35	37.0	30.4	2.5×2	58 000	122 000	678
DFT 3610-5	D	36	10	6.35	37.0	30.4	2.5×2	58 000	122 000	1 329
ZFT 3610-10	Z	36	10	6.35	37.0	30.4	2.5×2	58 000	122 000	1 329
SFT 3610-7.5	Clearance	36	10	6.35	37.0	30.4	2.5×3	82 200	183 000	998
PFT 4005-3	P	40	5	3.175	40.5	37.2	1.5×2	9 700	21 200	354
SFT 4005-2.5	Clearance	40	5	3.175	40.5	37.2	2.5×1	13 200	35 300	354
ZFT 4005-5	Z	40	5	3.175	40.5	37.2	2.5×1	13 200	35 300	695
PFT 4005-5	P	40	5	3.175	40.5	37.2	2.5×2	15 100	35 300	577
SFT 4005-3	Clearance	40	5	3.175	40.5	37.2	1.5×2	15 400	42 300	421
DFT 4005-3	D	40	5	3.175	40.5	37.2	1.5×2	15 400	42 300	826
PFT 4005-7.5	P	40	5	3.175	40.5	37.2	2.5×3	21 300	52 900	848
SFT 4005-5	Clearance	40	5	3.175	40.5	37.2	2.5×2	23 900	70 500	685
* ZFT 4005-10	Z	40	5	3.175	40.5	37.2	2.5×2	23 900	70 500	1 344
SFT 4005-7.5	Clearance	40	5	3.175	40.5	37.2	2.5×3	33 900	106 000	1 009
DFT 4005-7.5	D	40	5	3.175	40.5	37.2	2.5×3	33 900	106 000	1 979
ZFT 4006-5	Z	40	6	3.969	40.5	36.4	2.5×1	18 000	43 800	715
PFT 4006-5	P	40	6	3.969	40.5	36.4	2.5×2	20 500	43 800	592
SFT 4006-3	Clearance	40	6	3.969	40.5	36.4	1.5×2	21 000	52 500	433
DFT 4006-3	D	40	6	3.969	40.5	36.4	1.5×2	21 000	52 500	850
PFT 4006-7.5	P	40	6	3.969	40.5	36.4	2.5×3	29 100	65 600	872
SFT 4006-5	Clearance	40	6	3.969	40.5	36.4	2.5×2	32 600	87 500	705
ZFT 4006-10	Z	40	6	3.969	40.5	36.4	2.5×2	32 600	87 500	1 383
SFT 4006-7.5	Clearance	40	6	3.969	40.5	36.4	2.5×3	46 200	131 000	1 038
DFT 4006-7.5	D	40	6	3.969	40.5	36.4	2.5×3	46 200	131 000	2 036

- Notes**
1. Nut flange for shaft diameter 20 mm or larger comes in circular shape I and circular shape II. Select a flange that is suitable for the space available for nut installation.
 2. If there is no seal for PFT, ZFT, SFT, and DFT, the nut length "L" is shortened by dimension "M".
 3. The right turn screw is standard. "L" is added to the end of the model code for the left turn screw.



PFT, ZFT, SFT



DFT

Unit: mm


Ball nut dimensions

Nut entire length L	Nut diameter D	Flanged diameter A	Flanged width B	Notched flange G	Seal dimension M	Bolt hole dimension			Bolt hole PCD W	Oil hole Q
						X	Y	Z		
66	65	100	15	38	3	9	14	8.5	82	M6×1
66	65	100	15	38	3	9	14	8.5	82	M6×1
84	65	100	15	38	3	9	14	8.5	82	M6×1
66	65	100	15	38	3	9	14	8.5	82	M6×1
102	65	100	15	38	3	9	14	8.5	82	M6×1
84	65	100	15	38	3	9	14	8.5	82	M6×1
162	65	100	15	38	3	9	14	8.5	82	M6×1
73	75	120	18	45	7	11	17.5	11	98	M6×1
90	75	120	18	45	7	11	17.5	11	98	M6×1
90	75	120	18	45	7	11	17.5	11	98	M6×1
73	75	120	18	45	7	11	17.5	11	98	M6×1
103	75	120	18	45	7	11	17.5	11	98	M6×1
103	75	120	18	45	7	11	17.5	11	98	M6×1
90	75	120	18	45	7	11	17.5	11	98	M6×1
170	75	120	18	45	7	11	17.5	11	98	M6×1
133	75	120	18	45	7	11	17.5	11	98	M6×1
103	75	120	18	45	7	11	17.5	11	98	M6×1
193	75	120	18	45	7	11	17.5	11	98	M6×1
163	75	120	18	45	7	11	17.5	11	98	M6×1
133	75	120	18	45	7	11	17.5	11	98	M6×1
56	67	101	15	39	3	9	14	8.5	83	Rc1/8
44	67	101	15	39	3	9	14	8.5	83	Rc1/8
59	67	101	15	39	3	9	14	8.5	83	Rc1/8
59	67	101	15	39	3	9	14	8.5	83	Rc1/8
56	67	101	15	39	3	9	14	8.5	83	Rc1/8
106	67	101	15	39	3	9	14	8.5	83	Rc1/8
74	67	101	15	39	3	9	14	8.5	83	Rc1/8
59	67	101	15	39	3	9	14	8.5	83	Rc1/8
89	67	101	15	39	3	9	14	8.5	83	Rc1/8
74	67	101	15	39	3	9	14	8.5	83	Rc1/8
139	67	101	15	39	3	9	14	8.5	83	Rc1/8
66	70	104	15	40	3	9	14	8.5	86	Rc1/8
66	70	104	15	40	3	9	14	8.5	86	Rc1/8
60	70	104	15	40	3	9	14	8.5	86	Rc1/8
114	70	104	15	40	3	9	14	8.5	86	Rc1/8
84	70	104	15	40	3	9	14	8.5	86	Rc1/8
66	70	104	15	40	3	9	14	8.5	86	Rc1/8
102	70	104	15	40	3	9	14	8.5	86	Rc1/8
84	70	104	15	40	3	9	14	8.5	86	Rc1/8
162	70	104	15	40	3	9	14	8.5	86	Rc1/8


- The axial rigidity K in the table above is a theoretical value obtained from the elastic deformation between screw groove and ball when the axial load is 30% of the basic dynamic load rating (C_0) with non-preload, 10% with D-preload, and 5% with P-preload. Refer to "Technical Description" (page B37) if the axial load and preload differ from the conditions above, or when the deformation of the ball nut body must be considered.
- For PFT, the basic load ratings differ from the other models as the spacer balls are installed.
- The models marked with * (asterisk) are available in the SA type standard ball screws with finished shaft end.
- Preload system: P, Oversize ball preload; Z, Offset preload; D, Double nut preload (See page B5.)

Return tube type

View X-X




Circular shape I




Circular shape II

Model No.	Preload system	Shaft dia. d	Lead l	Ball dia. D _w	Ball circle dia. d _m	Root dia. d _r	Effective turns of balls Turns × Circuits	Basic load rating (N)		Axial rigidity K (N/μm)
								Dynamic C _a	Static C _{0a}	
PFT 4008-3	P	40	8	4.762	40.5	35.5	1.5×2	16 700	31 200	370
SFT 4008-2.5	Clearance	40	8	4.762	40.5	35.5	2.5×1	22 700	51 500	368
ZFT 4008-5	Z	40	8	4.762	40.5	35.5	2.5×1	22 700	51 500	721
PFT 4008-5	P	40	8	4.762	40.5	35.5	2.5×2	25 900	51 500	598
SFT 4008-3	Clearance	40	8	4.762	40.5	35.5	1.5×2	26 500	62 500	440
DFT 4008-3	D	40	8	4.762	40.5	35.5	1.5×2	26 500	62 500	863
SFT 4008-5	Clearance	40	8	4.762	40.5	35.5	2.5×2	41 100	103 000	711
ZFT 4008-10	Z	40	8	4.762	40.5	35.5	2.5×2	41 100	103 000	1 394
PFT 4010-2.5	P	40	10	6.35	41	34.4	2.5×1	21 300	34 200	322
PFT 4010-3	P	40	10	6.35	41	34.4	1.5×2	24 900	41 000	383
SFT 4010-2.5	Clearance	40	10	6.35	41	34.4	2.5×1	33 700	68 300	383
ZFT 4010-5	Z	40	10	6.35	41	34.4	2.5×1	33 700	68 300	751
PFT 4010-5	P	40	10	6.35	41	34.4	2.5×2	38 600	68 300	623
SFT 4010-3	Clearance	40	10	6.35	41	34.4	1.5×2	39 500	82 000	456
ZFT 4010-6	Z	40	10	6.35	41	34.4	1.5×2	39 500	82 000	894
ZFT 4010-7	Z	40	10	6.35	41	34.4	3.5×1	45 100	97 100	1 045
SFT 4010-3.5	Clearance	40	10	6.35	41	34.4	3.5×1	45 100	97 100	533
PFT 4010-7	P	40	10	6.35	41	34.4	3.5×2	51 500	97 100	859
SFT 4010-5	Clearance	40	10	6.35	41	34.4	2.5×2	61 200	137 000	741
* DFT 4010-5	D	40	10	6.35	41	34.4	2.5×2	61 200	137 000	1 454
ZFT 4010-10	Z	40	10	6.35	41	34.4	2.5×2	61 200	137 000	1 454
SFT 4010-7	Clearance	40	10	6.35	41	34.4	3.5×2	81 800	194 000	1 032
PFT 4012-2.5	P	40	12	7.144	41.5	34.1	2.5×1	24 900	38 600	323
SFT 4012-2.5	Clearance	40	12	7.144	41.5	34.1	2.5×1	39 500	77 200	390
ZFT 4012-5	Z	40	12	7.144	41.5	34.1	2.5×1	39 500	77 200	766
PFT 4012-5	P	40	12	7.144	41.5	34.1	2.5×2	45 200	77 200	626
PFT 4012-7.5	P	40	12	7.144	41.5	34.1	2.5×3	64 000	116 000	921
SFT 4012-5	Clearance	40	12	7.144	41.5	34.1	2.5×2	71 700	154 000	756
* DFT 4012-5	D	40	12	7.144	41.5	34.1	2.5×2	71 700	154 000	1 482
ZFT 4012-10	Z	40	12	7.144	41.5	34.1	2.5×2	71 700	154 000	1 482
SFT 4012-7.5	Clearance	40	12	7.144	41.5	34.1	2.5×3	102 000	232 000	1 114
ZFT 4016-3	Z	40	16	7.144	41.5	34.1	1.5×1	25 400	46 200	468
SFT 4016-2.5	Clearance	40	16	7.144	41.5	34.1	2.5×1	39 300	77 000	388
DFT 4016-2.5	D	40	16	7.144	41.5	34.1	2.5×1	39 300	77 000	760
SFT 4016-3	Clearance	40	16	7.144	41.5	34.1	1.5×2	46 000	92 400	461
DFT 4016-3	D	40	16	7.144	41.5	34.1	1.5×2	46 000	92 400	905

- Notes**
1. Nut flange for shaft diameter 20 mm or larger comes in circular shape I and circular shape II. Select a flange that is suitable for the space available for nut installation.
 2. If there is no seal for PFT, ZFT, SFT, and DFT, the nut length "L" is shortened by dimension "M".
 3. The right turn screw is standard. "L" is added to the end of the model code for the left turn screw.

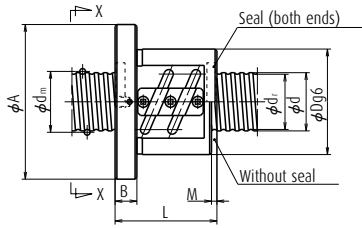

PFT, ZFT, SFT

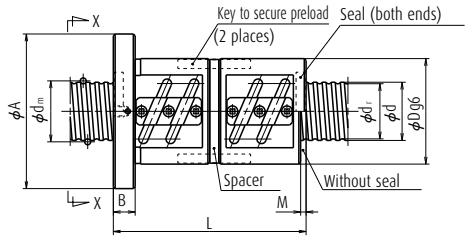

DFT

Unit: mm

Ball nut dimensions

Nut entire length L	Nut diameter D	Flanged diameter A	Flanged width B	Notched flange G	Seal dimension M	Bolt hole dimension			Bolt hole PCD W	Oil hole Q
						X	Y	Z		
71	74	108	15	41	5	9	14	8.5	90	Rc1/8
58	74	108	15	41	5	9	14	8.5	90	Rc1/8
82	74	108	15	41	5	9	14	8.5	90	Rc1/8
82	74	108	15	41	5	9	14	8.5	90	Rc1/8
71	74	108	15	41	5	9	14	8.5	90	Rc1/8
135	74	108	15	41	5	9	14	8.5	90	Rc1/8
82	74	108	15	41	5	9	14	8.5	90	Rc1/8
130	74	108	15	41	5	9	14	8.5	90	Rc1/8
73	82	124	18	47	7	11	17.5	11	102	Rc1/8
90	82	124	18	47	7	11	17.5	11	102	Rc1/8
73	82	124	18	47	7	11	17.5	11	102	Rc1/8
103	82	124	18	47	7	11	17.5	11	102	Rc1/8
103	82	124	18	47	7	11	17.5	11	102	Rc1/8
90	82	124	18	47	7	11	17.5	11	102	Rc1/8
140	82	124	18	47	7	11	17.5	11	102	Rc1/8
123	82	124	18	47	7	11	17.5	11	102	Rc1/8
83	82	124	18	47	7	11	17.5	11	102	Rc1/8
123	82	124	18	47	7	11	17.5	11	102	Rc1/8
103	82	124	18	47	7	11	17.5	11	102	Rc1/8
193	82	124	18	47	7	11	17.5	11	102	Rc1/8
163	82	124	18	47	7	11	17.5	11	102	Rc1/8
123	82	124	18	47	7	11	17.5	11	102	Rc1/8
81	86	128	18	48	9	11	17.5	11	106	Rc1/8
81	86	128	18	48	9	11	17.5	11	106	Rc1/8
117	86	128	18	48	9	11	17.5	11	106	Rc1/8
117	86	128	18	48	9	11	17.5	11	106	Rc1/8
153	86	128	18	48	9	11	17.5	11	106	Rc1/8
117	86	128	18	48	9	11	17.5	11	106	Rc1/8
225	86	128	18	48	9	11	17.5	11	106	Rc1/8
189	86	128	18	48	9	11	17.5	11	106	Rc1/8
153	86	128	18	48	9	11	17.5	11	106	Rc1/8
118	86	128	22	48	14	11	17.5	11	106	Rc1/8
102	86	128	22	48	14	11	17.5	11	106	Rc1/8
182	86	128	22	48	14	11	17.5	11	106	Rc1/8
118	86	128	22	48	14	11	17.5	11	106	Rc1/8
214	86	128	22	48	14	11	17.5	11	106	Rc1/8



4. The axial rigidity K in the table above is a theoretical value obtained from the elastic deformation between screw groove and ball when the axial load is 30% of the basic dynamic load rating (C_0) with non-preload, 10% with D-preload, and 5% with P-preload. Refer to "Technical Description" (page B37) if the axial load and preload differ from the conditions above, or when the deformation of the ball nut body must be considered.

5. For PFT, the basic load ratings differ from the other models as the spacer balls are installed.


6. The models marked with * (asterisk) are available in the SA type standard ball screws with finished shaft end.

7. Preload system: P, Oversize ball preload; Z, Offset preload; D, Double nut preload (See page B5.)


Return tube type

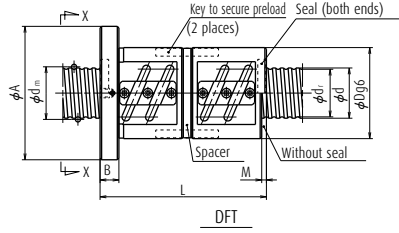

View X-X





Circular shape I





Circular shape II

Model No.	Preload system	Shaft dia. d	Lead l	Ball dia. D _w	Ball circle dia. d _m	Root dia. d _r	Effective turns of balls Turns × Circuits	Basic load rating (N)		Axial rigidity K (N/μm)	Nut entire length L
								Dynamic C _a	Static C _{0a}		
LPFT 4025-2.5	P	40	25	6.35	41.75	35.1	2.5×1	21 500	35 100	324	123
LPFT 4025-3	P	40	25	6.35	41.75	35.1	1.5×2	25 100	41 800	375	148
LSFT 4025-2.5	Clearance	40	25	6.35	41.75	35.1	2.5×1	34 100	70 100	385	123
LDFT 4025-2.5	D	40	25	6.35	41.75	35.1	2.5×1	34 100	70 100	755	223
LSFT 4025-3	Clearance	40	25	6.35	41.75	35.1	1.5×2	39 900	83 600	456	148
LDFT 4025-3	D	40	25	6.35	41.75	35.1	1.5×2	39 900	83 600	894	273
LPFT 4032-2.5	P	40	32	6.35	41.75	35.1	2.5×1	21 200	35 300	316	146
LSFT 4032-2.5	Clearance	40	32	6.35	41.75	35.1	2.5×1	33 600	70 700	381	146
LDFT 4032-2.5	D	40	32	6.35	41.75	35.1	2.5×1	33 600	70 700	747	274
LPFT 4040-1.5	P	40	40	6.35	41.75	35.1	1.5×1	13 400	21 000	191	133
LSFT 4040-1.5	Clearance	40	40	6.35	41.75	35.1	1.5×1	21 200	42 000	227	133
LDFT 4040-1.5	D	40	40	6.35	41.75	35.1	1.5×1	21 200	42 000	446	253
ZFT 4510-5	Z	45	10	6.35	46.0	39.4	2.5×1	36 300	78 500	841	103
PFT 4510-7	P	45	10	6.35	46.0	39.4	3.5×2	55 400	109 000	947	123
PFT 4510-7.5	P	45	10	6.35	46.0	39.4	2.5×3	58 800	118 000	1 015	133
SFT 4510-5	Clearance	45	10	6.35	46.0	39.4	2.5×2	65 800	157 000	830	103
DFT 4510-5	D	45	10	6.35	46.0	39.4	2.5×2	65 800	157 000	1 627	193
SFT 4510-7	Clearance	45	10	6.35	46.0	39.4	3.5×2	87 900	218 000	1 136	123
DFT 4510-7.5	Clearance	45	10	6.35	46.0	39.4	2.5×3	93 300	235 000	1 221	133
DFT 4510-7.5	D	45	10	6.35	46.0	39.4	2.5×3	93 300	235 000	2 395	253
SFT 4512-2.5	Clearance	45	12	7.144	46.5	39.1	2.5×1	41 600	88 200	432	83
ZFT 4512-5	Z	45	12	7.144	46.5	39.1	2.5×1	41 600	88 200	848	119
SFT 4512-5	Clearance	45	12	7.144	46.5	39.1	2.5×2	75 600	176 000	838	119
DFT 4512-5	D	45	12	7.144	46.5	39.1	2.5×2	75 600	176 000	1 643	227

- Notes**
1. Nut flange for shaft diameter 20 mm or larger comes in circular shape I and circular shape II. Select a flange that is suitable for the space available for nut installation.
 2. If there is no seal for PFT, ZFT, and SFT, the nut length "L" is shortened by dimension "M".
 3. If there is no seal for LSFT and LDFT of shaft diameter 25 mm or larger, the nut length "L" is shortened by dimension "M" and "C".
 4. The right turn screw is standard. "L" is added to the end of the model code for the left turn screw.

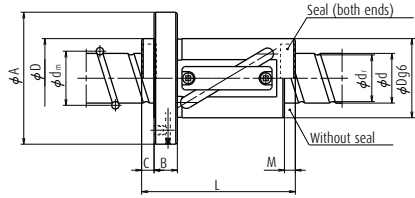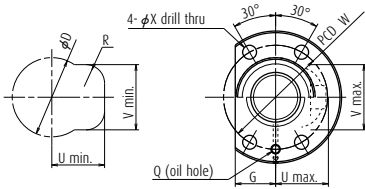

LPFT, LSFT

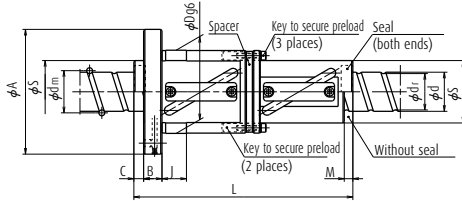

LDFT

Unit: mm


Ball nut dimensions

Nut diameter		Flanged diameter A	Flanged width B	Notched flange G	Tube projecting type			Seal dimension M	Diameter g6 C	Diameter g6 J	Bolt hole dimension			Bolt hole PCD W	Oil hole Q
D	S				U	V	R				X	Y	Z		
64	—	106	18	33	42	52	15	10	10	—	11	—	—	84	Rc1/8
64	—	106	18	33	42	52	15	10	10	—	11	—	—	84	Rc1/8
64	—	106	18	33	42	52	15	10	10	—	11	—	—	84	Rc1/8
84	64	126	18	48	—	—	—	10	10	22	11	—	—	104	Rc1/8
64	—	106	18	33	42	52	15	10	10	—	11	—	—	84	Rc1/8
84	64	126	18	48	—	—	—	10	10	22	11	—	—	104	Rc1/8
64	—	106	18	33	42	52	15	13	12	—	11	—	—	84	M6×1
64	—	106	18	33	42	52	15	13	12	—	11	—	—	84	M6×1
84	64	126	18	48	—	—	—	13	12	22	11	—	—	104	M6×1
64	—	106	18	33	42	52	15	16	14	—	11	—	—	84	M6×1
64	—	106	18	33	42	52	15	16	14	—	11	—	—	84	M6×1
84	64	126	18	48	—	—	—	16	14	22	11	—	—	104	M6×1
88	—	132	18	50	—	—	—	7	—	—	11	17.5	11	110	Rc1/8
88	—	132	18	50	—	—	—	7	—	—	11	17.5	11	110	Rc1/8
88	—	132	18	50	—	—	—	7	—	—	11	17.5	11	110	Rc1/8
88	—	132	18	50	—	—	—	7	—	—	11	17.5	11	110	Rc1/8
88	—	132	18	50	—	—	—	7	—	—	11	17.5	11	110	Rc1/8
88	—	132	18	50	—	—	—	7	—	—	11	17.5	11	110	Rc1/8
88	—	132	18	50	—	—	—	7	—	—	11	17.5	11	110	Rc1/8
88	—	132	18	50	—	—	—	7	—	—	11	17.5	11	110	Rc1/8
90	—	132	18	50	—	—	—	8	—	—	11	17.5	11	110	Rc1/8
90	—	132	18	50	—	—	—	8	—	—	11	17.5	11	110	Rc1/8
90	—	132	18	50	—	—	—	8	—	—	11	17.5	11	110	Rc1/8
90	—	132	18	50	—	—	—	8	—	—	11	17.5	11	110	Rc1/8

5. The axial rigidity K in the table above is a theoretical value obtained from the elastic deformation between screw groove and ball when the axial load is 30% of the basic dynamic load rating (C_a) with non-preload, 10% with D-preload, and 5% with P-preload. Refer to "Technical Description" (page B37) if the axial load and preload differ from the conditions above, or when the deformation of the ball nut body must be considered.

6. For PFT and LPFT, the basic load ratings differ from the other models as the spacer balls are installed.

7. Preload system: P, Oversize ball preload; Z, Offset preload; D, Double nut preload (See page B5.)

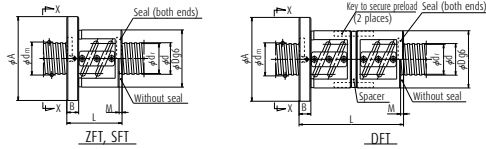

Unit: mm

Ball nut dimensions


Nut entire length L	Nut diameter D	Flanged diameter A	Flanged width B	Notched flange G	Seal dimension M	Bolt hole dimension			Bolt hole PCD W	Oil hole Q
						X	Y	Z		
58	80	114	15	43	3	9	14	8.5	96	Rc1/8
83	80	114	15	43	3	9	14	8.5	96	Rc1/8
68	80	114	15	43	3	9	14	8.5	96	Rc1/8
103	80	114	15	43	3	9	14	8.5	96	Rc1/8
62	84	118	15	45	3	9	14	8.5	100	Rc1/8
116	84	118	15	45	3	9	14	8.5	100	Rc1/8
86	84	118	15	45	3	9	14	8.5	100	Rc1/8
68	84	118	15	45	3	9	14	8.5	100	Rc1/8
104	84	118	15	45	3	9	14	8.5	100	Rc1/8
86	84	118	15	45	3	9	14	8.5	100	Rc1/8
164	84	118	15	45	3	9	14	8.5	100	Rc1/8
74	87	129	18	49	5	11	17.5	11	107	Rc1/8
138	87	129	18	49	5	11	17.5	11	107	Rc1/8
85	87	129	18	49	5	11	17.5	11	107	Rc1/8
133	87	129	18	49	5	11	17.5	11	107	Rc1/8
109	87	129	18	49	5	11	17.5	11	107	Rc1/8
205	87	129	18	49	5	11	17.5	11	107	Rc1/8
73	93	135	18	51	7	11	17.5	11	113	Rc1/8
103	93	135	18	51	7	11	17.5	11	113	Rc1/8
90	93	135	18	51	7	11	17.5	11	113	Rc1/8
170	93	135	18	51	7	11	17.5	11	113	Rc1/8
123	93	135	18	51	7	11	17.5	11	113	Rc1/8
133	93	135	18	51	7	11	17.5	11	113	Rc1/8
103	93	135	18	51	7	11	17.5	11	113	Rc1/8
163	93	135	18	51	7	11	17.5	11	113	Rc1/8
133	93	135	18	51	7	11	17.5	11	113	Rc1/8
253	93	135	18	51	7	11	17.5	11	113	Rc1/8
87	100	146	22	55	8	14	20	13	122	Rc1/8
123	100	146	22	55	8	14	20	13	122	Rc1/8
123	100	146	22	55	8	14	20	13	122	Rc1/8
231	100	146	22	55	8	14	20	13	122	Rc1/8
195	100	146	22	55	8	14	20	13	122	Rc1/8
104	100	146	22	55	14	14	20	13	122	Rc1/8
152	100	146	22	55	14	14	20	13	122	Rc1/8
200	100	146	22	55	14	14	17.5	11	122	Rc1/8
152	100	146	22	55	14	14	20	13	122	Rc1/8
280	100	146	22	55	14	14	20	13	122	Rc1/8
200	100	146	22	55	14	14	17.5	11	122	Rc1/8
147	100	146	28	55	17	14	20	13	122	Rc1/8
127	100	146	28	55	17	14	20	13	122	Rc1/8
227	100	146	28	55	17	14	20	13	122	Rc1/8
147	100	146	28	55	17	14	20	13	122	Rc1/8
267	100	146	28	55	17	14	20	13	122	Rc1/8

4. The axial rigidity K in the table above is a theoretical value obtained from the elastic deformation between screw groove and ball when the axial load is 30% of the basic dynamic load rating (C_0) with non-preload, 10% with D-preload, and 5% with P-preload. Refer to "Technical Description" (page B37) if the axial load and preload differ from the conditions above, or when the deformation of the ball nut body must be considered.


5. The models marked with * (asterisk) are available in the SA type standard ball screws with finished shaft end.

6. Preload system: P, Oversize ball preload; Z, Offset preload; D, Double nut preload (See page B5.)

Return tube type




ZFT, SFT

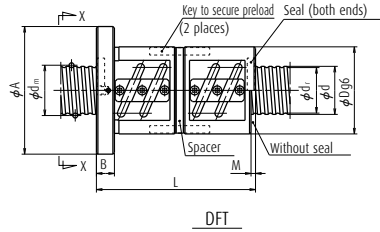


DFT

View X-X



Circular shape I





Circular shape II

Model No.	Preload system	Shaft dia. d	Lead l	Ball dia. D _w	Ball circle dia. d _m	Root dia. d _r	Effective turns of balls Turns × Circuits	Basic load rating (N)		Axial rigidity K (N/μm)	Nut entire length L
								Dynamic C _a	Static C _{0a}		
LPFT 5025-2.5	P	50	25	7.938	52.25	44	2.5×1	32 300	55 100	403	129
LPFT 5025-3	P	50	25	7.938	52.25	44	1.5×2	37 800	65 700	468	154
LSFT 5025-2.5	Clearance	50	25	7.938	52.25	44	2.5×1	51 300	110 000	480	129
LDFT 5025-2.5	D	50	25	7.938	52.25	44	2.5×1	51 300	110 000	941	229
LSFT 5025-3	Clearance	50	25	7.938	52.25	44	1.5×2	60 100	131 000	569	154
LDFT 5025-3	D	50	25	7.938	52.25	44	1.5×2	60 100	131 000	1 116	279
LPFT 5032-2.5	P	50	32	7.938	52.25	44	2.5×1	32 000	54 700	397	151
LPFT 5032-3	P	50	32	7.938	52.25	44	1.5×2	37 500	65 300	461	183
LSFT 5032-2.5	Clearance	50	32	7.938	52.25	44	2.5×1	50 900	109 000	473	151
LDFT 5032-2.5	D	50	32	7.938	52.25	44	2.5×1	50 900	109 000	928	279
LSFT 5032-3	Clearance	50	32	7.938	52.25	44	1.5×2	59 500	131 000	560	183
LDFT 5032-3	D	50	32	7.938	52.25	44	1.5×2	59 500	131 000	1 099	343
LPFT 5040-2.5	P	50	40	7.938	52.25	44	2.5×1	31 600	55 200	389	178
LSFT 5040-2.5	Clearance	50	40	7.938	52.25	44	2.5×1	50 200	110 000	469	178
LDFT 5040-2.5	D	50	40	7.938	52.25	44	2.5×1	50 200	110 000	920	338
LPFT 5050-1.5	P	50	50	7.938	52.25	44	1.5×1	20 000	32 800	236	161
LSFT 5050-1.5	Clearance	50	50	7.938	52.25	44	1.5×1	31 700	65 700	280	161
LDFT 5050-1.5	D	50	50	7.938	52.25	44	1.5×1	31 700	65 700	549	312
ZFT 5510-5	Z	55	10	6.35	56.0	49.4	2.5×1	38 700	96 000	977	103
SFT 5510-5	Clearance	55	10	6.35	56.0	49.4	2.5×2	70 200	192 000	964	103
ZFT 5510-10	Z	55	10	6.35	56.0	49.4	2.5×2	70 200	192 000	1 891	163
DFT 5510-5	D	55	10	6.35	56.0	49.4	2.5×2	70 200	192 000	1 891	193
SFT 5510-7.5	Clearance	55	10	6.35	56.0	49.4	2.5×3	99 500	288 000	1 419	133
DFT 5510-7.5	D	55	10	6.35	56.0	49.4	2.5×3	99 500	288 000	2 783	253

- Notes**
1. Nut flange for shaft diameter 20 mm or larger comes in circular shape I and circular shape II. Select a flange that is suitable for the space available for nut installation.
 2. If there is no seal for ZFT, SFT, and DFT, the nut length "L" is shortened by dimension "M".
 3. If there is no seal for LSFT and LDFT of shaft diameter 25 mm or larger, the nut length "L" is shortened by dimension "M" and "C".
 4. The right turn screw is standard. "L" is added to the end of the model code for the left turn screw.

Return tube type

View X-X




Circular shape I


Circular shape II

Model No.	Preload system	Shaft dia. d	Lead l	Ball dia. D _w	Ball circle dia. d _m	Root dia. d _r	Effective turns of balls Turns × Circuits	Basic load rating (N)		Axial rigidity K (N/μm)
								Dynamic C _a	Static C _{0a}	
SFT 8010-5	Clearance	80	10	6.35	81.0	74.4	2.5×2	83 200	282 000	1 309
DFT 8010-5	D	80	10	6.35	81.0	74.4	2.5×2	83 200	282 000	2 567
SFT 8010-7.5	Clearance	80	10	6.35	81.0	74.4	2.5×3	118 000	423 000	1 927
DFT 8010-7.5	D	80	10	6.35	81.0	74.4	2.5×3	118 000	423 000	3 779
SFT 8012-5	Clearance	80	12	7.938	81.5	73.2	2.5×2	113 000	350 000	1 345
DFT 8012-5	D	80	12	7.938	81.5	73.2	2.5×2	113 000	350 000	2 637
SFT 8012-7.5	Clearance	80	12	7.938	81.5	73.2	2.5×3	161 000	525 000	1 983
DFT 8012-7.5	D	80	12	7.938	81.5	73.2	2.5×3	161 000	525 000	3 889
SFT 8016-5	Clearance	80	16	9.525	82.0	72.2	2.5×2	192 000	581 000	1 764
DFT 8016-5	D	80	16	9.525	82.0	72.2	2.5×2	192 000	581 000	3 459
SFT 8016-7.5	Clearance	80	16	9.525	82.0	72.2	2.5×3	271 000	872 000	2 593
DFT 8016-7.5	D	80	16	9.525	82.0	72.2	2.5×3	271 000	872 000	5 085
SFT 8020-5	Clearance	80	20	9.525	82.0	72.2	2.5×2	191 000	581 000	1 758
DFT 8020-5	D	80	20	9.525	82.0	72.2	2.5×2	191 000	581 000	3 447
SFT 8020-7.5	Clearance	80	20	9.525	82.0	72.2	2.5×3	271 000	871 000	2 588
DFT 8020-7.5	D	80	20	9.525	82.0	72.2	2.5×3	271 000	871 000	5 075
SFT 10012-5	Clearance	100	12	7.938	101.5	93.2	2.5×2	124 000	441 000	1 611
DFT 10012-5	D	100	12	7.938	101.5	93.2	2.5×2	124 000	441 000	3 159
SFT 10012-7.5	Clearance	100	12	7.938	101.5	93.2	2.5×3	176 000	661 000	2 372
DFT 10012-7.5	D	100	12	7.938	101.5	93.2	2.5×3	176 000	661 000	4 652
SFT 10016-5	Clearance	100	16	9.525	102	92.2	2.5×2	208 000	736 000	2 109
DFT 10016-5	D	100	16	9.525	102	92.2	2.5×2	208 000	736 000	4 136
SFT 10016-7.5	Clearance	100	16	9.525	102	92.2	2.5×3	295 000	1 100 000	3 105
DFT 10016-7.5	D	100	16	9.525	102	92.2	2.5×3	295 000	1 100 000	6 089
SFT 10020-5	Clearance	100	20	9.525	102	92.2	2.5×2	208 000	735 000	2 106
DFT 10020-5	D	100	20	9.525	102	92.2	2.5×2	208 000	735 000	4 131
SFT 10020-7.5	Clearance	100	20	9.525	102	92.2	2.5×3	294 000	1 100 000	3 098
DFT 10020-7.5	D	100	20	9.525	102	92.2	2.5×3	294 000	1 100 000	6 075
SFT 12516-5	Clearance	125	16	9.525	127	117.2	2.5×2	231 000	918 000	2 520
DFT 12516-5	D	125	16	9.525	127	117.2	2.5×2	231 000	918 000	4 942
SFT 12516-7.5	Clearance	125	16	9.525	127	117.2	2.5×3	327 000	1 380 000	3 708
DFT 12516-7.5	D	125	16	9.525	127	117.2	2.5×3	327 000	1 380 000	7 272
SFT 12520-5	Clearance	125	20	9.525	127	117.2	2.5×2	230 000	917 000	2 515
DFT 12520-5	D	125	20	9.525	127	117.2	2.5×2	230 000	917 000	4 931
SFT 12520-7.5	Clearance	125	20	9.525	127	117.2	2.5×3	327 000	1 380 000	3 705
DFT 12520-7.5	D	125	20	9.525	127	117.2	2.5×3	327 000	1 380 000	7 266

- Notes**
1. Nut flange for shaft diameter 20 mm or larger comes in circular shape I and circular shape II. Select a flange that is suitable for the space available for nut installation.
 2. If there is no seal for SFT, and DFT, the nut length "L" is shortened by dimension "M".
 3. The right turn screw is standard. "L" is added to the end of the model code for the left turn screw.

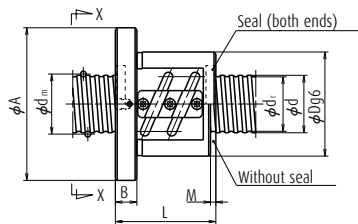

SFT

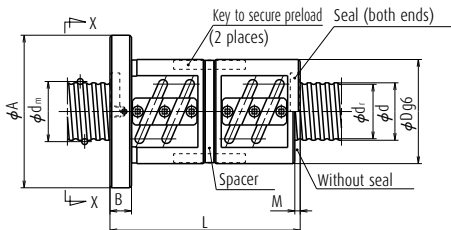

DFT

Unit: mm

Ball nut dimensions

Nut entire length L	Nut diameter D	Flanged diameter A	Flanged width B	Notched flange G	Seal dimension M	Bolt hole dimension			Bolt hole PCD W	Oil hole Q
						X	Y	Z		
107	130	176	22	66	7	14	20	13	152	Rc1/8
197	130	176	22	66	7	14	20	13	152	Rc1/8
137	130	176	22	66	7	14	20	13	152	Rc1/8
257	130	176	22	66	7	14	20	13	152	Rc1/8
123	136	182	22	68	8	14	20	13	158	Rc1/8
231	136	182	22	68	8	14	20	13	158	Rc1/8
159	136	182	22	68	8	14	20	13	158	Rc1/8
303	136	182	22	68	8	14	20	13	158	Rc1/8
158	143	204	28	77	10	18	26	17.5	172	Rc1/8
302	143	204	28	77	10	18	26	17.5	172	Rc1/8
206	143	204	28	77	10	18	26	17.5	172	Rc1/8
398	143	204	28	77	10	18	26	17.5	172	Rc1/8
187	143	204	28	77	17	18	26	17.5	172	Rc1/8
347	143	204	28	77	17	18	26	17.5	172	Rc1/8
247	143	204	28	77	17	18	26	17.5	172	Rc1/8
467	143	204	28	77	17	18	26	17.5	172	Rc1/8
129	160	220	28	82	8	18	26	17.5	188	Rc1/8
237	160	220	28	82	8	18	26	17.5	188	Rc1/8
165	160	220	28	82	8	18	26	17.5	188	Rc1/8
309	160	220	28	82	8	18	26	17.5	188	Rc1/8
162	170	243	32	91	10	22	32	21.5	205	Rc1/8
306	170	243	32	91	10	22	32	21.5	205	Rc1/8
210	170	243	32	91	10	22	32	21.5	205	Rc1/8
402	170	243	32	91	10	22	32	21.5	205	Rc1/8
191	170	243	32	91	17	22	32	21.5	205	Rc1/8
351	170	243	32	91	17	22	32	21.5	205	Rc1/8
251	170	243	32	91	17	22	32	21.5	205	Rc1/8
471	170	243	32	91	17	22	32	21.5	205	Rc1/8
170	200	290	36	109	10	26	39	25.5	243	Rc1/8
314	200	290	36	109	10	26	39	25.5	243	Rc1/8
218	200	290	36	109	10	26	39	25.5	243	Rc1/8
410	200	290	36	109	10	26	39	25.5	243	Rc1/8
199	200	290	36	109	12	26	39	25.5	243	Rc1/8
379	200	290	36	109	12	26	39	25.5	243	Rc1/8
259	200	290	36	109	12	26	39	25.5	243	Rc1/8
499	200	290	36	109	12	26	39	25.5	243	Rc1/8

4. The axial rigidity K in the table above is a theoretical value obtained from the elastic deformation between screw groove and ball when the axial load is 30% of the basic dynamic load rating (C_a) with non-preload, 10% with D-preload, and 5% with P-preload. Refer to "Technical Description" (page B37) if the axial load and preload differ from the conditions above, or when the deformation of the ball nut body must be considered.

5. Preload system: D; Double nut preload (See page B5.)

B-3-2.3 Deflector(bridge) Type Ball Screws

1. Features

The deflector(bridge) type has the smallest ball nut compared to the other recirculation systems, and suitable for fine lead operation.

2. Specifications

(1) Ball recirculation system

It has a small ball nut outside diameter, and suits for small lead ball screws. **Fig.1** shows the structure of the deflector(bridge) recirculation system.

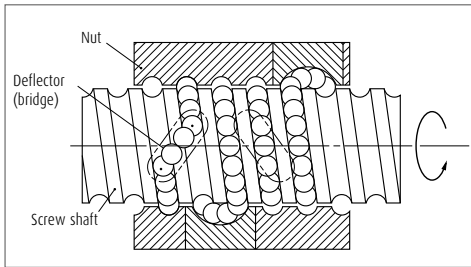


Fig. 1 Structure of deflector(bridge) recirculation system

Table 1 Accuracy grade and axial play

Accuracy grade	C0, C1, C2, C3, C5, C7 (Ct7 is not included in DFD)
Axial play	Z, 0 mm (preloaded); T, 0.005 mm or less S, 0.020 mm or less; N, 0.050 mm or less

Table 2 Deflector(bridge) type ball screw product categories

Nut model	Shape	Flange shape	Preload system
MSFD		Flanged Circular III	Non-preload, Slight axial play
MPFD			P-preload (light preload) no spacer ball
SFD		Screw shaft diameter of 16 mm or smaller: Flanged Screw shaft diameter of 20 mm or smaller: Rectangle Circulara, II	Non-preload, Slight axial play
ZFD		Flanged Circular I, II	Z-preload (medium preload)
DFD		Flanged Circular I, II	D-preload (medium preload) (heavy preload)

(2) Accuracy grade and axial play

The available standard accuracy grade and axial play are shown in **Table 1**. Please consult NSK for other grades.

(3) Allowable d-n value and the criterion of maximum rotational speed

The allowable d-n value and criterion of maximum rotational speed are shown below. Please consult NSK if the rotational speed exceeds the permissible range below. Basic measure must be taken for the high speed ball screws respectively.

Allowable d-n value:

Standard specification ; 84 000 or less

High-speed specification ; 100 000 or less

Standard of rotational speed : 3 000 min⁻¹

Note: Please also review the critical speed. Refer to "Technical Description: Permissible Rotational Speed" (page B47) for details.

(4) Other specifications

Please consult NSK for other specifications not listed in the dimension tables.

3. Product categories

There are four different preload systems (Table 2). Synthetic resin that shows superb characteristics against wear is used in the recirculation deflector (bridge) for MSFD, MPFD, and has enhanced the smooth recirculation of balls.

This product is being applied for a patent.

4. Design Precautions

When designing the screw shaft end, one end of the screw must meet either one of the following conditions. If not, we cannot install the ball nut on the screw shaft.

- > Cut the ball groove through to the shaft end.


- > The diameters of bearing journals and the gear or pulley seat must be less than the root diameter of ball groove "dr" specified on the dimension table.

For general precautions regarding ball screws, refer to "Design Precautions" (page B83) and "Handling Precautions" (page B103).

5. Structure of model number and reference number


The followings describe the structure of "Model number" and "Reference number for ball screw".

> Model Number

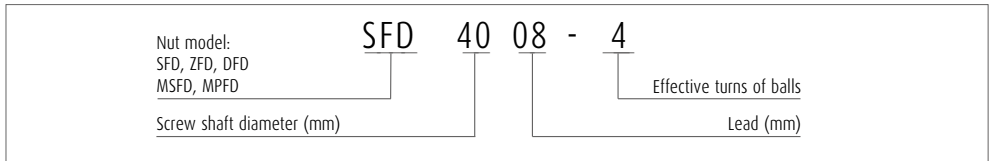


Note: In case of ZFD, the number here is twice as large as the effective turns of balls.

> Reference number for ball screw

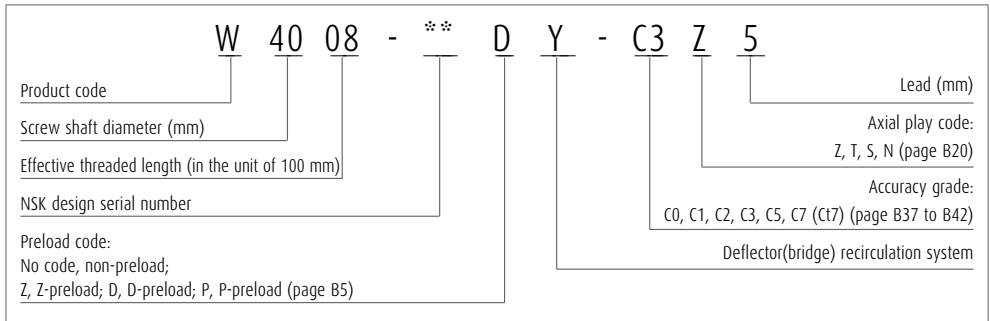


Deflector(bridge) type

View X-X




Lead $l = 0.5 \text{ mm}$



Lead $l > 1 \text{ mm}$

Model No.	Preload system	Shaft dia. d	Lead l	Ball dia. D _w	Ball circle dia. d _m	Root dia. d _r	Effective turns of balls Turns × Circuits	Basic load rating (N)	
								Dynamic C _a	Static C _{0a}
MSFD0400.5-3	Clearance	4	0.5	0.400	4.1	3.6	1×3	205	280
MPFD0400.5-3	P	4	0.5	0.400	4.1	3.6	1×3	205	280
MSFD 0401-2	Clearance	4	1	0.800	4.2	3.2	1×2	370	370
* MPFD 0401-2	P	4	1	0.800	4.2	3.2	1×2	370	370
MSFD0600.5-3	Clearance	6	0.5	0.400	6.1	5.6	1×3	240	430
MPFD0600.5-3	P	6	0.5	0.400	6.1	5.6	1×3	240	430
MSFD 0601-3	Clearance	6	1	0.800	6.2	5.2	1×3	680	920
* MPFD 0601-3	P	6	1	0.800	6.2	5.2	1×3	680	920
MSFD 0602-3	Clearance	6	2	0.800	6.2	5.2	1×3	675	920
MPFD 0602-3	P	6	2	0.800	6.2	5.2	1×3	675	920
MSFD0800.5-3	Clearance	8	0.5	0.400	8.1	7.6	1×3	275	595
MPFD0800.5-3	P	8	0.5	0.400	8.1	7.6	1×3	275	595
MSFD 0801-3	Clearance	8	1	0.800	8.2	7.2	1×3	790	1 290
* MPFD 0801-3	P	8	1	0.800	8.2	7.2	1×3	790	1 290
MSFD0801.5-3	Clearance	8	1.5	1.000	8.3	7.0	1×3	1 270	1 970
* MPFD0801.5-3	P	8	1.5	1.000	8.3	7.0	1×3	1 270	1 970
MSFD 0802-3	Clearance	8	2	1.200	8.3	6.9	1×3	1 560	2 200
* MPFD 0802-3	P	8	2	1.200	8.3	6.9	1×3	1 560	2 200
MSFD 1001-3	Clearance	10	1	0.800	10.2	9.2	1×3	880	1 660
MPFD 1001-3	P	10	1	0.800	10.2	9.2	1×3	880	1 660
MSFD 1002-3	Clearance	10	2	1.200	10.3	8.9	1×3	1 800	2 970
* MPFD 1002-3	P	10	2	1.200	10.3	8.9	1×3	1 800	2 970
MSFD1002.5-3	Clearance	10	2.5	1.588	10.4	8.6	1×3	2 500	3 630
* MPFD1002.5-3	P	10	2.5	1.588	10.4	8.6	1×3	2 500	3 630
MSFD 1201-3	Clearance	12	1	0.800	12.2	11.2	1×3	940	1 980
MPFD 1201-3	P	12	1	0.800	12.2	11.2	1×3	940	1 980
MSFD 1202-3	Clearance	12	2	1.200	12.3	10.9	1×3	1 960	3 620
* MPFD 1202-3	P	12	2	1.200	12.3	10.9	1×3	1 960	3 620
MSFD1202.5-3	Clearance	12	2.5	1.588	12.4	10.6	1×3	2 790	4 530
* MPFD1202.5-3	P	12	2.5	1.588	12.4	10.6	1×3	2 790	4 530
MSFD 1203-3	Clearance	12	3	2.000	12.5	10.2	1×3	3 680	5 400
MPFD 1203-3	P	12	3	2.000	12.5	10.2	1×3	3 680	5 400
MSFD 1402-3	Clearance	14	2	1.200	14.3	12.9	1×3	2 100	4 260
MPFD 1402-3	P	14	2	1.200	14.3	12.9	1×3	2 100	4 260
MSFD 1403-3	Clearance	14	3	2.000	14.5	12.2	1×3	4 010	6 480
MPFD 1403-3	P	14	3	2.000	14.5	12.2	1×3	4 010	6 480

- Notes**
1. If the shaft OD is less than 6 mm or the lead is less than 1 mm, a seal is not installed in the nut. (See page B68 for dust protection.)
 2. Ball nuts with shaft diameters under 14 mm do not have oil holes.
 3. Right turn screw is standard. Please consult NSK for left turn screw.

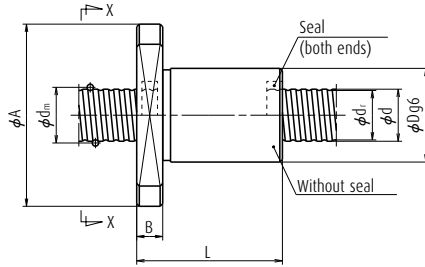


Unit: mm


Axial rigidity K (N/μm)	Ball nut dimensions						
	Nut entire length L	Nut diameter D	Flanged diameter A	Flanged width B	Flanged dimension A	Bolt hole dimension A	Bolt hole PCD W
32	13	10	22	3	11	3.4	16
50	13	10	22	3	11	3.4	16
23	12	10	20	3	14	2.9	15
36	12	10	20	3	14	2.9	15
44	13	12	24	3	13	3.4	18
69	13	12	24	3	13	3.4	18
51	15	12	24	3.5	16	3.4	18
80	15	12	24	3.5	16	3.4	18
51	17	13	25	4	17	3.4	19
79	17	13	25	4	17	3.4	19
57	13	14	27	3	15	3.4	21
89	13	14	27	3	15	3.4	21
67	16	14	27	4	18	3.4	21
104	16	14	27	4	18	3.4	21
79	22	15	28	4	19	3.4	22
123	22	15	28	4	19	3.4	22
76	26	16	29	4	20	3.4	23
119	26	16	29	4	20	3.4	23
81	16	16	29	4	20	3.4	23
127	16	16	29	4	20	3.4	23
97	28	18	35	5	22	4.5	27
151	28	18	35	5	22	4.5	27
94	32	19	36	5	23	4.5	28
147	32	19	36	5	23	4.5	28
93	16	18	31	4	22	3.4	25
145	16	18	31	4	22	3.4	25
114	28	20	37	5	24	4.5	29
177	28	20	37	5	24	4.5	29
113	32	21	38	5	25	4.5	30
176	32	21	38	5	25	4.5	30
111	36	22	39	5	26	4.5	31
174	36	22	39	5	26	4.5	31
129	29	22	41	6	26	5.5	32
201	29	22	41	6	26	5.5	32
129	37	24	43	6	28	5.5	34
201	37	24	43	6	28	5.5	34

- The axial rigidity K in the table above is a theoretical value obtained from the elastic deformation between screw groove and ball when the axial load is 30% of the basic dynamic load rating (C_d) with non-preload, 10% with D-preload, and 5% with P-preload. Refer to "Technical Description" (page B37) if the axial load and preload differ from the conditions above, or when the deformation of the ball nut body must be considered.
- The models marked with * (asterisk) are available in the MA type standard ball screw with finished shaft end.
- Preload system: P; Oversize ball preload (See page B5.)


Deflector(bridge) type




SFD, ZFD

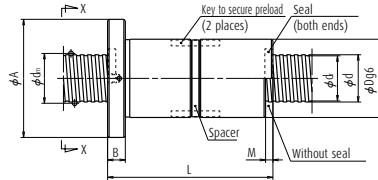

DFD





Circular shape I



Circular shape II

Model No.	Preload system	Shaft dia. d	Lead l	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Effective turns of balls Turns \times Circuits	Basic load rating (N)		Axial rigidity K (N/ μ m)
								Dynamic C_a	Static C_{0a}	
* MSFD 1602-4	Clearance	16	2	1.588	16.4	14.6	1 \times 4	4 150	8 450	194
* MPFD 1602-4	P	16	2	1.588	16.4	14.6	1 \times 4	4 150	8 450	302
MSFD 1602.5-4	Clearance	16	2.5	1.588	16.4	14.6	1 \times 4	4 150	8 440	194
* MPFD 1602.5-4	P	16	2.5	1.588	16.4	14.6	1 \times 4	4 150	8 440	302
MSFD 2002-4	Clearance	20	2	1.588	20.4	18.6	1 \times 4	4 620	10 900	237
MPFD 2002-4	P	20	2	1.588	20.4	18.6	1 \times 4	4 620	10 900	369
SFD 2005-3	Clearance	20	5	3.175	20.75	17.4	1 \times 3	10 100	17 400	206
ZFD 2005-6	Z	20	5	3.175	20.75	17.4	1 \times 3	10 100	17 400	404
SFD 2005-4	Clearance	20	5	3.175	20.75	17.4	1 \times 4	13 000	23 300	271
DFD 2005-4	D	20	5	3.175	20.75	17.4	1 \times 4	13 000	23 300	532
SFD 2006-3	Clearance	20	6	3.969	21	16.9	1 \times 3	13 100	20 500	202
ZFD 2006-6	Z	20	6	3.969	21	16.9	1 \times 3	13 100	20 500	396
SFD 2006-4	Clearance	20	6	3.969	21	16.9	1 \times 4	16 800	27 400	266
DFD 2006-4	D	20	6	3.969	21	16.9	1 \times 4	16 800	27 400	521
MSFD 2502-4	Clearance	25	2	1.588	25.4	23.6	1 \times 4	5 100	13 900	287
MPFD 2502-4	P	25	2	1.588	25.4	23.6	1 \times 4	5 100	13 900	447
SFD 2505-3	Clearance	25	5	3.175	25.75	22.4	1 \times 3	11 600	22 900	257
* ZFD 2505-6	Z	25	5	3.175	25.75	22.4	1 \times 3	11 600	22 900	503
SFD 2505-4	Clearance	25	5	3.175	25.75	22.4	1 \times 4	14 800	30 500	337
DFD 2505-4	D	25	5	3.175	25.75	22.4	1 \times 4	14 800	30 500	661
SFD 2506-3	Clearance	25	6	3.969	26	21.9	1 \times 3	15 200	27 300	254
ZFD 2506-6	Z	25	6	3.969	26	21.9	1 \times 3	15 200	27 300	499
SFD 2506-4	Clearance	25	6	3.969	26	21.9	1 \times 4	19 400	36 400	334
DFD 2506-4	D	25	6	3.969	26	21.9	1 \times 4	19 400	36 400	656
ZFD 2510-4	Z	25	10	4.762	26.25	21.3	1 \times 2	13 300	21 200	337
SFD 2510-3	Clearance	25	10	4.762	26.25	21.3	1 \times 3	18 900	31 800	253
DFD 2510-3	D	25	10	4.762	26.25	21.3	1 \times 3	18 900	31 800	497

- Notes**
- Nut comes in circular shape I and circular shape II for shaft diameter 20 mm or larger. Select a flange that is suitable for the space available for nut installation.
 - If there is no seal for SFD, ZFD, and DFD, the nut length "L" is shortened by dimension "M". For MSFD and MPFD, the nut length is the same as those with seal.
 - The right turn screw is standard. "L" is added to the end of the model code for the left turn screw. Please consult NSK for MSFD and MPFD.

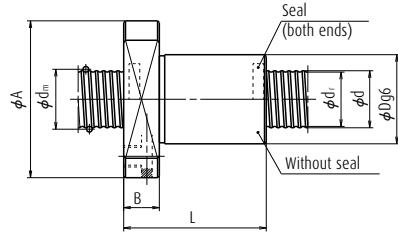

MSFD, MPFD




Unit: mm

Ball nut dimensions


Nut entire length L	Nut diameter D	Flanged diameter A	Flanged width B	Notched flange		Seal dimension M	Bolt hole dimension			Bolt hole PCD W	Oil hole dimension T	Oil hole Q
				G	H		X	Y	Z			
40	25	44	10	—	29	—	5.5	—	—	35	16	M6×1
40	25	44	10	—	29	—	5.5	—	—	35	16	M6×1
44	25	44	10	—	29	—	5.5	—	—	35	16	M6×1
44	25	44	10	—	29	—	5.5	—	—	35	16	M6×1
40	30	49	10	—	34	—	5.5	—	—	40	18.5	M6×1
40	30	49	10	—	34	—	5.5	—	—	40	18.5	M6×1
46	35	58	11	22.5	—	5	5.5	9.5	5.5	46	—	M6×1
66	35	58	11	22.5	—	5	5.5	9.5	5.5	46	—	M6×1
51	35	58	11	22.5	—	5	5.5	9.5	5.5	46	—	M6×1
91	41	64	11	25	—	5	5.5	9.5	5.5	52	—	M6×1
52	35	58	11	22.5	—	6	5.5	9.5	5.5	46	—	M6×1
76	35	58	11	22.5	—	6	5.5	9.5	5.5	46	—	M6×1
60	35	58	11	22.5	—	6	5.5	9.5	5.5	46	—	M6×1
108	42	65	11	25	—	6	5.5	9.5	5.5	53	—	M6×1
40	36	55	10	—	40	—	5.5	—	—	46	21.5	M6×1
40	36	55	10	—	40	—	5.5	—	—	46	21.5	M6×1
46	40	63	11	24	—	5	5.5	9.5	5.5	51	—	M6×1
66	40	63	11	24	—	5	5.5	9.5	5.5	51	—	M6×1
51	40	63	11	24	—	5	5.5	9.5	5.5	51	—	M6×1
91	46	69	11	26	—	5	5.5	9.5	5.5	57	—	M6×1
52	40	63	11	24	—	6	5.5	9.5	5.5	51	—	M6×1
76	40	63	11	24	—	6	5.5	9.5	5.5	51	—	M6×1
60	40	63	11	24	—	6	5.5	9.5	5.5	51	—	M6×1
108	47	70	11	27	—	6	5.5	9.5	5.5	58	—	M6×1
88	42	69	15	26	—	10	6.6	11	6.5	55	—	M6×1
80	42	69	15	26	—	10	6.6	11	6.5	55	—	M6×1
140	47	74	15	28	—	10	6.6	11	6.5	60	—	M6×1

- The axial rigidity K in the table above is a theoretical value obtained from the elastic deformation between screw groove and ball when the axial load is 30% of the basic dynamic load rating (C_d) with non-preload, 10% with D-preload, and 5% with P-preload. Refer to "Technical Description" (page B37) if the axial load and preload differ from the conditions above, or when the deformation of the ball nut body must be considered.
- It is recommended to use with seals when the shaft diameter is 16 mm or over and an oil hole is provided on the ball nut.
- The models marked with * (asterisk) are available in the MA type standard ball screw with finished shaft end.
- Preload system: Z, Offset preload; P, Oversize ball preload; D, Double nut preload (See page B5.)

Deflector(bridge) type

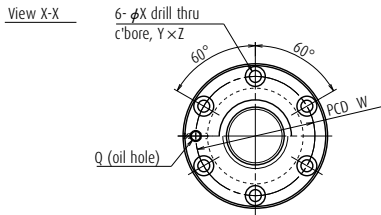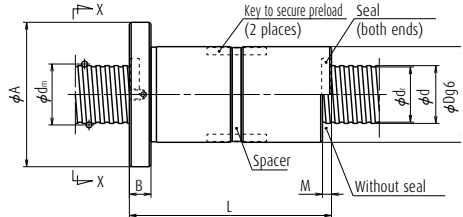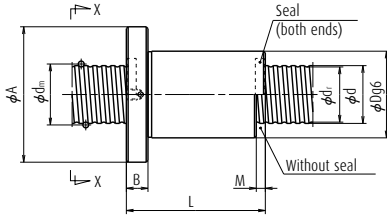


Circular shape I



Circular shape II

Model No.	Preload system	Shaft dia. d	Lead l	Ball dia. D _w	Ball circle dia. d _m	Root dia. d _r	Effective turns of balls Turns × Circuits	Basic load rating (N)		Axial rigidity K (N/μm)
								Dynamic C _a	Static C _{0a}	
MSFD 3202-6	Clearance	32	2	1.588	32.4	30.6	1×6	8 030	27 100	521
MPFD 3202-6	P	32	2	1.588	32.4	30.6	1×6	8 030	27 100	811
SFD 3205-3	Clearance	32	5	3.175	32.75	29.4	1×3	13 100	30 500	322
ZFD 3205-6	Z	32	5	3.175	32.75	29.4	1×3	13 100	30 500	631
SFD 3205-4	Clearance	32	5	3.175	32.75	29.4	1×4	16 800	40 600	424
* ZFD 3205-8	Z	32	5	3.175	32.75	29.4	1×4	16 800	40 600	831
SFD 3205-6	Clearance	32	5	3.175	32.75	29.4	1×6	23 800	60 900	623
DFD 3205-6	D	32	5	3.175	32.75	29.4	1×6	23 800	60 900	1 222
SFD 3206-3	Clearance	32	6	3.969	33	28.9	1×3	17 700	37 400	328
ZFD 3206-6	Z	32	6	3.969	33	28.9	1×3	17 700	37 400	643
SFD 3206-4	Clearance	32	6	3.969	33	28.9	1×4	22 600	49 900	431
ZFD 3206-8	Z	32	6	3.969	33	28.9	1×4	22 600	49 900	846
SFD 3206-6	Clearance	32	6	3.969	33	28.9	1×6	32 100	74 800	635
DFD 3206-6	D	32	6	3.969	33	28.9	1×6	32 100	74 800	1 245
SFD 3208-3	Clearance	32	8	4.762	33.25	28.3	1×3	21 600	41 700	316
ZFD 3208-6	Z	32	8	4.762	33.25	28.3	1×3	21 600	41 700	619
SFD 3208-4	Clearance	32	8	4.762	33.25	28.3	1×4	27 700	55 600	415
ZFD 3208-8	Z	32	8	4.762	33.25	28.3	1×4	27 700	55 600	815
SFD 3210-3	Clearance	32	10	6.35	33.75	27.1	1×3	30 500	52 500	313
* ZFD 3210-6	Z	32	10	6.35	33.75	27.1	1×3	30 500	52 500	614
SFD 3210-4	Clearance	32	10	6.35	33.75	27.1	1×4	39 000	70 000	411
DFD 3210-4	D	32	10	6.35	33.75	27.1	1×4	39 000	70 000	807

- Notes**
1. Nut comes in circular shape I and circular shape II for shaft diameter 20 mm or larger. Select a flange that is suitable for the space available for nut installation.
 2. If there is no seal for SFD, ZFD, and DFD, the nut length "L" is shortened by dimension "M". For MSFD and MPFD, the nut length is the same as those with seal.
 3. The right turn screw is standard. "L" is added to the end of the model code for the left turn screw. Please consult NSK for MSFD and MPFD.

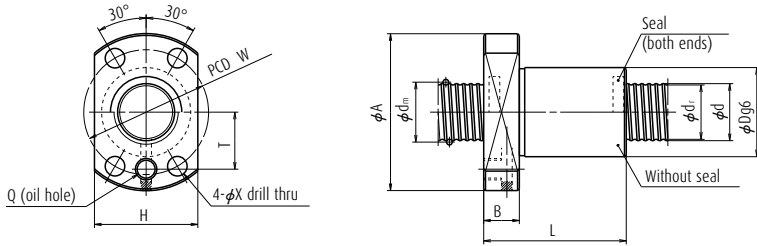

MSFD, MPFD


Unit: mm

Ball nut dimensions


Nut entire length L	Nut diameter D	Flanged diameter A	Flanged width B	Notched flange		Seal dimension M	Bolt hole dimension			Bolt hole PCD W	Oil hole dimension T	Oil hole Q
				G	H		X	Y	Z			
50	42	65	10	—	46	—	6.6	—	—	54	26.5	M6×1
50	42	65	10	—	46	—	6.6	—	—	54	26.5	M6×1
47	48	75	12	29	—	5	6.6	11	6.5	61	—	M6×1
67	48	75	12	29	—	5	6.6	11	6.5	61	—	M6×1
52	48	75	12	29	—	5	6.6	11	6.5	61	—	M6×1
77	48	75	12	29	—	5	6.6	11	6.5	61	—	M6×1
62	48	75	12	29	—	5	6.6	11	6.5	61	—	M6×1
112	53	80	12	30	—	5	6.6	11	6.5	66	—	M6×1
53	48	75	12	29	—	6	6.6	11	6.5	61	—	M6×1
77	48	75	12	29	—	6	6.6	11	6.5	61	—	M6×1
61	48	75	12	29	—	6	6.6	11	6.5	61	—	M6×1
90	48	75	12	29	—	6	6.6	11	6.5	61	—	M6×1
73	48	75	12	29	—	6	6.6	11	6.5	61	—	M6×1
133	54	81	12	31	—	6	6.6	11	6.5	67	—	M6×1
67	50	84	15	32	—	8	9	14	8.5	66	—	M6×1
99	50	84	15	32	—	8	9	14	8.5	66	—	M6×1
76	50	84	15	32	—	8	9	14	8.5	66	—	M6×1
116	50	84	15	32	—	8	9	14	8.5	66	—	M6×1
80	54	88	15	34	—	10	9	14	8.5	70	—	M6×1
120	54	88	15	34	—	10	9	14	8.5	70	—	M6×1
90	54	88	15	34	—	10	9	14	8.5	70	—	M6×1
160	54	88	15	34	—	10	9	14	8.5	70	—	M6×1

- The axial rigidity K in the table above is a theoretical value obtained from the elastic deformation between screw groove and ball when the axial load is 30% of the basic dynamic load rating (C_d) with non-preload, 10% with D-preload, and 5% with P-preload. Refer to "Technical Description" (page B37) if the axial load and preload differ from the conditions above, or when the deformation of the ball nut body must be considered.
- It is recommended to use with seals when the shaft diameter is 16 mm or over and an oil hole is provided on the ball nut.
- The models marked with * (asterisk) are available in the SS type standard ball screw with finished shaft end.
- Preload system: Z, Offset preload; P, Oversize ball preload; D, Double nut preload (See page B5.)


Deflector(bridge) type




SFD, ZFD

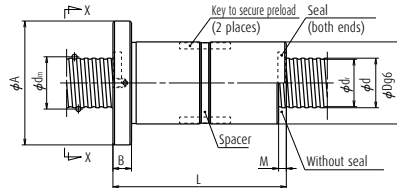

DFD





Circular shape I



Circular shape II

Model No.	Preload system	Shaft dia. d	Lead l	Ball dia. D _w	Ball circle dia. d _m	Root dia. d _r	Effective turns of balls Turns × Circuits	Basic load rating (N)		Axial rigidity K (N/μm)
								Dynamic C ₀	Static C _{0a}	
MSFD 4002-6	Clearance	40	2	1.588	40.4	38.6	1×6	8 720	33 900	620
MPFD 4002-6	P	40	2	1.588	40.4	38.6	1×6	8 720	33 900	966
SFD 4005-4	Clearance	40	5	3.175	40.75	37.4	1×4	18 700	52 200	517
ZFD 4005-8	Z	40	5	3.175	40.75	37.4	1×4	18 700	52 200	1 013
SFD 4005-6	Clearance	40	5	3.175	40.75	37.4	1×6	26 500	78 300	761
ZFD 4005-12	Z	40	5	3.175	40.75	37.4	1×6	26 500	78 300	1 492
SFD 4006-4	Clearance	40	6	3.969	41.0	36.9	1×4	25 100	63 500	522
ZFD 4006-8	Z	40	6	3.969	41.0	36.9	1×4	25 100	63 500	1 023
SFD 4006-6	Clearance	40	6	3.969	41.0	36.9	1×6	35 600	95 200	768
ZFD 4006-12	Z	40	6	3.969	41.0	36.9	1×6	35 600	95 200	1 506
SFD 4008-4	Clearance	40	8	4.762	41.25	36.3	1×4	32 000	75 000	529
ZFD 4008-8	Z	40	8	4.762	41.25	36.3	1×4	32 000	75 000	1 038
SFD 4008-6	Clearance	40	8	4.762	41.25	36.3	1×6	45 400	113 000	779
DFD 4008-6	D	40	8	4.762	41.25	36.3	1×6	45 400	113 000	1 528
SFD 4010-3	Clearance	40	10	6.35	41.75	35.1	1×3	35 300	69 800	394
ZFD 4010-6	Z	40	10	6.35	41.75	35.1	1×3	35 300	69 800	773
SFD 4010-4	Clearance	40	10	6.35	41.75	35.1	1×4	45 200	93 100	518
ZFD 4010-8	Z	40	10	6.35	41.75	35.1	1×4	45 200	93 100	1 016
SFD 5005-4	Clearance	50	5	3.175	50.75	47.4	1×4	20 700	66 700	627
ZFD 5005-8	Z	50	5	3.175	50.75	47.4	1×4	20 700	66 700	1 230
SFD 5005-6	Clearance	50	5	3.175	50.75	47.4	1×6	29 300	100 000	923
ZFD 5005-12	Z	50	5	3.175	50.75	47.4	1×6	29 300	100 000	1 810
SFD 5006-4	Clearance	50	6	3.969	51.0	46.9	1×4	27 900	81 600	636
ZFD 5006-8	Z	50	6	3.969	51.0	46.9	1×4	27 900	81 600	1 248
SFD 5006-6	Clearance	50	6	3.969	51.0	46.9	1×6	39 600	122 000	937
ZFD 5006-12	Z	50	6	3.969	51.0	46.9	1×6	39 600	122 000	1 837

- Notes**
- Nut comes in circular shape I and circular shape II for shaft diameter 20 mm or larger. Select a flange that is suitable for the space available for nut installation.
 - If there is no seal for SFD, ZFD, and DFD, the nut length "L" is shortened by dimension "M". For MSFD and MPFD, the nut length is the same as those with seal.
 - The right turn screw is standard. "L" is added to the end of the model code for the left turn screw. Please consult NSK for MSFD and MPFD.

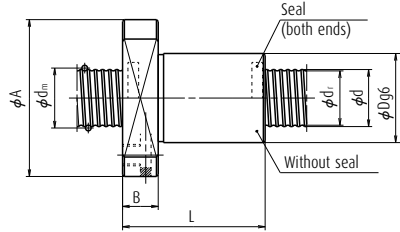

MSFD, MPFD


Unit: mm

Ball nut dimensions


Nut entire length L	Nut diameter D	Flanged diameter A	Flanged width B	Notched flange		Seal dimension M	Bolt hole dimension			Bolt hole PCD W	Oil hole dimension T	Oil hole Q
				G	H		X	Y	Z			
50	51	74	10	—	55	—	6.6	—	—	63	31	M6×1
50	51	74	10	—	55	—	6.6	—	—	63	31	M6×1
55	56	90	15	34	—	5	9	14	8.5	72	—	Rc1/8
80	56	90	15	34	—	5	9	14	8.5	72	—	Rc1/8
65	56	90	15	34	—	5	9	14	8.5	72	—	Rc1/8
101	56	90	15	34	—	5	9	14	8.5	72	—	Rc1/8
64	56	90	15	34	—	6	9	14	8.5	72	—	Rc1/8
93	56	90	15	34	—	6	9	14	8.5	72	—	Rc1/8
76	56	90	15	34	—	6	9	14	8.5	72	—	Rc1/8
118	56	90	15	34	—	6	9	14	8.5	72	—	Rc1/8
76	60	94	15	36	—	8	9	14	8.5	76	—	Rc1/8
116	60	94	15	36	—	8	9	14	8.5	76	—	Rc1/8
93	60	94	15	36	—	8	9	14	8.5	76	—	Rc1/8
168	62	96	15	37	—	8	9	14	8.5	78	—	Rc1/8
83	62	104	18	40	—	10	11	17.5	11	82	—	Rc1/8
123	62	104	18	40	—	10	11	17.5	11	82	—	Rc1/8
93	62	104	18	40	—	10	11	17.5	11	82	—	Rc1/8
143	62	104	18	40	—	10	11	17.5	11	82	—	Rc1/8
55	66	100	15	38	—	5	9	14	8.5	82	—	Rc1/8
80	66	100	15	38	—	5	9	14	8.5	82	—	Rc1/8
65	66	100	15	38	—	5	9	14	8.5	82	—	Rc1/8
101	66	100	15	38	—	5	9	14	8.5	82	—	Rc1/8
64	66	100	15	38	—	6	9	14	8.5	82	—	Rc1/8
93	66	100	15	38	—	6	9	14	8.5	82	—	Rc1/8
76	66	100	15	38	—	6	9	14	8.5	82	—	Rc1/8
118	66	100	15	38	—	6	9	14	8.5	82	—	Rc1/8

- The axial rigidity K in the table above is a theoretical value obtained from the elastic deformation between screw groove and ball when the axial load is 30% of the basic dynamic load rating (C_d) with non-preload, 10% with D-preload, and 5% with P-preload. Refer to "Technical Description" (page B37) if the axial load and preload differ from the conditions above, or when the deformation of the ball nut body must be considered.
- It is recommended to use with seals when the shaft diameter is 16 mm or over and an oil hole is provided on the ball nut.
- Preload system: Z, Offset preload; P, Oversize ball preload; D, Double nut preload (See page B5.)

Deflector(bridge) type




Circular shape I




Circular shape II

Model No.	Preload system	Shaft dia. d	Lead l	Ball dia. D _w	Ball circle dia. d _m	Root dia. d _r	Effective turns of balls Turns × Circuits	Basic load rating (N)		Axial rigidity K (N/μm)
								Dynamic C _a	Static C _{0a}	
SFD 5008-4	Clearance	50	8	4.762	51.25	46.3	1×4	35 300	94 700	635
ZFD 5008-8	Z	50	8	4.762	51.25	46.3	1×4	35 300	94 700	1 246
SFD 5008-6	Clearance	50	8	4.762	51.25	46.3	1×6	50 000	142 000	935
DFD 5008-6	D	50	8	4.762	51.25	46.3	1×6	50 000	142 000	1 833
SFD 5010-3	Clearance	50	10	6.35	51.75	45.1	1×3	40 200	91 500	489
ZFD 5010-6	Z	50	10	6.35	51.75	45.1	1×3	40 200	91 500	960
SFD 5010-4	Clearance	50	10	6.35	51.75	45.1	1×4	51 500	122 000	644
ZFD 5010-8	Z	50	10	6.35	51.75	45.1	1×4	51 500	122 000	1 263
SFD 5010-6	Clearance	50	10	6.35	51.75	45.1	1×6	72 900	183 000	947
DFD 5010-6	D	50	10	6.35	51.75	45.1	1×6	72 900	183 000	1 858
SFD 5012-3	Clearance	50	12	7.938	52.25	44	1×3	52 800	109 000	485
ZFD 5012-6	Z	50	12	7.938	52.25	44	1×3	52 800	109 000	952
SFD 5012-4	Clearance	50	12	7.938	52.25	44	1×4	67 600	145 000	639
DFD 5012-4	D	50	12	7.938	52.25	44	1×4	67 600	145 000	1 252
SFD 5020-3	Clearance	50	20	7.938	52.25	44	1×3	52 400	109 000	480
DFD 5020-3	D	50	20	7.938	52.25	44	1×3	52 400	109 000	942
SFD 6306-4	Clearance	63	6	3.969	64.0	59.9	1×4	30 800	104 000	772
ZFD 6306-8	Z	63	6	3.969	64.0	59.9	1×4	30 800	104 000	1 513
SFD 6306-6	Clearance	63	6	3.969	64.0	59.9	1×6	43 600	156 000	1 135
ZFD 6306-12	Z	63	6	3.969	64.0	59.9	1×6	43 600	156 000	2 226
SFD 6308-4	Clearance	63	8	4.762	64.25	59.3	1×4	39 600	124 000	787
ZFD 6308-8	Z	63	8	4.762	64.25	59.3	1×4	39 600	124 000	1 543
SFD 6308-6	Clearance	63	8	4.762	64.25	59.3	1×6	56 200	186 000	1 159
DFD 6308-6	D	63	8	4.762	64.25	59.3	1×6	56 200	186 000	2 272
SFD 6310-4	Clearance	63	10	6.35	64.75	58.1	1×4	58 700	162 000	810
ZFD 6310-8	Z	63	10	6.35	64.75	58.1	1×4	58 700	162 000	1 588
SFD 6310-6	Clearance	63	10	6.35	64.75	58.1	1×6	83 200	244 000	1 192
DFD 6310-6	D	63	10	6.35	64.75	58.1	1×6	83 200	244 000	2 337
ZFD 6312-6	Z	63	12	7.938	65.25	57	1×3	59 900	143 000	1 181
SFD 6312-4	Clearance	63	12	7.938	65.25	57	1×4	76 800	191 000	793
DFD 6312-4	D	63	12	7.938	65.25	57	1×4	76 800	191 000	1 555
SFD 6312-6	Clearance	63	12	7.938	65.25	57	1×6	109 000	286 000	1 167
DFD 6312-6	D	63	12	7.938	65.25	57	1×6	109 000	286 000	2 289
SFD 6320-3	Clearance	63	20	9.525	65.75	56	1×3	98 400	231 000	766
DFD 6320-3	D	63	20	9.525	65.75	56	1×3	98 400	231 000	1 503

- Notes**
1. Nut comes in circular shape I and circular shape II for shaft diameter 20 mm or larger. Select a flange that is suitable for the space available for nut installation.
 2. If there is no seal the nut length "L" is shortened by dimension "M".
 3. The right turn screw is standard. "L" is added to the end of the model code for the left turn screw.



SFD

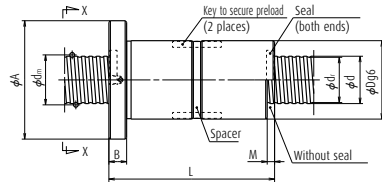

DFD

Unit: mm

Ball nut dimensions


Nut entire length L	Nut diameter D	Flanged diameter A	Flanged width B	Notched flange G	Seal dimension M	Bolt hole dimension			Bolt hole PCD W	Oil hole Q
						X	Y	Z		
79	70	112	18	43	8	11	17.5	11	90	Rc1/8
119	70	112	18	43	8	11	17.5	11	90	Rc1/8
96	70	112	18	43	8	11	17.5	11	90	Rc1/8
171	72	114	18	44	8	11	17.5	11	92	Rc1/8
83	72	114	18	44	10	11	17.5	11	92	Rc1/8
123	72	114	18	44	10	11	17.5	11	92	Rc1/8
93	72	114	18	44	10	11	17.5	11	92	Rc1/8
143	72	114	18	44	10	11	17.5	11	92	Rc1/8
114	72	114	18	44	10	11	17.5	11	92	Rc1/8
205	72	114	18	44	10	11	17.5	11	92	Rc1/8
99	75	121	22	47	12	14	20	13	97	Rc1/8
147	75	121	22	47	12	14	20	13	97	Rc1/8
111	75	121	22	47	12	14	20	13	97	Rc1/8
195	75	121	22	47	12	14	20	13	97	Rc1/8
146	75	121	28	47	20	14	20	13	97	Rc1/8
253	75	121	28	47	20	14	20	13	97	Rc1/8
67	80	122	18	47	6	11	17.5	11	100	Rc1/8
96	80	122	18	47	6	11	17.5	11	100	Rc1/8
79	80	122	18	47	6	11	17.5	11	100	Rc1/8
121	80	122	18	47	6	11	17.5	11	100	Rc1/8
79	82	124	18	47	8	11	17.5	11	102	Rc1/8
119	82	124	18	47	8	11	17.5	11	102	Rc1/8
96	82	124	18	47	8	11	17.5	11	102	Rc1/8
175	85	127	18	48	8	11	17.5	11	105	Rc1/8
97	85	131	22	50	10	14	20	13	107	Rc1/8
147	85	131	22	50	10	14	20	13	107	Rc1/8
118	85	131	22	50	10	14	20	13	107	Rc1/8
214	85	131	22	50	10	14	20	13	107	Rc1/8
147	90	136	22	52	12	14	20	13	112	Rc1/8
111	90	136	22	52	12	14	20	13	112	Rc1/8
195	90	136	22	52	12	14	20	13	112	Rc1/8
136	90	136	22	52	12	14	20	13	112	Rc1/8
248	90	136	22	52	12	14	20	13	112	Rc1/8
146	95	153	28	59	20	18	26	17.5	123	Rc1/8
253	95	153	28	59	20	18	26	17.5	123	Rc1/8

- The axial rigidity K in the table above is a theoretical value obtained from the elastic deformation between screw groove and ball when the axial load is 30% of the basic dynamic load rating (C_d) with non-preload, 10% with D-preload, and 5% with P-preload. Refer to "Technical Description" (page B37) if the axial load and preload differ from the conditions above, or when the deformation of the ball nut body must be considered.
- It is recommended to use with seals when the shaft diameter is 16 mm or over and an oil hole is provided on the ball nut.


- Preload system: Z, Offset preload; P, Oversize ball preload; D, Double nut preload (See page B5.)

Deflector(bridge) type

View X-X




Circular shape I




Circular shape II

Model No.	Preload system	Shaft dia. d	Lead l	Ball dia. D _w	Ball circle dia. d _m	Root dia. d _r	Effective turns of balls × Circuits	Basic load rating (N)		Axial rigidity K (N/μm)
								Dynamic C _a	Static C _{0a}	
SFD 8010-4	Clearance	80	10	6.35	81.75	75.1	1×4	65 100	209 000	987
DFD 8010-4	D	80	10	6.35	81.75	75.1	1×4	65 100	209 000	1 935
SFD 8010-6	Clearance	80	10	6.35	81.75	75.1	1×6	92 200	313 000	1 452
DFD 8010-6	D	80	10	6.35	81.75	75.1	1×6	92 200	313 000	2 848
SFD 8012-4	Clearance	80	12	7.938	82.25	74	1×4	87 400	254 000	996
DFD 8012-4	D	80	12	7.938	82.25	74	1×4	87 400	254 000	1 954
SFD 8012-6	Clearance	80	12	7.938	82.25	74	1×6	124 000	381 000	1 467
DFD 8012-6	D	80	12	7.938	82.25	74	1×6	124 000	381 000	2 877
SFD 8020-3	Clearance	80	20	9.525	82.75	73	1×3	114 000	312 000	978
DFD 8020-3	D	80	20	9.525	82.75	73	1×3	114 000	312 000	1 918
SFD 8020-4	Clearance	80	20	9.525	82.75	73	1×4	146 000	416 000	1 287
DFD 8020-4	D	80	20	9.525	82.75	73	1×4	146 000	416 000	2 524
SFD 10010-6	Clearance	100	10	6.35	101.75	95.1	1×6	102 000	400 000	1 762
DFD 10010-6	D	100	10	6.35	101.75	95.1	1×6	102 000	400 000	3 456
SFD 10012-6	Clearance	100	12	7.938	102.25	94	1×6	138 000	490 000	1 789
DFD 10012-6	D	100	12	7.938	102.25	94	1×6	138 000	490 000	3 509
SFD 10020-4	Clearance	100	20	9.525	102.75	93	1×4	161 000	525 000	1 546
DFD 10020-4	Z	100	20	9.525	102.75	93	1×4	161 000	525 000	3 031

- Notes**
1. Nut comes in circular shape I and circular shape II for shaft diameter 20 mm or larger. Select a flange that is suitable for the space available for nut installation.
 2. If there is no seal the nut length "L" is shortened by dimension "M".
 3. The right turn screw is standard. "L" is added to the end of the model code for the left turn screw.

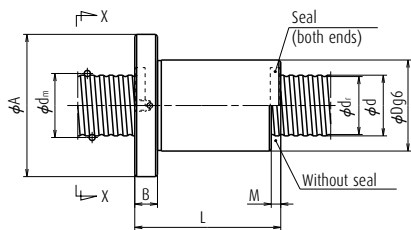

SFD

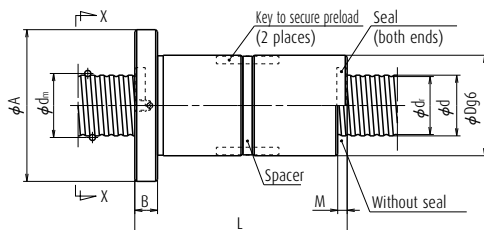

DFD

Unit: mm

Ball nut dimensions

Nut entire length L	Nut diameter D	Flanged diameter A	Flanged width B	Notched flange G	Seal dimension M	Bolt hole dimension			Bolt hole PCD W	Oil hole Q
						X	Y	Z		
97	105	151	22	57	10	14	20	13	127	Rc1/8
172	105	151	22	57	10	14	20	13	127	Rc1/8
118	105	151	22	57	10	14	20	13	127	Rc1/8
214	105	151	22	57	10	14	20	13	127	Rc1/8
111	110	156	22	59	12	14	20	13	132	Rc1/8
195	110	156	22	59	12	14	20	13	132	Rc1/8
136	110	156	22	59	12	14	20	13	132	Rc1/8
248	110	156	22	59	12	14	20	13	132	Rc1/8
146	115	173	28	66	20	18	26	17.5	143	Rc1/8
253	115	173	28	66	20	18	26	17.5	143	Rc1/8
168	115	173	28	66	20	18	26	17.5	143	Rc1/8
297	115	173	28	66	20	18	26	17.5	143	Rc1/8
118	125	171	22	64	10	14	20	13	147	Rc1/8
214	125	171	22	64	10	14	20	13	147	Rc1/8
142	130	188	28	71	12	18	26	17.5	158	Rc1/8
254	130	188	28	71	12	18	26	17.5	158	Rc1/8
172	135	205	32	79	20	22	32	21.5	169	Rc1/8
301	135	205	32	79	20	22	32	21.5	169	Rc1/8

- The axial rigidity K in the table above is a theoretical value obtained from the elastic deformation between screw groove and ball when the axial load is 30% of the basic dynamic load rating (C_a) with non-preload, 10% with D-preload, and 5% with P-preload. Refer to "Technical Description" (page B37) if the axial load and preload differ from the conditions above, or when the deformation of the ball nut body must be considered.
- It is recommended to use with seals when the shaft diameter is 16 mm or over and an oil hole is provided on the ball nut.
- Preload system: Z, Offset preload; P, Oversize ball preload; D, Double nut preload (See page B5.)

B-3-2.4 End Cap Type Ball Screws

1. Features

The end cap recirculation system is suitable for high-helix lead and multiple start threads. Since the leads are 1 to 3 times larger than their screw shaft diameter, it makes them more suitable for high-speed operation.

2. Specifications

(1) Ball recirculation system

The structure of end cap recirculation system is shown in **Fig. 1**.

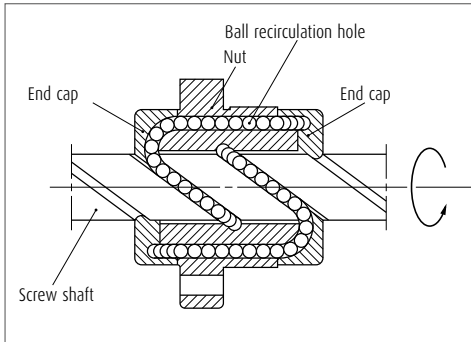


Fig. 1 Structure of end cap recirculation system

(2) Accuracy grade and axial play

The available standard accuracy grade and axial play are shown in **Table 1**. Please consult NSK for other grades.

Table 1 Accuracy grade and axial play

Accuracy grade	LSFC, LPFC: C1, C2, C3, C5, Ct7 USFC, UPFC: C3, C5, Ct7 (Three times lead or over are C5, Ct7)
Axial play	Z, 0 mm (preloaded); T, 0.005 mm or less S, 0.020 mm or less; N, 0.050 mm or less

(3) Allowable d-n value and the criterion of maximum rotational speed

The allowable d-n value and criterion of maximum rotational speed are shown below. Please consult NSK for high-speed specification. Basic measure must be taken for the high speed ball screws respectively.

Allowable d-n value:

Standard specification ; 80 000 or less

High-speed specification ; 100 000 or less

Standard of rotational speed : 3 000 min⁻¹

※Please also review the critical speed. Refer to "Technical Description: Permissible Rotational Speed" (page B47) for details.

(4) Other specifications

Please consult NSK for other specifications not listed in the dimension tables.

3. Product categories

There are two different preload systems with several models (**Table 2**).

Table 2 End cap type ball screws product categories

Nut model	Shape	Flang shape	Nut shape	Preload system
LSFC		Flanged Circular III	Circular	Non-preload, Slight axial play
LPFC		Flanged Circular III	Circular	P-preload (light preload) no spacer ball
USFC		Flanged Rectangular	Circular	Non-preload, Slight axial play
UPFC		Flanged Rectangular	Circular	P-preload (light preload) no spacer ball

4. Design Precautions

When designing the screw shaft end, one end of the screw must meet either one of the following conditions. If not, we cannot install the ball nut on the screw shaft.

- > Cut the ball groove through to the shaft end.
- > The diameters of bearing journals and the gear or pulley seat must be less than the root diameter of ball groove "dr" specified on the dimension table.


Special bearings which have higher-load carrying capacity are available.

For general precautions regarding ball screws, refer to "Design Precautions" (page B83) and "Handling Precautions" (page B103).


5. Structure of model number and reference number

The followings describe the structure of "Model number" and "Reference number for ball screw".


> Model Number

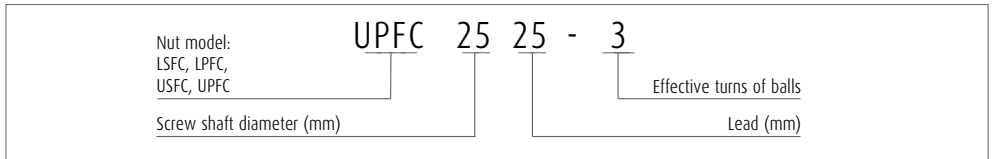

> Reference number for ball screw

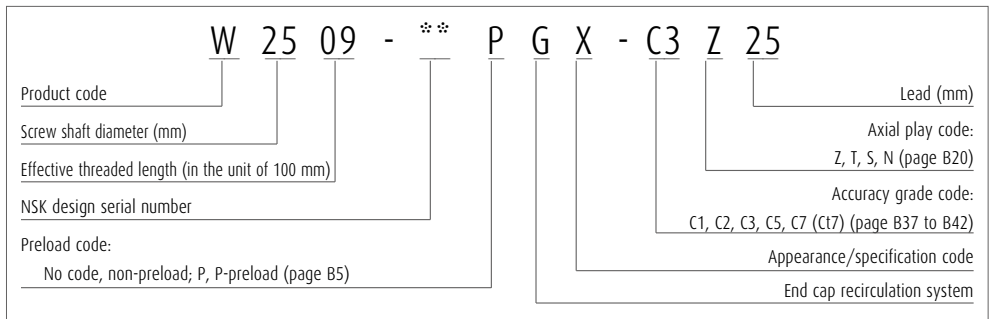



End cap type

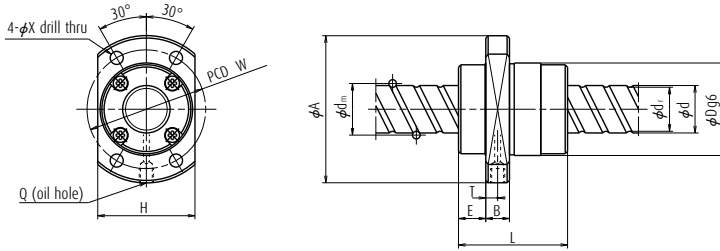

LSFC, LPFC

Model No.	Preload system	Shaft dia. d	Lead l	Ball dia. D _w	Ball circle dia. d _m	Root dia. d _r	Effective turns of balls Turns × Circuits	Basic load rating (N)		Axial rigidity K (N/μm)
								Dynamic C _a	Static C _{0a}	
USFC1220-1.5	Clearance	12	20	2.381	12.5	9.9	1.7×1	2 960	4 370	68
UPFC1220-1.5	P	12	20	2.381	12.5	9.9	1.7×1	2 960	4 370	106
USFC1520-1.5	Clearance	15	20	3.175	15.5	12.2	1.7×1	5 660	8 700	101
UPFC1520-1.5	P	15	20	3.175	15.5	12.2	1.7×1	5 660	8 700	156
USFC 1540-1	Clearance	15	40	3.175	15.75	12.2	0.7×2	4 430	7 320	65
UPFC 1540-1	P	15	40	3.175	15.75	12.2	0.7×2	4 430	7 320	102
USFC 1540-2	Clearance	15	40	3.175	15.75	12.2	0.7×4	8 040	14 600	134
UPFC 1540-2	P	15	40	3.175	15.75	12.2	0.7×4	8 040	14 600	209
LSFC 1616-3	Clearance	16	16	2.778	16.65	13.7	1.7×2	7 910	13 700	185
LPFC 1616-3	P	16	16	2.778	16.65	13.7	1.7×2	7 910	13 700	288
LSFC 1616-6	Clearance	16	16	2.778	16.65	13.7	1.7×4	14 400	27 400	359
LPFC 1616-6	P	16	16	2.778	16.65	13.7	1.7×4	14 400	27 400	559
USFC 1632-1	Clearance	16	32	3.175	16.75	13.4	0.7×2	4 800	7 510	79
* UPFC 1632-1	P	16	32	3.175	16.75	13.4	0.7×2	4 800	7 510	124
USFC 1632-3	Clearance	16	32	3.175	16.75	13.4	1.7×2	10 300	18 500	187
UPFC 1632-3	P	16	32	3.175	16.75	13.4	1.7×2	10 300	18 500	230
USFC 1632-6	Clearance	16	32	3.175	16.75	13.4	1.7×4	18 700	37 000	361
UPFC 1632-6	P	16	32	3.175	16.75	13.4	1.7×4	18 700	37 000	562
USFC 1650-1	Clearance	16	50	3.175	16.75	13.4	0.7×2	4 410	7 840	65
UPFC 1650-1	P	16	50	3.175	16.75	13.4	0.7×2	4 410	7 840	105
USFC 1650-2	Clearance	16	50	3.175	16.75	13.4	0.7×4	8 000	15 700	130
UPFC 1650-2	P	16	50	3.175	16.75	13.4	0.7×4	8 000	15 700	203
LSFC 2020-3	Clearance	20	20	3.175	20.75	17.4	1.7×2	12 300	23 600	258
LPFC 2020-3	P	20	20	3.175	20.75	17.4	1.7×2	12 300	23 600	402
LSFC 2020-6	Clearance	20	20	3.175	20.75	17.4	1.7×4	22 400	47 200	500
LPFC 2020-6	P	20	20	3.175	20.75	17.4	1.7×4	22 400	47 200	779
USFC 2040-1	Clearance	20	40	3.175	20.75	17.4	0.7×2	5 410	9 360	94
* UPFC 2040-1	P	20	40	3.175	20.75	17.4	0.7×2	5 410	9 360	147
USFC 2040-3	Clearance	20	40	3.175	20.75	17.4	1.7×2	11 600	23 400	224
UPFC 2040-3	P	20	40	3.175	20.75	17.4	1.7×2	11 600	23 400	349
USFC 2040-6	Clearance	20	40	3.175	20.75	17.4	1.7×4	21 100	46 800	435
UPFC 2040-6	P	20	40	3.175	20.75	17.4	1.7×4	21 100	46 800	677
USFC 2060-1	Clearance	20	60	3.175	20.75	17.4	0.7×2	4 950	9 590	81
UPFC 2060-1	P	20	60	3.175	20.75	17.4	0.7×2	4 950	9 590	125
USFC 2060-2	Clearance	20	60	3.175	20.75	17.4	0.7×4	8 990	19 200	156
UPFC 2060-2	P	20	60	3.175	20.75	17.4	0.7×4	8 990	19 200	243

Notes 1. For the LSFC and USFC type ball screws, the axial rigidity K in the table above is the theoretical values obtained from the elastic deformation between screw groove and ball when the axial load is 30% of the basic dynamic load rating (C_a). For the LPFC and UPFC type, the rigidity is the theoretical value when the preload is 10% of the basic dynamic load rating (C_a) and an axial load is applied to it. Refer to the "Technical Description" (page B37) if the rigidity and preload differ from the conditions above, or when the deformation of the ball nut body must be considered.

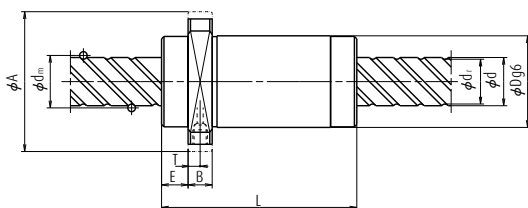

USFC, UPFC


Unit: mm

Ball nut dimensions

Nut entire length L	Nut diameter D	Flanged diameter A	Flanged width B	Flanged dimension		End cap dimension E	Bolt hole dimension X	Bolt hole PCD W	Oil hole Q	Oil hole position T
				H	K					
44	26	44	10	28	40	9	4.5	35	M6×1	5
44	26	44	10	28	40	9	4.5	35	M6×1	5
45	34	55	10	36	50	11	5.5	45	M6×1	5
45	34	55	10	36	50	11	5.5	45	M6×1	5
40	32	53	10	33	48	12	5.5	43	M6×1	5
40	32	53	10	33	48	12	5.5	43	M6×1	5
40	32	53	10	33	48	12	5.5	43	M6×1	5
40	32	53	10	33	48	12	5.5	43	M6×1	5
38	32	53	10	34	—	10	4.5	42	M6×1	5
38	32	53	10	34	—	10	4.5	42	M6×1	5
38	32	53	10	34	—	10	4.5	42	M6×1	5
38	32	53	10	34	—	10	4.5	42	M6×1	5
34	34	55	10	36	50	10.5	5.5	45	M6×1	5
34	34	55	10	36	50	10.5	5.5	45	M6×1	5
66	34	55	10	36	50	10.5	5.5	45	M6×1	5
66	34	55	10	36	50	10.5	5.5	45	M6×1	5
66	34	55	10	36	50	10.5	5.5	45	M6×1	5
66	34	55	10	36	50	10.5	5.5	45	M6×1	5
50	34	55	10	36	50	12	5.5	45	M6×1	5
50	34	55	10	36	50	12	5.5	45	M6×1	5
50	34	55	10	36	50	12	5.5	45	M6×1	5
50	34	55	10	36	50	12	5.5	45	M6×1	5
46	39	62	10	41	—	11.5	5.5	50	M6×1	5
46	39	62	10	41	—	11.5	5.5	50	M6×1	5
46	39	62	10	41	—	11.5	5.5	50	M6×1	5
46	39	62	10	41	—	11.5	5.5	50	M6×1	5
41	38	58	10	40	52	11	5.5	48	M6×1	5.5
41	38	58	10	40	52	11	5.5	48	M6×1	5.5
81	38	58	10	40	52	11	5.5	48	M6×1	5.5
81	38	58	10	40	52	11	5.5	48	M6×1	5.5
81	38	58	10	40	52	11	5.5	48	M6×1	5.5
58	38	58	10	40	52	12.3	5.5	48	M6×1	5
58	38	58	10	40	52	12.3	5.5	48	M6×1	5
58	38	58	10	40	52	12.3	5.5	48	M6×1	5

2. The right turn screw is the standard. Please consult NSK for the left turn screw.
3. The models marked with * (asterisk) are available in the FA type standard ball screws with finished shaft end.
4. Preload system: P; Oversize ball preload (See page B5.)

End cap type


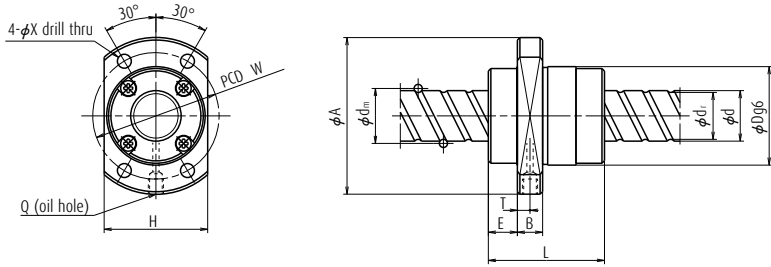


LSFC, LPFC

Model No.	Preload system	Shaft dia. d	Lead l	Ball dia. D _w	Ball circle dia. d _m	Root dia. d _r	Effective turns of balls Turns × Circuits	Basic load rating (N)		Axial rigidity K (N/μm)
								Dynamic C ₃	Static C _{0a}	
LSFC 2525-3	Clearance	25	25	3.969	26.0	21.9	1.7×2	18 400	36 900	318
LPFC 2525-3	P	25	25	3.969	26.0	21.9	1.7×2	18 400	36 900	495
LSFC 2525-6	Clearance	25	25	3.969	26.0	21.9	1.7×4	33 400	73 800	616
LPFC 2525-6	P	25	25	3.969	26.0	21.9	1.7×4	33 400	73 800	959
USFC 2550-1	Clearance	25	50	3.969	26.0	21.9	0.7×2	8 090	14 600	112
* UPFC 2550-1	P	25	50	3.969	26.0	21.9	0.7×2	8 090	14 600	181
USFC 2550-3	Clearance	25	50	3.969	26.0	21.9	1.7×2	17 300	37 500	281
UPFC 2550-3	P	25	50	3.969	26.0	21.9	1.7×2	17 300	37 500	437
USFC 2550-6	Clearance	25	50	3.969	26.0	21.9	1.7×4	31 500	75 000	545
UPFC 2550-6	P	25	50	3.969	26.0	21.9	1.7×4	31 500	75 000	848
USFC 2580-1	Clearance	25	80	3.969	26.0	21.9	0.7×2	7 290	15 300	97
UPFC 2580-1	P	25	80	3.969	26.0	21.9	0.7×2	7 290	15 300	151
USFC 2580-2	Clearance	25	80	3.969	26.0	21.9	0.7×4	13 200	30 600	188
UPFC 2580-2	P	25	80	3.969	26.0	21.9	0.7×4	13 200	30 600	293
LSFC 3232-3	Clearance	32	32	4.762	33.25	28.3	1.7×2	26 800	56 300	383
LPFC 3232-3	P	32	32	4.762	33.25	28.3	1.7×2	26 800	56 300	618
LSFC 3232-6	Clearance	32	32	4.762	33.25	28.3	1.7×4	48 700	113 000	770
LPFC 3232-6	P	32	32	4.762	33.25	28.3	1.7×4	48 700	113 000	1 198
USFC 3264-1	Clearance	32	64	4.762	33.25	28.3	0.7×2	11 400	23 800	150
UPFC 3264-1	P	32	64	4.762	33.25	28.3	0.7×2	11 400	23 800	234
USFC 3264-3	Clearance	32	64	4.762	33.25	28.3	1.7×2	24 400	56 800	346
UPFC 3264-3	P	32	64	4.762	33.25	28.3	1.7×2	24 400	56 800	571
USFC 3264-6	Clearance	32	64	4.762	33.25	28.3	1.7×4	44 400	114 000	670
UPFC 3264-6	P	32	64	4.762	33.25	28.3	1.7×4	44 400	114 000	1 043
LSFC 4040-3	Clearance	40	40	6.350	41.75	35.2	1.7×2	42 900	94 500	494
LPFC 4040-3	P	40	40	6.350	41.75	35.2	1.7×2	42 900	94 500	769
LSFC 4040-6	Clearance	40	40	6.350	41.75	35.2	1.7×4	77 800	189 000	956
LPFC 4040-6	P	40	40	6.350	41.75	35.2	1.7×4	77 800	189 000	1 488
LSFC 5050-3	Clearance	50	50	7.938	52.25	44.1	1.7×2	64 100	148 000	608
LPFC 5050-3	P	50	50	7.938	52.25	44.1	1.7×2	64 100	148 000	1 004
LSFC 5050-6	Clearance	50	50	7.938	52.25	44.1	1.7×4	116 000	295 000	1 176
LPFC 5050-6	P	50	50	7.938	52.25	44.1	1.7×4	116 000	295 000	1 831

Notes

- For the LSFC and USFC type ball screws, the axial rigidity K in the table above is the theoretical values obtained from the elastic deformation between screw groove and ball when the axial load is 30% of the basic dynamic load rating (C₃). For the LPFC and UPFC type, the rigidity is the theoretical value when the preload is 10% of the basic dynamic load rating (C₃) and an axial load is applied to it. Refer to the "Technical Description" (page B37) if the rigidity and preload differ from the conditions above, or when the deformation of the ball nut body must be considered.

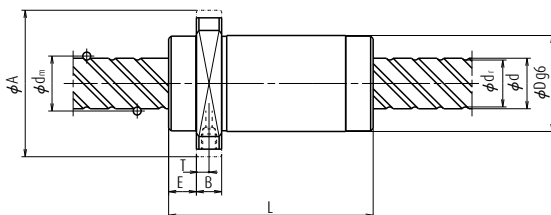

USFC, UPFC

Unit: mm

Ball nut dimensions








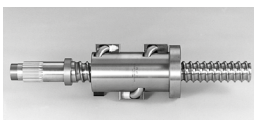
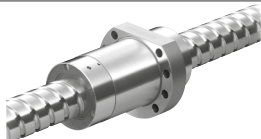
Nut entire length L	Nut diameter D	Flanged diameter A	Flanged width B	Flanged dimension		End cap dimension E	Bolt hole dimension X	Bolt hole PCD W	Oil hole Q	Oil hole position T
				H	K					
55	47	74	12	49	—	13	6.6	60	M6×1	6
55	47	74	12	49	—	13	6.6	60	M6×1	6
55	47	74	12	49	—	13	6.6	60	M6×1	6
55	47	74	12	49	—	13	6.6	60	M6×1	6
50	46	70	12	48	63	13	6.6	58	M6×1	7
50	46	70	12	48	63	13	6.6	58	M6×1	7
100	46	70	12	48	63	13	6.6	58	M6×1	7
100	46	70	12	48	63	13	6.6	58	M6×1	7
100	46	70	12	48	63	13	6.6	58	M6×1	7
100	46	70	12	48	63	13	6.6	58	M6×1	7
75	46	70	12	48	63	14.5	6.6	58	M6×1	6
75	46	70	12	48	63	14.5	6.6	58	M6×1	6
75	46	70	12	48	63	14.5	6.6	58	M6×1	6
75	46	70	12	48	63	14.5	6.6	58	M6×1	6
70	58	92	12	60	—	16	9	74	M6×1	5.5
70	58	92	12	60	—	16	9	74	M6×1	5.5
70	58	92	12	60	—	16	9	74	M6×1	5.5
70	58	92	12	60	—	16	9	74	M6×1	5.5
62	58	92	12	60	82	15.5	9	74	M6×1	7.5
62	58	92	12	60	82	15.5	9	74	M6×1	7.5
126	58	92	12	60	82	15.5	9	74	M6×1	7.5
126	58	92	12	60	82	15.5	9	74	M6×1	7.5
126	58	92	12	60	82	15.5	9	74	M6×1	7.5
126	58	92	12	60	82	15.5	9	74	M6×1	7.5
85	73	114	15	75	—	19.5	11	93	M6×1	6.5
85	73	114	15	75	—	19.5	11	93	M6×1	6.5
85	73	114	15	75	—	19.5	11	93	M6×1	6.5
85	73	114	15	75	—	19.5	11	93	M6×1	6.5
107	90	135	20	92	—	21.5	14	112	M6×1	7
107	90	135	20	92	—	21.5	14	112	M6×1	7
107	90	135	20	92	—	21.5	14	112	M6×1	7
107	90	135	20	92	—	21.5	14	112	M6×1	7


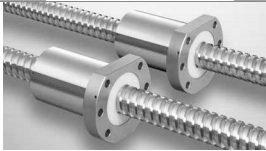






- The right turn screw is the standard. Please consult NSK for the left turn screw.
- The models marked with * (asterisk) are available in the FA type standard ball screws with finished shaft end.
- Preload system: P; Oversize ball preload (See page B5.)

B-3-3 Dimension Table and Reference Number of Application-Oriented Ball Screws

	Page
1. DIN Ball Screws for the Machine Tool Industry	B515
2. HMD Type for High-Speed Machine Tools	B521
3. HMS Type for High-Speed Machine Tools	B525
4. HMC Type for High-Speed Machine Tools	B529
5. BSL Type for Miniature Lathes	B535
6. For High-Load Drives	
6.1 HTF-SRC Type	B539
6.2 HTF-SRD Type	B543
6.3 HTF Type	B547
7. For Contaminated Environments	
7.1 VSS Type	B563
7.2 Ball Screw with X1 Seals for Contaminated Environments and Grease Retention	B567
8. TW Series for Twin-Drive Systems	B573
9. For High Precision Machine Tools	
9.1 Hollow Shaft Ball Screws	B574
9.2 Nut Cooling Ball Screws	B579
10. ND Series for Nut-Rotatable Drives	B583
11. Σ Series for Robots	B591
12. Ball Screw with L1 Seal designed for B571 Minimal Grease Splatter	B603
13. Equipped with "NSK K1" Lubrication Unit	B607
14. Special Ball Screws	B613

► Features and application examples of application-oriented ball screws

Applications		Shape	Features	Applications	Page
High-Speed Machine Tools	DIN Type		High-speed operation: up to 160 m/min Rigidity: 5% greater than the HMC series. High-load carrying capacity: 7% greater than the HMC type New recirculation system reduces the noise level by 5 dB or more compared with the HMC type	High-speed machining centers High-speed combined machine tools Die mold processing machine	B515
High-Speed Machine Tools	HMD Type		High-speed operation: 64 to 120 m/min Rigidity: 5% greater than the HMC series. High-load carrying capacity: 7% greater than the HMC type New recirculation system reduces the noise level by 5 dB or more compared with the HMC type	High-speed machining centers High-speed combined machine tools Die mold processing machine	B521
High-Speed Machine Tools	HMS Type		Fine lead: 5 to 12 mm High-speed operation: 25 to 50 m/min Easy replacement: Dimensional interchangeability with tube type ball screws New recirculation system reduces the noise level by 5 dB or more compared with the Tube type.	Machining centers Die mold processing machine NC lathes Combined machine tools	B525
High-Speed Machine Tools	HMC Type		High-speed: 40 to 120 m/min Rigidity: 30% greater than existing tube type ball screws High-Load carrying capacity: 14% greater than existing tube type ball screws Noise reduced by small-diameter balls	High-speed machining centers High-speed combined machine tools Die mold processing machines	B529
Small Lathes	BSL Type		Compact nut: 50% less ball nut volume than NSK existing products. High-dust protection by thin plastic seal Special high-load capacity ball screw support bearings are available.	Small lathes Multi-axis lathes Small machining centers	B535
High-Load Drives	HTF-SRC Type		High-load capacity High-speed operation by high-speed rotation: 930 mm/sec Even load distribution to balls in the ball nut for high-load drive Improved durability by NSK S1	Injection axis of injection molding machines Press machines Press brake Bending machines	B539
High-Load Drives	HTF-SRD Type		High-load capacity High-speed operation by large screw lead: 1 600 mm/sec Improved durability by NSK S1	Clamping axis of injection molding machines Die cast machines Punch presses Lifting and lowering devices	B543
High-Load Drives	HTF Type		High-load capacity Even load distribution to the balls in a ball nut for high-load drive Improved durability by NSK S1 Provide a wide range of screw diameter and lead combinations.	Injection molding machines Press machines Press fitting machines Lifting and lowering machines	B547
Contaminated Environments	VSS Type		High dust-resistant performance: Reduces particle penetration rate to less than 1/15 (compared with standard seal). More than four times longer service life than standard seal under contaminated environments.	Woodworking machines Laser cutting machines Graphite milling machines Tire molding machines Transfer equipment	B563

Applications		Shape	Features	Applications	Page
Contaminated Environments and Grease Retention	Ball Screw with X1 Seals		Highly dustproof: Particle penetration ratio reduced to less than 1/30 of existing standard seals. Superior grease retention: Can reduce lubricant consumption, also effective at suppressing grease splattering.	Machining centers Combined machine tools NC lathes Woodworking machines Laser cutting machines Graphite milling machines Tire molding machines	B567
Twin-Drive Systems	TW Series		Controlled screw lead accuracy and variation of preload torque for twin drive. Improved axial rigidity, expected life and controllability by the paired up two ball-screw driving systems	Machining centers Combined machine tools Large-size machine tools	B573
High-Precision Machine Tools	Hollow Shaft Ball Screws		Suppress thermal deformation by cooling the shaft center Prevent the machine base from deforming due to thermal expansion. NSK special support units and seal units are available.	High-precision die processing machines High-precision combined machine tools High-precision machining centers High-precision lathes	B574
High-Precision Machine Tools	Nut Cooling Ball Screws		Due to the simple nut cooling setup, cooling is achieved simply by attaching piping to the thermal displacement control nut. Cooling just as effective as core cooling Insulation to prevent heat from affecting the table.	High-precision die processing machines High-precision combined machine tools High-precision machining centers High-precision lathes Large machine tools	B579
Nut-Rotatable Ball Screws	NDT and NDD Type		Angular contact support bearings are integrated into the ball nut. Two or more ball nuts can be installed in a single ball screw shaft. The NDD type ball screws can surpass the critical speed. A special vibration damper enables long-stroke-high-speed operation.	Woodworking machines Laser cutting machines Electronic component mounting devices Liquid crystal display transfer equipment Transfer equipment	B583
Robots	Σ Series		A ball screw and a ball spline are made in one shaft, combining a drive and guide system. A ball screw nut, a ball spline nut and support bearings are combined to the unit. Hollow shaft has an effect for weight saving. The hollow can be used for wiring and piping.	SCALA type robots Electronic-component mounting systems	B591
Ball Screw with L1 Seal designed for Minimal Grease Splatter			Amount of splattered grease : 1/10 or less (compared with standard seal) Reduced grease-splattering helps maintaining machines and working environment clean. It can be fitted to Compact FA Series and High Speed SS Series later.	Electronic component mounting devices Semiconductor/Liquid crystal display manufacturing equipment Food processing/ Medical equipment Transfer equipment	B603
Equipped with "NSK K1" Lubrication Unit			Long-term, maintenance-free operation Maintains lubrication efficiency for a prolonged time in contaminated environments Does not pollute the environment Made of compatible material with the FDA regulations is also available.	Automotive manufacturing machines Woodworking machines Laser cutting machines Semiconductor/Liquid crystal display manufacturing equipment Food processing/Medical equipment	B607

B-3-3.1 DIN Ball Screws for Machine Tool Industry




Features

- › High speed capability
- › High load capacity
- › Low torque variation
- › Low noise
- › Dimensions according DIN-Norm
- › Available from stock for prototypes


High-speed operation

Depending on shaft diameter and lead combination, two types of recirculation system are used. One option is the newly developed internal deflector which is chosen for smaller leads (10 – 30 mm). The other is the end-deflector for higher leads between 20 and 40 mm. Both allow a high d-n value of 150.000 ~ 160.000.

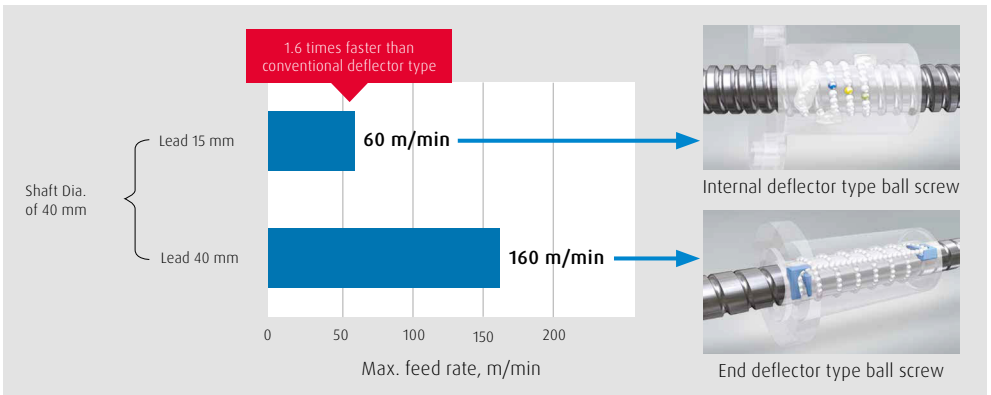


High load capacity

1.4 times dynamic load rating is achieved by applying special TF bearing steel with dedicated heat treatment to ball screws for machine tools. This TF material has already been applied in the bearing industry several years ago and as well as to our high load capacity ball screws for injection molding machines. It contributes to high cycle operation with long life of ball screws.

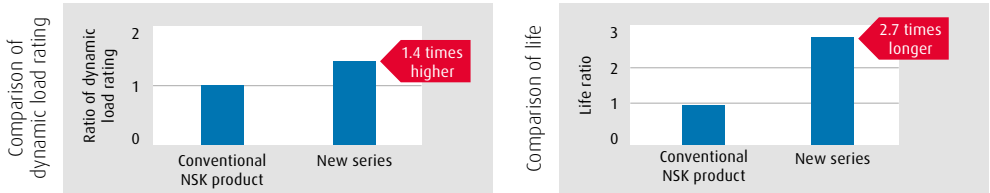


Newly developed internal deflector for low torque variation

By using our own simulation technology for ball motion NSK has developed improved ball recirculation systems. The low torque variation contributes to the improvement of the surface profile of machined work pieces.

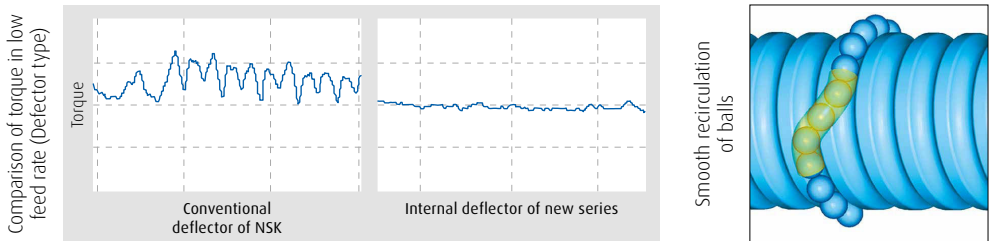

Low noise

Low noise technology that has previously been used for the end deflector type has now been applied to the new internal deflector type. Other low noise technology that reduces the noise from raceway can be applied to this series when the specified accuracy grade is C3 or higher. Please contact NSK when this feature is needed for accuracy grade C5.

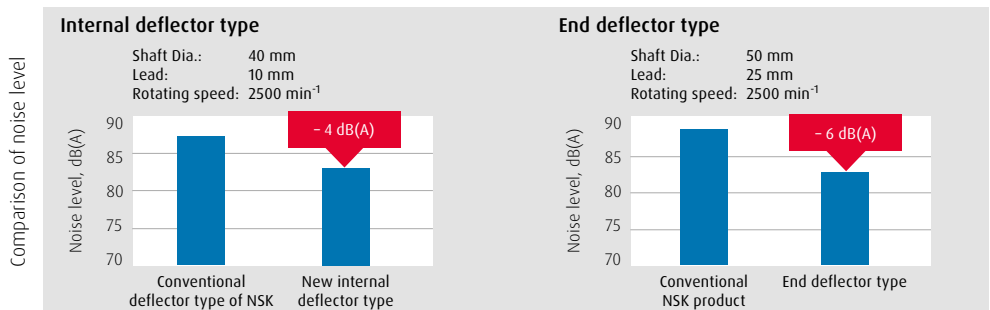

TF Steel technology now used for BS series

We are applying our existing TF bearing steel technology to increase the robustness and lifespan of our new DIN ball screw series. Using this material enables us to extend our ball screw life by avoiding external early flaking due to stress at impressions.


Properties of the TF material

- › Fine distribution of carbides and carbonitride particles
- › Remaining austenite is checked properly to have the best combination of hardness and strength
- › Due to this fact, excess material can be pushed back into the surface and thus avoids recurring tensions


Advantages of the TF material

- › Far better lifespan in polluted environments
- › Longer life even under normal conditions
- › Better resistance against surface damage
- › Reduced failure caused by broken parts released from impressions


TF steel relieves the stress concentration due to hardness and toughness

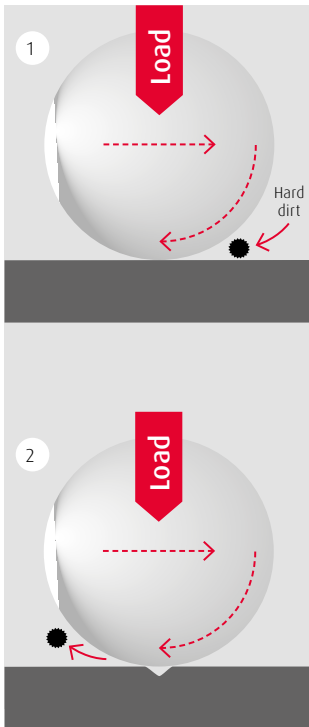

Conventional steel

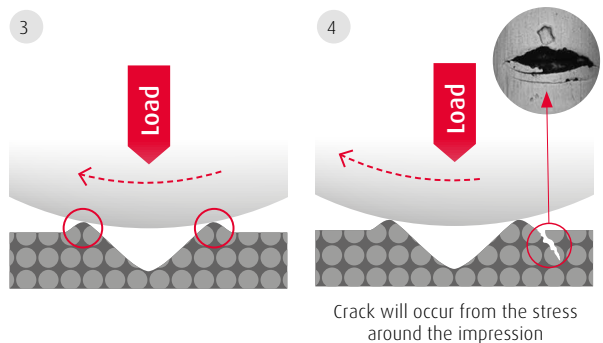


TF-Steel

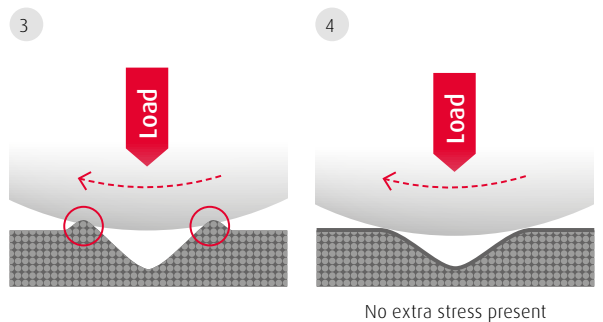

Theory of decreasing the stress concentration around the impression

BS Failure mode and countermeasures

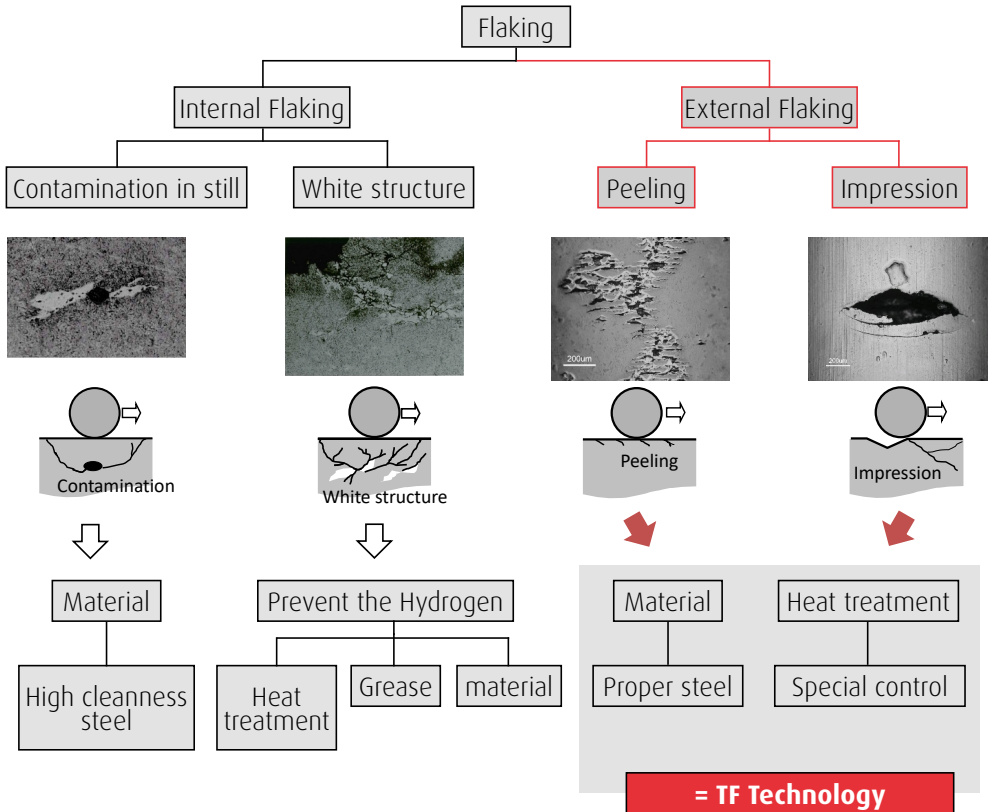

~ Long life technology by material and heat treatment ~

Series range and allowable feed rate

DIN standard nut Dia. range

Unit: m/min

Shaft Diameter	Lead					
	10 mm	15 mm	20 mm	25 mm	30 mm	40 mm
32 mm	50	75	100	—	—	—
40 mm	40	60	80	100	120	160
50 mm	32	48	64	—	—	—
63 mm	23	35	47	—	71	—

DIN extended nut Dia. range

Unit: m/min


Shaft Diameter	Lead					
	10 mm	15 mm	20 mm	25 mm	30 mm	40 mm
32 mm	—	—	100	—	—	—
40 mm	—	—	80	100	120	160
50 mm	—	—	—	80	96	128
63 mm	—	—	—	—	—	—

Remarks Maximum allowable feed rate (m/min) is calculated from allowable rotating speed. Review of critical speed is required. Please contact NSK when the speed exceeds the maximum allowable dn value $\varnothing 32 \sim \varnothing 50$: 160,000, $\varnothing 63$: 150,000.


Preload system

The standard preload system is offset preload.


Dimensions

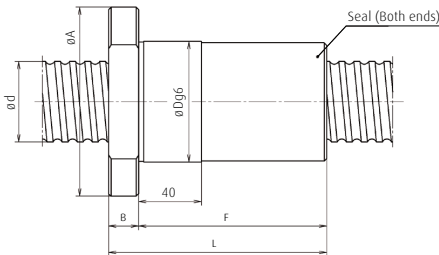


ZSD (Internal deflector type)

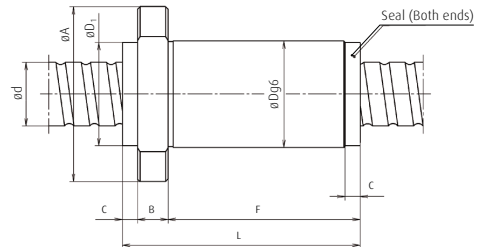

ZSS (End deflector type)



Shape I (Shaft Dia. = 32)



Shape II (Shaft Dia. > 32)

Unit: m/min

Model No.	Shaft dia. d	Lead l	Effective ball turns Turns × Circuits	Basic load rating (N)		Ball nut dimensions										DIN standard nut Dia.	DIN extended nut Dia.
				Dyna- mic Ca	Static COa	L	D	D1	A	B	C	F	W	X	H		
ZSD3210-10	32	10	1×5	58700	83 200	156	50	-	80	12	-	144	65	9	62	•	
ZSD3215-6	32	15	1×3	37500	49 700	148	50	-	80	12	-	136	65	9	62	•	
ZSD3220-4	32	20	1×2	26200	32 900	132	50	-	80	12	-	120	65	9	62	•	
ZSS3220-4E	32	20	3.7×1	50000	71 800	121	56	55	86	14	10,5	96,5	71	9	65		•
ZSD4010-8	40	10	1×4	73400	103 000	137	63	-	93	14	-	123	78	9	70	•	
ZSD4015-6	40	15	1×3	57000	77 100	155	63	-	93	14	-	141	78	9	70	•	
ZSS4020-4ES	40	20	3.7×1	55000	89 900	102	63	62	93	14	5	83	78	9	70	•	
ZSS4020-4E	40	20	3.7×1	65400	102 000	126	70	69	100	14	10,5	101,5	85	9	75		•
ZSS4025-4ES	40	25	3.7×1	54600	90 300	122	63	-	93	14	5	103	78	9	70	•	
ZSS4025-4E	40	25	3.7×1	64900	102 000	145	70	69	100	14	10,5	120,5	85	9	75		•
ZSS4030-4ES	40	30	3.7×1	55500	90 700	141	63	-	93	14	5	122	78	9	70	•	
ZSS4030-4E	40	30	3.7×1	66300	103 000	164	70	69	100	14	10,5	139,5	85	9	75		•
ZSS4040-3ES	40	40	2.7×1	41300	65 700	134	63	-	93	14	-	120	78	9	70	•	
ZSS4040-3E	40	40	2.7×1	49300	74 600	150	70	69	100	14	10,5	125,5	85	9	75		•
ZSD5010-8	50	10	1×4	82700	133 000	140	75	-	110	16	-	124	93	11	85	•	
ZSD5015-8	50	15	1×4	94400	145 000	191	75	-	110	16	-	175	93	11	85	•	
ZSD5020-8	50	20	1×4	94000	145 000	240	75	-	110	16	-	224	93	11	85	•	
ZSS5025-4E	50	25	3.7×1	72600	129 000	145	82	81	118	16	10,5	118,5	100	11	92		•
ZSS5030-4E	50	30	3.7×1	72100	128 000	164	82	81	118	16	10,5	137,5	100	11	92		•
ZSS5040-3E	50	40	2.7×1	55500	94 200	142	82	81	118	16	10,5	115,5	100	11	92		•
ZSD6310-10	63	10	1×5	115000	220 000	164	90	-	125	18	-	146	108	11	95	•	
ZSD6315-8	63	15	1×4	177000	309 000	198	95	-	135	20	-	178	115	13,5	100	•	
ZSD6320-10	63	20	1×5	214000	385 000	286	95	-	135	20	-	266	115	13,5	100	•	
ZSD6330-6	63	30	1×3	137000	230 000	269	95	-	135	20	-	249	115	13,5	100	•	

B-3-3.2 HMD Type for High-Speed Machine Tools

This product is being applied for a patent. The newly developed ball recirculation components, the end-deflector and middle-deflector, have greatly contributed for the substantial improvements in the maximum rotational speed and noise level compared to the HMC type.

1. Features

› High speed

The permissible rotational speed (d-n value) has greatly increased to 160 000 compared with 135 000 of the HMC type.

› Low noise

Noise reduced by 5 dB(A) or more compared with the HMC type ball screws for high-speed machine tools.

› Nut mounting dimensions

The ball nut diameters are the same as those of the HMC type.

2. Specifications

(1) Recirculation system

Fig.1 shows the structure of the middle-deflector recirculation system of the HMD type.

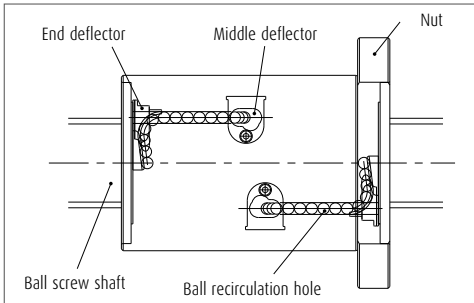


Fig. 1 Structure of middle-deflector recirculation system

(2) Accuracy grade and axial play

The available standard accuracy grade and axial play are as follows. Please consult NSK for other grades.

Table 1 Accuracy grade and axial play

Accuracy grade	C3, C5
Axial play	0 mm (preloaded)

(3) Allowable d-n value and the criterion of maximum rotational speed

Allowable d-n value and the criterion of maximum rotational speed are shown below. Please consult NSK if the rotational speed exceeds the permissible range below.

Allowable d-n value: 160 000 or less

Criterion of maximum rotational speed: 4 000 min⁻¹

Note: Please also review the critical speed. See "Technical Description: Permissible Rotational Speed" (page B47) for details.

(4) Options

› For twin-drive systems (See page B573)

Upon request, the variations in lead accuracy and preload torque between two ball screws of a pair of the TW series are controlled for the further improvement of the reliability.

› Hollow shaft ball screw (See page B574)

› Nut cooling ball screw (See page B579)

The temperature rise and measures against thermal expansion of ball screw driving mechanism are the most challenging for high-speed machine tools. We recommend using core forced cooling or nut cooling for the HMD type.

(5) Seal

Compact, thin plastic seal is available. Nut outside diameter is compact compare with the return tube recirculation system.


3. Design precautions

For general precautions regarding ball screws, refer to "Design Precautions" (page B83) and "Handling Precautions" (page B103).

4. Product categories

The HMD type has a model as follows.


Table 2 HMD type product categories

Nut model	Shape	Flange shape	Nut shape	Preload system
EM		Flanged Circular II	Circular	Z-Preload (medium preload)


5. Structure of model number and reference number

The followings describe the structure of "Model number" and "Reference number for ball screw".

> Model number

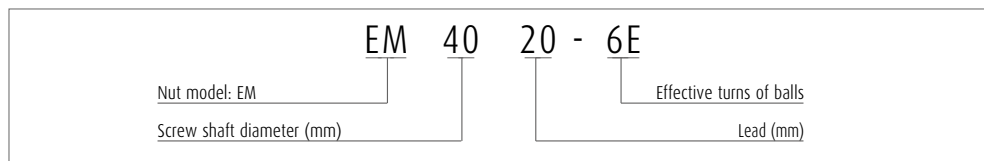

> Reference number for ball screw

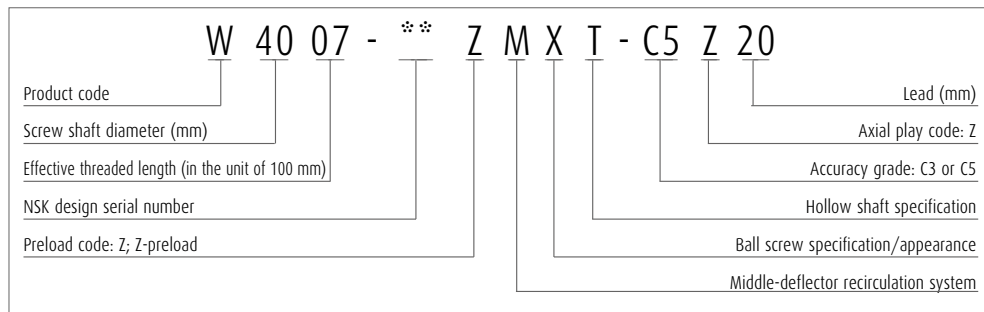


6. Handling Precautions

Maximum operating temperature: 80°C

If using NSK K1, operating temperature should not exceed 50°C.

Refer to "Designing Precautions" (page B83).


HMD Type for high-speed machine tools

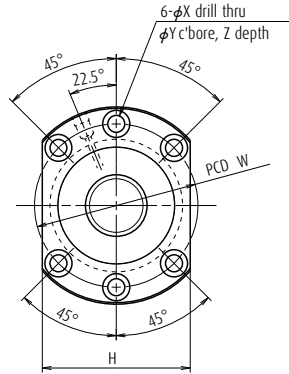

Model No.	Shaft dia. d	Lead l	Root dia. d _r	Basic load rating (N)		Axial rigidity K (N/μm)
				Dynamic C _a	Static C _{0a}	
EM4016-4E	40	16	34.1	66 900	131 000	1 023
EM4020-6E	40	20	34.4	77 900	166 000	1 415
EM4025-6E	40	25	34.1	91 300	191 000	1 442
EM4030-6E	40	30	34.1	90 400	190 000	1 419
EM4516-4E	45	16	39.1	69 900	146 000	1 121
EM4520-6E	45	20	39.4	83 200	187 000	1 573
EM4525-6E	45	25	39.1	95 700	214 000	1 589
EM5016-4E	50	16	44.1	72 700	161 000	1 216
EM5020-6E	50	20	44.4	85 700	205 000	1 695
EM5025-6E	50	25	44.1	103 000	232 000	1 731
EM5030-6E	50	30	44.1	102 000	235 000	1 730
EM6316-4E	63	16	55.2	131 000	338 000	1 696

Notes

1. The right turn screw is the standard. Please consult NSK for left turn screws.
2. Rigidity listed under the column K is the value when a 5% of basic dynamic load rating is applied as the preload.

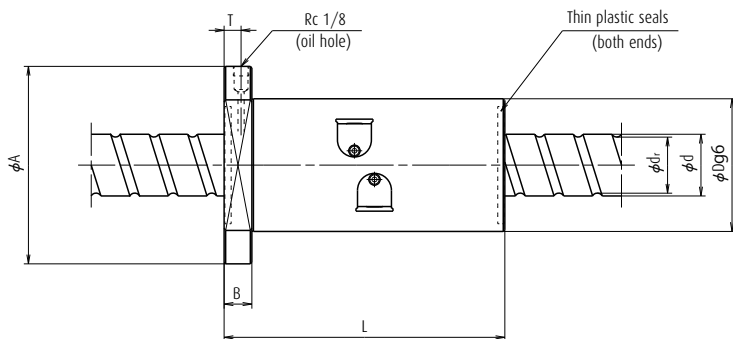

Unit: mm

Ball nut dimensions								Bolt hole PCD	Oil hole position	Max. feeding speed
Nut length L	Nut dia. D	Flange dia. A	Flange width B	Flange size	Bolt hole size					
				H	X	Y	Z			
160	86	128	18	96	11	17.5	11	106	11	64
150	86	128	18	96	11	17.5	11	106	11	80
182	86	128	18	96	11	17.5	11	106	11	100
213	86	128	18	96	11	17.5	11	106	11	120
160	92	134	18	102	11	17.5	11	112	11	56
150	92	134	18	102	11	17.5	11	112	11	70
182	92	134	18	102	11	17.5	11	112	11	88
160	98	140	18	107	11	17.5	11	118	11	51
150	98	140	18	107	11	17.5	11	118	11	64
182	98	140	18	107	11	17.5	11	118	11	80
213	98	140	18	107	11	17.5	11	118	11	96
170	122	180	28	138	18	26	17.5	150	14	40

B-3-3.3 HMS Type for High-Speed Machine Tools

1. Features

- › High speed

The permissible rotational speed (d-n value) has greatly increased to 160 000 compared with 100 000 for tube type screws.

- › Low noise

By adopting SRC recirculation system, noise reduced by 5 dB(A) or more compared with tube type screws.

- › Nut mounting dimensions

The ball nut diameters are the same as those of tube type screws.

2. Specifications

(1) Recirculation system

Fig.1 shows the structure of the SRC recirculation system of the HMS type.

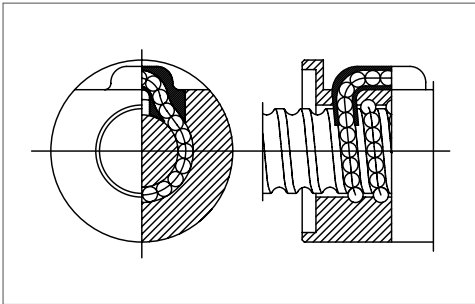


Fig. 1 Structure of SRC recirculation system

(2) Accuracy grade and axial play

The available standard accuracy grade and axial play are as follows. Please consult NSK for other grades.

Table 1 Accuracy grade and axial play

Accuracy grade	C3, C5
Axial play	0 mm (preloaded)

(3) Allowable d-n value and the criterion of maximum rotational speed

Allowable d-n value and the criterion of maximum rotational speed are shown below. Please consult NSK if the rotational speed exceeds the permissible range below.

Allowable d-n value: 160 000 or less

Criterion of maximum rotational speed: 5 000 min⁻¹

Note: Please also review the critical speed. See "Technical Description: Permissible Rotational Speed" (page B47) for details.

(4) Options

- › For twin-drive systems (See page B573)

Upon request, the variations in lead accuracy and preload torque between two ball screws of a pair of the TW series are controlled for the further improvement of the reliability.

- › Hollow shaft ball screw (See page B574)

- › Nut cooling ball screw (See page B579)

The temperature rise and measures against thermal expansion of ball screw driving mechanism are the most challenging for high-speed machine tools. We recommend using core forced cooling or nut cooling for the HMS type.


3. Design precautions

For general precautions regarding ball screws, refer to "Design Precautions" (page B83) and "Handling Precautions" (page B103).

4. Product categories

The HMS type has a model as follows.


Table 2 HMD type product categories

Nut model	Shape	Flange shape	Nut shape	Preload system
ZFRC		Flanged Circular II	Circular	Z-Preload (medium preload)

5. Structure of model number and reference number


The followings describe the structure of "Model number" and "Reference number for ball screw".

> Model number

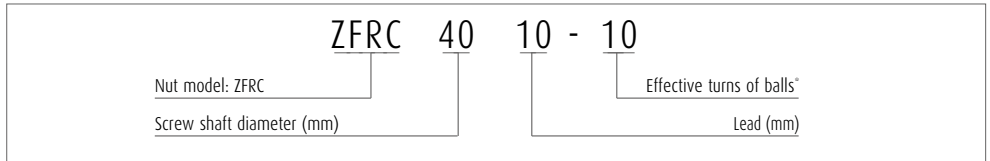

* In the case of Z-preload, the amount shown is twice the effective turn of balls.

> Reference number for ball screw

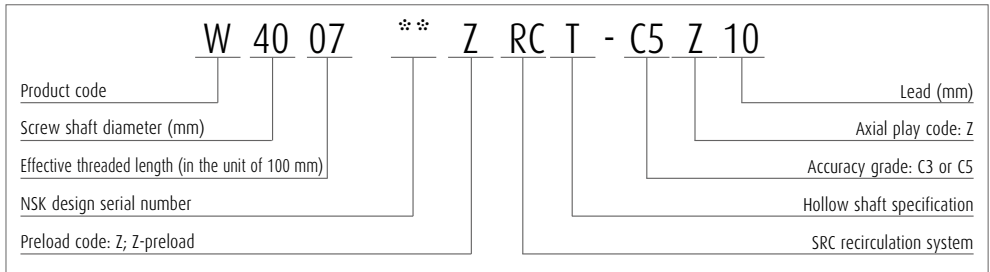


6. Handling Precautions

Maximum operating temperature: 60°C

If using NSK K1, operating temperature should not exceed 50°C.

Refer to "Designing Precautions" (page B83).


HMS Type for high-speed machine tools



Model No.	Shaft dia. d	Lead l	Root dia. d _r	Effective turns Turns × rows	Basic load rating (N)		Axial rigidity K (N/μm)
					Dynamic C _a	Static C _{0a}	
ZFRC3205-10	40	5	29.2	2.5×2	21 800	56 000	891
ZFRC3210-10	40	10	26.4	2.5×2	54 500	110 000	970
ZFRC4005-10	40	5	37.2	2.5×2	23 900	70 500	1 067
ZFRC4010-10	40	10	34.4	2.5×2	61 200	137 000	1 154
ZFRC4012-10	40	12	34.1	2.5×2	71 700	154 000	1 177
ZFRC4508-10	45	8	40.5	2.5×2	44 000	118 000	1 234
ZFRC4510-10	45	10	39.4	2.5×2	65 800	157 000	1 291
ZFRC4512-10	45	12	39.1	2.5×2	75 600	176 000	1 304
ZFRC5010-10	50	10	44.4	2.5×2	68 100	174 000	1 397
ZFRC5012-10	50	12	43.2	2.5×2	91 500	218 000	1 441
ZFRC6312-14	63	12	56.2	3.5×2	136 000	385 000	2 388

Notes

1. The right turn screw is the standard. Please consult NSK for left turn screws.
2. Rigidity listed under the column K is the value when a 5% of basic dynamic load rating is applied as the preload.

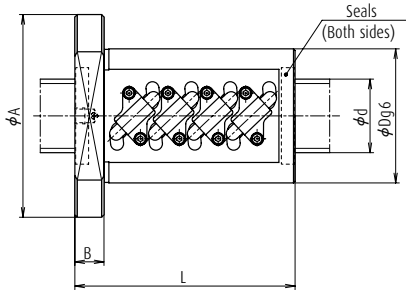

Unit: mm

Ball nut dimensions								Bolt hole PCD W	Oil hole position Q	Max. feeding speed (m/min)
Nut length L	Nut dia. D	Flange dia. A	Flange width B	Groove size H	Bolt hole size					
					X	Y	Z			
89	58	85	12	32	6.6	11	6.5	71	M6×1	25
160	74	108	15	41	9	14	8.5	90	M6×1	50
92	67	101	15	39	9	14	8.5	83	M6×1	25
166	82	124	18	47	11	17.5	11	102	Rc1/8	40
192	86	128	18	48	11	17.5	11	106	Rc1/8	48
136	82	124	18	47	11	17.5	11	102	Rc1/8	28
166	88	132	18	50	11	17.5	11	110	Rc1/8	35
192	90	132	18	50	11	17.5	11	110	Rc1/8	42
166	93	135	18	51	11	17.5	11	113	Rc1/8	32
198	100	146	22	55	14	20	13	122	Rc1/8	38
244	115	161	22	61	14	20	13	137	Rc1/8	30

B-3-3.4 HMC Type for High-Speed Machine Tools

This product is being applied for a patent.

1. Features

- High-speed traveling

High helix leads of 16 mm to 36 mm are used. Furthermore, the ball recirculation return tube is reinforced to make a high-speed traveling of 40 to 120 m/min. possible.

- High rigidity, high load carrying capacity

Double start thread increases the number of effective turns of balls, and a smaller ball size increases the number of the balls. Together they contribute to have high rigidity and high load carrying capacity, despite the high helix lead.

- Compact nut

The size of nut diameter and length were reduced.

2. Specifications

(1) Recirculation system

The ball recirculation circuits and grooves are suited for high-speed operation. Structure of recirculation system is shown in Fig. 1.

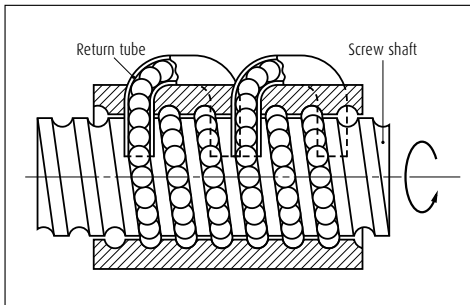


Fig. 1 Structure of return tube recirculation system

(2) Accuracy grade and axial play

Standard accuracy grades and axial play are shown in Table 1. Please consult NSK for other grade.

Table 1 Accuracy grade and axial play

Accuracy grade	C3, C5
Axial play	0 mm (preloaded)

(3) Options

- Equipped with NSK K1 lubrication unit

Optional NSK K1 lubrication unit, molded from

resin and impregnated with lubrication oil, is available. Please consult NSK when using NSK K1.

- For twin-drive systems (See page B573.)

Upon request, the variations in lead accuracy and preload torque between two ball screws of a pair of the TW series are controlled for the further improvement of the reliability.

- Hollow shaft ball screw specifications (See page B574.)

The temperature rise and measures against thermal expansion of ball screw driving mechanism are the most challenging for high-speed machine tools. For the HMD type ball screws, we recommend to utilize the hollow for forced cooling system.

- For a vertical axis ball screw

For a vertical axis ball screw, which constantly supports the load of vertical axis system, a high load capacity ball screw is required. A high load capacity type with compact design is available for the nut models II and III in the dimension tables. For details, please consult NSK.

(4) Allowable d-n value and the criterion of maximum rotational speed

Allowable d-n value and the criterion of maximum rotational speed are shown below. Please consult NSK if the rotational speed exceeds the permissible range below.

Allowable d-n value: HZC, HDC; 100 000 or less
HZF, HDF; 135 000 or less

Criterion of maximum rotational speed: 3 750 min⁻¹

Note: Please also review the critical speed. See "Technical Description: Permissible Rotational Speed" (page B47) for details.

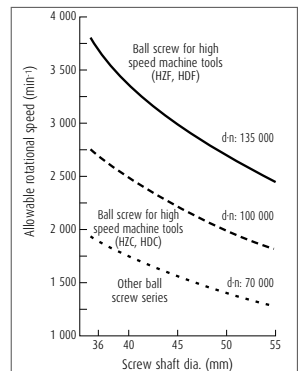


Fig. 2 Comparison of permissible rotational speed

5) Other specifications

For other specifications not listed in the dimension tables such as high-speed, high-load capacity, and NSK K1 installed type, please consult NSK.



3. Design precautions

For general precautions regarding ball screws, refer to "Design Precautions" (page B83) and "Handling Precautions" (page B103).

4. Product categories

HMC type has two different preload systems with several models (**Table 2**).


Table 2 HMC type product categories

Nut model	Shape	Flange shape	Preload system
HZC HZF		Flanged Circular I	Z-Preload (medium preload)
HDC HDF		Flanged Circular I	D-preload (medium preload)


5. Structure of model number and reference number

The followings describe the structure of "Model number" and "Reference number for ball screw".


> Model number

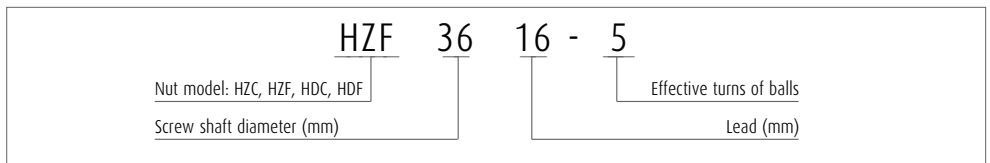

> Reference number for ball screw

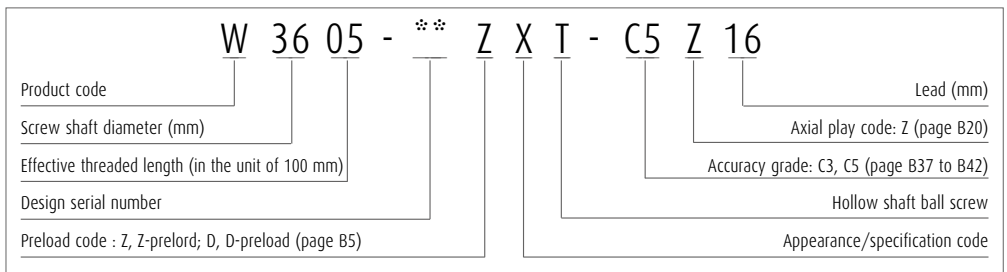


HMC Type for high-speed machine tools

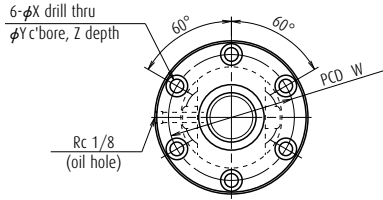


Model No.	Shaft dia. d	Lead l	Root dia. d _r	Effective turns of balls	Nut model	Basic load rating (N)		Axial rigidity K (N/μm)	
						Dynamic C ₃	Static C _{0a}	5%C ₃	10%C ₃
HZF3616-5	36	16	31.5	5	II	47 000	102 000	1 156	1 456
HZC3616-5	36	16	31.5	5	II	47 000	102 000	1 156	1 456
HZF3620-3.5	36	20	30.4	3.5	I	51 100	98 600	862	1 086
HZC3620-3.5	36	20	30.4	3.5	I	51 100	98 600	862	1 086
HZF4016-5	40	16	35.5	5	II	49 500	113 000	1 269	1 599
HZC4016-5	40	16	35.5	5	II	49 500	113 000	1 269	1 599
HZF4020-3.5	40	20	34.4	3.5	I	53 600	107 000	933	1 176
HZC4020-3.5	40	20	34.4	3.5	I	53 600	107 000	933	1 176
HZF4020-5	40	20	34.4	5	II	72 900	154 000	1 316	1 659
HZC4020-5	40	20	34.4	5	II	72 900	154 000	1 316	1 659
HZF4516-5	45	16	40.5	5	II	51 400	126 000	1 390	1 751
HZF4516-7.5	45	16	40.5	7.5	II	72 800	189 000	2 045	2 576
HZF4520-3.5	45	20	39.4	3.5	I	57 300	121 000	1 037	1 307
HZC4520-3.5	45	20	39.4	3.5	I	57 300	121 000	1 037	1 307
HZF4520-5	45	20	39.4	5	II	77 900	172 000	1 455	1 834
HZC4520-5	45	20	39.4	5	II	77 900	172 000	1 455	1 834
HZF4525-3.5	45	25	39.1	3.5	I	65 900	137 000	1 045	1 317
HZC4525-3.5	45	25	39.1	3.5	I	65 900	137 000	1 045	1 317
HZF5020-3.5	50	20	44.4	3.5	I	59 000	132 000	1 119	1 410
HZC5020-3.5	50	20	44.4	3.5	I	59 000	132 000	1 119	1 410
HZF5020-5	50	20	44.4	5	II	80 200	189 000	1 575	1 985
HZC5020-5	50	20	44.4	5	II	80 200	189 000	1 575	1 985
HZF5025-3.5	50	25	44.1	3.5	I	70 700	152 000	1 153	1 452
HZC5025-3.5	50	25	44.1	3.5	I	70 700	152 000	1 153	1 452
HZF5025-5	50	25	44.1	5	II	96 100	217 000	1 617	2 037
HZC5025-5	50	25	44.1	5	II	96 100	217 000	1 617	2 037
HZF5030-3.5	50	30	44.1	3.5	I	70 200	152 000	1 140	1 437
HZC5030-3.5	50	30	44.1	3.5	I	70 200	152 000	1 140	1 437
HZF5520-3.5	55	20	49.4	3.5	I	62 100	146 000	1 218	1 534
HZF5520-5	55	20	49.4	5	II	84 300	207 000	1 706	2 149
HZF5525-3.5	55	25	49.1	3.5	I	73 100	165 000	1 237	1 558
HZF5525-5	55	25	49.1	5	II	99 300	236 000	1 735	2 186
HZF5530-3.5	55	30	49.1	3.5	I	72 700	167 000	1 235	1 556

Notes

- Ball screws of 32 or 36 mm lead have triple start threads. Others have double start threads.
- Rigidity listed under the column 5%Ca is the value when a 5% of basic dynamic load rating is applied as the preload. Similarly, those listed under the column 10%Ca means a 10% of basic dynamic load rating is applied.

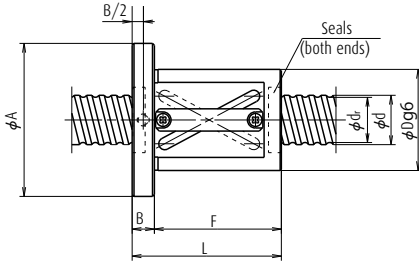

Nut model I (offset preload)

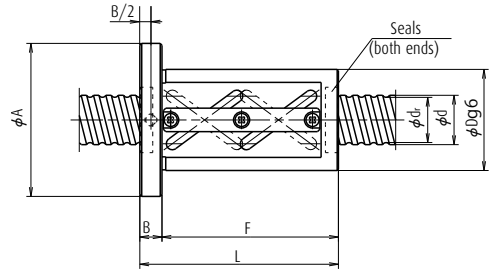


Nut model II (offset preload)

Unit: mm

Ball nut dimensions					Bolt hole size			Bolt hole PCD W	Max. feeding speed (m/min)
Nut length L	Nut dia. D	Flange dia. A	Flange width B	Nut length H	X	Y	Z		
134	78	120	18	116	11	17.5	11	98	60
134	71	113	18	116	11	17.5	11	91	44
121	94	136	18	103	11	17.5	11	114	75
121	78	120	18	103	11	17.5	11	98	56
134	79	121	18	116	11	17.5	11	99	54
134	76	118	18	116	11	17.5	11	96	40
121	96	138	18	103	11	17.5	11	116	67
121	82	124	18	103	11	17.5	11	102	50
161	96	138	18	143	11	17.5	11	116	67
161	82	124	18	143	11	17.5	11	102	50
134	82	124	18	116	11	17.5	11	102	48
187	82	124	22	165	14	20	13	104	48
122	98	140	18	104	11	17.5	11	118	60
122	88	130	18	144	11	17.5	11	108	44
162	98	140	18	104	11	17.5	11	118	60
162	88	130	18	140	11	17.5	11	108	44
141	101	143	18	123	11	17.5	11	121	75
141	92	134	18	123	11	17.5	11	112	56
122	101	143	18	104	11	17.5	11	121	54
122	95	137	18	104	11	17.5	11	115	40
162	101	143	18	144	11	17.5	11	121	54
162	95	137	18	144	11	17.5	11	115	40
141	103	145	18	123	11	17.5	11	123	67
141	98	140	18	123	11	17.5	11	118	50
191	103	145	18	173	11	17.5	11	123	67
191	98	140	18	173	11	17.5	11	118	50
159	103	145	18	141	11	17.5	11	123	81
159	98	140	18	141	11	17.5	11	118	60
122	103	145	18	104	11	17.5	11	123	49
162	103	145	18	144	11	17.5	11	123	49
141	105	147	18	123	11	17.5	11	125	61
191	105	147	18	173	11	17.5	11	125	61
159	105	147	18	141	11	17.5	11	125	73


HMC Type for high-speed machine tools

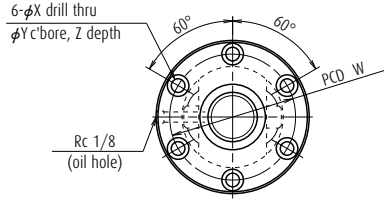

Model No.	Shaft dia. d	Lead l	Root dia. d _r	Effective turns of balls	Nut model	Basic load rating (N)		Axial rigidity K (N/μm)	
						Dynamic C _a	Static C _{oa}	5%C _a	10%C _a
HDF3620-5	36	20	30.4	5	III	69 400	139 000	1 204	1 516
HDC3620-5	36	20	30.4	5	III	69 400	139 000	1 204	1 516
HDF4025-5	40	25	34.1	5	III	85 500	176 000	1 334	1 681
HDC4025-5	40	25	34.1	5	III	85 500	176 000	1 334	1 681
HDF4030-5	40	30	34.1	5	III	84 600	175 000	1 313	1 654
HDC4030-5	40	30	34.1	5	III	84 600	175 000	1 313	1 654
HDF4032-7.5	40	32	34.4	7.5	III	104 000	232 000	1 909	2 405
HDC4032-7.5	40	32	34.4	7.5	III	104 000	232 000	1 909	2 405
HDF4036-4.5	40	36	34.4	4.5	III	66 500	137 000	1 214	1 530
HDF4525-5	45	25	39.1	5	III	89 600	195 000	1 460	1 840
HDC4525-5	45	25	39.1	5	III	89 600	195 000	1 460	1 840
HDF4530-5	45	30	39.1	5	III	91 800	197 000	1 476	1 860
HDC4530-5	45	30	39.1	5	III	91 800	197 000	1 476	1 860
HDF4532-7.5	45	32	39.4	7.5	III	108 000	259 000	2 100	2 646
HDC4532-7.5	45	32	39.4	7.5	III	108 000	259 000	2 100	2 646
HDF4536-4.5	45	36	39.4	4.5	III	69 200	155 000	1 280	1 612
HDF5030-5	50	30	44.1	5	III	95 500	216 000	1 600	2 016
HDC5030-5	50	30	44.1	5	III	95 500	216 000	1 600	2 016
HDF5032-7.5	50	32	44.4	7.5	III	112 000	285 000	2 286	2 881
HDC5032-7.5	50	32	44.4	7.5	III	112 000	285 000	2 286	2 881
HDF5530-5	55	30	49.1	5	III	98 700	235 000	1 719	2 166
HDF5532-7.5	55	32	49.4	7.5	III	118 000	312 000	2 483	3 128

Notes

1. Ball screws of 32 or 36 mm lead have triple start threads. Others have double start threads.
2. Rigidity listed under the column 5%Ca is the value when a 5% of basic dynamic load rating is applied as the preload. Similarly, those listed under the column 10%Ca means a 10% of basic dynamic load rating is applied.

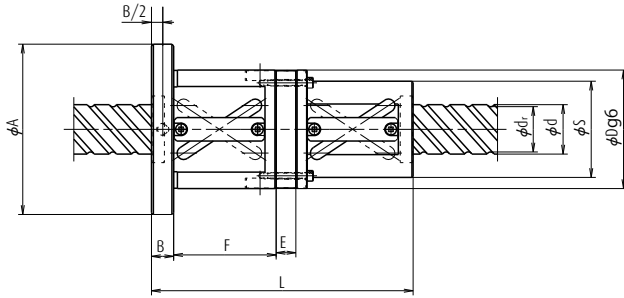

Nut model III (double nut spacer, preload)
 (the figure indicates use of double start threads)

Unit: mm

Ball nut dimensions										Bolt hole PCD W	Max. feeding speed (m/min)
Nut length L	Nut dia.		Flange dia. A	Flange width B	Nut length F	Spacer dimensions E	Bolt hole size				
	D	S					X	Y	Z		
191	94	76	136	18	77	5	11	17.5	114	114	75
191	78	60	120	18	77	5	11	17.5	98	98	56
228.5	98	80	140	18	91	13.5	11	17.5	118	118	84
228.5	86	68	128	18	91	13.5	11	17.5	106	106	63
248	98	80	140	18	104	8	11	17.5	11	118	101
248	86	68	128	18	104	8	11	17.5	11	106	75
265	96	78	142	22	109	11	14	20	13	118	108
265	82	64	128	22	109	11	14	20	13	106	80
200	96	78	138	18	83	4	11	17.5	11	116	120
228.5	101	83	143	18	91	13.5	11	17.5	11	121	75
228.5	92	74	134	18	91	13.5	11	17.5	11	112	56
248	101	83	143	18	104	8	11	17.5	11	121	90
248	92	74	134	18	104	8	11	17.5	11	112	67
266	98	80	144	22	109	11	14	20	13	120	96
266	88	70	134	22	109	11	14	20	13	110	71
200	98	80	140	18	83	4	11	17.5	11	118	108
249	103	85	145	18	104	8	11	17.5	11	123	81
249	98	80	140	18	104	8	11	17.5	11	118	60
266	101	83	147	22	109	11	14	20	13	123	86
266	95	77	141	22	109	11	14	20	13	117	64
249	105	87	147	18	104	8	11	17.5	11	125	73
266	103	85	149	22	109	11	14	20	13	125	78

B-3-3.5 BSL Type for Miniature Lathes

1. Features

- ▶ Prompt delivery

Screw shaft configuration and ball nut shape are standardized for prompt delivery.

- ▶ High speed and low noise

Adoption of end-deflector recirculation system realized high-speed operation with low noise.

- ▶ Excellent dust resistance

Thin plastic seal and specially designed ball grooves prevent the entry of foreign matters.

2. Specifications

(1) Recirculation system

End-deflector recirculation system has features of high-speed, low-noise operation and compact ball nut. The structure of recirculation system is shown in **Fig.1**.

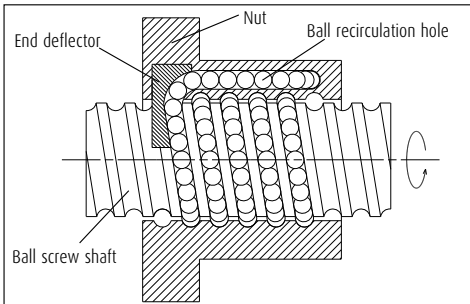


Fig. 1 Structure of end-deflector recirculation system

(2) Accuracy grade and axial play

The available standard accuracy grade and axial play are as follows. Please consult NSK for other grades.

Table 1 Accuracy grade and axial play

Accuracy grade	C5
Axial play	0 mm (preloaded)

(3) Allowable d-n value and the criterion of maximum rotational speed

Allowable d-n value and the criterion of maximum rotational speed are shown below. Please consult NSK if the rotational speed exceeds the permissible range below.

Allowable d-n value: 180 000 or less

Criterion of maximum rotational speed: 4 000 min⁻¹

Note: Please also review the critical speed. See "Technical Description: Permissible Rotational Speed" (page B47) for details.

(4) Options

Optional NSK K1 lubrication unit, molded from resin and impregnated with lubrication oil, supplies fresh oil onto ball rolling surface, ensuring long-term, maintenance-free operation. Please consult NSK when using NSK K1.

3. Design Precautions

When designing the screw shaft end, one end of the shaft must meet either one of the following conditions. If not, we cannot install the ball nut on the screw shaft.

- Cut the ball groove through to the shaft end.
- The diameters of bearing journals and the gear or pulley seat must be less than the root diameter of ball groove "dr" specified on the dimension table.


Special bearings which have higher-load carrying capacity are available.

For general precautions regarding ball screws, refer to "Design Precautions" (page B83) and "Handling Precautions" (page B103).

4. Product categories

The BSL type has a model as follows.


Table 2 BSL type product categories

Nut model	Shape	Flange shape	Preload system
BSL		Circular III	P-Preload (Slight preload)


5. Structure of model number and reference number

The followings describe the structure of "Model number" and "Reference number for ball screw".

> Model number

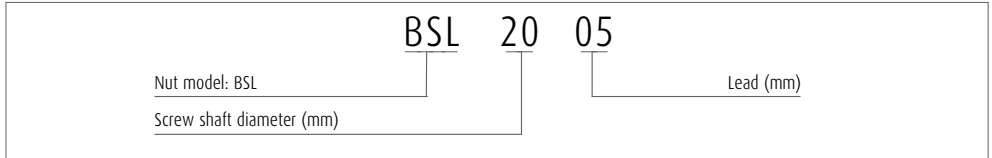

> Reference number for ball screw

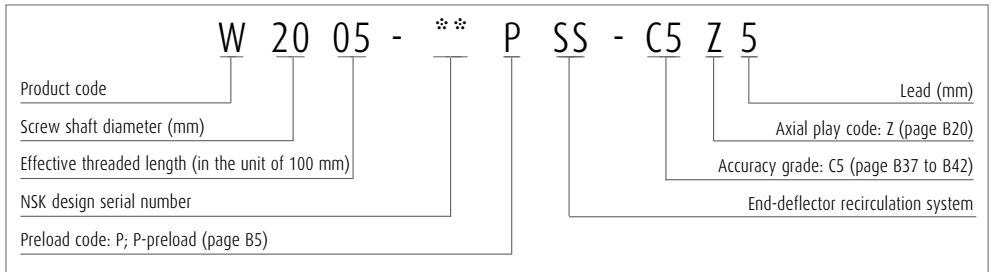


6. Handling Precautions

Maximum operating temperature: 80°C

If using NSK K1, operating temperature should not exceed 50°C.

Refer to "Designing Precautions" (page B83).


BSL Type for small lathes

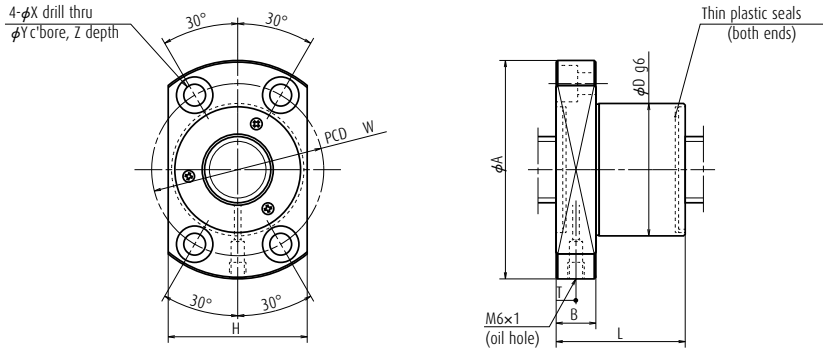

Model No.	Shaft dia. d	Lead l	Root dia. d _r	Basic load rating (N)		Ball nut dimensions										
				Dynamic C _a	Static C _{0a}	External dimensions					Bolt hole dimensions				Oil hole	
						D	A	H	B	L	W	X	Y	Z	T	d ₁
BSL2005	20	5	17.2	10 500	16 200	36	63	38	12	37	49	6.6	11	6.5	6.5	15
BSL2006	20	6	16.4	14 000	20 000	40	65	42	12	45	51	6.6	11	6.5	6.7	15
BSL2505	25	5	22.2	11 700	20 400	40	65	42	12	38	51	6.6	11	6.5	7.1	20
BSL2506	25	6	21.4	15 700	25 400	43	69	45	12	45	55	6.6	11	6.5	6.3	20
BSL2508	25	8	20.5	20 100	29 900	46	72	48	12	55	58	6.6	11	6.5	6.5	20
BSL2510	25	10	20.5	20 000	29 800	46	72	48	12	65	58	6.6	11	6.5	6	20
BSL3210	32	10	26.4	32 500	51 800	61	93	63	18	68	76	9	14	8.5	10	25
BSL3212	32	12	26.4	32 400	51 600	61	93	63	18	77	76	9	14	8.5	10	25

Notes

1. The right turn screw is the standard. Please consult NSK for left turn screw.
2. Shaft dimensions are for reference.

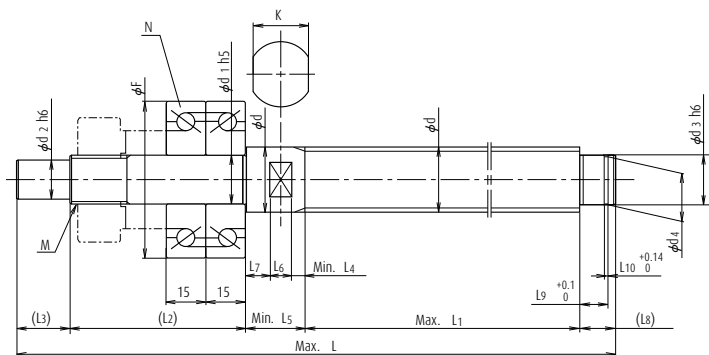

Unit: mm

Shaft configuration and dimensions (reference)

Shaft dimension																	Exclusive bearing N		Basic dynamic load rating C_a	Permissible axial load (N)
d_2	d_3	d_4	L (max.)	L_1 (max.)	L_2	L_3	L_4 (min.)	L_5 (min.)	L_6	L_7	L_8	L_9	L_{10}	K	M	Bearing reference number	F			
12	15	$14.3^{+0.11}_0$	500	500	66	20	3	20	8	9	14	10.15	1.15	17	M15×1.0	15TAC47C	47	21 900	26 600	
12	15	$14.3^{+0.11}_0$	500	500	66	20	4	21	8	9	14	10.15	1.15	17	M15×1.0	15TAC47C	47	21 900	26 600	
15	20	$19^{+0.21}_0$	700	700	71	27	3	27	10	14	19	15.35	1.35	22	M20×1.0	20TAC62C	62	28 500	40 500	
15	20	$19^{+0.21}_0$	700	700	71	27	4	28	10	14	19	15.35	1.35	22	M20×1.0	20TAC62C	62	28 500	40 500	
15	20	$19^{+0.21}_0$	700	700	71	27	5	29	10	14	19	15.35	1.35	22	M20×1.0	20TAC62C	62	28 500	40 500	
15	20	$19^{+0.21}_0$	700	700	71	27	5	29	10	14	19	15.35	1.35	22	M20×1.0	20TAC62C	62	28 500	40 500	
20	25	$23.9^{+0.21}_0$	1 000	800	71	33	6	33	12	15	20	16.35	1.35	27	M25×1.5	25TAC62C	62	28 500	40 500	
20	25	$23.9^{+0.21}_0$	1 000	800	71	33	7	34	12	15	20	16.35	1.35	27	M25×1.5	25TAC62C	62	28 500	40 500	

3. Shaft length L_1 and shaft entire length L are the maximum length.
 When L becomes the same length as the L_1 , the thread is all screw specification.

B-3-3.6.1 HTF-SRC Type for High-Load Drives

1. Features

> High-speed operation and low noise

The SRC recirculation system contributes to more than twice the feed speed (d·n value: 140 000 and 160 000) and the noise level of less than 8 to 10 dB(A) (half to 1/3 of noise) compared with the HTF type.

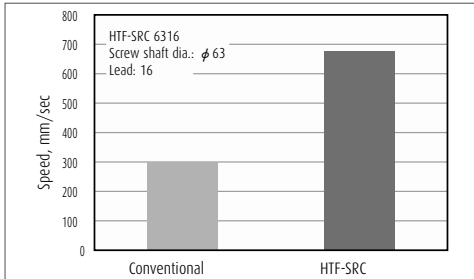


Fig. 1 Feed speed comparison

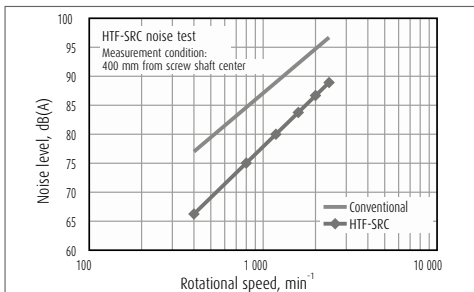


Fig. 2 Noise level comparison

2. Specifications

(1) Recirculation system

The SRC recirculation system picks up balls in the direction they are moving, and thus contributed to high-speed, low-noise operation. Structure of the recirculation system is as follows.

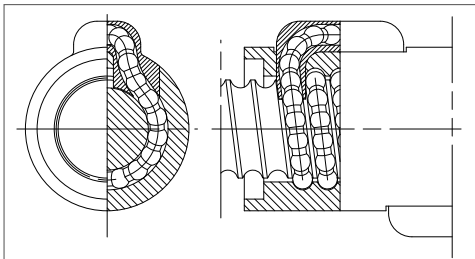


Fig. 3 Structure of SRC recirculation system

(2) Accuracy grade and axial play

The available standard accuracy grade and axial play are as follows. Please consult NSK for other grades.

Table 1 Accuracy grade and axial play

Accuracy grade	Ct7
Axial play	S,0.020 mm or less; N,0.050 mm or less

(3) Allowable d·n value and the criterion of maximum rotational speed

Allowable d·n value and the criterion of maximum rotational speed are shown below. Please consult NSK if the rotational speed exceeds the permissible range below.

Table 2 Allowable d·n value and the criterion of maximum rotational speed

Lead	14, 16 mm	20, 25 mm [☆]
Allowable d·n value	160 000 or less	140 000 or less
Criterion of maximum rotational speed	3 225 min ⁻¹	

d·n value: shaft dia. d [mm] × rotational speed n [min⁻¹]

☆ Allowable d · n value for HTF-SRC5020: 160 000

Note: Please also review the critical speed. See "Technical Description: Permissible Rotational Speed" (page B47) for details.

(4) Ball retaining piece NSK S1

The NSK S1, resin retainers between the balls, significantly extend ball screw durability to the moment load.

(5) Other

Please consult NSK for special requests, such as the addition of a recirculation circuit to increase the load capacity, or the arrangement of all recirculation circuits on the same phase of ball nut circumference.

3. Design Precautions

The HTF-SRC type is designed to distribute the load uniformly to the load balls for high-load drive mechanism.

We recommend installing the ball screws in the way shown below for the full use of this characteristic.

In addition, we will make full analysis when you use the HTF-SRC type under extreme conditions such as application of extremely high load or operating in short stroke.

Contact NSK about operating conditions (See page B561).

When designing the screw shaft end, one end of the screw shaft must meet either one of the following conditions.

If not, we cannot install the ball nut on the screw shaft.

- > Cut the ball groove through to the shaft end.
- > The diameters of bearing journals and the gear or pulley seat must be less than the root diameter of ball groove "d_r" specified on the dimension table.

For general precautions regarding ball screws, refer to "Design Precautions" (page B83) and "Handling Precautions" (page B103).

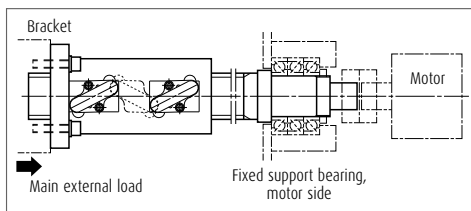


Fig. 4 Recommended installing direction of high-load drive ball screw

4. Product categories

The HTF-SRC type has a model as follows.

Table 3 HTF-SRC type product categories

Nut model	Shape	Flange shape	Preload system
HTF-SRC		Flanged Circular I	Non-preload Slight axial play

5. Structure of model number and reference number

The followings describe the structure of "Model number" and "Reference number for ball screw".

- > Model number

HTF-SRC 63 20 - 7.5			
Nut model: HTF-SRC	63	20	Effective turns of balls
Screw shaft diameter (mm)			Lead (mm)

- > Reference number for ball screw

W 63 04 - * RC SP - C7 S 20						
Product code	63	04	*	RC	SP	Lead (mm)
Screw shaft diameter (mm)						Axial play code: S, N (page B20)
Effective threaded length (in the unit of 100 mm)						Accuracy grade: C7 (Ct7) (page B37 to B42)
NSK design serial number						Ball retaining pieces NSK S1 specification
SRC recirculation system						

6. Handling Precautions


Maximum operating temperature: 70°C
(at outside diameter of ball nut)

The lubricant deteriorates, operating temperature

is recommended 60°C and under.

Please consult NSK in the case of a short stroke operation less than or equal to four times the length of the ball screw lead.

HTF-SRC Type for high-load drives

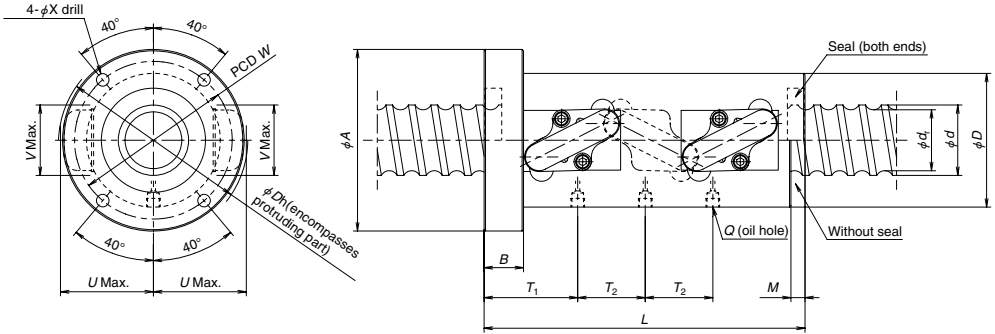


Nut model I

Model No.	Lead I	Shaft dia. d	Root dia. d _r	Effective turns of balls Turns × Circuits	Nut model	Basic load rating (kN)				
						Dynamic C _a	Static C _{0a}	D	A	B
HTF-SRC5014-7.5	14	50	41.6	2.5×3	I	264	623	80	114	28
HTF-SRC5016-7.5	16	50	39	2.5×3	1	383	818	95	129	28
HTF-SRC6316-7.5	16	63	52	2.5×3	1	429	1 050	105	139	28
HTF-SRC6316-10	16	63	52	2.5×4	II	549	1 410	105	139	28
HTF-SRC6316-10.5	16	63	52	3.5×3	1	562	1 450	105	139	28
HTF-SRC6316-14	16	63	52	3.5×4	2	720	1 930	105	139	28
HTF-SRC8016-10.5	16	80	69	3.5×3	1	627	1 870	120	154	32
HTF-SRC8016-14	16	80	69	3.5×4	2	802	2 490	120	154	32
HTF-SRC5020-7.5	20	50	39	2.5×3	1	383	818	95	129	28
HTF-SRC6320-7.5	20	63	49	2.5×3	1	572	1 280	117	157	32
HTF-SRC6320-10	20	63	49	2.5×4	2	732	1 710	117	157	32
HTF-SRC8020-10.5	20	80	66	3.5×3	1	838	2 300	130	170	32
HTF-SRC10020-10.5	20	100	86	3.5×3	1	936	2 910	145	185	32
HTF-SRC10020-14	20	100	86	3.5×4	2	1 200	3 890	145	185	32
HTF-SRC12020-7.5	20	120	106	2.5×3	1	776	2 550	173	213	40
HTF-SRC12020-10	20	120	106	2.5×4	2	994	3 400	173	213	40
HTF-SRC6325-10.5	25	63	49	3.5×3	1	750	1 770	117	157	32
HTF-SRC8025-7.5	25	80	63	2.5×3	1	790	1 960	145	185	40
HTF-SRC10025-10.5	25	100	83	3.5×3	1	1 200	3 430	159	199	40
HTF-SRC10025-14	25	100	83	3.5×4	2	1 540	4 580	159	199	40
HTF-SRC12025-10.5	25	120	103	3.5×3	1	1 300	4 200	173	213	40
HTF-SRC12025-14	25	120	103	3.5×4	2	1 660	5 600	173	213	40

Remarks


1. The ball nut length with no seals is shorter by M than that of a ball nut with seals.
2. Please consult NSK if load exceeds the allowable axial load (Fa max.).
3. The right hand screw is the standard. For specifications on left hand screws, contact NSK.
4. The allowable axial load is a value in the case of S clearance. If the clearance amount and mounting conditions differ, please note that the allowable axial load is also different.

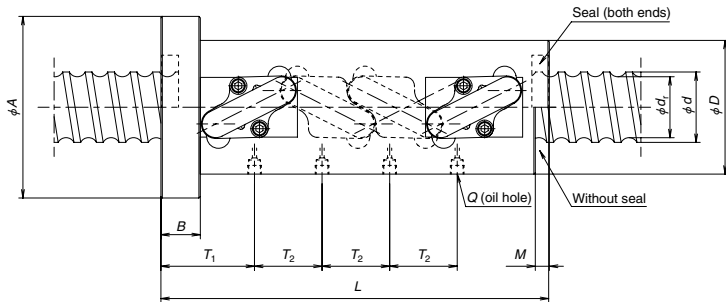

Nut model II

Unit: mm

Ball nut dimensions										Allowable axial load (kN)	
										Mounting *See below	
L	M	W	X	U	V	Dh	Q	T ₁	T ₂	[A] Recommended	[B]
202	10	97	9	54.5	46	111	M6×1	69	42	98.5	75.7
228	10	112	9	66	50	134	Rc1/8	74.5	48	124.8	106.2
228	10	122	9	72.5	50	148	Rc1/8	74.5	48	174.2	139.9
276	10	122	9	72.5	50	148	Rc1/8	74.5	48	202.3	152.4
276	10	122	9	72.5	50	148	Rc1/8	74.5	64	210.6	157.9
340	10	122	9	72.5	50	148	Rc1/8	74.5	64	233.8	165.5
278	10	137	9	80	60	165	Rc1/8	78.5	64	305.7	209.4
342	10	137	9	80	60	165	Rc1/8	78.5	64	351.2	220.9
268	10	112	9	66	50	135	Rc1/8	83.5	60	117.7	98.5
279	12	137	11	80	62	163	Rc1/8	90	60	202.2	170
339	12	137	11	80	62	163	Rc1/8	90	60	227.7	183.2
339	12	150	11	88	64	180	Rc1/8	90	80	350	255.5
339	12	165	11	97	78	199	Rc1/8	90	80	497.1	325.6
419	12	165	11	97	78	199	Rc1/8	90	80	572.1	341.8
287	12	193	11	109.5	88	229	Rc1/8	98	60	481.6	365
347	12	193	11	109.5	88	229	Rc1/8	98	60	589.3	404.8
405	12	137	11	81.5	61	167	Rc1/8	101.75	100	220.4	174.1
347	17	165	11	99.5	73	202	Rc1/8	111.75	75	319.3	268.3
422	17	179	11	108	79	220	Rc1/8	111.75	100	539.8	384.5
522	17	179	11	108	79	220	Rc1/8	111.75	100	603.3	402.2
421	17	193	11	116	92	238	Rc1/8	111.25	100	713.4	466.6
521	17	193	11	116	92	238	Rc1/8	111.25	100	815.4	488.3



B-3-3.6.2 HTF-SRD Type for High-Load Drives

This product is being applied for a patent.

1. Features

- High-speed operation and low noise

Used with end deflectors, HTF-SRD type ball screws achieve the maximum feed speed of 1 600 mm/s. The ball nut body surface is completely round, thus enabling well balanced ball nut rotation.

Double start thread structure which has more recirculation circuits, and large diameter balls contribute to have high load carrying capacity.

- Low noise and compact design

End deflector system using a ball scooping mechanism in the direction of screw spiral offers smoother ball recirculation system, thus contributing to less than half the noise level compared with existing ball screws equipped with a return tube.

Compact, high-performance seal is available. Nut outside diameter is compact compare with the return tube recirculation system.

Also, compact, thin plastic seal is available. Nut outside diameter is compact compare with the return tube recirculation system.

2. Specifications

(1) Ball recirculation system

End-deflector recirculation system has features of high-speed, low-noise operation, and compact ball nut. The structure of recirculation parts are as follows.

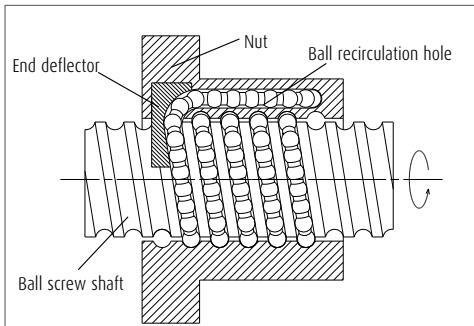


Fig. 1 Structure of End-deflector recirculation system

(2) Accuracy grade and axial play

The available standard accuracy grade and axial play are as follows. Please consult NSK for other grades.

Table 1 Accuracy grade and axial play

Accuracy grade	Ct7
Axial play	S,0.020 mm or less; N,0.050 mm or less

(3) Allowable d-n value and the criterion of maximum rotational speed

Allowable d-n value and the criterion of maximum rotational speed are shown below. Please consult NSK if the rotational speed exceeds the permissible range below.

Table 2 Allowable d-n value and the criterion of maximum rotational speed

Allowable d-n value	120 000 or less
Criterion of maximum rotational speed	2 400 min ⁻¹

Note: Please also review the critical speed. See "Technical Description: Permissible Rotational Speed" (page B47) for details.

(4) Ball retaining piece NSK S1

The NSK S1, resin retainers between the balls, significantly extend ball screw durability to the moment load.

3. Design Precautions

The HTF-SRD type is designed to distribute the load uniformly to the load balls for high-load drive mechanism.

We recommend installing the ball screws in the way shown below for the full use of this characteristic.

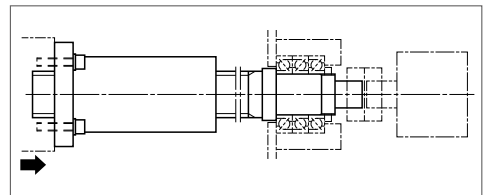


Fig. 2 Recommended installing direction of high-load drives ball screw

In addition, we will make full analysis when you use the HTF-SRD type under extreme conditions such as application of extremely high load or operating in short stroke. Contact NSK about operating conditions (see page B561).

When designing the screw shaft end, one end of the screw shaft must meet either one of the following conditions. If not, we cannot install the ball nut on the screw shaft.


- > Cut the ball groove through to the shaft end.
- > The diameters of bearing journals and the gear or pulley seat must be less than the root diameter of ball groove "dr" specified on the dimension table.

For general precautions regarding ball screws, refer to "Design Precautions" (page B83) and "Handling Precautions" (page B103).

4. Product categories

The HTF-SRD type has a model as follows.


Table 3 HTF-SRD type product categories

Nut model	Shape	Flange shape	Preload system
HTF-SRD		Circular III	Non-preload Slight axial play


5. Structure of model number and reference number

The followings describe the structure of "Model number" and "Reference number for ball screw".

- > Model number

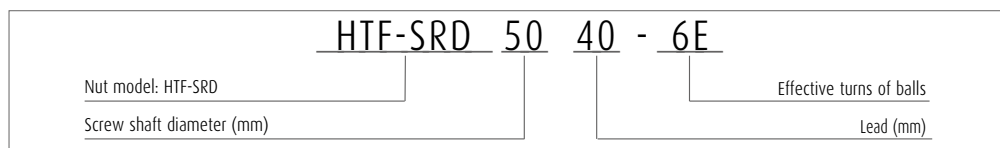

- > Reference number for ball screw


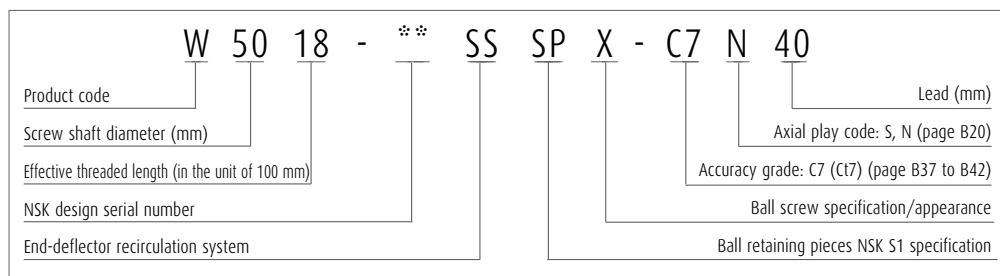


6. Handling Precautions

Maximum operating temperature: 70°C
(at outside diameter of ball nut)
The lubricant deteriorates, operating temperature

is recommended 60°C and under.
Please consult NSK in the case of a short stroke operation less than or equal to four times the length of the ball screw lead.

HTF-SRD Type for high-load drives

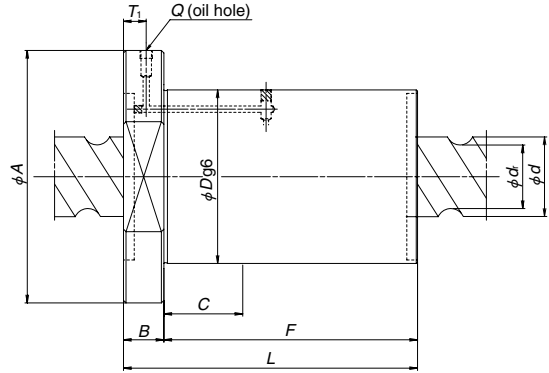
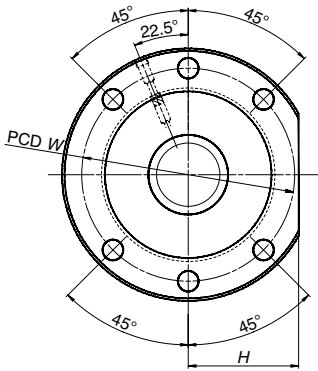


Nut model I

Model No.	Lead /	Shaft dia. d	Root dia. d _r	Nut model	Basic load rating (kN)				
					Dynamic C _a	Static C _{0a}	D	A	B
HTF-SRD5040-6E	40	50	39	II	243	491	115	165	28
HTF-SRD5040-8E	40	50	39	II	319	679	115	165	28
HTF-SRD6340-6E	40	63	49	II	363	768	140	200	32
HTF-SRD6340-8E	40	63	49	II	476	1 060	140	200	32
HTF-SRD5050-6E	50	50	39	II	243	491	115	165	28
HTF-SRD5050-8E	50	50	39	II	319	679	115	165	28
HTF-SRD8050-6E	50	80	63	II	502	1 180	175	250	40
HTF-SRD8050-8E	50	80	63	II	658	1 630	175	250	40
HTF-SRD6360-6E	60	63	49	II	363	768	140	200	32
HTF-SRD6360-8E	60	63	49	II	476	1 060	140	200	32
HTF-SRD10060-6E	60	100	83	II	583	1 490	195	270	40
HTF-SRD10060-8E	60	100	83	II	765	2 060	195	270	40
HTF-SRD12070-6E	70	120	103	II	630	1 810	210	285	50
HTF-SRD12070-8E	70	120	103	II	826	2 520	210	285	50
HTF-SRD8080-6E	80	80	63	II	502	1 180	175	250	40
HTF-SRD8080-8E	80	80	63	II	658	1 630	175	250	40
HTF-SRD100100-6E	100	100	83	II	583	1 490	195	270	40
HTF-SRD100100-8E	100	100	83	II	765	2 060	195	270	40
HTF-SRD80120-4E	120	80	63	II	337	751	175	250	40
HTF-SRD120120-6E	120	120	103	II	630	1 810	210	285	50
HTF-SRD120120-8E	120	120	103	II	826	2 520	210	285	50

Remarks


1. Please consult NSK if load exceeds the allowable axial load (Fa max.).
2. The right hand screw is the standard. For specifications on left hand screws, contact NSK.
3. The allowable axial load is a value in the case of S clearance. If the clearance amount and mounting conditions differ, please note that the allowable axial load is also different.
4. When F and C dimensions are the same, the diameter of whole area of F dimension is $\phi Dg6$

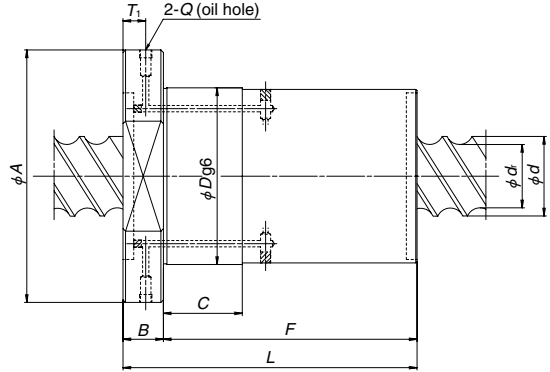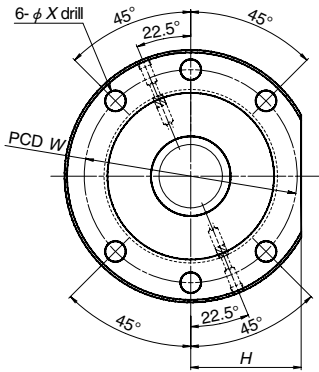

Nut model II

Unit: mm

Ball nut dimensions								Allowable axial load (kN)	
								Mounting ^{*See below}	
F	C	L	H	W	X	Q	T ₁	[A] Recommended	[B]
144	—	176	85	165	14	Rc1/8	22	109.7	105.9
131	131	159	72.5	140	14	Rc1/8	18	101	94.9
171	171	199	72.5	140	14	Rc1/8	18	119.7	109.6
131	131	163	90	170	18	Rc1/8	22	170	160.3
171	171	203	90	170	18	Rc1/8	22	205.2	188.2
159	159	187	72.5	140	14	Rc1/8	18	98.1	91.5
209	209	237	72.5	140	14	Rc1/8	18	113.6	103.1
154	154	194	110	210	22	Rc1/8	30	265.3	249.7
204	204	244	110	210	22	Rc1/8	30	322.3	294.5
188	188	220	90	170	18	Rc1/8	22	159.9	148.3
248	248	280	90	170	18	Rc1/8	22	186	167.5
185	185	225	122	235	22	Rc1/8	30	339.7	313.2
245	245	285	122	235	22	Rc1/8	30	415.8	368.3
210	210	260	130	250	22	Rc1/8	40	416.5	373
280	280	330	130	250	22	Rc1/8	40	519.4	440
244	244	284	110	210	22	Rc1/8	30	245.6	226.6
324	100	364	110	210	22	Rc1/8	30	286.5	256.1
301	100	341	122	235	22	Rc1/8	30	318.2	284.5
401	100	441	122	235	22	Rc1/8	30	371.8	318.4
243	243	290	110	210	22	Rc1/8	30	171.7	162.5
356	100	406	130	250	22	Rc1/8	40	389	333.4
476	100	526	130	250	22	Rc1/8	40	463.4	373.9



B-3-3.6.3 HTF Type for High-Load Drives

This product is being applied for a patent.

1. Features

› High load carrying capacity

Has an ideal design to bear heavy load. It significantly enhances load rating as well as maximum permissible load.

› Respond to various shaft end configuration

Additional ball screw shaft machining is not required. HTF type responds to various shaft ends that convey high torque.

HTF type can be used with: involute spline (JIS B 1603), straight sided spline (JIS B 1601), key seat, etc.

2. Specifications

(1) Ball recirculation system

Structure of recirculation system is shown in Fig. 1.

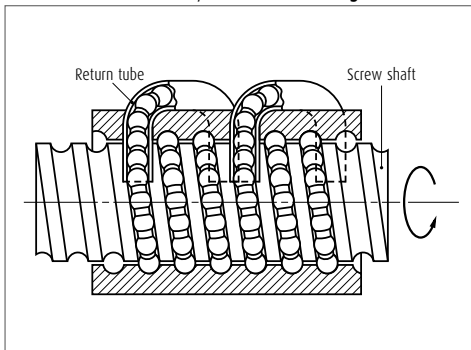


Fig. 1 Structure of return tube recirculation system

(2) Accuracy grade and axial play

The available standard accuracy grade and axial play are as follows. Please consult NSK for other grades.

Table 1 Accuracy grade and axial play

Accuracy grade	C7
Axial play	S,0.020 mm or less; N,0.050 mm or less

(3) Allowable d-n value and the criterion of maximum rotational speed

Allowable d-n value and the criterion of maximum rotational speed are shown below. Please consult NSK if the rotational speed exceeds the permissible range below. For higher-speed operation, HTF-SRC type is recommend (See page 539).

Table 2 Allowable d-n value and the criterion of maximum rotational speed

Lead		-20 mm	25 mm	30 - 32 mm
Allowable d-n value	Standard specification	70 000 or less	70 000 or less	50 000 or less
Allowable d-n value	High-speed specification	10 0000 or less	-	-
Criterion of maximum rotational speed		3 125 min ⁻¹		

d-n value: shaft dia. d [mm] × rotational speed n [min⁻¹]

Note: Please also review the critical speed. See "Technical Description: Permissible Rotational Speed" (page B47) for details.

(4) Ball retaining piece NSK S1

The NSK S1, resin retainers between the balls, significantly extend ball screw durability to the moment load.

(5) Other

Please consult NSK for special requests, such as the addition of a recirculation circuit to increase the load capacity, or the arrangement of all recirculation circuits on the same phase of ball nut circumference.

3. Design precautions


For designing shaft end configuration, you should take into account that the HTF type ball screws are dedicated to high-load drives. The HTF type is designed to distribute the load uniformly to the load balls for high load drive mechanism. We recommend installing the ball screws in the way shown in Fig. 2 for the full use of this characteristic. In addition, we will make full analysis when you use the HTF type under extreme conditions such as application of extremely high load or operating in short stroke. Contact NSK about operating conditions (See page B559). When designing the screw shaft end, the one end shall be cut-through and shaft end dimension must be less than the root diameter

of ball groove. If not, the nut cannot be assembled. For general precautions regarding ball screws, refer to "Design Precautions" (page B83) and "Handling Precautions" (page B103).

4. Product categories

The HTF type has a model as follows.

Table 3 HTF-SRD type product categories

Nut model	Shape	Flange shape	Preload system
HTF		Flanged Circular I	Non-preloaded Slight axial play


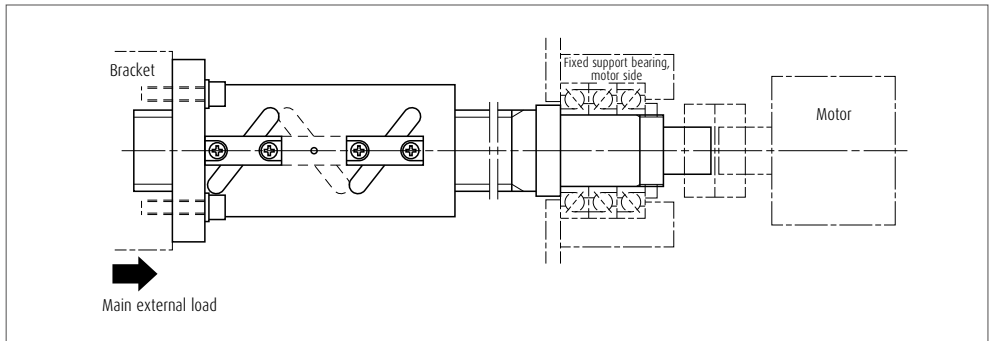


Fig. 2 Recommended installing direction of ball screws for high-load drives


5. Structure of model number and reference number

A structure of "Model number" and "Reference number for ball screw" are as follows.

> Model number

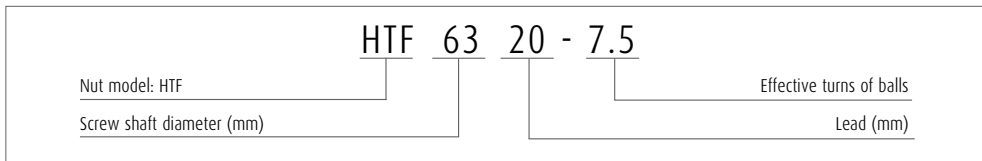

> Reference number for ball screw

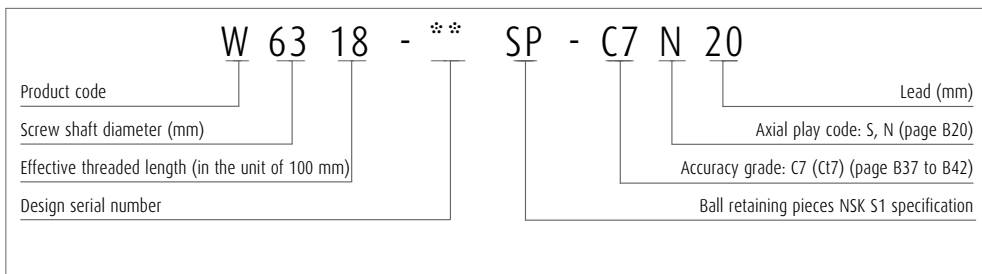

6. Handling precautions


Maximum operating temperature : 70°C (at outside diameter of all nut)

The lubricant deteriorates, operating temperature is recommended 60°C and under.

Please consult NSK in the case of a short stroke operation less than or equal to four times the length of the ball screw lead.



HTF Type for high-load drives

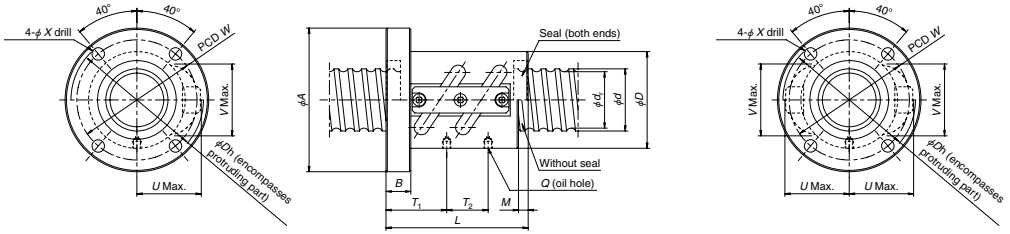


Nut model I


Model No.	Lead <i>l</i>	Shaft dia. <i>d</i>	Root dia. <i>d_r</i>	Effective ball turns Turns × Circuits	Nut model	Basic load rating (kN)				
						Dynamic <i>C_a</i>	Static <i>C_{0a}</i>	<i>D</i>	<i>A</i>	<i>B</i>
HTF3610-5	10	36	29.6	2.5×2	I	96.1	191	62	96	18
HTF4010-7.5	10	40	33.6	2.5×3	II	149	344	66	100	18
HTF4510-7.5	10	45	38.6	2.5×3	II	158	386	70	104	18
HTF4510-10	10	45	38.6	2.5×4	III	203	514	70	104	18
HTF5010-7.5	10	50	43.6	2.5×3	II	166	435	75	109	18
HTF5010-10	10	50	43.6	2.5×4	III	213	580	75	109	18
HTF5510-7.5	10	55	48.6	2.5×3	II	173	477	80	114	18
HTF5510-10	10	55	48.6	2.5×4	III	222	636	80	114	18
HTF3612-5	12	36	29	2.5×2	I	112	228	66	100	22
HTF4012-7.5	12	40	33	2.5×3	II	184	422	70	104	22
HTF4512-7.5	12	45	38	2.5×3	II	195	473	72	106	22
HTF5012-7.5	12	50	43	2.5×3	II	205	525	77	111	22
HTF5012-10	12	50	43	2.5×4	III	263	700	77	111	22
HTF5512-7.5	12	55	48	2.5×3	II	214	586	82	116	22
HTF5512-10	12	55	48	2.5×4	III	274	781	82	116	22
HTF6312-7.5	12	63	56	2.5×3	II	227	668	92	126	22
HTF6312-10	12	63	56	2.5×4	III	290	891	92	126	22

Remarks

1. The ball nut length with no seals is shorter by *M* than that of a ball nut with seals.
2. Please consult NSK if load exceeds the allowable axial load (*F_a max.*).
3. The right hand screw is the standard. For specifications on left hand screws, contact NSK.
4. The allowable axial load is a value in the case of *S* clearance. If the clearance amount and mounting conditions differ, please note that the allowable axial load is also different.

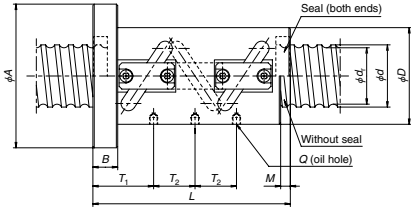


Nut model II

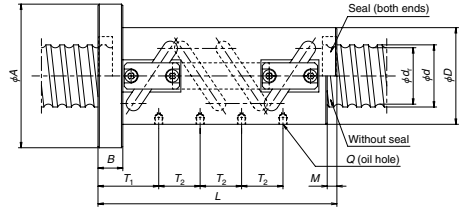



Nut model III

Unit: mm

Ball nut dimensions										Allowable axial load (kN)	
L	M	W	X	U	V	Dh	Q	T ₁	T ₂	Mounting ^{*See below}	
										[A] Recommended	[B]
103	7	75	9	40.5	42	82	M6×1	36.5	30	30.9	28.3
103	7	79	9	43	45	87	M6×1	36.5	30	34.9	31.8
143	7	83	9	45	48	91	M6×1	46.5	30	56.2	45.3
143	7	87	9	47	52	95	M6×1	46.5	30	65.7	51.3
173	7	87	9	47	52	95	M6×1	46.5	30	78.2	56.4
143	7	92	9	49	57	99	M6×1	46.5	30	76.2	58.4
173	7	92	9	49	57	99	M6×1	46.5	30	91.9	64.4
143	7	97	9	51.5	62	104	M6×1	46.5	30	85.7	64.7
173	7	97	9	51.5	62	104	M6×1	46.5	30	104.7	71.6
123	8	83	9	46.5	46	94	M6×1	44	36	40.1	36.7
171	8	87	9	47.5	50	96	M6×1	56	36	58.9	49.1
171	8	89	9	49.5	54	100	M6×1	56	36	71.7	55.7
171	8	94	9	52	59	105	M6×1	56	36	82.9	63.2
207	8	94	9	52	59	105	M6×1	56	36	98.3	68.9
171	8	99	9	54.5	63	110	M6×1	56	36	94.4	70.6
207	8	99	9	54.5	63	110	M6×1	56	36	113.3	77.3
171	8	109	9	58.5	70	118	M6×1	56	36	111.5	83.9
207	8	109	9	58.5	70	118	M6×1	56	36	135.8	92.6



HTF Type for high-load drives

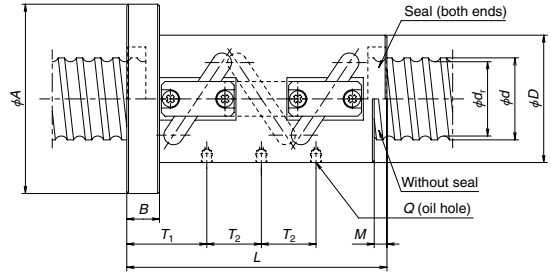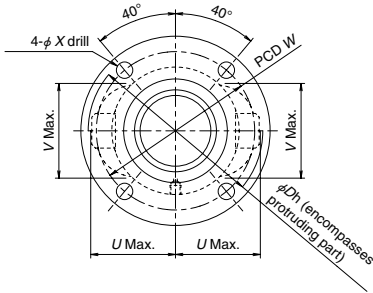


Nut model II

Model No.	Lead <i>l</i>	Shaft dia. <i>d</i>	Root dia. <i>d_r</i>	Effective ball turns Turns × Circuits	Nut model	Basic load rating (kN)				
						Dynamic <i>C_a</i>	Static <i>C_{0a}</i>	<i>D</i>	<i>A</i>	<i>B</i>
HTF5014-7.5	14	50	41.7	2.5×3	II	264	623	80	114	28
HTF5514-7.5	14	55	46.7	2.5×3	II	270	696	85	119	28
HTF6314-7.5	14	63	54.7	2.5×3	II	291	800	94	128	28
HTF6314-10	14	63	54.7	2.5×4	III	373	1 070	94	128	28
HTF8014-7.5	14	80	71.7	2.5×3	II	327	1 020	116	150	28
HTF8014-10	14	80	71.7	2.5×4	III	418	1 360	116	150	28
HTF5016-7.5	16	50	39	2.5×3	II	383	818	95	129	28
HTF5516-7.5	16	55	44	2.5×3	II	399	922	99	133	28
HTF6316-7.5	16	63	52	2.5×3	II	429	1 050	105	139	28
HTF6316-10	16	63	52	2.5×4	III	549	1 410	105	139	28
HTF6316-10.5	16	63	52	3.5×3	II	562	1 450	105	139	28
HTF6316-14	16	63	52	3.5×4	III	720	1 930	105	139	28
HTF8016-7.5	16	80	69	2.5×3	II	478	1 340	120	154	32
HTF8016-10	16	80	69	2.5×4	III	612	1 790	120	154	32
HTF8016-10.5	16	80	69	3.5×3	II	627	1 870	120	154	32
HTF8016-14	16	80	69	3.5×4	III	802	2 490	120	154	32
HTF10016-7.5	16	100	89	2.5×3	II	529	1 710	145	185	32
HTF10016-10	16	100	89	2.5×4	III	677	2 280	145	185	32
HTF12016-7.5	16	120	109	2.5×3	II	572	2 050	173	213	32
HTF12016-10	16	120	109	2.5×4	III	732	2 730	173	213	32

Remarks


1. The ball nut length with no seals is shorter by *M* than that of a ball nut with seals.
2. Please consult NSK if load exceeds the allowable axial load (*F_a max.*).
3. The right hand screw is the standard. For specifications on left hand screws, contact NSK.
4. The allowable axial load is a value in the case of *S* clearance. If the clearance amount and mounting conditions differ, please note that the allowable axial load is also different.

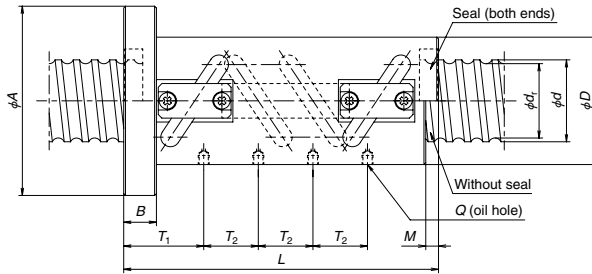



Nut model III

Unit: mm

Ball nut dimensions										Allowable axial load (kN)	
L	M	W	X	U	V	Dh	Q	T ₁	T ₂	Mounting ^{See below}	
										[A] Recommended	[B]
200	10	97	9	55.5	61	112	M6×1	66.5	42	98.6	75.8
200	10	102	9	57.5	65	116	M6×1	66.5	42	112.4	84.7
200	10	111	9	61.5	72	124	M6×1	66.5	42	135.3	100.5
242	10	111	9	61.5	72	124	M6×1	66.5	42	162	109.7
200	10	133	9	72	87	146	M6×1	66.5	42	180	136.2
242	10	133	9	72	87	146	M6×1	66.5	42	220.6	151.1
223	10	112	9	68	66	137	Rc1/8	73	48	124.8	106.2
223	10	116	9	70	70	141	Rc1/8	73	48	143.1	119.2
223	10	122	9	72.5	76	146	Rc1/8	73	48	174.2	139.9
271	10	122	9	72.5	76	146	Rc1/8	73	48	202.3	152.4
271	10	122	9	72.5	76	146	Rc1/8	73	64	210.6	157.9
335	10	122	9	72.5	76	146	Rc1/8	73	64	233.8	165.5
227	10	137	9	80	92	161	Rc1/8	77	48	240.6	182.3
275	10	137	9	80	92	161	Rc1/8	77	48	289.6	200.3
275	10	137	9	80	92	161	Rc1/8	77	64	305.7	209.4
339	10	137	9	80	92	161	Rc1/8	77	64	351.2	220.9
227	10	165	11	91	109	184	Rc1/8	77	48	318.1	242.8
275	10	165	11	91	109	184	Rc1/8	77	48	391.3	270.5
227	10	193	11	104	126	210	Rc1/8	77	48	387.4	305.8
275	10	193	11	104	126	210	Rc1/8	77	48	482.6	346.1



HTF Type for high-load drives

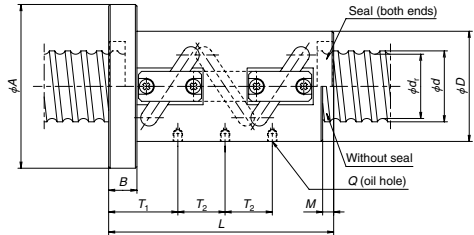


Nut model II

Model No.	Lead <i>l</i>	Shaft dia. <i>d</i>	Root dia. <i>d_r</i>	Effective ball turns Turns × Circuits	Nut model	Basic load rating (kN)				
						Dynamic <i>C_a</i>	Static <i>C_{0a}</i>	<i>D</i>	<i>A</i>	<i>B</i>
HTF6320-7.5	20	63	49	2.5×3	II	572	1 320	117	157	32
HTF6320-10	20	63	49	2.5×4	III	732	1 760	117	157	32
HTF6320-10.5	20	63	49	3.5×3	II	749	1 810	117	157	32
HTF8020-7.5	20	80	66	2.5×3	II	639	1 690	130	170	32
HTF8020-10	20	80	66	2.5×4	III	818	2 250	130	170	32
HTF8020-10.5	20	80	66	3.5×3	II	838	2 300	130	170	32
HTF10020-7.5	20	100	86	2.5×3	II	713	2 140	145	185	32
HTF10020-10	20	100	86	2.5×4	III	914	2 850	145	185	32
HTF10020-10.5	20	100	86	3.5×3	II	935	2 920	145	185	32
HTF10020-14	20	100	86	3.5×4	III	1 200	3 890	145	185	32
HTF12020-7.5	20	120	106	2.5×3	II	775	2 550	173	213	40
HTF12020-10	20	120	106	2.5×4	III	993	3 400	173	213	40
HTF12020-10.5	20	120	106	3.5×3	II	1 020	3 530	173	213	40
HTF12020-14	20	120	106	3.5×4	III	1 300	4 710	173	213	40
HTF14020-7.5	20	140	126	2.5×3	II	829	3 000	204	250	40
HTF14020-10	20	140	126	2.5×4	III	1 060	4 000	204	250	40
HTF6325-10.5	25	63	49	3.5×3	II	749	1 810	117	157	32
HTF8025-7.5	25	80	64	2.5×3	II	829	2 020	145	185	40
HTF10025-7.5	25	100	84	2.5×3	II	917	2 550	159	199	40
HTF10025-10	25	100	84	2.5×4	III	1 170	3 400	159	199	40
HTF10025-10.5	25	100	84	3.5×3	II	1 200	3 490	159	199	40
HTF10025-14	25	100	84	3.5×4	III	1 540	4 650	159	199	40
HTF12025-7.5	25	120	104	2.5×3	II	990	3 080	173	213	40
HTF12025-10	25	120	104	2.5×4	III	1 270	4 110	173	213	40
HTF12025-10.5	25	120	104	3.5×3	II	1 300	4 200	173	213	40
HTF12025-14	25	120	104	3.5×4	III	1 660	5 600	173	213	40
HTF14025-7.5	25	140	124	2.5×3	II	1 050	3 610	204	250	40
HTF14025-10	25	140	124	2.5×4	III	1 350	4 810	204	250	40
HTF14025-10.5	25	140	124	3.5×3	II	1 380	4 910	204	250	40
HTF14025-14	25	140	124	3.5×4	III	1 770	6 540	204	250	40
HTF16025-7.5	25	160	144	2.5×3	II	1 140	4 140	234	280	40
HTF16025-10	25	160	144	2.5×4	III	1 450	5 520	234	280	40

Remarks


1. The ball nut length with no seals is shorter by *M* than that of a ball nut with seals.
2. Please consult NSK if load exceeds the allowable axial load (*F_a max.*).
3. The right hand screw is the standard. For specifications on left hand screws, contact NSK.
4. The allowable axial load is a value in the case of *S* clearance. If the clearance amount and mounting conditions differ, please note that the allowable axial load is also different.

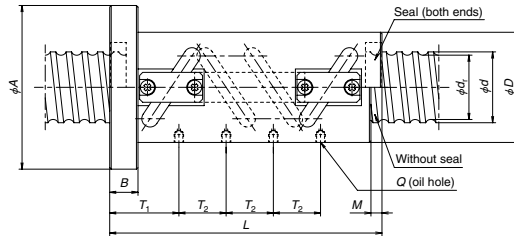



Nut model III

Unit: mm

Ball nut dimensions										Allowable axial load (kN)	
										Mounting [°] See below	
L	M	W	X	U	V	Dh	Q	T ₁	T ₂	[A] Recommended	[B]
273	12	137	11	83.5	81	168	Rc1/8	88	60	203.6	170.6
333	12	137	11	83.5	81	168	Rc1/8	88	60	229.6	184
333	12	137	11	83.5	81	168	Rc1/8	88	80	239.4	191.1
273	12	150	11	89.5	96	181	Rc1/8	88	60	291.6	228.2
333	12	150	11	89.5	96	181	Rc1/8	88	60	340.2	248.1
333	12	150	11	89.5	96	181	Rc1/8	88	80	352.5	255.9
273	12	165	11	97.5	114	196	Rc1/8	88	60	394.9	289
333	12	165	11	97.5	114	196	Rc1/8	88	60	474.9	315.3
333	12	165	11	97.5	114	196	Rc1/8	90	80	493.5	325.4
413	12	165	11	97.5	114	196	Rc1/8	90	80	566.8	341.6
281	12	193	11	111	130	223	Rc1/8	96	60	479.9	364.9
341	12	193	11	111	130	223	Rc1/8	96	60	586.3	404.7
341	12	193	11	111	131	223	Rc1/8	96	80	618.5	422.6
421	12	193	11	111	131	223	Rc1/8	96	80	722.4	448.8
281	12	226	14	122.5	148	248	Rc1/8	96	60	575	451
341	12	226	14	122.5	148	248	Rc1/8	96	60	712.4	508
398	12	137	11	83.5	83	169	Rc1/8	98.75	100	225.7	177.1
338	17	165	11	102	100	206	Rc1/8	109.25	75	322.7	266.4
338	17	179	11	108.5	118	219	Rc1/8	109.25	75	454.4	347.2
413	17	179	11	108.5	118	219	Rc1/8	109.25	75	532.4	376.6
413	17	179	11	108.5	118	219	Rc1/8	109.25	100	553.2	389.3
513	17	179	11	108.5	118	219	Rc1/8	109.25	100	619.4	406.9
338	17	193	11	116	135	223	Rc1/8	109.25	75	568.3	415.7
413	17	193	11	116	135	223	Rc1/8	109.25	75	678.1	451.5
413	17	193	11	116	134	233	Rc1/8	109.25	100	704.2	465.9
513	17	193	11	116	134	233	Rc1/8	109.25	100	802.1	487.6
338	17	226	14	127.5	153	258	Rc1/8	109.25	75	690.7	516.4
413	17	226	14	127.5	153	258	Rc1/8	109.25	75	842.6	570
413	17	226	14	127.5	153	258	Rc1/8	109.25	100	883.6	592.4
513	17	226	14	127.5	153	258	Rc1/8	109.25	100	1030.5	627.2
338	17	256	14	138	173	279	Rc1/8	109.25	75	798.7	616.6
413	17	256	14	138	173	279	Rc1/8	109.25	75	984	689.4



HTF Type for high-load drives

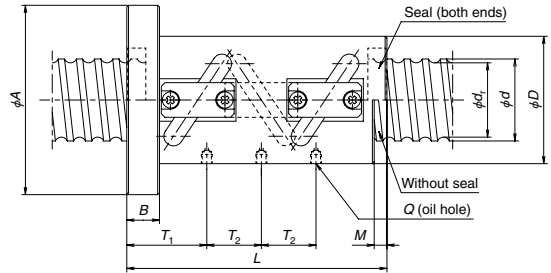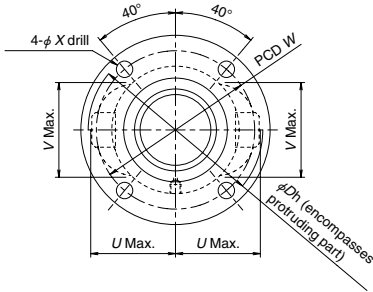


Nut model II

Model No.	Lead <i>l</i>	Shaft dia. <i>d</i>	Root dia. <i>d_r</i>	Effective ball turns Turns × Circuits	Nut model	Basic load rating (kN)		D	A	B
						Dynamic	Static			
						<i>C_a</i>	<i>C_{0a}</i>			
HTF14030-7.5	30	140	121	2.5×3	II	1 310	4 110	222	282	50
HTF14030-10	30	140	121	2.5×4	III	1 670	5 490	222	282	50
HTF14030-10.5	30	140	121	3.5×3	II	1 710	5 710	222	282	50
HTF16030-7.5	30	160	141	2.5×3	II	1 400	4 760	234	294	50
HTF16030-10	30	160	141	2.5×4	III	1 790	6 340	234	294	50
HTF16030-10.5	30	160	141	3.5×3	II	1 830	6 520	234	294	50
HTF20030-7.5	30	200	181	2.5×3	II	1 550	5 960	290	350	50
HTF20030-10	30	200	181	2.5×4	III	1 980	7 950	290	350	50
HTF14032-7.5	32	140	118	2.5×3	II	1 590	4 740	222	296	70
HTF14032-10	32	140	118	2.5×4	III	2 040	6 320	222	296	70
HTF14032-10.5	32	140	118	3.5×3	II	2 080	6 420	222	296	70
HTF16032-7.5	32	160	138	2.5×3	II	1 660	5 370	234	308	70
HTF16032-10	32	160	138	2.5×4	III	2 130	7 160	234	308	70
HTF16032-10.5	32	160	138	3.5×3	II	2 180	7 460	234	308	70
HTF20032-7.5	32	200	178	2.5×3	II	1 840	6 840	290	364	70
HTF20032-10	32	200	178	2.5×4	III	2 360	9 120	290	364	70

Remarks


1. The ball nut length with no seals is shorter by M than that of a ball nut with seals.
2. Please consult NSK if load exceeds the allowable axial load (Fa max.).
3. The right hand screw is the standard. For specifications on left hand screws, contact NSK.
4. The allowable axial load is a value in the case of S clearance. If the clearance amount and mounting conditions differ, please note that the allowable axial load is also different.

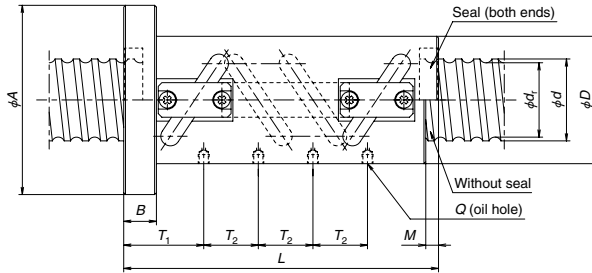

Nut model III

Unit: mm

Ball nut dimensions										Allowable axial load (kN)	
										Mounting ^{See below}	
L	M	W	X	U	V	Dh	Q	T ₁	T ₂	[A] Recommended	[B]
411	22	252	18	139	160	281	Rc1/8	134.5	90	753.5	596.1
501	22	252	18	139	160	281	Rc1/8	134.5	90	894.7	656.4
501	22	252	18	139	160	281	Rc1/8	134.5	120	942.8	686.3
411	22	264	18	148	177	299	Rc1/8	134.5	90	928.4	689.5
501	22	264	18	148	177	299	Rc1/8	134.5	90	1 128.2	758.4
501	22	264	18	148	177	299	Rc1/8	134.5	120	1 175.8	784.5
411	22	320	18	178	212	359	Rc1/8	134.5	90	1 190.1	920.7
501	22	320	18	178	212	359	Rc1/8	134.5	90	1 470.4	1 031.7
465	22	259	22	148	163	299	Rc1/8	166.5	96	856.9	669.1
561	22	259	22	148	163	299	Rc1/8	166.5	96	1 009.6	731.3
561	22	259	22	148	163	299	Rc1/8	166.5	128	1 057.3	760.7
465	22	271	22	152	181	307	Rc1/8	166.5	96	1 043.7	762.9
561	22	271	22	152	181	307	Rc1/8	166.5	96	1 261.7	834.1
561	22	271	22	152	181	307	Rc1/8	166.5	128	1 332.3	871.7
465	22	327	22	182	215	367	Rc1/8	166.5	96	1 359.2	1 034.9
561	22	327	22	182	215	367	Rc1/8	166.5	96	1 670.5	1 151.7



NSK Technical Data Sheet for NSK High-Load Drive Ball Screws

Custom-made ball screw

Company name:	Date:	NSK sales office
Section:	Person in charge:	
Address:		

Name of machine*1 : Electric injection molding machine; 200-ton capacity Application*2 : Injection axis


Drawing/rough sketch attached?: Yes No

*1 Please specify capacity of the machine in case of injection molding machine or press.
*2 If the application is injection molding machine, please indicate the axis. (Examples: injection axis and clamping axis)

1. Use conditions

Operating conditions	<input checked="" type="checkbox"/> Shaft rotation — Moving nut <input type="checkbox"/> Shaft rotation — Moving shaft <input type="checkbox"/> Nut rotation — Moving nut <input type="checkbox"/> Nut rotation — Moving shaft	<input checked="" type="checkbox"/> Normal operation <input type="checkbox"/> Back drive operation <input type="checkbox"/> Oscillation	Degree of vibration/impact	<input type="checkbox"/> Smooth operation without impact <input checked="" type="checkbox"/> Normal operation <input type="checkbox"/> Operation associated with impact or vibration	
Direction of load*3	<input checked="" type="checkbox"/> C-C <input type="checkbox"/> T-T <input type="checkbox"/> T-C <input type="checkbox"/> C-T <input type="checkbox"/> Other (Refer to figures below.) <i>See attachment</i>		Mounting orientation	<input checked="" type="checkbox"/> Horizontal <input type="checkbox"/> Vertical (Indicate the direction of gravity.)	
Lubricant	<input checked="" type="checkbox"/> Grease (Brand name: <i>High-load grease with an extreme pressure additive</i>) <input type="checkbox"/> Oil (Maker:)		How to replenish lubricant	<input type="checkbox"/> Grease gun <input checked="" type="checkbox"/> Automatic (cm ³ / cycles)	
Request for oil hole	<input checked="" type="checkbox"/> NSK recommended <input type="checkbox"/> Your request				
Necessity of seals	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No		NSK S1 necessary?	<input checked="" type="checkbox"/> NSK recommended <input type="checkbox"/> Not necessary	
Environment	Temperature (40 deg)	Particles / <input type="checkbox"/> Yes (Size of particle : a) -0.1, b) over 0.1-0.3, c) over 0.3- , d) Ingredient:) <input checked="" type="checkbox"/> No particle.			
Surface treatment	<input checked="" type="checkbox"/> Not required <input type="checkbox"/> Low-temperature chrome plating <input type="checkbox"/> Fluoride low-temperature chrome plating <input type="checkbox"/> Other				
Quantity in mass-production	/Month	/Year	/Lot	Quantity used per machine	<i>1</i> pcs./machine

*3 Please specify loading direction code on the figures below. (Shaft fixed: , Main load:)

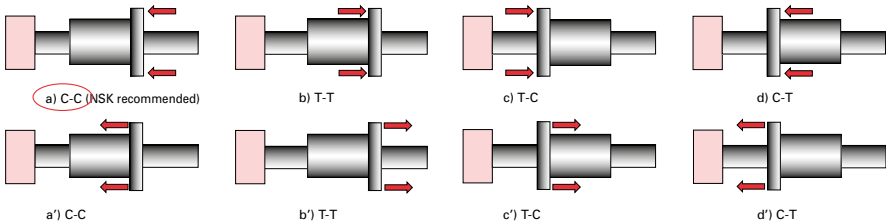


2. Specifications

Shaft diameter	φ 63 mm	Lead	16 mm	Accuracy grade	Ct7	Axial play	0.050 or less mm max.
Nut model No.	HTF-SRC 6316-7.5-S1	Effective turns of balls	2.5 × 3	Direction of turn	right	Thread length/ Overall shaft length	800 / 1200

Special note / Requests

NSK Technical Data Sheet for NSK High-Load Drive Ball Screws

3. Load chart (If using multiple ball screws in an axis, fill out the axial load per ball screw.)

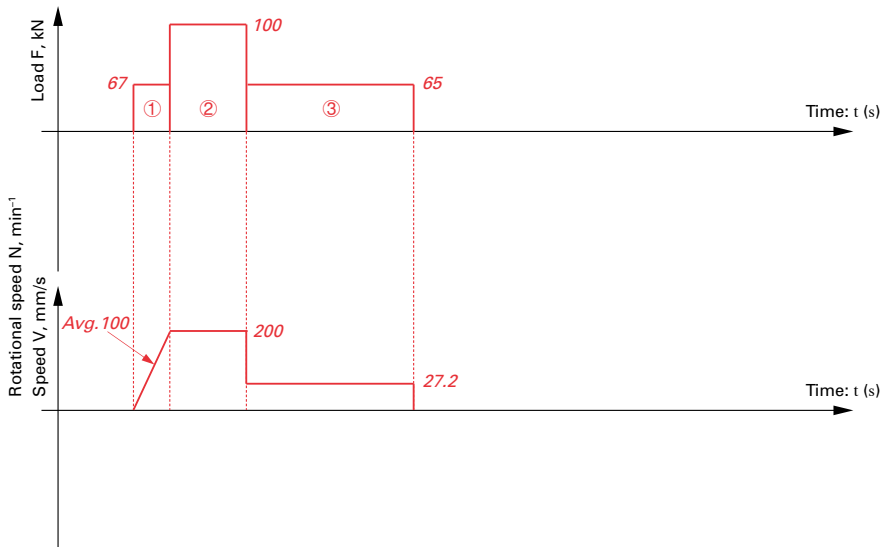

	Axial load*	Rotational speed or Average speed		Time t (s)	Stroke St (mm)	Remarks
	F (kN)	N (min ⁻¹)	V (mm/s)			
①	67		100	0.1	10	
②	100		200	0.5	100	
③	65		27.2	7	190	
④	0		0	10.4	0	
⑤				Total: 18	Total: 300	
⑥						
⑦						
⑧						
⑨						
⑩						

Dynamic axial load (Max.): **100** (kN) Static axial load (Max.)* (at 0 mm/s): (kN)
 Stroke in normal use: **300** (mm) Maximum stroke: **500** (mm)
 Cycle time: **18** (s) Required life: **40000** (h or cycles)
 *If using multiple ball screws in an axis, fill out the axial load per ball screw.

4. Plan to conduct the endurance test of the ball screw?

Actual data on the machine Yes
 N/A Planning to check endurance (Date: *From the middle of March 20XX*)
 No (Reason: _____)

Endurance of the ball screw

- (1) Mounting accuracy, load conditions, and lubricating conditions are the main factors affecting the ball screw fatigue life. Therefore, we recommend evaluating the influence of those factors on actual use of your machines.
- (2) A temperature rise caused by operational and environmental conditions may reduce the effectiveness of lubricant.

NSK Technical Data Sheet for NSK High-Load Drive Ball Screws

Custom-made ball screw

Company name:	Date:	NSK sales office
Section:	Person in charge:	
Address:		

Name of machine*1 : _____ Application*2 : _____

Drawing/rough sketch attached?: Yes No


*1 Please specify capacity of the machine in case of injection molding machine or press.

*2 If the application is injection molding machine, please indicate the axis. (Examples: injection axis and clamping axis)

1. Use conditions

Operating conditions	<input type="checkbox"/> Shaft rotation — Moving nut <input type="checkbox"/> Shaft rotation — Moving shaft <input type="checkbox"/> Nut rotation — Moving nut <input type="checkbox"/> Nut rotation — Moving shaft	<input type="checkbox"/> Normal operation <input type="checkbox"/> Back drive operation <input type="checkbox"/> Oscillation	Degree of vibration/impact	<input type="checkbox"/> Smooth operation without impact <input type="checkbox"/> Normal operation <input type="checkbox"/> Operation associated with impact or vibration	
Direction of load*3	<input type="checkbox"/> C-C <input type="checkbox"/> T-T <input type="checkbox"/> T-C <input type="checkbox"/> C-T <input type="checkbox"/> Other (Refer to figures below.)		Mounting orientation	<input type="checkbox"/> Horizontal <input type="checkbox"/> Vertical (Indicate the direction of gravity.)	
Lubricant	<input type="checkbox"/> Grease (Brand name: _____) <input type="checkbox"/> Oil (Maker: _____)		How to replenish lubricant	<input type="checkbox"/> Grease gun <input type="checkbox"/> Automatic (_____ cm ³ / _____ cycles)	
Request for oil hole	<input type="checkbox"/> NSK recommended <input type="checkbox"/> Your request				
Necessity of seals	<input type="checkbox"/> Yes <input type="checkbox"/> No		NSK S1 necessary?	<input type="checkbox"/> NSK recommended <input type="checkbox"/> Not necessary	
Environment	Temperature (deg)	Particles / <input type="checkbox"/> Yes (Size of particle : a) -0.1, b) over 0.1-0.3, c) over 0.3- , d) Ingredient: _____) <input type="checkbox"/> No particle.			
Surface treatment	<input type="checkbox"/> Not required <input type="checkbox"/> Low-temperature chrome plating <input type="checkbox"/> Fluoride low-temperature chrome plating <input type="checkbox"/> Other				
Quantity in mass-production	/Month	/Year	/Lot	Quantity used per machine	pcs./machine

*3 Please specify loading direction code on the figures below. (Shaft fixed: , Main load:)

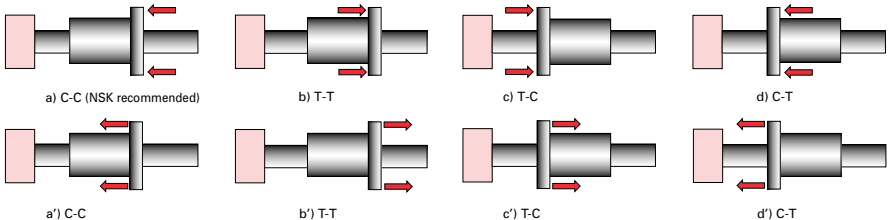


2. Specifications

Shaft diameter	φ mm	Lead	mm	Accuracy grade		Axial play	mm max.
Nut model No.		Effective turns of balls		Direction of turn		Thread length/ Overall shaft length	/

Special note / Requests

NSK Technical Data Sheet for NSK High-Load Drive Ball Screws

3. Load chart (If using multiple ball screws in an axis, fill out the axial load per ball screw.)

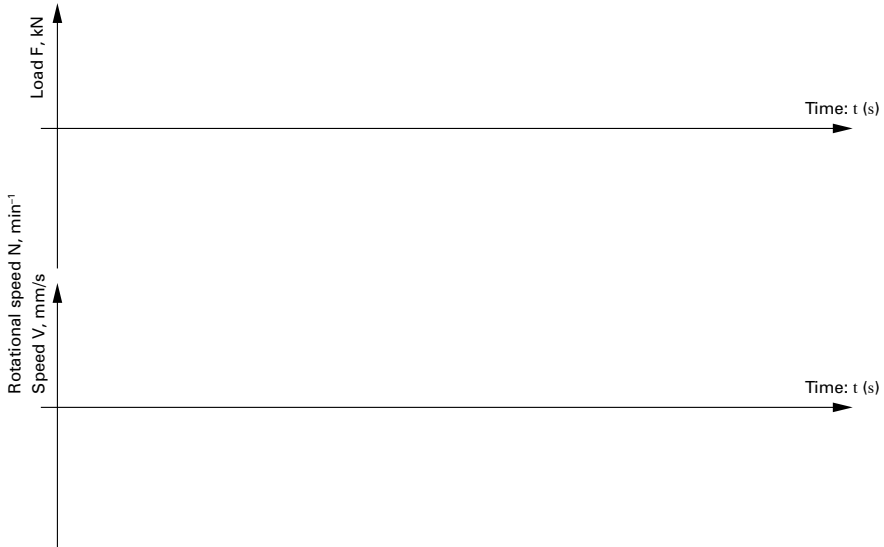

	Axial load* F (kN)	Rotational speed or Average speed		Time t (s)	Stroke St (mm)	Remarks
		N (min ⁻¹)	V (mm/s)			
①						
②						
③						
④						
⑤						
⑥						
⑦						
⑧						
⑨						
⑩						

Dynamic axial load (Max.)*: (kN) Static axial load (Max.)*(at 0 mm/s): (kN)
 Stroke in normal use: (mm) Maximum stroke: (mm)
 Cycle time: (s) Required life: (h or cycles)
 *If using multiple ball screws in an axis, fill out the axial load per ball screw.

4. Plan to conduct the endurance test of the ball screw?

Actual data on the machine Yes
 N/A Planning to check endurance (Date: _____)
 No (Reason: _____)

Endurance of the ball screw

- (1) Mounting accuracy, load conditions, and lubricating conditions are the main factors affecting the ball screw fatigue life. Therefore, we recommend evaluating the influence of those factors on actual use of your machines.
- (2) A temperature rise caused by operational and environmental conditions may reduce the effectiveness of lubricant.

B-3-3.7.1 VSS Type for Contaminated Environments

1. Features

- › High dust-resistance

Specially profiled screw shaft grooves and high performance seals prevent the entry of fine contaminants. Reduces particle penetration rate to less than 1/15 of existing standard products.

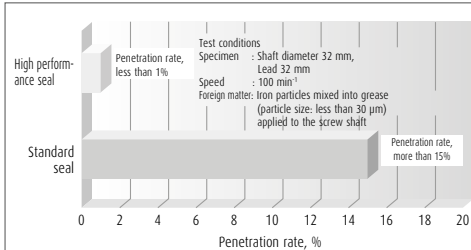


Fig. 1 Particle penetration rate

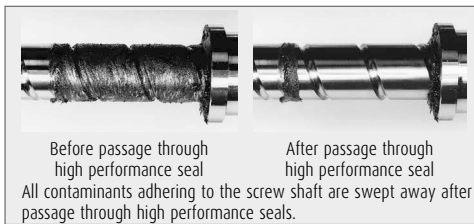


Fig. 2 Contamination before and after particle penetration test

- › Long life

High performance seals extend ball screw durability under severely contaminated environments with iron powder. Extreme durability tests under contaminated environments show the durability of the VSS type extends more than four times longer than our existing type with a standard seal.

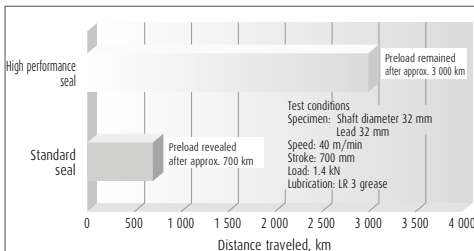


Fig. 3 Extreme durability test results using iron particles

- › High speed

For ultimate smoothness of ball recirculation, the internal ball recirculation system enables high-speed operation at a maximum of d-n 150000. Large lead specifications allow high-speeds of 150 m/min.

- › Low-noise

Reduces noise level by more than 6 dB(A) compared with our conventional tube-type ball screws, thereby providing low-noise and good noise tone features.

- › Compact size

Ball nut external diameter is up to 25% smaller than our conventional models.

2. Specifications

(1) Ball recirculation system

End-deflector recirculation system has features of high-speed operation with low-noise, and compact ball nut. The structure of recirculation system is shown in Fig. 4.

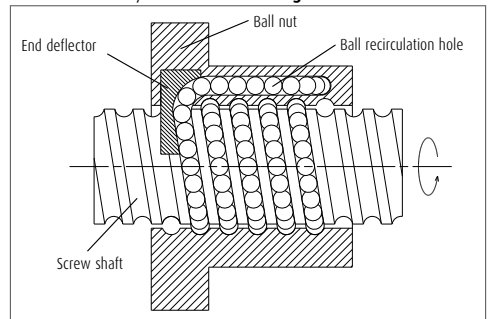


Fig. 4 Structure of end deflector recirculation system

(2) Accuracy grade and axial play

The available standard accuracy grade and axial play are as follows. Please consult NSK for other grades.

Table 1 Accuracy grade and axial play

Accuracy grade	C5
Axial play	Z, 0 mm (preloaded) T, 0.005 mm or less; S, 0.020 mm or less

(3) Allowable d-n value and the criterion of maximum rotational speed

Allowable d-n value and the criterion of maximum rotational speed are shown below. Please consult NSK if the rotational speed exceeds the permissible range below.

Allowable d-n value: 150 000 or less

Criterion of maximum rotational speed: 3 000 min⁻¹

Note: Please also review critical speed.

See "Technical Description: Permissible Rotational Speed" (page B47) for details.

(4) High performance seal

High performance seal (Japanese patents: 3646452, 3692203) with special lip that contacts screw shaft cross-section and prevents entry of fine contaminants.

(5) Lubrication unit

Incorporates NSK K1 lubrication unit to sufficiently lubricate the high performance seal lip, reduce friction, and improve durability.


(6) optional

Non-contact metal protector that traces the ball screw grooves and safeguards the seal against high-temperature foreign matter.


4. Structure of model number and reference number

The followings describe the structure of "Model number" and "Reference number for ball screw".

> Model number

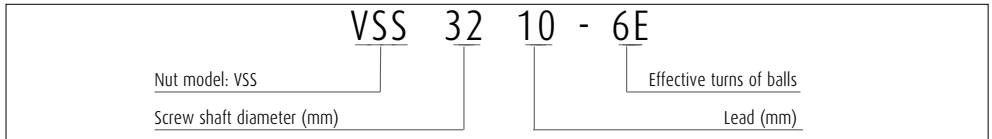

> Reference number for ball screw

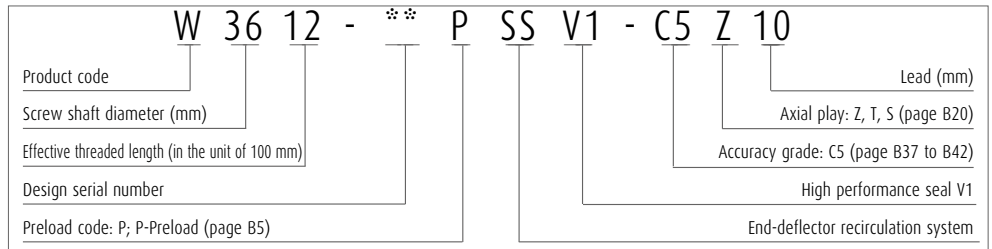

5. Handling Precautions

Maximum operating temperature: 50°C

Maximum momentary operating temperature: 80°C

Chemical precautions: Never expose the ball screw to grease-removing organic solvents such as hexane or thinner. Never immerse the ball screw in kerosene or rust preventive oils which contain kerosene.

3. Design precaution

When designing the screw shaft end, one end of the screw must meet either one of the following conditions. If not, we cannot install the ball nut on the screw shaft.


- > Cut the ball groove through to the shaft end.
- > The diameters of bearing journals and the gear or pulley seat must be less than the root diameter of ball groove "dr" specified on the dimension table.

High performance seals may increase torque, which may in turn increase temperature. Please inform NSK about your service conditions using the technical data sheet on page B572.


For general precautions regarding ball screws, refer to "Design Precautions" (page B83) and "Handling Precautions" (page B103).

VSS Type for contaminated environments

View X-X

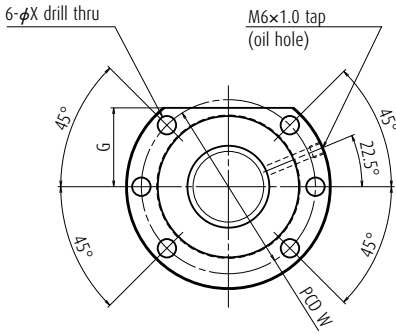


Screw shaft diameter $d = 32$ mm

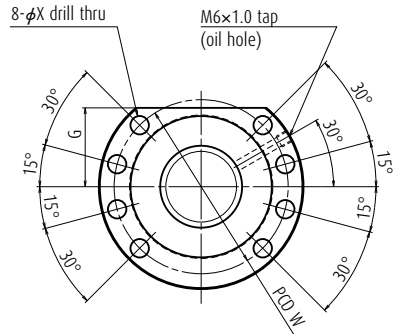

Screw shaft diameter $d \geq 40$ mm

Model No.	Shaft dia. d	Lead l	Root dia. d_r	Effective turns of balls Turns × Circuits	Basic load rating (N)		Axial rigidity K (N/μm)
					Dynamic C_a	Static C_{oa}	
VSS3210-6E	32	10	27.2	6	50 900	110 000	720
VSS3216-5E	32	16	27.2	5	44 300	90 800	600
VSS3220-5E	32	20	27.2	5	43 900	91 200	596
VSS3232-4E	32	32	27.2	4	32 100	65 800	421
VSS4040-4E	40	40	34.4	4	42 900	94 300	513
VSS5050-4E	50	50	44.4	4	47 400	117 000	606

- Notes**
1. The right hand screw is the standard. For specifications on left hand screws, contact NSK.
 2. Rigidity in the table is theoretical value obtained from the elastic deformation between screw groove and ball when the preload is 1.5% of the basic dynamic load rating, and axial load is applied to it. Refer to "Technical Description" (page B37) if axial load and preload differs from the conditions above, or when considering change in the deformation of the ball nut itself.
 3. Products with axial play may have a partially negative play (preloaded condition) depending on screw length. Refer to "Manufacturing range of effective screw length in combination of accuracy grade and axial play" (page B20).

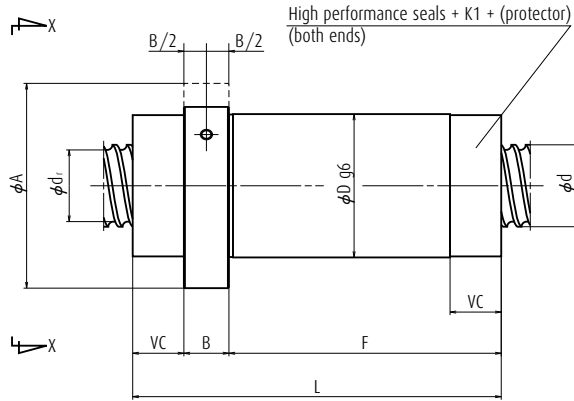

Unit: mm

Ball nut dimensions

Nut entire length L	Nut outside diameter D	Flange outside diameter A	Flange width B	Nut length F	Notch size G	Seal installation dimensions VC	Bolt hole PCD W	Bolt hole dimensions X	Maximum shaft length
132	56	86	18	89.5	34	24.5	71	9	2 800
150	56	86	18	107.5	34	24.5	71	9	2 800
169	56	86	18	126.5	34	24.5	71	9	2 800
122	56	86	18	79.5	34	24.5	71	9	2 800
144	70	100	22	94	38.5	27.5	85	9	3 800
164	82	118	22	114.5	46.0	27.5	100	11	5 000

B-3-3.7.2 Ball Screw with X1 Seals for Contaminated Environments and Grease Retention

1. Features

> Highly dustproof

Particle penetration ratio reduced to less than 1/30 of existing standard seals, thus contributing to longer service life for machine tools.

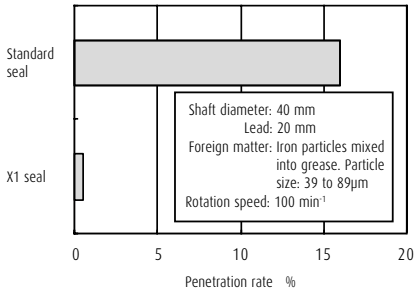


Fig. 1 Results of particle penetration rate test

> Superior grease retention

Automatically adding grease makes it possible to reduce the amount used and keep it from spattering.

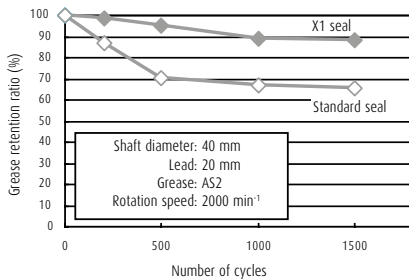


Fig. 2 Results of grease leakage test

> Contact seal with low torque

Optimizing the seal shape reduces torque and enhances seal performance.

2. Specifications

(1) Structure

The ball screw with X1 seals has a double seal structure combining a dustproof seal and a grease-retaining seal.




Fig. 3 Seal structure

(2) Scope of application in NSK Ball Screw series

This series is standard for the following two types.

Ball screws for high-speed machine tools	HMS type	Nut model: ZFRC
	HMD type	Nut model: EM
	BSS type	Nut model: BSS
	Deflector (bridge) type	Nut model: ZFD

For specifications other than the above, please consult NSK. Table 1 shows the minimum nut outer diameter on which X1 seals can be mounted.

Table 1 The minimum nut outer diameter on which X1 seals can be mounted

Shaft diameter: 32 mm	56 mm
Shaft diameter: 40 mm	70 mm (68 mm)
Shaft diameter: 45 mm	75 mm (73 mm)
Shaft diameter: 50 mm	82 mm (78 mm)

Values in parentheses are applicable to the deflector (bridge) type

(3) Accuracy grade / axial play

Table 2 shows standard tolerance classes and axial clearances. Please consult NSK for tolerance classes other than those in the table.

Table 2 Accuracy grade and axial play

Accuracy grade	C3, C5
Axial play	0 mm (preloaded)

(4) Design-related precautions

When designing the screw shaft end, assume that the end of the screw shaft is cut.

The temperature will increase somewhat when torque is applied if an X1 seal is attached. Please inform NSK about your service conditions using the technical data sheet on page B571.


Maximum overall shaft length is 2900 mm.

For general precautions regarding ball screws, refer to "Design Precautions" (page B83) and "Handling Precautions" (page B103).

The right hand screw is the standard. For specifications on left hand screws, contact NSK.




HMS type

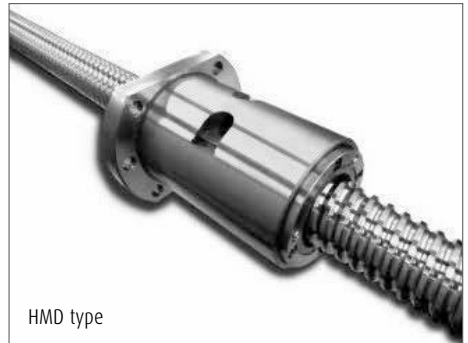

HMD type



BSS type

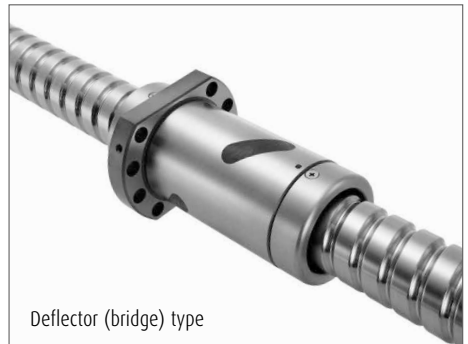

Deflector (bridge) type

Fig. 4 External appearance

3. Example of reference number

A structure of "Reference number for ball screw" is as follows.

Note: "X1" is added at the end of "nut model code" and "Specifications number".

> Reference number for ball screw

W4010-^{*}^{*}ZMX1-C5Z16

X1 seal equipped type ball screw code

4. Precautions for use


Temperature range for use: Maximum temperature: 60°C
(at outside diameter of ball nut)

Chemicals that should not come to contact:

Do not leave ball screw in organic solvent, white kerosene such as hexane, thinner which removes oil, and rust preventive oil which contains white kerosene.

The data shown in the catalog are the results of our tests, and no warranty is given to sealing performance on actual usage on machinery. Sealing performance is affected by usage environment and lubrication conditions. Dust covers and other measures to keep machinery free of dust are recommended.

Ball Screw with X1 Seals for Contaminated Environments and Grease Retention

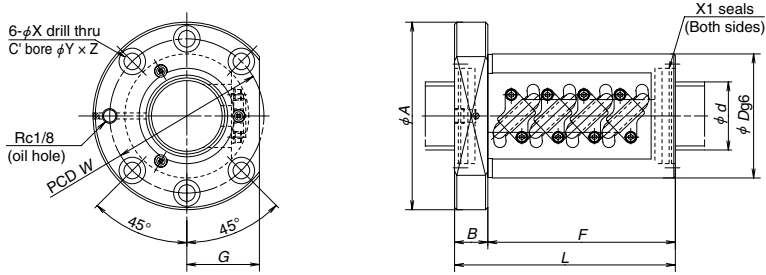


HMS type (Nut model : ZFRC)

Applicable dimensions for HMS type

Unit: mm

Model No.	Shaft dia. d	Lead l	Basic load rating (N)		Nut dimensions							Bolt holes			
			Dynamic C _a	Static C _{0a}	L	F	B	D	A	G	X	Y	Z	W	
ZFRC3205-10	32	5	21 800	56 000	107	87	20	58	85	32	6.6	11	6.5	71	
ZFRC4010-10	40	10	61 200	137 000	173	151	22	82	124	47	11	17.5	11	102	
ZFRC4012-10		12	71 700	154 000	197	175		86	128	48					
ZFRC4508-10	45	8	44 000	118 000	146	124	22	82	124	47	11	17.5	11	102	
ZFRC5010-10	50	10	68 100	174 000	174	151	23	93	135	51	11	17.5	11	113	
ZFRC5012-10		12	91 500	218 000	200	177		100	146	55					14


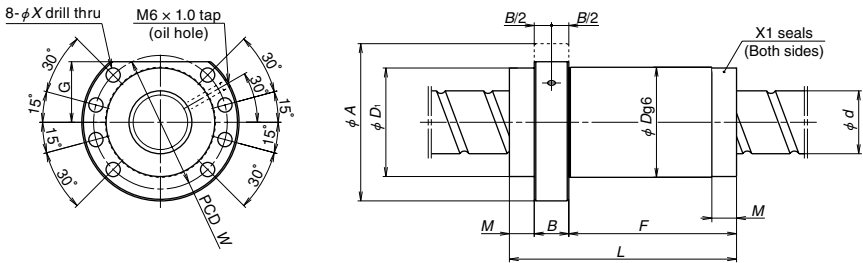


End deflector type (Nut model : BSS)

Applicable dimensions for End deflector type

Unit: mm

Model No.	Shaft dia. d	Lead l	Basic load rating (N)		Nut dimensions							Bolt holes		
			Dynamic C _a	Static C _{0a}	L	F	M	B	D	D ₁	A	G	X	W
BSS3205-4E	32	5	16 800	41 700	77	46	19	12	56	55	86	34	9	71
BSS3210-6E		10	50 900	110 000	114	80.5	15.5	18		55.5				
BSS4010-5E	40	10	58 100	130 000	112	73	17	22	70	69	100	38.5	9	85
BSS4020-5E		20	57 400	130 000	159	120	17		82	81				
BSS5010-4E	50	10	52 600	129 000	159	120	17	22	82	81	118	46	11	100

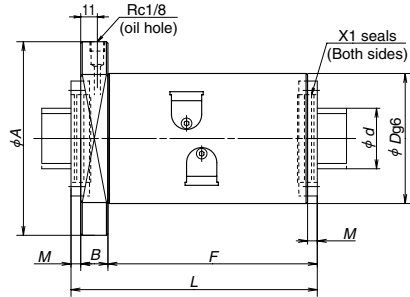



HMD type (Nut model: EM)

Applicable dimensions for HMD type

Unit: mm

Model No.	Shaft dia. d	Lead l	Basic load rating (N)		Nut dimensions										
			Dynamic C _a	Static C _{0a}	L	F	M	B	D	A	H	Bolt holes			
												X	Y	Z	W
EM4016-4E	40	16	66 900	131 000	172	148	6	18	86	128	96	11	17.5	11	106
EM4020-6E		20	77 900	166 000	164	139	7								
EM4516-4E	45	16	69 900	146 000	173	148.5	6.5	18	92	134	102	11	17.5	11	112
EM4520-6E		20	83 200	187 000	164	139	7								
EM5016-4E	50	16	72 700	161 000	173	148.5	6.5								
EM5020-6E		20	85 700	205 000	164	139	7	18	98	140	107	11	17.5	11	118
EM5030-6E		30	102 000	235 000	227	202	7								

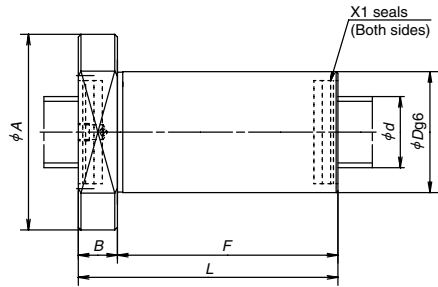

Deflector (bridge) type (Nut model: ZFD)

Applicable dimensions for Deflector (bridge) type

Unit: mm

Model No.	Shaft dia. d	Lead l	Basic load rating (N)		Nut dimensions												
			Dynamic C _a	Static C _{0a}	L	F	B	D	A	G	Bolt holes						
												X	Y	Z	W		
ZFD4005-12	40	5	26 500	78 300	119	97											
ZFD4006-12		6	35 600	95 200	135	113	22	68	102	40	9	14	8.5	84			
ZFD4008-8		8	32 000	75 000	131	109											
ZFD4010-8		10	45 200	93 100	153	131	22	68	110	43	11	17.5	11	88			
ZFD5010-8	50	10	51 500	122 000	154	131											
ZFD5020-6		20	52 400	109 000	199	176	23	78	120	47	11	17.5	11	98			

NSK Data Sheet for Ball Screws in Contaminated Environments

[Example]

(Please copy) 1 / 1

Model: Washing machine

Location: Workpiece transfer axis

1. Operating Conditions

Operating Conditions	a) Shaft rotation – nut moving b) Shaft rotation – shaft moving c) Nut rotation – nut moving d) Nut rotation – shaft moving	Stroke in Normal Use	400 [mm] (Please indicate operating pattern)
		Mounting Orientation	a) Vertical b) Horizontal
Lubricant	a) Grease (Brand: AS2) b) Oil (Brand:)	Lubricating Method	a) Automatic (cm ³ / min) b) Grease gun
Operating Duration	years 6 months	Axial play: 0.1 mm	Seal: standard /

2. Ball Screw Environment (Accessories & Contamination)

Contaminant	Iron particles and washing solution	Contaminant Size	Particle size 30 µm max. -
Cause of Contamination	Does not fall directly on it, but there is a possibility that it could happen. (Please reference with photographs)		
Countermeasures (For already assembled parts, complete after inspection)	a) Telescopic cover b) Bellow c) Dust collector d) Dust-resistant lubricant e) Other () (Please supply drawings to demonstrate dust countermeasures)		

3. Ball Screw Dimensions

Screw Shaft Diameter	Φ 32	Lead	5 mm	Accuracy Grade	C5	Axial Play	Z
Nut Model	ZFRC	Effective Turns of Balls	2.5×2	Direction of Turn	Right	Screw/Overall Length	510 / 750

Remarks

Request X1 seal

4. Durability Test

Durability test → Scheduled *Scheduled to perform functional evaluation for about 2 months.*
 → Not scheduled (Reason:)

Ball Screw Use in Contaminated Environments

※Please read the below and tick the relevant boxes

- An evaluation test result of the special dust-resistant seal which NSK carried out is one case by a particular examination condition (alien substance environment and operating conditions). I accept that the special dust-resistant seal is unable to completely prevent contamination in such an environment and that life may be affected.
- In order to improve wear life in contaminated environments, NSK require **dust-proof accessories (covers, lubricating oil, dust collectors, etc)** in addition to the recommended seal exchange.
- Ball screw wear life is greatly impacted by contamination entering the nut, offset load from misalignment, as well as lubricating condition. **The final durability comes to need the evaluation confirmation with the actual machine.**

Company Name:	Date:	NSK Ltd. Sales Representative	NSK Ltd. Sales Manager
Department:	Name:		
Address:	Tel:	Fax:	Sign
			Sign

NSK Data Sheet for Ball Screws in Contaminated Environments

(Please copy) 1/1

Model: _____

Location: _____

1. Operating Conditions

Operating Conditions	a) Shaft rotation – nut moving b) Shaft rotation – shaft moving c) Nut rotation – nut moving d) Nut rotation – shaft moving	Stroke in Normal Use	[mm] (Please indicate operating pattern)
		Mounting Orientation	a) Vertical b) Horizontal
Lubricant	a) Grease (Brand: _____) b) Oil (Brand: _____)	Lubricating Method	a) Automatic b) Grease gun (_____ cm ³ /min)
Operating Duration	_____ years _____ months	Axial play: _____ mm	Seal: standard /

2. Ball Screw Environment (Accessories & Contamination)

Contaminant	_____	Contaminant Size	_____	Particle size	-
Cause of Contamination	(Please reference with photographs)				
Countermeasures (For already assembled parts, complete after inspection)	a) Telescopic cover b) Bellow c) Dust collector d) Dust-resistant lubricant e) Other (_____)	(Please supply drawings to demonstrate dust countermeasures)			

3. Ball Screw Dimensions

Screw Shaft Diameter	φ	Lead	_____ mm	Accuracy Grade	_____	Axial Play	_____
Nut Model	_____	Effective Turns of Balls	_____	Direction of Turn	_____	Screw/Overall Length	_____ /

Remarks

4. Durability Test

Durability test



Scheduled

Not scheduled (Reason: _____)

Ball Screw Use in Contaminated Environments

※Please read the below and tick the relevant boxes

- An evaluation test result of the special dust-resistant seal which NSK carried out is one case by a particular examination condition (alien substance environment and operating conditions). I accept that the special dust-resistant seal is unable to completely prevent contamination in such an environment and that life may be affected.
- In order to improve wear life in contaminated environments, NSK require **dust-proof accessories (covers, lubricating oil, dust collectors, etc)** in addition to the recommended seal exchange.
- Ball screw wear life is greatly impacted by contamination entering the nut, offset load from misalignment, as well as lubricating condition. **The final durability comes to need the evaluation confirmation with the actual machine.**

Company Name: _____	Date: _____	NSK Ltd. Sales Representative	NSK Ltd. Sales Manager
Department: _____	Name: _____		
Address: _____	Tel: _____	Fax: _____	Sign _____

NSK Ltd.

B-3-3.8 TW Series for Twin-Drive Systems

1. Features

Variations in the lead accuracy and preload torque between two ball screws, which consist of a unit of TW Series, are controlled, resulting in improved travel accuracy and ball screw operating lifetime.

Fig. 1 shows measured variation in lead accuracy while **Fig. 2** displays an example of variation in thermal expansion between the two ball screws. **Fig. 3** is a schematic diagram comparing the travel accuracy between the TW Series and conventional model.

> High rigidity and long lifetime

Twin-drive systems are superior to single-drive systems in system rigidity, supporting the design of long-life feeding mechanism even if they make the shaft diameter one size smaller.

> High responsiveness to positioning commands

Twin-drive systems permit the use of screw shaft diameters that are one size smaller, thereby reducing screw shaft inertia by up to 50%, offering high responsiveness to positioning commands.

> Improved high-speed capability and noise level

Twin-drive systems allow the use of smaller screw diameters, resulting in no increase in the level of noise. The end-deflector recirculation system significantly improves high-speed capability and noise level compared with the existing model, offering high-speed feeding of up to 1 200 mm/min (shaft dia. 40 mm, lead 30 mm, rotational speed 4 000 min⁻¹).

2. Specifications

Table 1 Specifications of twin-drive systems

Recirculation systems	End-deflector recirculation system, Return tube system, Deflector (bridge type) system
Shaft dia.	φ 32 – 63 mm
Lead	10 – 30 mm
Accuracy grade	C5
Screw shaft length	3 m or less

(3) Optional specifications

- > Hollow shaft ball screw and nut cooling ball screw
- > Provides high accuracy through the use of forced cooling. Please refer to ball screws for high precision machine tools (page B574 to B582) for more details.

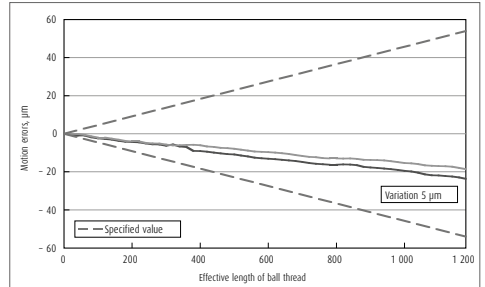


Fig. 1 Example of measured variation in lead accuracy

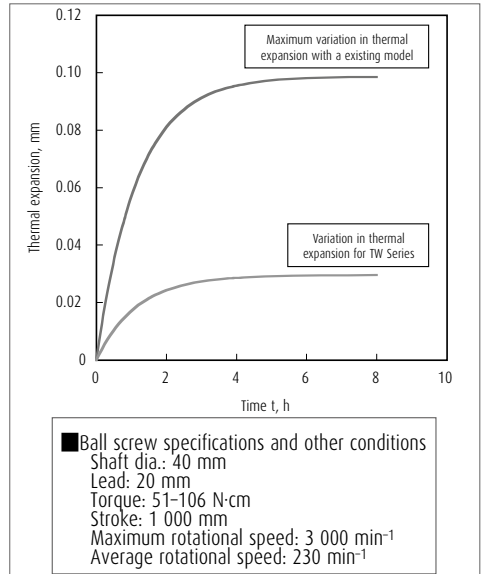


Fig. 2 Calculation example of the variation of thermal expansion

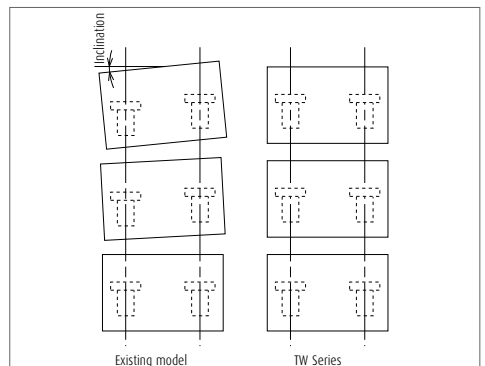


Fig. 3 Schematic diagram of travel accuracy

B-3-3.9.1 Hollow Shaft Ball Screw for High Precision Machine Tools

The increase in speed of the feeding mechanism for highly accurate positioning may require some measures against thermal expansion of the ball screw (forced cooling using hollow ball screw). NSK standardized hollowed screw shafts and shaft ends configuration (sealing section and support bearing seat). NSK recommends this as the most effective measure against thermal expansion.

1. Features

- > Stable positioning accuracy

Suppresses expansion of the ball screw shaft by rising temperature, and provides stable, precise positioning.

- > Prevents displacement of various sections

Minimizes deformation of the ball screw support bearings as well as of the machine base which is caused by thermal expansion of ball screw. Forced cooling keeps the heat from spreading to other sections, and prevents the processing table from deforming due to heat.

- > Reduces warm-up time

Temperature does not rise high, therefore cuts machine warm-up period.

- > Maintains lubricant's effect

Removes heat from the ball screw, deterring lubricant deterioration.


- > Easy designing for installation

Use support bearing unit exclusive for NSK ball screws (high speed and high load capacity for machine tools, see page B427) and seal unit (page B577) to standardized shaft end. This makes designing of mounting ball screw easy. NSK also provides nut cooling ball screws. The level of temperature rise for nut cooling ball

3. Model example of dimension table

A model number that indicates specification factors is structured as shown below.

- > Example of model

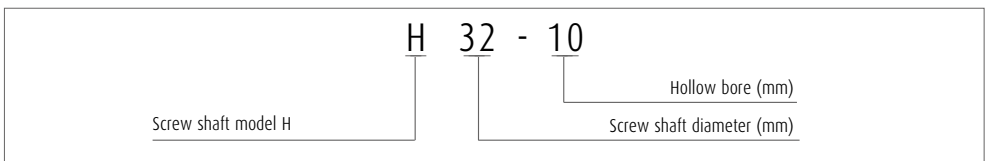

screw is equal to the hollow shaft ball screw thanks to the optimized nut internal design for cooling. Please refer to nut cooling ball screws (page B577) for more details.

2. Design precautions

Refer to HMC type, end-deflector recirculation system, return tube recirculation system, and deflector(bridge type) recirculation system for ball screw specifications. If the overall ball screw length exceeds 3 000 mm, contact NSK. For general precautions regarding ball screw, refer to "Design Precautions" (page B83) and "Handling precautions" (page B103).



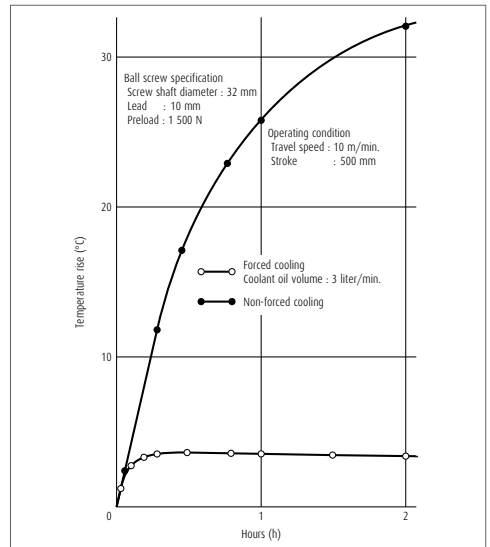


Fig. 1 Effect of forced cooling by hollow shaft ball screw



Hollow shaft ball screw

4. Installation example and standard dimensions

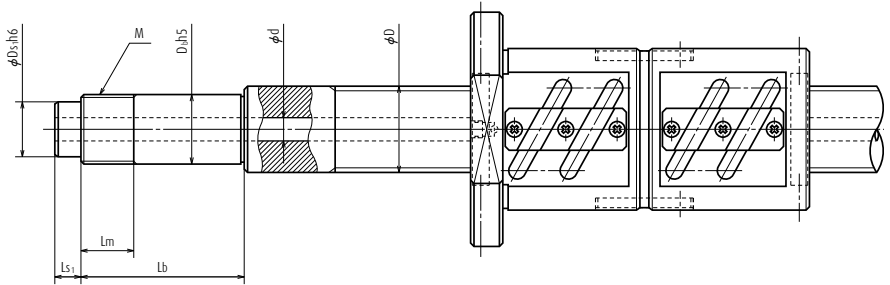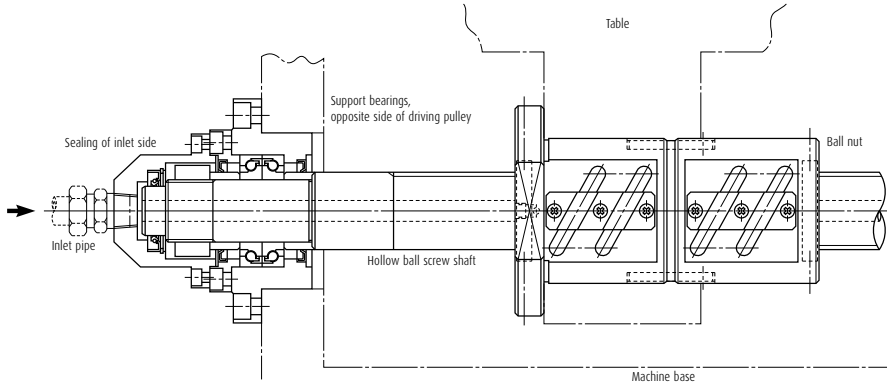

Model No.	Screw shaft		Bearing seat			Sealing						
	Diameter D	Hollow d	Diameter D _b	Lock nut			Inlet		Outlet			
				M	L _m	L _b	D _{s1}	L _{s1}	D _{s2}	L _{s2}	L _a	ds
H32-10	32	10	25	M25×1.5	26	89	20	15	32	60	25	6
H32-10	32	10	25	M25×1.5	26	104	20	15	32	60	25	6
H32-10	32	10	25	M25×1.5	26	119	20	15	32	60	25	6
H40-12	40	12	30	M30×1.5	26	89	25	15	40	60	25	7
H40-12	40	12	30	M30×1.5	26	104	25	15	40	60	25	7
H40-12	40	12	30	M30×1.5	26	119	25	15	40	60	25	7
H50-15	50	15	40	M40×1.5	30	92	32	15	50	65	27	8
H50-15	50	15	40	M40×1.5	30	107	32	15	50	65	27	8
H50-15	50	15	40	M40×1.5	30	122	32	15	50	65	27	8

- Notes**
1. Please consult NSK for other models.
 2. See B438 for bearing combination symbols.

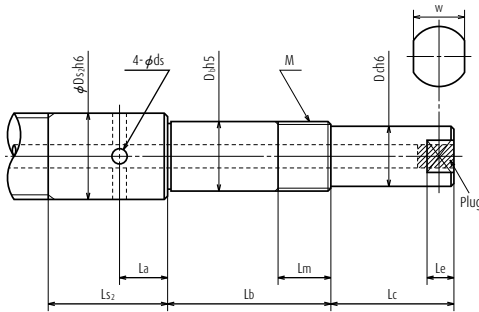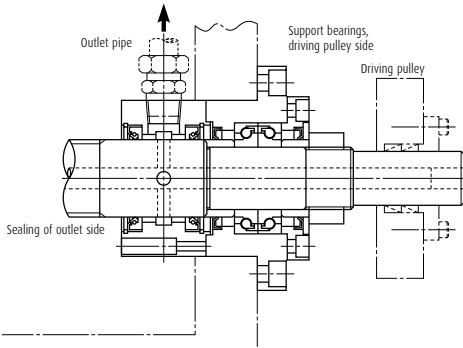

Unit: mm


Drive side		Spanner flats		Applicable support unit	Used bearing	Equipped seal unit	
Dc	Lc	w	Le			Shaft end	Shaft outer surface
20	40	17	8	WBK25DF-31H	25TAC62CSUHPN7C DF combination	WSK20A-01	WSK32B-01
20	40	17	8	WBK25DFD-31H	25TAC62CSUHPN7C DFD combination	WSK20A-01	WSK32B-01
20	40	17	8		(25TAC62CSUHPN7C DFF combination)	WSK20A-01	WSK32B-01
25	50	22	10	WBK30DF-31H	30TAC62CSUHPN7C DF combination	WSK25A-01	WSK40B-01
25	50	22	10	WBK30DFD-31H	30TAC62CSUHPN7C DFD combination	WSK25A-01	WSK40B-01
25	50	22	10		(30TAC62CSUHPN7C DFF combination)	WSK25A-01	WSK40B-01
35	70	30	13	WBK40DF-31H	40TAC72CSUHPN7C DF combination	WSK32A-01	WSK50B-01
35	70	30	13	WBK40DFD-31H	40TAC72CSUHPN7C DFD combination	WSK32A-01	WSK50B-01
35	70	30	13	WBK40DFD-31H	40TAC72CSUHPN7C DFF combination	WSK32A-01	WSK50B-01

Hollow shaft ball screw: Seal units

5. Seal units for hollow ball screw shaft (available by order)


This is an exclusive joint for coolant of the hollow ball screw shaft.

A Type (for shaft end)

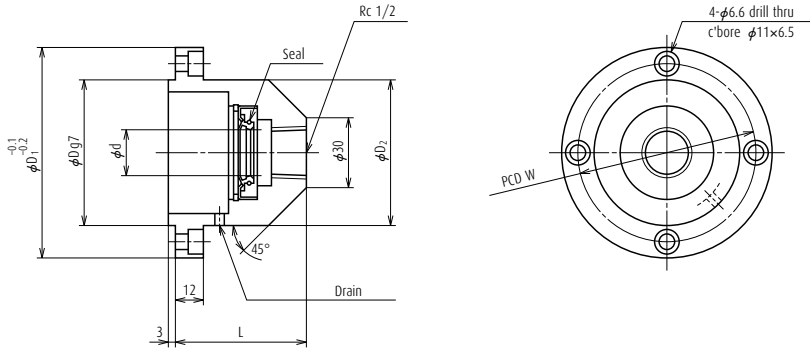

Reference No.	d	D	D ₁	D ₂	L	W	Fixing bolt
WSK20A-01	20	57	85	57	56	70	M6
WSK25A-01	25	57	85	57	56	70	M6
WSK32A-01	32	69	95	67	61	80	M6

B Type
(for shaft outer surface)

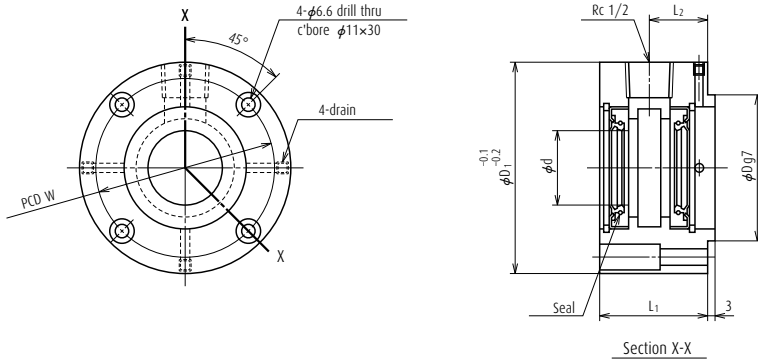

Unit: mm

Reference No.	d	D	D ₁	D ₂	L	W	Fixing bolt
WSK32B-01	32	57	85	46	25	70	M6
WSK40B-01	40	57	85	46	25	70	M6
WSK50B-01	50	69	95	49	27	80	M6

Handling precautions

› Use NSK support unit (high speed and high load capacity for machine tools on page B427) for installation in order to maintain the eccentricity between screw shaft and seal unit.

- › Apply grease to the lip section for protection at the time of installation to the ball screw.
- › Make certain that the drain holes (one for A Type, four for B Type) of the seal unit directly face downward when the unit is installed.

B-3-3.9.2 Nut Cooling Ball Screws for High Precision Machine Tools

Nut cooling ball screws are easily cooled with a ball nut cooling system and are ideal for use in high-speed and high-precision machine tools that have nut cooling systems.

Using nut cooling ball screws makes it possible to cool long ball screws that are difficult to cool with hollow-core cooling, and they accommodate the broad high-precision needs of machine tools both small and large.

1. Features

› Cooling effects

By optimizing the cooling structure inside the nut, cooling capacity equivalent to hollow shaft cooling has been achieved. The nut in contact with the table is cooled, so that heat conduction from the table to the ball screw is blocked. Moreover, by cooling hollow shaft in parallel, the screw shaft and ball nut can be cooled at the same time for even more precise temperature control.

› Internal design in consideration of preload torque change

The nut cooling ball screw has double contact-point preload in the tensile direction. This prevents an increase in preload torque when the nut is cooled, enabling effective cooling of the ball screw.

› Reference number for nut cooling ball screw

› Cooling structure

The cooling fluid goes in a balanced way through the nut. Double nuts have separate coolant routes for each nut for efficient cooling. Cooling fluid does not go through the inside of spacers, so coolant fluid does not leak even when preload drops and airtightness is maintained.

› Improved handling

Ball screws can be cooled by simply attaching piping to the exterior flange part.* Sliding seals and rotary joints that are required for hollow shaft cooling are not needed. Dimensions for mounting area (without nut cooling) are the same as conventional products, so the nut cooling can be implemented without changing machine designs.

*When cooling double nuts, piping is required on the nut end face on the other side of the flange.

› Long ball screws can be cooled at a low cost

Since these products are suitable for long ball screws for which hollow hole processing is difficult, improved precision of large machine tools can be achieved at a low cost.

2. Cautions regarding design

If heat impact from the bearing is too great, separate cooling for bearing and surrounding areas is recommended. For details, please contact NSK.

W4012- * * ZMNC-C5Z20

Nut cooling ball screw code



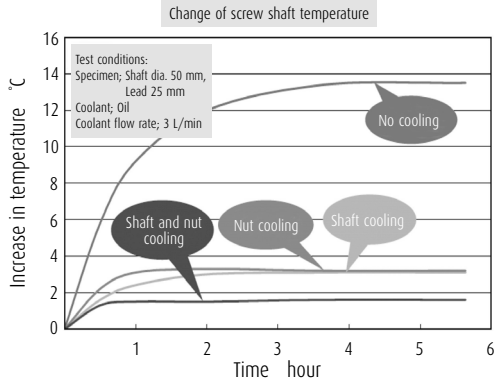


Fig. 1 Effect of forced cooling by nut cooling ball screw



Test table appearance




Temperature distribution with nut cooling




Temperature distribution without cooling

Fig. 2 Effect of forced cooling by nut cooling ball screw

Cooling structure



Single nut

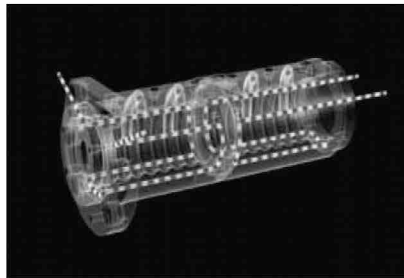


Double nut

Fig. 3 Cooling structure of a nut cooling ball screw

Nut cooling ball screws

Nut cooling ball screws: dimension chart

> Single nut cooling ball screws (for HMD type, nut type: EM)

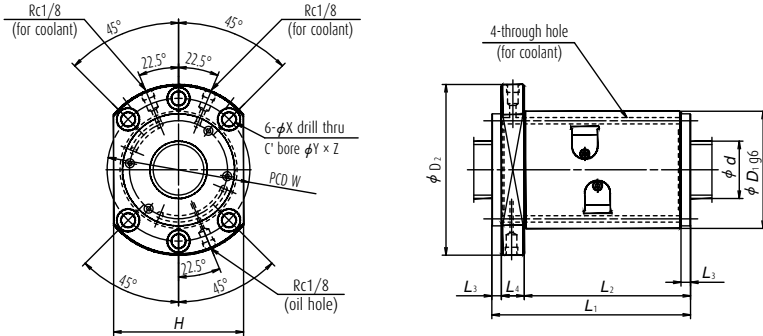


Applicable dimensions for HMD type

Unit: mm

Model No.	Shaft dia. d	Lead l	Nut dimensions										
			D ₁	D ₂	H	L ₁	L ₂	L ₃	L ₄	W	X	Y	Z
EM4016-4E	40	16	86	128	96	166	140.5	7.5	18	106	11	17.5	11
EM4020-6E	40	20	86	128	96	156	130.5	7.5	18	106	11	17.5	11
EM4025-6E	40	25	86	128	96	188	162.5	7.5	18	106	11	17.5	11
EM4030-6E	40	30	86	128	96	219	193.5	7.5	18	106	11	17.5	11
EM4516-4E	45	16	92	134	102	166	140.5	7.5	18	112	11	17.5	11
EM4520-6E	45	20	92	134	102	156	130.5	7.5	18	112	11	17.5	11
EM4525-6E	45	25	92	134	102	188	162.5	7.5	18	112	11	17.5	11
EM5016-4E	50	16	98	140	107	166	140.5	7.5	18	118	11	17.5	11
EM5020-6E	50	20	98	140	107	156	130.5	7.5	18	118	11	17.5	11
EM5025-6E	50	25	98	140	107	188	162.5	7.5	18	118	11	17.5	11
EM5030-6E	50	30	98	140	107	219	193.5	7.5	18	118	11	17.5	11
EM6316-4E	63	16	122	180	138	176	139	9	28	150	18	26	17.5

> Double nut cooling ball screws (tube-type, nut type: DFT)

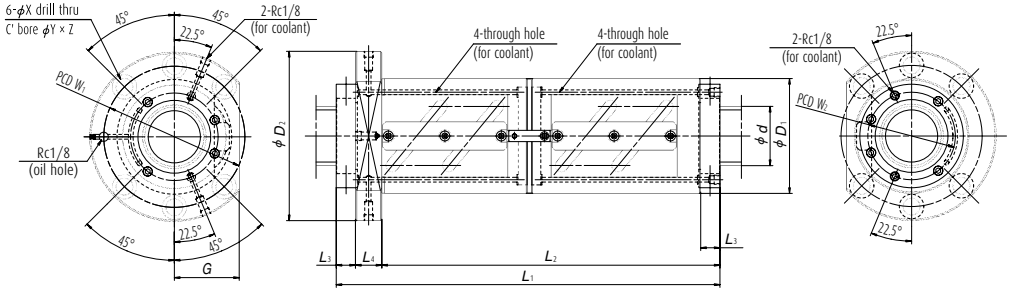

Dimensions for tube type

Unit: mm

Model No.	Shaft dia. d	Lead l	Nut dimensions											
			D ₁	D ₂	L ₁	L ₂	L ₃	L ₄	G	W ₁	X	Y	Z	W ₂
DFT5010-7.5	50	10	93	135	303	275	10	18	51	113	11	17.5	11	73
DFT5012-5	50	12	100	146	279	245	12	22	55	122	14	20	13	78
DFT5016-5	50	16	100	146	344	306	16	22	55	122	14	20	13	78
DFT5020-3	50	20	100	146	327	279	20	28	55	122	14	20	13	78
DFT5510-5	55	10	102	144	243	215	10	18	54	122	11	17.5	11	80
DFT6310-7.5	63	10	108	154	307	275	10	22	58	130	14	20	13	88
DFT6312-5	63	12	115	161	279	245	12	22	61	137	14	20	13	91
DFT6316-5	63	16	122	180	350	306	16	28	69	150	18	26	17.5	93
DFT6320-5	63	20	122	180	407	359	20	28	69	150	18	26	17.5	93
DFT8010-5	80	10	130	176	247	215	10	22	66	152	14	20	13	108
DFT8012-5	80	12	136	182	279	245	12	22	68	158	14	20	13	110
DFT8016-5	80	16	143	204	350	306	16	28	77	172	18	26	17.5	112
DFT8020-5	80	20	143	204	407	359	20	28	77	172	18	26	17.5	112
DFT10012-5	100	12	160	220	285	245	12	28	82	188	18	26	17.5	134
DFT10016-5	100	16	170	243	354	306	16	32	91	205	2	32	21.5	136
DFT10020-5	100	20	170	243	411	359	20	32	91	205	2	32	21.5	136

B-3-3.10 ND Series for Nut-Rotatable Drives

> This product is patented by NSK.

A nut rotatable ball screw is developed as a unit into which angular contact support ball bearings are integrated. It is best suited for an application that requires rotation of the ball nut while the screw shaft is fixed.

NDT model

1. Structure

Balls are installed between the assembly housing and the ball nut. The outer bearing rings are integrated into the assembly housing and thus, compact design are attained. A timing pulley (prepared by the user) is directly secured to the end face of the nut.

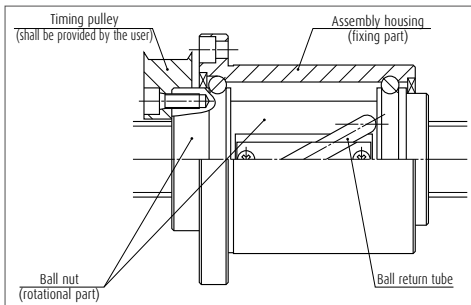


Fig. 1 Ball nut structure

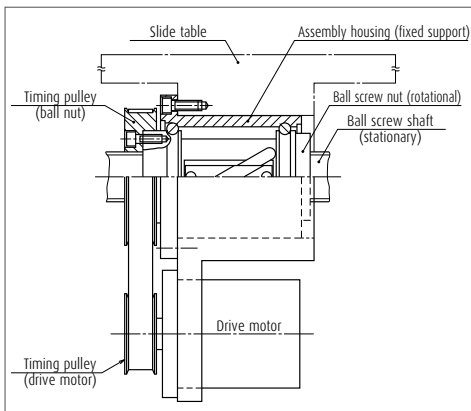


Fig. 2 Example of installation to the table

2. Features

> Multi-nut drive

Two or more nut units can be installed in a single ball screw shaft. They can be operated by respective motors.

> High operation speed

High feeding speed operation, but yet low rotational speed, is feasible by means of medium to high-helix lead ball screws.

> Easy installation

Merely install a mount housing to the table of the machine to take advantage of this multi-nut rotation system.

> Simple shaft end configuration

Shaft end configuration is simple because this unit does not need support bearings.

> Shaft diameter/lead combination

There are 10 types of "shaft diameter/lead" combinations.

Selections are: Shaft diameters -- 32, 40, 50 mm;
Leads -- 20, 25, 32, 40, 50 mm.

> Low inertia

Compared to the NSK current product (end cap ball recirculation system), rotational inertia was reduced by 16% at most.

3. Specifications

(1) Ball recirculation system

The structure of return tube recirculation system is shown below.

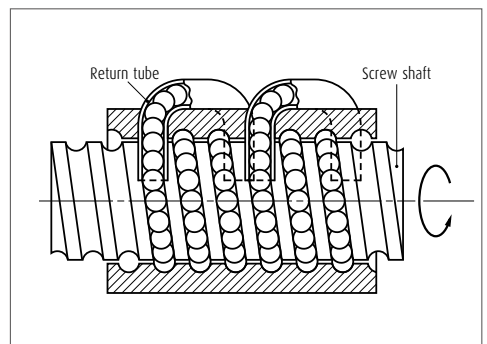


Fig. 3 Structure of ball return tube recirculation system

(2) Accuracy grade and axial play

The available standard accuracy grade and axial play are as follows. Please consult NSK for other grades.

Table 1 Axial play

Axial play code	Z	T	S
Axial play	0	0.005 mm or less	0.020 mm or less

Table 2 Combination of accuracy grades and axial play

Accuracy grade	C3	C5	Ct7
Axial play code	Z, T, S	Z, T, S	S

4. Allowable d·n value and the criterion of maximum rotational speed

Allowable d·n value and the criterion of maximum rotational speed are shown below. Please consult NSK if the rotational speed exceeds the permissible range below.

Note: The basic concept is the same as that of general ball screws. Refer to "Technical Description: Permissible Rotational Speed" (page B47).

Table 3 Allowable d·n value and the criterion of maximum rotational speed

Allowable d·n value	Standard specification	70 000 or less
Allowable d·n value	High-speed specification	100 000 or less
Criterion of maximum rotational speed	3 000 min ⁻¹	3 000 min ⁻¹

d·n value: shaft dia. d [mm] x rotational speed n [min⁻¹]

› Critical speed n_c

As shown **Fig. 4**, calculate unsupported length (mm) of L_1 , L_2 , and L_3 (assumed that the nut section is a fixed support.)

Table 4 shows the coefficients "f" of each shaft end mounting condition.

$$n_c = f \cdot \frac{d_r}{L_i^2} \times 10^7 \text{ (min}^{-1}\text{)} \quad \text{(III-1)}$$

d_r : Screw shaft root diameter (See the dimension table.)

L_i : Unsupported length (mm) (See **Fig. 4**)

f: Factor determined by the ball screw shaft end mounting condition

Table 4

Shaft end mounting condition	f
Fixed -- Fixed support	21.9
Fixed -- Simple support	15.1
Fixed -- Free support	3.4

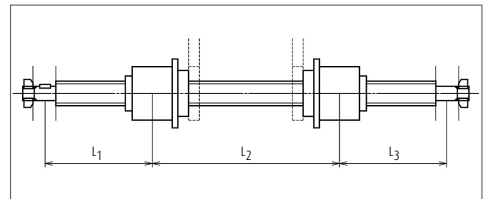


Fig. 4 Installation example

5. Design precautions

One end of the screw thread should be cut-through to the end. Also, if the nut must be removed from the screw shaft, the user should have an arbor to prevent the balls from falling out during this process. (NSK manufactures arbors on request.)

For general precautions regarding ball screws, refer to "Design Precautions" (page B83) and "Handling Precautions" (page B103).

NDD Type: (Incorporating vibration damper)

An increase in stroke length may restrict required rotational speed of a ball screw due to the issue of critical speed even if there is no problem on $d \cdot n$ limitation.

In such a case, we recommend using NDD Type nut rotatable ball screws equipped with vibration damper.

It will make it possible to operate a ball screw exceeding the critical speed, which is conventionally considered being impossible.

- Notes:** 1) However, NDD Type cannot be used exceeding the $d \cdot n$ limitation. Please consult with NSK in such a case.
2) You cannot rotate the screw shaft of NDD Series.

1. Structure

Hollow ball screw shaft has a mechanism to absorb vibration energy (vibration damper). This increases dynamic rigidity of the screw shaft and lowers vibration when exceeding the critical speed.

Construction of the ball nuts are the same as those of NDT Type.

2. Features

- › No need for measures against critical speed.

Conventionally, an increase in screw shaft diameter or use of intermediate support is the measure against the issue of critical speed. NDD Type ball screw will make these measures needless.

- › Dimensional interchangeability with NDT Type ball screws

The vibration damper is set inside a ball screw shaft, and therefore, there is no difference with existing series in regards to external dimensions. The ball nuts of NDD Type are interchangeable with those of NDT Type.

- › Others

Benefits in multiple ball nut on a screw shaft, high feeding speed for long stroke, easy in installation, and low inertia of the ball nuts are the same as NDT Type.

3. Specification

Recirculation system, accuracy grade, axial play and preload system are the same as NDT Type.

4. Design precautions

They are the same as NDT Type.

5. Permissible rotational speed

The $d \cdot n$ value is the same as NDT Type.

You don't need to consider the critical speed.

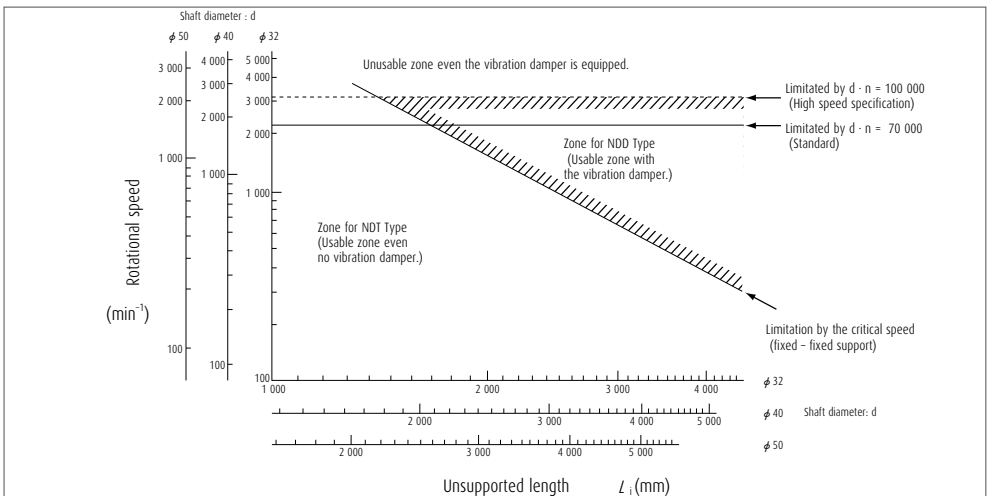


Fig. 5 Compartmentalization between NDT and NDD types to rotational speed and unsupported length



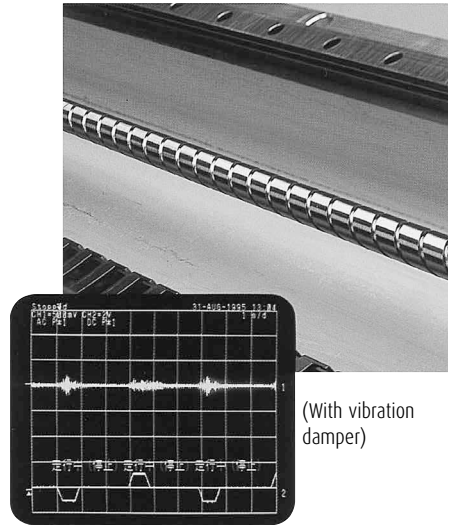


Fig. 6 Vibration of screw shaft when nut is rotating

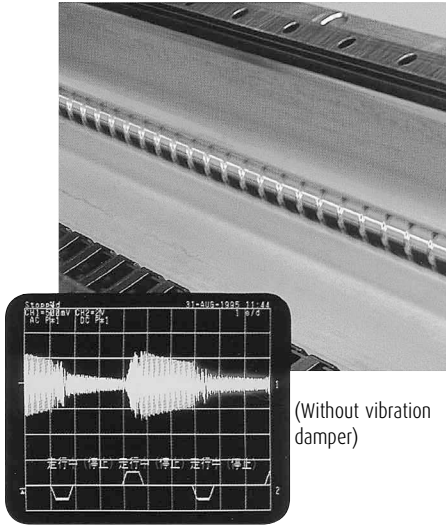

(Without vibration damper)

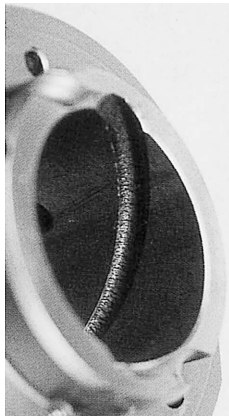

(With vibration damper)

Fig. 7 Effect of vibration damper (results of endurance test)

Calculation example of permissible rotational speed

[Calculation example]

Assume a system which moves two nuts on a shaft as shown below.

Does this system operate appropriately if: both ends of the ball screw (shaft diameter 40 mm/lead 40 mm) are fixed, and the travel speed is at 60 m/min?

[Answer]

The rotational speed n (min^{-1}) when the lead of the ball screw is 40 mm, and the travel speed is at 60 m/min is:

$$n = \frac{60 \times 10^3}{40} = 1\,500 \text{ (min}^{-1}\text{)}$$

> Calculate $d \cdot n$ value

As the $d \cdot n$ value of standard specification is 7 000, therefore, the permissible rotational speed is;

$$n \leq \frac{70\,000}{40} = 1\,750 \text{ (min}^{-1}\text{)}$$

> Calculate critical speed

The maximum unsupported length comes between Nut A and B.

$$L_2 = 3\,300 \text{ (mm)}$$

$$f = 21.9 \text{ (Fixed-Fixed)}$$

$$\text{Root diameter: } d_r = 35.1 \text{ (mm)}$$

Therefore, the permissible rotational speed is;

$$n \leq \frac{21.9 \times 35.1}{3\,300^2} \times 10^7 = 706 \text{ (min}^{-1}\text{)}$$

The calculation indicates that the $d \cdot n$ value is at the safe level. But the critical speed exceeds the limitation. However, with a vibration damper, the system can be operated at 1 500 min^{-1} .


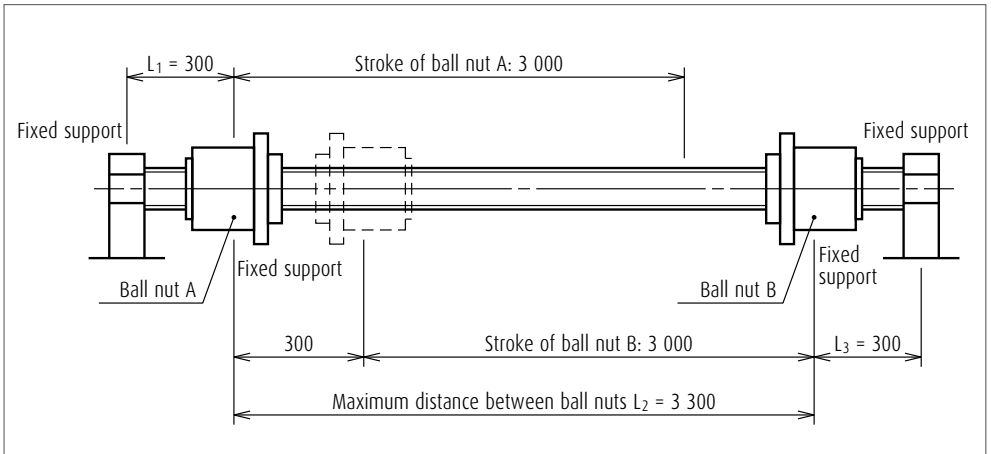


Fig. 8 Calculation example of permissible rotational speed


Structure of reference number

The followings describe the structure of "Reference number for ball screw".

> Reference number for ball screw

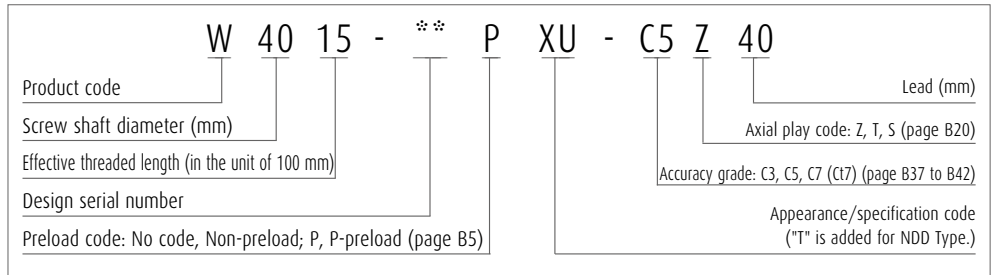

ND Series for nut-rotatable drives

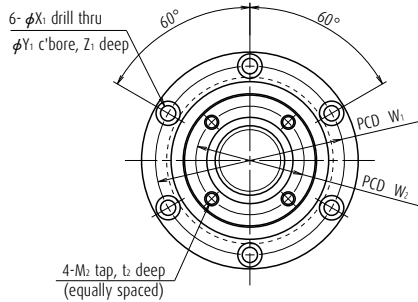

Model No.	Shaft dia. d	Lead l	Ball dia. D _w	Ball circle dia. d _m	Root dia. d _r	Effective turns of balls Turns × Circuits	Basic load rating (N)		Moment of inertia, ball nut J (kg·cm ²)	Ball nut mass W (kg)
							Dynamic C _a	Static C _{0a}		
NDT 3220-2.5	32	20	4.762	33.25	28.3	2.5×1	20 700	41 900	6.2	2.9
NDD 3220-2.5	32	20	4.762	33.25	28.3	2.5×1	20 700	41 900	6.2	2.9
NDT 3225-2.5	32	25	4.762	33.25	28.3	2.5×1	20 400	42 200	6.7	3.2
NDD 3225-2.5	32	25	4.762	33.25	28.3	2.5×1	20 400	42 200	6.7	3.2
NDT 3232-1.5	32	32	4.762	33.25	28.3	1.5×1	13 300	25 200	6.2	2.9
NDD 3232-1.5	32	32	4.762	33.25	28.3	1.5×1	13 300	25 200	6.2	2.9
NDT 3232-3	32	32	4.762	33.25	28.3	1.5×2	21 700	45 300	6.2	2.9
NDD 3232-3	32	32	4.762	33.25	28.3	1.5×2	21 700	45 300	6.2	2.9
NDT 4025-2.5	40	25	6.35	41.75	35.1	2.5×1	34 100	70 100	19.3	6.0
NDD 4025-2.5	40	25	6.35	41.75	35.1	2.5×1	34 100	70 100	19.3	6.0
NDT 4032-1.5	40	32	6.35	41.75	35.1	1.5×1	21 600	41 300	18.0	5.5
NDD 4032-1.5	40	32	6.35	41.75	35.1	1.5×1	21 600	41 300	18.0	5.5
NDT 4032-3	40	32	6.35	41.75	35.1	1.5×2	35 400	74 400	18.0	5.5
NDD 4032-3	40	32	6.35	41.75	35.1	1.5×2	35 400	74 400	18.0	5.5
NDT 4040-1.5	40	40	6.35	41.75	35.1	1.5×1	21 200	42 000	19.2	6.0
NDD 4040-1.5	40	40	6.35	41.75	35.1	1.5×1	21 200	42 000	19.2	6.0
NDT 4040-3	40	40	6.35	41.75	35.1	1.5×2	34 700	75 600	19.2	6.0
NDD 4040-3	40	40	6.35	41.75	35.1	1.5×2	34 700	75 600	19.2	6.0
NDT 5025-2.5	50	25	7.938	52.25	44.0	2.5×1	51 300	110 000	45.7	8.5
NDD 5025-2.5	50	25	7.938	52.25	44.0	2.5×1	51 300	110 000	45.7	8.5
NDT 5032-2.5	50	32	7.938	52.25	44.0	2.5×1	50 900	109 000	48.9	9.4
NDD 5032-2.5	50	32	7.938	52.25	44.0	2.5×1	50 900	109 000	48.9	9.4
NDT 5040-1.5	50	40	7.938	52.25	44.0	1.5×1	32 300	64 600	45.5	8.5
NDD 5040-1.5	50	40	7.938	52.25	44.0	1.5×1	32 300	64 600	45.5	8.5
NDT 5040-3	50	40	7.938	52.25	44.0	1.5×2	52 800	116 000	45.5	8.5
NDD 5040-3	50	40	7.938	52.25	44.0	1.5×2	52 800	116 000	45.5	8.5
NDT 5050-1.5	50	50	7.938	52.25	44.0	1.5×1	31 700	65 700	48.7	9.4
NDD 5050-1.5	50	50	7.938	52.25	44.0	1.5×1	31 700	65 700	48.7	9.4
NDT 5050-3	50	50	7.938	52.25	44.0	1.5×2	51 800	118 000	48.7	9.4
NDD 5050-3	50	50	7.938	52.25	44.0	1.5×2	51 800	118 000	48.7	9.4

Notes

1. The right hand screw is the standard. Consult NSK for the left hand screws.
2. Seals are standard equipment.

B-3-3.11 Σ Series for Robots

1. Structure

Σ Series (NSK's Robotte) is a ball screw with a high-performance spline. It is ideal for various actuators such as the vertical axis of SCALA type robot.

A ball screw groove and a ball spline groove are made in one shaft, combining the ball screw and the ball spline.

Mount housing, nuts, and support bearings are combined into a single unit.

Timing pulley (prepared by the user) is directly secured at the end face of the nut.

> High functions

A single shaft has both feeding mechanism and guide functions. This allows the shaft ends to move back and forth (linear motion), as well as to rotate.

> Compact and lightweight

A ball screw nut and a spline nut are placed on one shaft, and support bearings are also combined to the unit. This allows compact and high-precision design. Hollow shaft is standard to reduce weight. The hollow can be used for wiring and piping. Other components are also designed to be light in weight.

> Low inertia

Because of return tube type ball nut of which outside diameter is decreased, low inertia design is enabled. It reduces the inertia by 19% of conventional products.

2. Functions

As shown in Fig. 1, the ball screw nut and a spline nut are rotated independently to control rotation value. Thereby the shaft can move in any direction -- linear and rotational.

Table 1 shows the relationship between power input and output.

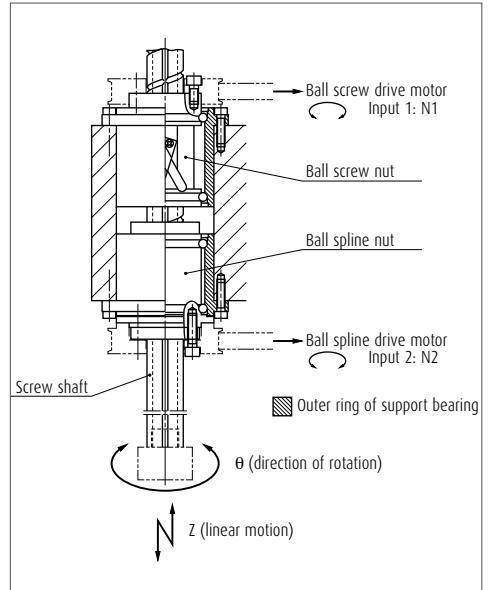


Fig. 1 Example structure of Z axis plus θ axis actuator

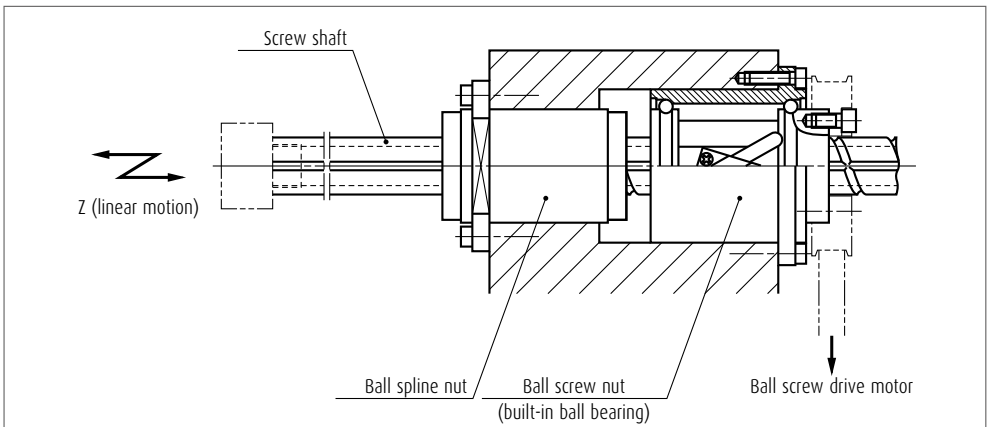


Fig. 2 Example structure of single Z axis unit

Table 1 Power input and output of Σ Series

Shaft movement (output)		Input		
Z (up-down movement) (mm/min)	θ (rotational movement) (min ⁻¹)	① Ball screw (min ⁻¹)	② Spline (min ⁻¹)	Notes
Up, down N1-I	Stop 0	Rotate N1	Stop 0	-
Stop 0	Rotate N2	Rotate N1	Rotate N2	N1 = N2
Up, down N2-I	Rotate N2	Stop 0	Rotate N2	-
Up, down N1-N2 -I	Rotate N2	Rotate N1	Rotate N2	N1≠N2

3. Specifications

(1) Ball recirculation system

A structure of return tube recirculation system is shown below.

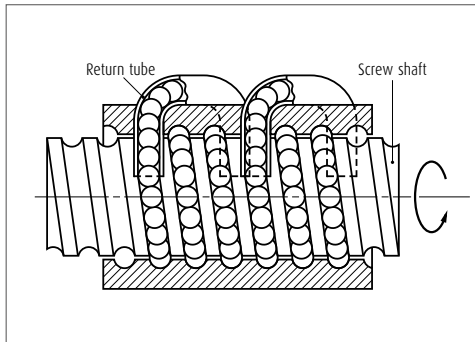


Fig. 3 Structure of return tube recirculation system

(2) Accuracy grade and axial play

The available standard accuracy grade and axial play for ball screw are as follows. The axial play for spline is 0 mm (preloaded product). Please consult NSK for other grades.

Table 2 Accuracy grade and axial play

Accuracy grade	C3, C5, Ct7
Axial play	Z, 0 mm (preloaded) T, 0.005 mm or less; S, 0.020 mm or less

(2) Allowable d·n value and the criterion of maximum rotational speed

Allowable d·n value and the criterion of maximum rotational speed are shown below. Please consult NSK if the rotational speed exceeds the permissible range below.

Permissible d·n value: 70 000 or less

Criterion of maximum rotational speed: 3 000 min⁻¹

Note: Please also review the critical speed.

For details, see "Technical Description: Permissible Rotational Speed" (page B47).

(4) Application

SCALA type and Cartesian type industrial robots, semiconductor manufacturing machines, machines for automobile production facilities, material handling systems, other Z (vertical) axis and Z axis plus θ (rotation) axis actuators.

4. Design precautions

The overall length L can be extended to 25 times of the shaft diameter.

To remove the spline nut from the shaft for assembling, use an arbor as shown in Fig. 4. (page B584). Avoid removing ball screw nut as much as possible. Refer to root diameter in the dimension table for arbor diameter. (NSK manufactures the arbors on request.)

For general precautions regarding ball screws, refer to "Precautions in Designing" (page B83) and "Precautions in Handling" (page B103).

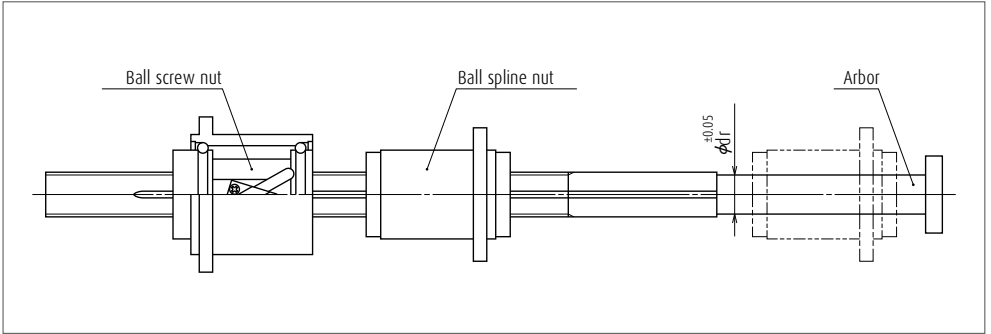


Fig. 4 Removing spline nut

5. Product categories

Σ Series (NSK's Robotte) is four models with different moving functions and performances are available. Select a standard model if rigidity is important. A compact system is recommended for reducing the weight of machine.

Table 3 Σ Series product categories

Model	Appearance	Size	Structure (Movement)
Σ		Standard	Z+ θ Unit
ΣZ		Standard	Z Unit
ΣC		Compact	Z+ θ Unit
ΣCZ		Compact	Z Unit

6. Load rating and life

The relationship between load rating of the ball spline section and life is the same as in other NSK liner motion products. However, various loads that apply to Robotte must be taken into account. For example, the following factors must be considered in calculating life when the product is used as shown in Fig. 5.

F_a : Load that is generated when the shaft moves in up-down direction. (Load is applied to the ball screw nut.)

T : Torque that is generated to the shaft by F_a .

F_r : Load that is generated by moment of inertia of the shaft and the work attached to Robotte as well as by centrifugal force when the arm rotates.

θ : Direction of F_r load that changes by shaft rotation.

NSK has life calculation programs which take these factors into account. Please ask NSK for more details.

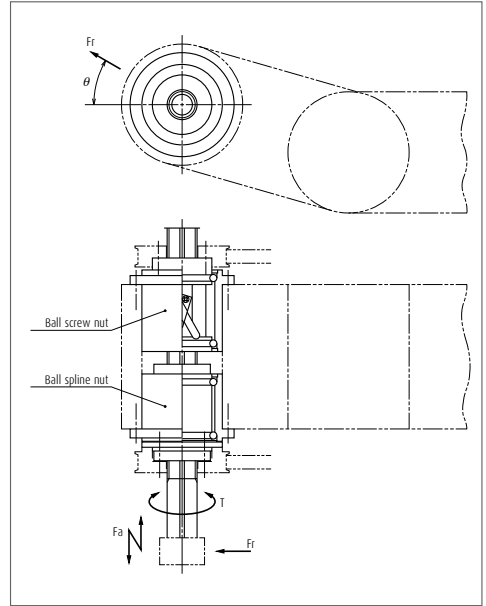


Fig. 5 Example structure of Z axis plus θ axis actuator



7. Structure of reference number

The following describes the structure of "Reference number for ball screw".



> Reference number for ball screw

	PW	25	02	-	**	P	T	U	-	C5	Z	20	
Product code	Screw shaft diameter (mm)		Effective threaded length (in the unit of 100 mm)	Design serial number	Preload code: No code, Non-preload; P, P-preload (page B5)								Lead (mm)
													Axial play code: Z, T, S (page B20)
													Accuracy grade: C3, C5, C7 (Ct7) (page B37 to B42)
													Use support unit
													Hollow shaft ball screw specification

Σ Series for Robots

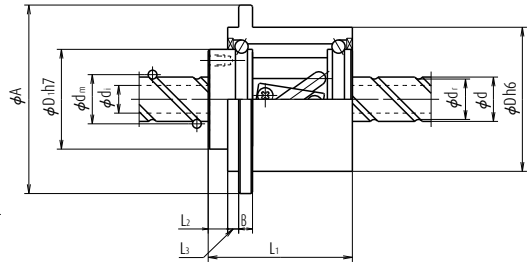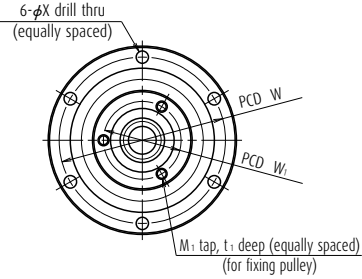



Model No.	Shaft dia. d	Lead l	Ball dia. D _w	Ball circle dia. d _m	Root dia. d _r	Screw shaft hollow dia. d _i	Ball screw nut														
							Basic load rating (N)		Dimensions										Moment of inertia (kg·cm ²)		
							Dynamic C _a	Static C _{0a}	D	A	B	L ₁	L ₂	L ₃	M ₁	t ₁	W ₁	D ₁		W	X
Σ1610	16	10	3.175	16.75	13.4	(8)	5 610	8 300	48	64	5	47	7	4	3-M4	6	28	35	56	4.5	0.41
Σ1632	16	32	3.175	16.75	13.4	(8)	3 240	4 680	48	64	5	52	7	4	3-M4	6	28	35	56	4.5	0.44
Σ2010	20	10	3.175	20.75	17.4	(14)	9 560	17 300	54	70	6	57	8	4	3-M4	6	32	40	62	4.5	0.64
Σ2020	20	20	3.175	20.75	17.4	(14)	6 100	10 500	54	70	6	63	8	4	3-M4	6	32	40	62	4.5	0.65
Σ2040	20	40	3.175	20.75	17.4	(14)	3 640	6 310	54	70	6	57	8	4	3-M4	6	32	40	62	4.5	0.64
Σ2510	25	10	3.175	25.75	22.4	(18)	10 700	22 000	58	74	6	57	8	4	3-M4	6	38	45	66	4.5	1.10
Σ2520	25	20	3.175	25.75	22.4	(18)	6 860	13 100	58	74	6	63	8	4	3-M4	6	38	45	66	4.5	1.18
Σ2525	25	25	3.175	25.75	22.4	(18)	6 720	13 300	58	74	6	72	8	4	3-M4	6	38	45	66	4.5	1.30
Σ2550	25	50	3.175	25.75	22.4	(18)	4 040	7 440	58	74	6	64	8	4	3-M4	6	38	45	66	4.5	1.20
Σ3220	32	20	3.175	32.75	29.4	(25)	7 710	16 900	70	95	8	70	10	6	3-M5	10	44	53	82	6.6	2.60
Σ3232	32	32	3.175	32.75	29.4	(25)	7 590	16 700	70	95	8	91	10	6	3-M5	10	44	53	82	6.6	3.15
Σ4020	40	20	3.969	41.0	36.9	(30)	11 600	26 500	85	110	8	73	10	6	4-M5	10	58	67	96	6.6	5.96
Σ4040	40	40	3.969	41.0	36.9	(30)	11 300	26 200	85	110	8	107	10	6	4-M5	10	58	67	96	6.6	7.85
Σ4520	45	20	3.969	46.0	41.9	(35)	12 000	30 000	90	115	8	73	10	6	4-M5	10	63	72	101	6.6	7.73
Σ4540	45	40	3.969	46.0	41.9	(35)	11 800	29 700	90	115	8	107	10	6	4-M5	10	63	72	101	6.6	10.3

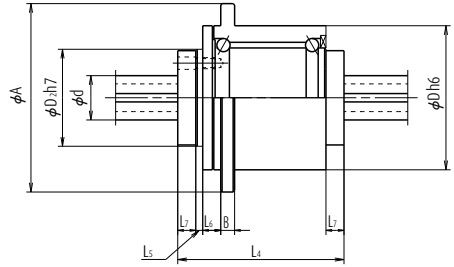

Unit: mm



Mass (kg)	Ball spline nut																				Moment of inertia (kg-cm ²)	Mass (kg)
	Basic load rating (N)		Basic torque (N-m)		Dimensions																	
	Dynamic C_r	Static C_{0r}	Dynamic C_t	Static C_{0t}	D	A	B	L ₄	L ₅	L ₆	L ₇	Y	T	M ₂	t ₂	W ₂	D ₂	W	X			
0.50	5 530	7 270	61.5	91.3	48	64	5	60	2.5	6.5	6.5	4.5	6.5	M4	7	25	35	56	4.5	0.71	0.63	
0.55	5 890	8 000	65.5	100	48	64	5	60	2.5	6.5	6.5	4.5	6.5	M4	7	25	35	56	4.5	0.71	0.63	
0.74	6 260	8 720	86.3	135	54	70	6	65	2.5	6.5	6.5	5.5	6.5	M5	8	30.5	40	62	4.5	1.15	0.87	
0.81	6 610	9 450	91.1	145	54	70	6	65	2.5	6.5	6.5	5.5	6.5	M5	8	30.5	40	62	4.5	1.15	0.87	
0.74	6 610	9 450	91.1	145	54	70	6	65	2.5	6.5	6.5	5.5	6.5	M5	8	30.5	40	62	4.5	1.15	0.87	
0.81	6 630	9 450	115	185	58	74	6	70	2.5	6.5	6.5	5.5	6.5	M5	8	35.5	45	66	4.5	1.88	1.03	
0.88	7 290	10 900	125	210	58	74	6	70	2.5	6.5	6.5	5.5	6.5	M5	8	35.5	45	66	4.5	1.88	1.03	
1.00	7 290	10 900	125	210	58	74	6	70	2.5	6.5	6.5	5.5	6.5	M5	8	35.5	45	66	4.5	1.88	1.03	
0.91	7 290	10 900	125	210	58	74	6	70	2.5	6.5	6.5	5.5	6.5	M5	8	35.5	45	66	4.5	1.88	1.03	
1.46	7 630	11 600	165	285	70	95	8	75	2.5	7.5	6.5	5.5	6.5	M5	8	42	50	82	6.6	3.80	1.62	
1.83	7 950	12 400	175	305	70	95	8	75	2.5	7.5	6.5	5.5	6.5	M5	8	42	50	82	6.6	3.80	1.62	
2.02	10 600	14 800	290	455	85	110	8	80	4	7.5	8	5.5	8	M5	8	55	65	96	6.6	9.74	2.38	
2.85	11 200	15 900	305	490	85	110	8	80	4	7.5	8	5.5	8	M5	8	55	65	96	6.6	9.74	2.38	
2.17	11 200	15 900	340	550	90	115	8	85	4	7.5	8	5.5	8	M5	8	60	70	101	6.6	12.5	2.56	
3.06	11 700	17 000	360	590	90	115	8	85	4	7.5	8	5.5	8	M5	8	60	70	101	6.6	12.5	2.56	

Σ Series for Robots

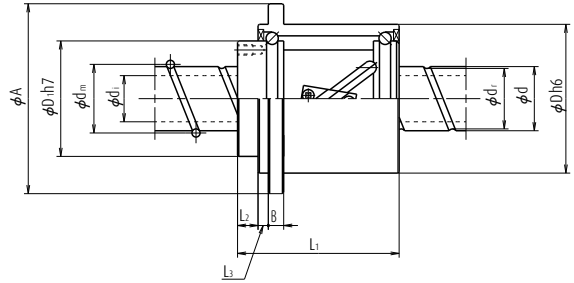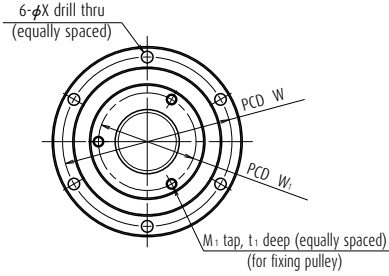

Model No.	Shaft dia. d	Lead l	Ball dia. D_w	Ball circle dia. d_m	Root dia. d_r	Screw shaft hollow d_i	Ball screw nut													
							Basic load rating (N)		Dimensions											
							Dynamic C_a	Static C_{0a}	D	A	B	L_1	L_2	L_3	M_1	t_1	W_1	D_1	W	X
ΣZ1610	16	10	3.175	16.75	13.4	(8)	5 610	8 300	48	64	5	47	7	4	3-M4	6	28	35	56	4.5
ΣZ1632	16	32	3.175	16.75	13.4	(8)	3 240	4 680	48	64	5	52	7	4	3-M4	6	28	35	56	4.5
ΣZ2010	20	10	3.175	20.75	17.4	(14)	9 560	17 300	54	70	6	57	8	4	3-M4	6	32	40	62	4.5
ΣZ2020	20	20	3.175	20.75	17.4	(14)	6 100	10 500	54	70	6	63	8	4	3-M4	6	32	40	62	4.5
ΣZ2040	20	40	3.175	20.75	17.4	(14)	3 640	6 310	54	70	6	57	8	4	3-M4	6	32	40	62	4.5
ΣZ2510	25	10	3.175	25.75	22.4	(18)	10 700	22 000	58	74	6	57	8	4	3-M4	6	38	45	66	4.5
ΣZ2520	25	20	3.175	25.75	22.4	(18)	6 860	13 100	58	74	6	63	8	4	3-M4	6	38	45	66	4.5
ΣZ2525	25	25	3.175	25.75	22.4	(18)	6 720	13 300	58	74	6	72	8	4	3-M4	6	38	45	66	4.5
ΣZ2550	25	50	3.175	25.75	22.4	(18)	4 040	7 440	58	74	6	64	8	4	3-M4	6	38	45	66	4.5
ΣZ3220	32	20	3.175	32.75	29.4	(25)	7 710	16 900	70	95	8	70	10	6	3-M5	10	44	53	82	6.6
ΣZ3232	32	32	3.175	32.75	29.4	(25)	7 590	16 700	70	95	8	91	10	6	3-M5	10	44	53	82	6.6
ΣZ4020	40	20	3.969	41.0	36.9	(30)	11 600	26 500	85	110	8	73	10	6	4-M5	10	58	67	96	6.6
ΣZ4040	40	40	3.969	41.0	36.9	(30)	11 300	26 200	85	110	8	107	10	6	4-M5	10	58	67	96	6.6
ΣZ4520	45	20	3.969	46.0	41.9	(35)	12 000	30 000	90	115	8	73	10	6	4-M5	10	63	72	101	6.6
ΣZ4540	45	40	3.969	46.0	41.9	(35)	11 800	29 700	90	115	8	107	10	6	4-M5	10	63	72	101	6.6



Σ Z Type

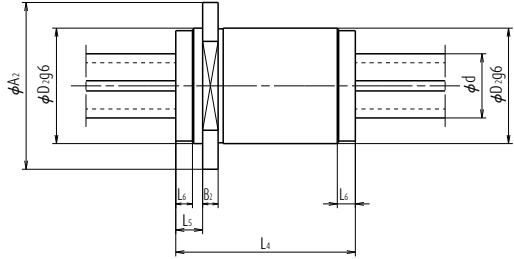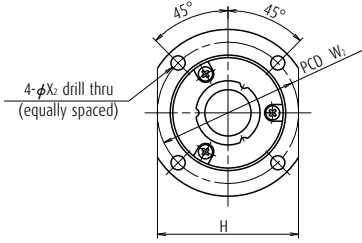

Unit: mm



		Ball spline nut													
Moment of inertia (kg-cm ²)	Mass (kg)	Basic load rating (N)		Basic torque (N-m)		Dimensions									Mass (kg)
		Dynamic C _t	Static C _{0r}	Dynamic C _t	Static C _{0t}	D ₂	A ₂	B ₂	L ₄	L ₅	L ₆	H	W ₂	X	
0.41	0.50	5 530	7 270	61.5	91.3	35	55	6	60	10.5	6.5	45	4.5	4.5	0.35
0.44	0.55	5 890	8 000	65.5	100	35	55	6	60	10.5	6.5	45	4.5	4.5	0.35
0.64	0.74	6 260	8 720	86.3	135	40	60	6	65	10.5	6.5	50	5.5	5.5	0.46
0.65	0.81	6 610	9 450	91.1	145	40	60	6	65	10.5	6.5	50	5.5	5.5	0.46
0.64	0.74	6 610	9 450	91.1	145	40	60	6	65	10.5	6.5	50	5.5	5.5	0.46
1.10	0.81	6 630	9 450	115	185	45	65	6	70	10.5	6.5	55	5.5	5.5	0.57
1.18	0.88	7 290	10 900	125	210	45	65	6	70	10.5	6.5	55	5.5	5.5	0.57
1.30	1.00	7 290	10 900	125	210	45	65	6	70	10.5	6.5	55	5.5	5.5	0.57
1.20	0.91	7 290	10 900	125	210	45	65	6	70	10.5	6.5	55	5.5	5.5	0.57
2.60	1.46	7 630	11 600	165	285	50	70	6	75	10.5	6.5	60	6.6	6.6	0.64
3.15	1.83	7 950	12 400	175	305	50	70	6	75	10.5	6.5	60	6.6	6.6	0.64
5.96	2.02	10 600	14 800	290	455	65	88	8	80	12	8	76	7.6	7.6	1.20
7.85	2.85	11 200	15 900	305	490	65	88	8	80	12	8	76	7.6	7.6	1.20
7.73	2.17	11 200	15 900	340	550	70	93	8	85	12	8	81	8.1	8.1	1.39
10.3	3.06	11 700	17 000	360	590	70	93	8	85	12	8	81	8.1	8.1	1.39

Σ Series for Robots

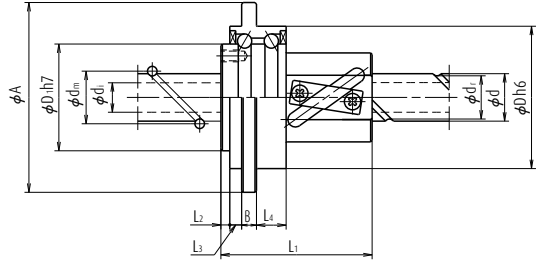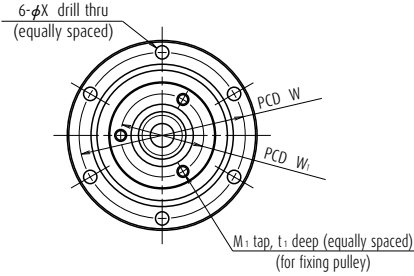

Model No.	Shaft dia. d	Lead l	Ball dia. D _w	Ball circle dia. d _m	Root dia. d _r	Screw shaft hollow d _i	Ball screw nut														Moment of inertia (kg·cm ²)	
							Basic load rating (N)		Dimensions										X			
							Dynamic C _a	Static C _{0a}	D	A	B	L ₁	L ₂	L ₃	L ₄	M ₁	t ₁	W ₁		D ₁		W
ΣC1610	16	10	3.175	16.75	13.4	(8)	5 670	8 300	48	64	5	46	3	4	10	3-M4	6	28	35	56	4.5	0.40
ΣC1632	16	32	3.175	16.75	13.4	(8)	3 240	4 680	48	64	5	51	3	4	10	3-M4	6	28	35	56	4.5	0.43
ΣC2010	20	10	3.175	20.75	17.4	(14)	9 560	17 300	54	70	6	56	4	4	10	3-M4	6	32	40	62	4.5	0.63
ΣC2020	20	20	3.175	20.75	17.4	(14)	6 100	10 500	54	70	6	63	4	4	10	3-M4	6	32	40	62	4.5	0.65
ΣC2040	20	40	3.175	20.75	17.4	(14)	3 640	6 310	54	70	6	56	4	4	10	3-M4	6	32	40	62	4.5	0.63
ΣC2510	25	10	3.175	25.75	22.4	(18)	10 700	22 000	58	74	6	56	4	4	10	3-M4	6	38	45	66	4.5	1.04
ΣC2520	25	20	3.175	25.75	22.4	(18)	6 860	13 100	58	74	6	63	4	4	10	3-M4	6	38	45	66	4.5	1.13
ΣC2525	25	25	3.175	25.75	22.4	(18)	6 720	13 300	58	74	6	71	4	4	10	3-M4	6	38	45	66	4.5	1.24
ΣC2550	25	50	3.175	25.75	22.4	(18)	4 040	7 440	58	74	6	63	4	4	10	3-M4	6	38	45	66	4.5	1.13



Σ C Type

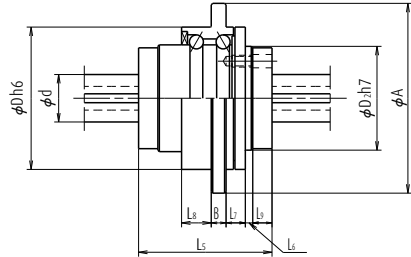

Unit: mm



Ball spline nut																						
Mass (kg)	Basic load rating (N)		Basic torque (N-m)		Dimensions															Moment of inertia (kg-cm ²)	Mass (kg)	
	Dynamic C _t	Static C _{0r}	Dynamic C _t	Static C _{0t}	D	A	B	L ₅	L ₆	L ₇	L ₈	L ₉	Y	T	M ₂	t ₃	W ₂	D ₂	W			X
0.41	4 300	5 090	47.9	63.9	48	64	5	45	2.5	6.5	10	6.5	4.5	6.5	M4	7	25	35	56	4.5	0.52	0.42
0.43	4 300	5 090	47.9	63.9	48	64	5	45	2.5	6.5	10	6.5	4.5	6.5	M4	7	25	35	56	4.5	0.52	0.42
0.53	4 730	5 820	65.1	90.5	54	70	6	50	2.5	6.5	10	6.5	5.5	6.5	M5	8	30.5	40	62	4.5	0.86	0.56
0.56	5 110	6 540	70.5	100	54	70	6	50	2.5	6.5	10	6.5	5.5	6.5	M5	8	30.5	40	62	4.5	0.86	0.56
0.53	5 110	6 540	70.5	100	54	70	6	50	2.5	6.5	10	6.5	5.5	6.5	M5	8	30.5	40	62	4.5	0.86	0.56
0.60	5 130	6 540	87.8	125	58	74	6	55	2.5	6.5	10	6.5	5.5	6.5	M5	8	35.5	45	66	4.5	1.44	0.67
0.64	5 870	8 000	100	155	58	74	6	55	2.5	6.5	10	6.5	5.5	6.5	M5	8	35.5	45	66	4.5	1.44	0.67
0.69	5 870	8 000	100	155	58	74	6	55	2.5	6.5	10	6.5	5.5	6.5	M5	8	35.5	45	66	4.5	1.44	0.67
0.64	5 870	8 000	100	155	58	74	6	55	2.5	6.5	10	6.5	5.5	6.5	M5	8	35.5	45	66	4.5	1.44	0.67

Σ Series for Robots

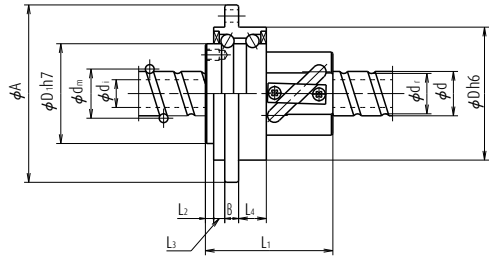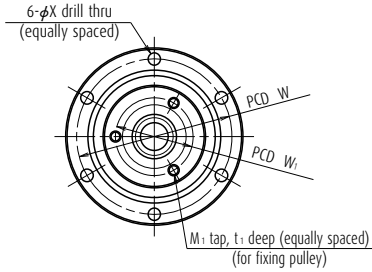

Model No.	Shaft dia. d	Lead l	Ball dia. D _w	Ball circle dia. d _m	Root dia. d _r	Screw shaft hollow dia. d _i	Ball screw nut														
							Basic load rating (N)		Dimensions												
							Dynamic C _a	Static C _{0a}	D	A	B	L ₁	L ₂	L ₃	L ₄	M ₁	t ₁	W ₁	D ₁	W	X
ΣCZ1610	16	10	3.175	16.75	13.4	(8)	5 670	8 300	48	64	5	46	3	4	10	3-M4	6	28	35	56	4.5
ΣCZ1632	16	32	3.175	16.75	13.4	(8)	3 240	4 680	48	64	5	51	3	4	10	3-M4	6	28	35	56	4.5
ΣCZ2010	20	10	3.175	20.75	17.4	(14)	9 560	17 300	54	70	6	56	4	4	10	3-M4	6	32	40	62	4.5
ΣCZ2020	20	20	3.175	20.75	17.4	(14)	6 100	10 500	54	70	6	63	4	4	10	3-M4	6	32	40	62	4.5
ΣCZ2040	20	40	3.175	20.75	17.4	(14)	3 640	6 310	54	70	6	56	4	4	10	3-M4	6	32	40	62	4.5
ΣCZ2510	25	10	3.175	25.75	22.4	(18)	10 700	22 000	58	74	6	56	4	4	10	3-M4	6	38	45	66	4.5
ΣCZ2520	25	20	3.175	25.75	22.4	(18)	6 860	13 100	58	74	6	63	4	4	10	3-M4	6	38	45	66	4.5
ΣCZ2525	25	25	3.175	25.75	22.4	(18)	6 720	13 300	58	74	6	71	4	4	10	3-M4	6	38	45	66	4.5
ΣCZ2550	25	50	3.175	25.75	22.4	(18)	4 040	7 440	58	74	6	63	4	4	10	3-M4	6	38	45	66	4.5

Σ CZ Type

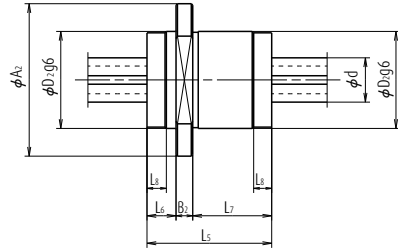

Unit: mm

		Ball spline nut															
Moment of inertia (kg-cm ²)	Mass (kg)	Basic load rating (N)		Basic torque (N-m)		Dimensions										Mass (kg)	
		Dynamic C _r	Static C _{0r}	Dynamic C _t	Static C _{0t}	D ₂	A ₂	B ₂	L ₅	L ₆	L ₇	L ₈	H	W ₂	X ₂		
0.40	0.41	4 300	5 090	47.9	63.9	35	55	6	45	10.5	28.5	6.5	45	45	4.5	0.26	
0.43	0.43	4 300	5 090	47.9	63.9	35	55	6	45	10.5	28.5	6.5	45	45	4.5	0.26	
0.63	0.53	4 730	5 820	65.1	90.5	40	60	6	50	10.5	33.5	6.5	50	50	5.5	0.35	
0.65	0.56	5 110	6 540	70.5	100	40	60	6	50	10.5	33.5	6.5	50	50	5.5	0.35	
0.63	0.53	5 110	6 540	70.5	100	40	60	6	50	10.5	33.5	6.5	50	50	5.5	0.35	
1.04	0.60	5 130	6 540	87.8	125	45	65	6	55	10.5	38.5	6.5	55	55	5.5	0.44	
1.13	0.64	5 870	8 000	100	155	45	65	6	55	10.5	38.5	6.5	55	55	5.5	0.44	
1.24	0.69	5 870	8 000	100	155	45	65	6	55	10.5	38.5	6.5	55	55	5.5	0.44	
1.13	0.64	5 870	8 000	100	155	45	65	6	55	10.5	38.5	6.5	55	55	5.5	0.44	

B-3-3.12 Ball Screw with L1 Seal designed for Minimal Grease Splatter [Patent application submitted]

1. Features

- Substantial reduction in grease splatter

The amount of grease splatter for the L1 seal is reduced to 1/10 compared to NSK standard seal to contribute to maintain equipment and working environment clean.

- Adoption of non-contact type seal

Seal torque is avoided by optimizing the seal shape. The current seals with relatively small splatter are all contact type seals, but the L1 seal is the first non-contact type seal to achieve low grease splatter.

- Seal cover is equipped as standard.

To prevent grease from dripping, a seal cover is equipped as standard.

- Later fitting to NSK standard ball screws is available.

NSK ensures quick delivery because later fitting to “Compact FA Series” and “High Speed SS Series” is possible.

2. Specifications

(1) Applicable ball screw

Shaft diameter : 15 to 23 mm

Lead : 5 mm min.



Lubricant : NSK standard grease, NSK clean grease, grease for general food

Environment : Ambient temperature

Short lead time : Can be fitted to NSK standard stock ball screws.

Compact FA series (dia.15 to 25 mm)

High speed SS series (dia.32 mm)

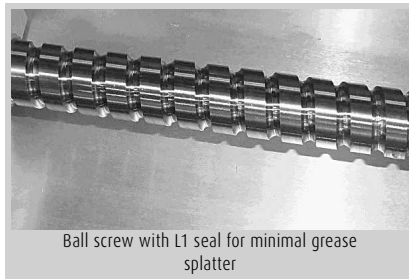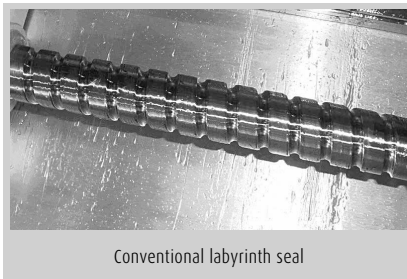

BSS2010-3E
AS2 grease
3 000min⁻¹

Fig. 1 Comparison of grease splatter from the shaft





Fig. 2 Results of grease splattering test

(2) Design-related precautions

When designing the screw shaft end, the one end shall be cut-through. For general precautions regarding ball screws, refer to “Design Precautions” (page B83) and “Handling Precautions” (page B103).

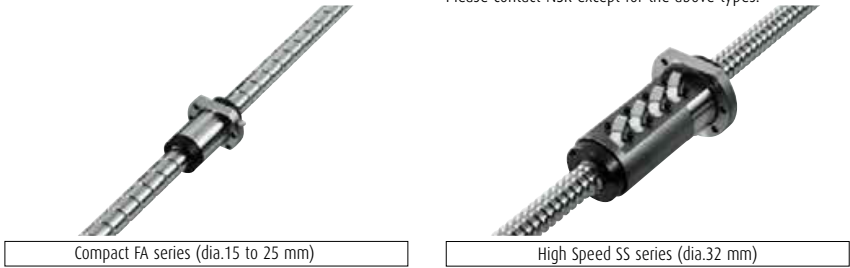


Fig. 3 Appearance

3. Example of reference number

A structure of “Reference number for ball screw” is as follows.

*“L1” is added at the end of “nut model code” and “Specifications number”.

- › Reference number for ball screw

W2005 - * * * * L1 - C5 Z10

NSK L1 equipped type ball screw code

4. Precautions for use

- › Maximum temperatures are as follows.
Compact FA series with L1 seal: 80 °C (at outside diameter of ball nut)
High Speed SS series with L1 seal: 60 °C (at outside diameter of ball nut)
- › Do not use the product in environments where foreign matter is present.
- › Please note that L1 seal reduces grease splatter but cannot reduce it to zero.


The data shown in the catalog are the results of our tests, and no warranty is given to sealing performance on actual usage on machinery. The amount of grease splatter is affected by usage conditions (rotational speed, temperature, greases, grease filling amount). Dust covers and other measures to keep machinery free of dust are recommended.

Table 1 Combinations of shaft diameter and lead

Lead \ Shaft dia.	5	10	20	25	Applicable series
15	○	○	○		Compact FA
20	○	○	○		Compact FA
25	○	○	○	○	Compact FA
32	○	○			High speed SS

Please contact NSK except for the above types.



Ball Screw with L1 Seal designed for Minimal Grease Splatter

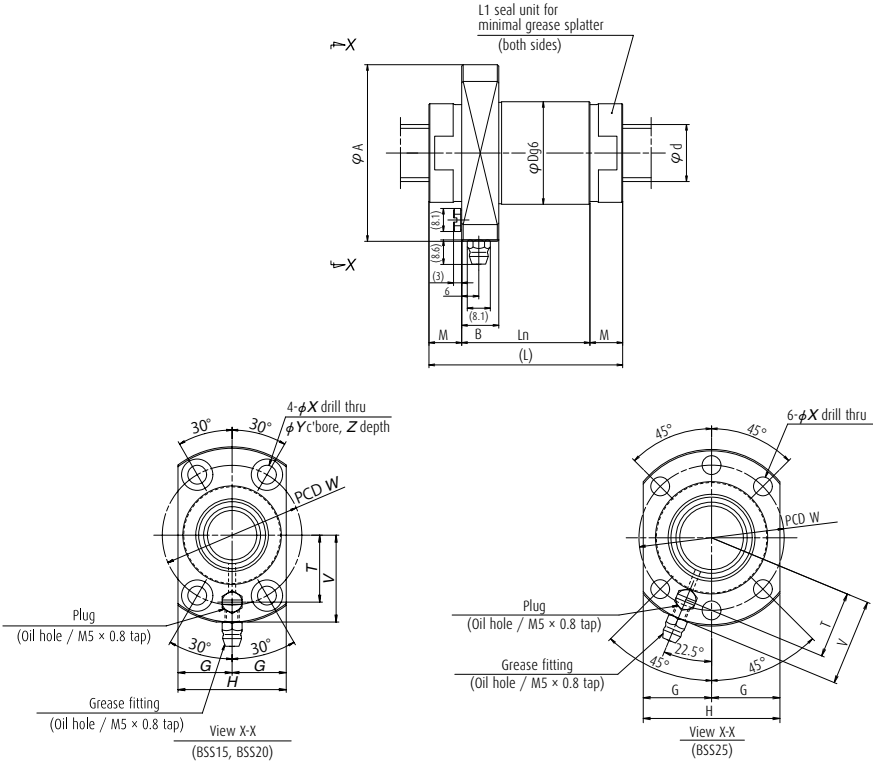

Model No.	Shaft dia. d	Lead l	Basic load rating (N)		Ball nut dimensions											Seal dimensions	Total length with nut & seal	Internal spatial volume of nut (cm ³)	Standard volume of grease replenishing (cm ³)				
			Dynamic C _a	Static C _{0a}	Dia	Flange				Nut length	Bolt holes				Oil hole position								
						D	A	G	H		B	L _n	W	X	Y					Z	T	V	M
BSS1505-3E	15	5	6 410	10 100	28	51	15.5	31	11	30	43	39	5.5	9.5	5.5	18	25	10	50	2.0	1.0		
BSS1510-3E		10	6 530	10 200															63				
BSS1520-2E		20	5 660	8 700															32			55	16.5
BSS2005-3E	20	5	10 400	18 500	36	62	19	38	13	31	45	49	6.6	11	6.5	23.5	30.5	12	55	3.4	1.7		
BSS2010-3E		10	10 200	18 600															69				
BSS2020-2E		20	6 790	11 800															32			54	20
BSS2505-3E	25	5	11 500	23 500	40	62	24	48	12	32	56	51	6.6	—	—	23.5	30.5	12	56	4.4	2.2		
BSS2510-4E		10	15 000	32 400															80			4.7	2.4
BSS2520-2E		20	7 650	14 800															94			3.9	2.0
BSS2525-2E		25	7 490	14 600															103			4.3	2.2

Notes

1. Maximum operating temperature: 80°C (at outside diameter of ball nut)
2. Grease nipple attachment is done only on the outer side of the flange (see diagram).

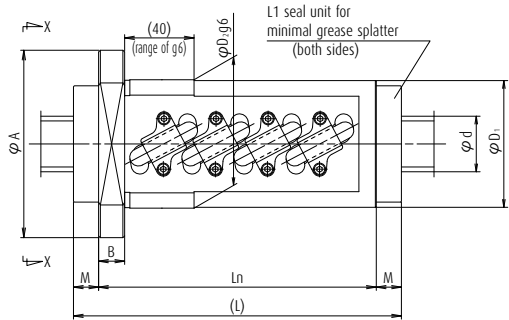

Model No.	Shaft dia. d	Lead l	Basic load rating (N)		Dia		Ball nut dimensions										Seal dimensions	Total length with nut & seal	Internal spatial volume of nut (cm ³)	Standard volume of grease replenishing (cm ³)
			Dynamic C _a	Static C _{0a}	Dia		Flange				Nut length L _n	Bolt holes				Oil hole position T				
					D ₁	D ₂	A	G	H	B		W	X	Y	Z		M	L		
HSS3205	32	5	21 800	56 000	57	58	85	32	42	13	89	71	6.6	11	6.5	33	9.5	108	10	5
HSS3210	32	10	54 500	110 000	73	74	108	41	53.5	15	160	90	9	14	8.5	45	14.5	189	43	22

Notes 1. Maximum operating temperature: 80°C (at outside diameter of ball nut)

B-3-3.13 Equipped with "NSK K1" Lubrication Unit This product is being applied for a patent.

1. Features

NSK K1 is a new, efficient lubrication unit. Equipped with NSK K1, the ball screws demonstrate a superb performance as shown below.

- > Long-term, maintenance-free usage

In mechanical environments where lubrication is difficult to apply, long-term running efficiency is maintained by using the NSK K1 in combination with grease.

[ex.] For automotive component processing lines, etc.

- > Does not pollute the environment

A very small volume of grease combined with NSK K1 can provide sufficient lubrication in the environment where grease is undesirable as well as in the environment where high cleanliness is required.

[ex.] Food processing equipment, medical equipment, liquid crystal display/semiconductor manufacturing equipment, etc.

- > Good for environments where lubricant is washed away

When used with grease, life of the machine is prolonged even when the machine is washed entirely by water, or in an environment where the machine is exposed to rain or wind.

[ex.] Food processing equipment, housing/construction machines, etc.

- > Maintains efficiency in dusty environment

In environment where oil- and grease-absorbing dust is produced, long-term efficiency in lubrication and prevention from foreign inclusions are maintained by using the NSK K1 in combination with grease.

[ex.] Woodworking machines, etc.

- > Comparative duration test of samples with and without NSK K1

Sample, testing conditions and test result are shown in **Table 1** and **Fig. 1**.

Without lubricant, operation became impossible after running 8.6 km. With NSK K1 alone, it was possible to continue running exceeding 10 000 km.

NSK conducts various tests under different conditions. Please consult NSK.

Table 1 Sample and testing conditions

Ball screw	Shaft dia. 20 mm, lead 20 mm
Lubrication	Comparison with only NSK K1 against no lubrication
Speed	4 000 min ⁻¹ (80 m/min)
Stroke	600 mm

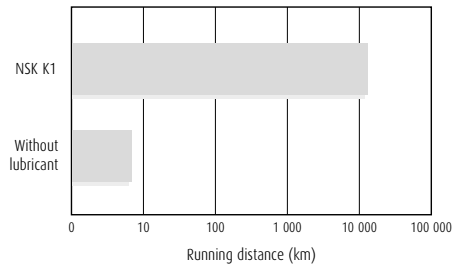


Fig. 1 Duration test results on ball screws without lubricant

2. Specifications

(1) Structure

The structure makes it possible to have a stable contact between the NSK K1 and outside of a ball screw with moderate force by a garter spring which fits onto outside of the NSK K1.

NSK K1 is installed between the ball screw nut and the labyrinth seal. The overall nut length is slightly longer than that of the standard ball screw.

Combination of NSK standard grease (factory-packed in the nut) and NSK K1 are standard specifications.




Fig. 2 NSK K1

(2) Accuracy grade and axial play


Accuracy grades, clearance and preload specifications remain unchanged from the existing products. There is a slight increase in torque due to the equipped NSK K1.

(3) Overall nut length after equipped with NSK K1

The nut length becomes longer than that of standard ball screws after equipped with NSK K1. The nut length after equipped with K1 is shown in pages B609 to B612 for each type of ball recirculation. NSK K1 can be installed on other types not listed in the dimension table. Please consult with NSK if you require the K1 for a special ball nut.

(4) Application examples

Ball screws equipped with NSK K1 are maintenance-free for a long period of time. Its application is expanding in various industries.

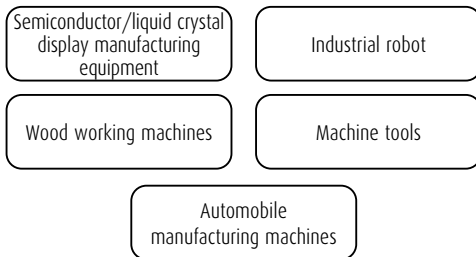

3. Precautions for use

Temperature range for use: Maximum temperature: 50°C
Momentary maximum temperature: 80°C

Chemicals that should not come to contact with K1:

Do not leave NSK K1 in organic solvent, white kerosene such as hexane, thinner which removes oil, and rust preventive oil which contains white kerosene.

Note: Water-type cutting oil, oil-type cutting oil, grease such as mineral-type AS2 and ester-type PS2 do not damage K1 Seal.

Note: NSK K1 is not applicable to the Compact FA series.

4. Example of reference number

A structure of "Reference number for ball screw" is as follows.

Note: "K1" is added at the end of "nut model code" and "Specifications number".


› Reference number for ball screw equipped with NSK K1

W1401 - ** P K1 - C3 Z10

NSK K1 equipped type ball screw code

Equipped with "NSK K1" lubrication unit

(1) Tube type

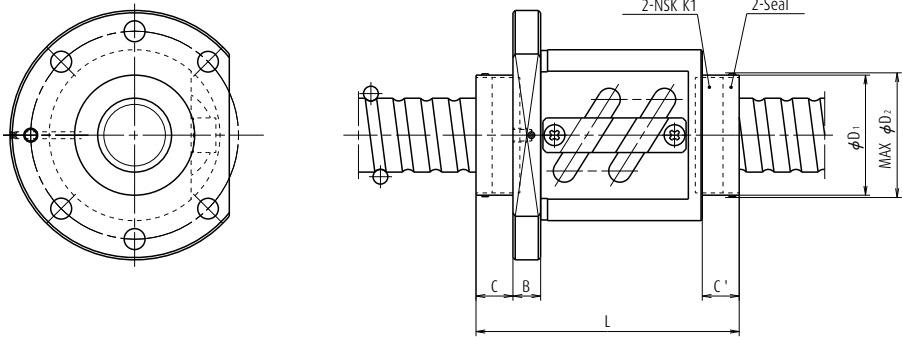

Tube type

Model No.	Screw Shaft dia. d	Lead l	K1 installing dimension		Frange width B	Overall length when equipped K1 L	K1 cap dimension	
			C	C'			Cap dia. φ D ₁	Protruding dimension φ D ₂
PFT1004-2.5	10	4	14	15	10	61.5	φ 22	MAX φ 24
PFT1205-2.5	12	5	14	15	10	66	φ 26.5	MAX φ 29
LPFT1210-2.5	12	10	14	17	10	79	φ 26.5	MAX φ 29
PFT1405-2.5	14	5	14	15	10	65	φ 30	MAX φ 32
LPFT1510-2.5	15	10	14	15	10	76	φ 30	MAX φ 32
PFT1605-2.5	16	5	14	15	10	67	φ 32	MAX φ 34
PFT2005-5	20	5	14	14	10	81	φ 38	MAX φ 40
LPFT2010-2.5	20	10	14	14	10	78	φ 38	MAX φ 40
LPFT2020-1.5	20	20	14	14	10	84	φ 38	MAX φ 40
ZFT2505-10	25	5	16	17	10	115	φ 44	MAX φ 46
PFT2506-5	25	6	16	17	12	93	φ 44	MAX φ 46
PFT2510-2.5	25	10	16	17	12	89	φ 44	MAX φ 46
ZFT2510-3	25	10	16	17	12	103	φ 44	MAX φ 46
LPFT2520-2.5	25	20	12	12	12	109	φ 38	MAX φ 40
LPFT2525-1.5	25	25	12	12	12	98	φ 38	MAX φ 40
DFT2805-5	28	5	16	17	12	137	φ 48	MAX φ 50
PFT2810-2.5	28	5	16	17	12	90	φ 48	MAX φ 50
DFT2810-3	28	10	16	17	12	174	φ 48	MAX φ 50
PFT3206-5	32	6	16	17	12	93	φ 52	MAX φ 54
ZFT3206-10	32	6	16	17	12	129	φ 52	MAX φ 54
PFT3210-5	32	10	16	17	12	122	φ 52	MAX φ 54
ZFT3210-5	32	10	16	17	12	122	φ 52	MAX φ 54
DFT3210-5	32	10	16	16	12	212	φ 52	MAX φ 54
PFT3212-3	32	12	16	17	12	114	φ 52	MAX φ 54
DFT3212-3	32	12	16	16	12	198	φ 52	MAX φ 54
LPFT3225-2.5	32	25	12	12	12	122	φ 46	MAX φ 48
LPFT3232-1.5	32	32	12	12	12	109	φ 46	MAX φ 48


Notes

1. NSK K1 can be installed in other types not listed in the table. Please consult NSK.
2. C, C' and L are the dimensions when one NSK K1 is equipped to both ends of the nut.

Model No.	Screw Shaft dia. d	Lead l	K1 installing dimension		Frang width B	Overall length when equipped K1 L	K1 cap dimension	
			C	C'			Cap dia. ϕD_1	Protruding dimension ϕD_2
PFT3610-5	36	10	19	20	15	131	$\phi 56$	MAX $\phi 58$
DFT3610-5	36	10	19	19	15	221	$\phi 56$	MAX $\phi 58$
HZF3616-5	36	16	19	19	15	163	$\phi 56$	MAX $\phi 58$
HZF3620-3.5	36	20	19	19	15	146	$\phi 56$	MAX $\phi 58$
PFT4008-5	40	8	19	20	16	117	$\phi 62$	MAX $\phi 64$
ZFT4008-10	40	8	19	20	16	165	$\phi 62$	MAX $\phi 64$
ZFT4010-7	40	10	19	20	16	152	$\phi 62$	MAX $\phi 64$
DFT4010-5	40	10	19	19	16	222	$\phi 61$	MAX $\phi 64$
PFT4012-5	40	12	19	20	16	144	$\phi 62$	MAX $\phi 64$
DFT4012-5	40	12	19	19	16	252	$\phi 61$	MAX $\phi 64$
HZF4016-5	40	16	19	19	16	164	$\phi 61$	MAX $\phi 64$
HZF4020-5	40	20	19	19	16	189	$\phi 61$	MAX $\phi 64$
LPFT4032-2.5	40	32	14	14	16	151	$\phi 54$	MAX $\phi 56$
LPFT4040-1.5	40	40	14	14	16	133	$\phi 54$	MAX $\phi 56$
DFT4510-5	45	10	19	19	16	222	$\phi 72$	MAX $\phi 75$
DFT4512-5	45	12	19	19	16	254	$\phi 72$	MAX $\phi 75$
HZF4520-5	45	20	19	19	18	190	$\phi 72$	MAX $\phi 75$
ZFT5010-10	50	10	19	20	18	194	$\phi 73$	MAX $\phi 76$
DFT5012-5	50	12	19	19	18	256	$\phi 73$	MAX $\phi 76$
ZFT5016-5	50	16	19	20	18	172	$\phi 73$	MAX $\phi 76$
DFT5016-5	50	16	19	19	18	300	$\phi 73$	MAX $\phi 76$
HZF5020-5	50	20	19	19	18	192	$\phi 73$	MAX $\phi 76$
HZF5025-5	50	25	19	19	18	221	$\phi 73$	MAX $\phi 76$
DFT5516-5	55	16	22	22	18	178	$\phi 81$	MAX $\phi 87$
HZF5520-5	55	20	22	22	18	198	$\phi 81$	MAX $\phi 81$
HZF5525-5	55	25	22	22	18	227	$\phi 81$	MAX $\phi 81$
DFT6316-5	63	16	22	22	18	322	$\phi 89$	MAX $\phi 95$
DFT6320-5	63	20	22	22	18	362	$\phi 89$	MAX $\phi 95$

Equipped with "NSK K1" lubrication unit

(2) Deflector(bridge) type

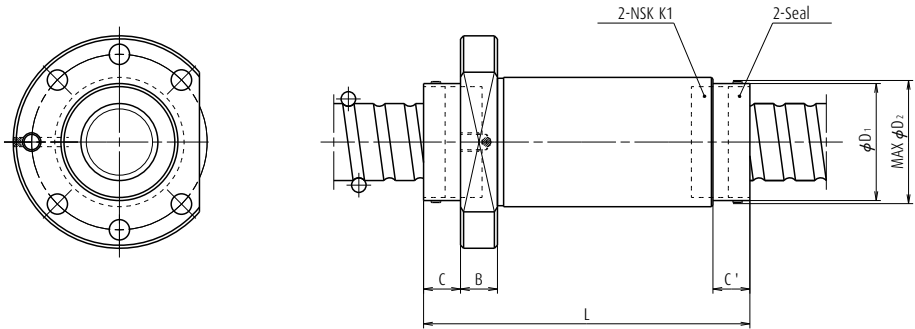


Deflector(bridge) type

Model No.	Screw Shaft dia. d	Lead l	K1 installing dimension		Frange width B	Overall length when equipped K1 L	K1 cap dimension	
			C	C'			Cap dia. ϕD_1	Protruding dimension ϕD_2
ZFD2005-6	20	5	9	9	12	87	$\phi 32$	MAX $\phi 34$
ZFD2506-6	25	6	12	-	12	102	$\phi 38$	MAX $\phi 40$
ZFD2510-4	25	10	12	12	12	106	$\phi 38$	MAX $\phi 40$
ZFD3208-8	32	8	12	12	12	136	$\phi 46$	MAX $\phi 48$
ZFD3210-6	32	10	12	12	12	138	$\phi 46$	MAX $\phi 48$
ZFD3212-6	32	12	12	12	12	153	$\phi 46$	MAX $\phi 48$
ZFD4010-8	40	10	14	14	16	167	$\phi 54$	MAX $\phi 57$
ZFD4012-8	40	12	14	14	16	189	$\phi 54$	MAX $\phi 57$
ZFD5010-8	50	10	14	14	18	169	$\phi 64$	MAX $\phi 67$
ZFD5012-6	50	12	14	14	18	167	$\phi 64$	MAX $\phi 67$

Notes

1. NSK K1 can be installed in other types not listed in the table. Please consult NSK.
2. C, C' and L are the dimensions when one NSK K1 is equipped to both ends of the nut.

(3) End cap type

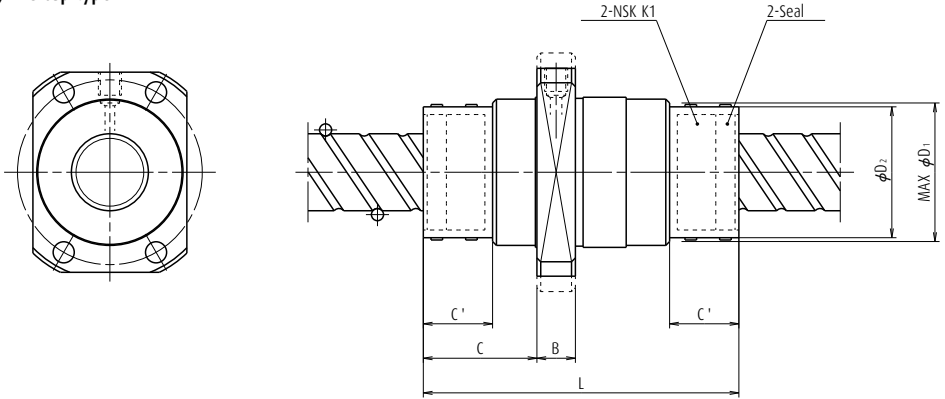

End cap type

Model No.	Screw Shaft dia. d	Lead l	K1 installing dimension		Frange width B	Overall length when equipped K1 L	K1 cap dimension	
			C	C'			Cap dia. φ D ₁	Protruding dimension φ D ₂
UPFC1520-1.5	15	20	29	18	10	81	φ 30	MAX φ 32
LPFC1616-3	16	16	28	18	10	74	φ 28	MAX φ 30
LPFC2020-3	20	20	29.5	18	10	82	φ 34	MAX φ 36
UPFC2040-1	20	40	29	18	10	77	φ 32	MAX φ 34
LPFC2525-3	25	25	34	21	12	97	φ 44	MAX φ 46
UPFC2550-1	25	50	34	21	12	92	φ 44	MAX φ 46
LPFC3232-3	32	32	37	21	12	112	φ 52	MAX φ 54
UPFC3264-1	32	64	36.5	21	12	104	φ 52	MAX φ 54
LPFC4040-3	40	40	43.5	24	15	133	φ 62	MAX φ 65
LPFC5050-3	50	50	43.5	24	20	155	φ 74	MAX φ 77


Notes

1. NSK K1 can be installed in other types not listed in the table. Please consult NSK.
2. C, C' and L are the dimensions when one NSK K1 is equipped to both ends of the nut.


B-3-3.14 Special Ball Screws

In addition to the standard ball screws, NSK manufactures various types of ball screws in special shapes as shown below.


Thoroughly discuss with NSK the specifications before determining specifications and ordering ball screws in special shapes.

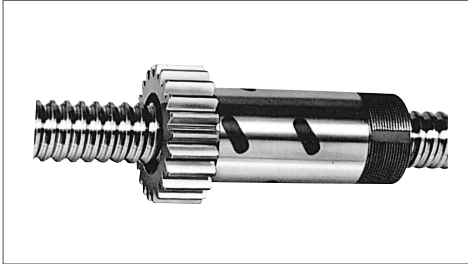


Nut with gear

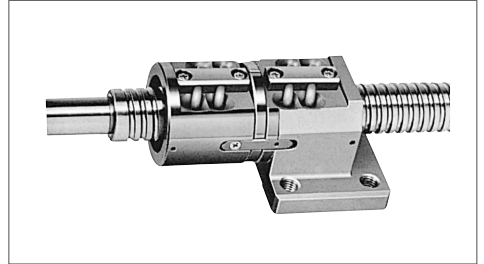


Double nut with flat mounting surface

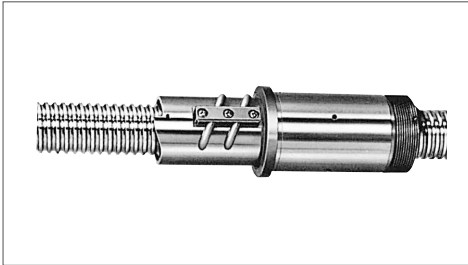


Lightly preloaded single nut with bearing seat

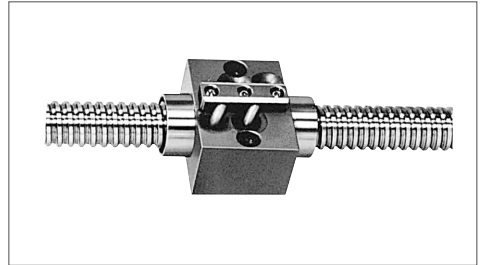


Lightly preloaded single nut with flat mounting surface

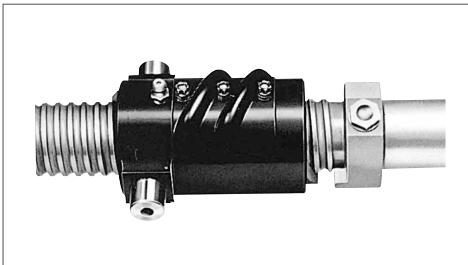


Nut with trunion

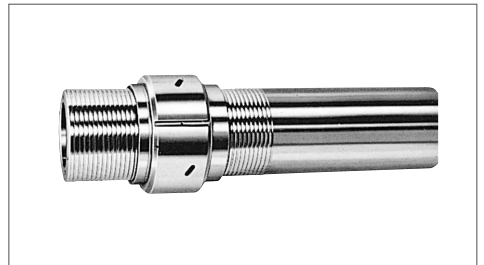


Hollow shaft, lightly preloaded single nut, with large shaft diameter and fine lead

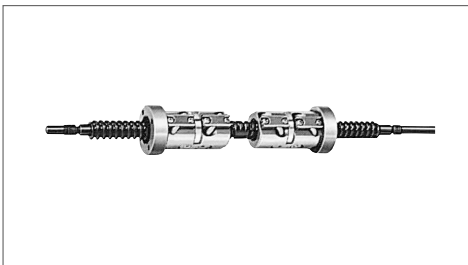


Double nut with right and left turn thread on each side of screw shaft

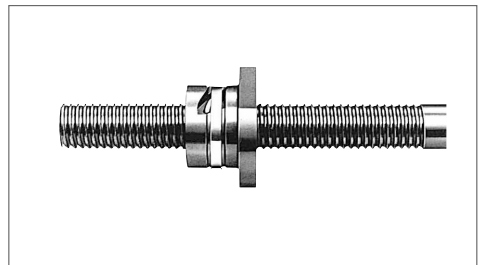

Ceramic ball screw

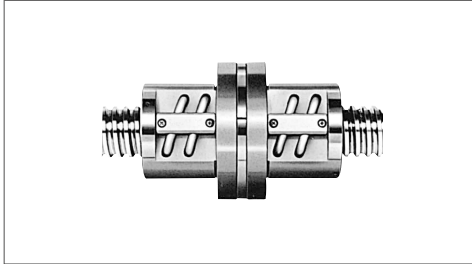


Flanged to flanged ball nut

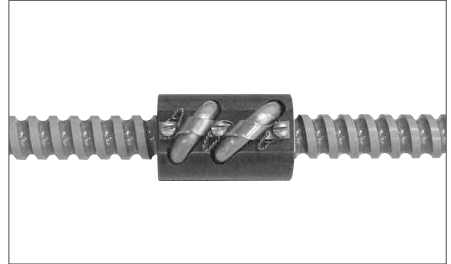


Ball screw for aircraft




Cylindrical double nut

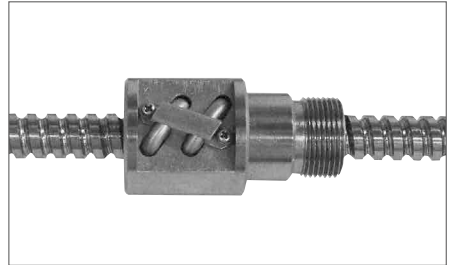

Ball screw for nuclear power plant

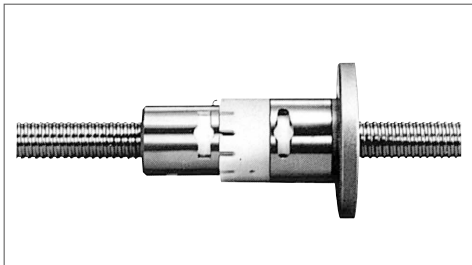

Spring preloaded ball screw

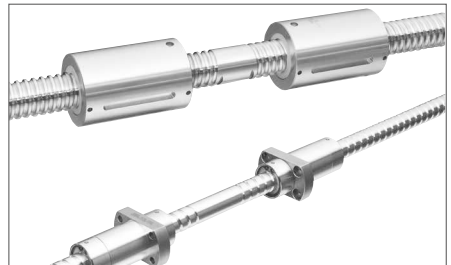


Right and left hand thread on each side of screw

C-1 Monocarrier

1. Features	C5
2. Classification and Series	C7
3. Accessories	C9
4. Selection of Monocarrier	C10
4.1. Procedures for Selecting Monocarrier	C10
4.2. Rigidity	C10
4.3. Maximum Speed	C11
4.4. Accuracy Grade	C15
4.5. Stroke and Ball Screw Lead	C15
4.6. Basic Load Rating	C17
4.7. Estimation of Life Expectancy	C19
4.8. Example of Life Estimation	C21
5. MCM Series	C25
5.1. MCM Series Reference Number Coding	C27
5.2. MCM Series Dimension Table of Standard Products	C28
5.3. MCM Series Accessories	C49
6. MCH Series	C73
6.1. MCH Series Reference Number Coding	C75
6.2. MCH Series Dimension Table of Standard Products	C76
6.3. MCH Series Accessories	C83

C-2 Toughcarrier

1. Features	C95
2. Classification and Series	C95
3. Accessories	C97
4. Selection of Toughcarrier	C98
4.1. Selection Procedures	C98
4.2. Stroke and Lead	C99
4.3. Reference Number Coding and Accuracy Grade	C100
4.4. Maximum Speed	C101
4.5. Rigidity	C103
4.6. Basic Load Rating	C104
4.7. Estimation of Life Expectancy	C105
4.8. Example of Life Estimation	C107
5. TCH Series Dimension Table for Standard Products	C111
5.1. TCH06 Series	C111
5.2. TCH09 Series	C113
5.3. TCH10 Series	C115
6. Accessories	C117
6.1. Sensor Unit	C117
6.2. Cover Unit	C118
6.3. Motor Bracket	C121
7. Motor Bracket Compatibility Table	C130
8. Sensor Rail and Top Cover Unit Combination Table	C131
9. Toughcarrier High-Thrust Series	C134



Monocarrier

C-3 Technical Materials

1. Sensor Specification	C137
1.1 Proximity Switch	C137
1.2 Photo Sensor	C138
2. Characteristics and Evaluation Method	C139
2.1 Positioning Accuracy	C139
2.2 Repeatability	C139
2.3 Running Parallelism	C139
3. Special Specifications	C140
4. Maintenance	C141
4.1 Maintenance Method	C141
4.2 NSK K1 Lubricant Unit	C141
5. NSK Clean Grease LG2 Specification	C142

C3-C90

C91
-C132

C133
-C142

Toughcarrier

Monocarrier Toughcarrier

Monocarrier Toughcarrier


All-in-one structure (ball screw, linear guide and base integrated) results in a light and compact actuator without extra work for design or adjustment when installing. Design and assembly loads can be reduced by unit type. Also, the many variations make it possible to deal with many different uses.

Monocarrier and Toughcarrier Classifications

> Monocarrier




Rolling elements: Balls




> Toughcarrier: High load capacity




Rolling elements: Rollers



Procedure for Selecting Monocarrier and Toughcarrier models

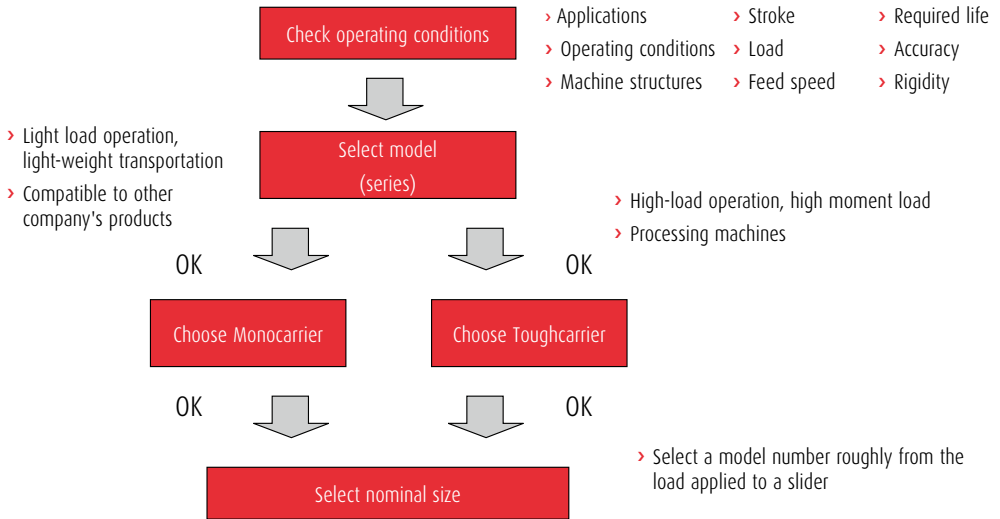

Monocarrier and Toughcarrier Composition

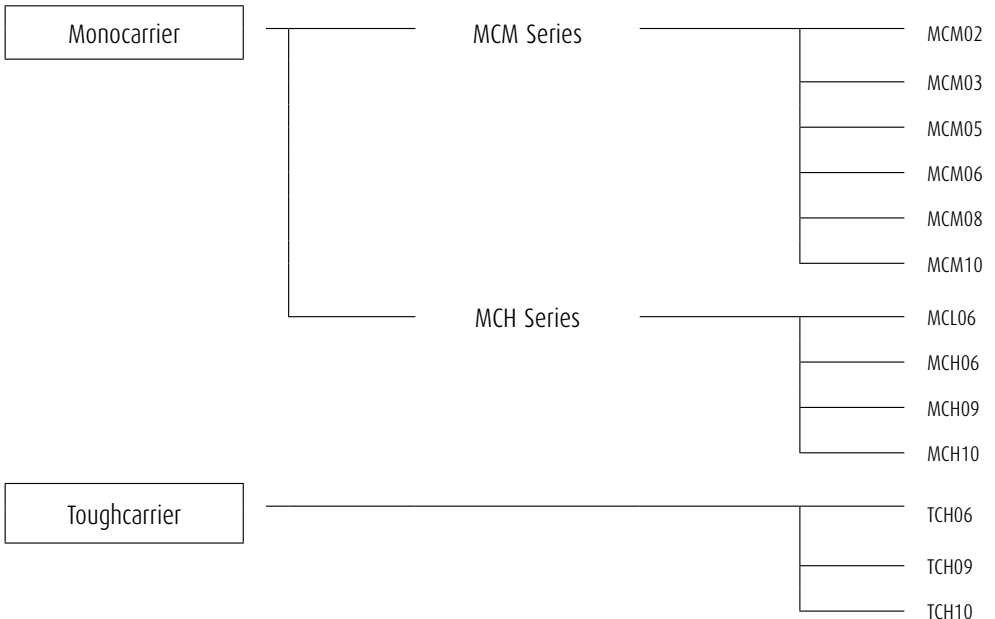

C-1 Monocarrier

C-1 Monocarrier

	Page
1 Features	C5
2 Classification and Series	C7
3 Accessories	C9
4 Selection of Monocarrier	C10
4.1 Procedures for Selecting Monocarrier	C10
4.2 Rigidity.....	C10
4.3 Maximum Speed.....	C11
4.4 Accuracy Grade	C15
4.5 Stroke and Ball Screw Lead	C15
4.6 Basic Load Rating.....	C17
4.7 Estimation of Life Expectancy	C19
4.8 Example of Life Estimation.....	C21
5 MCM Series.....	C25
5.1 MCM Series Reference Number Coding	C27
5.2 MCM Series Dimension Table of Standard Products	C28
5.3 MCM Series Accessories	C49
6 MCH Series	C73
6.1 MCH Series Reference Number Coding	C75
6.2 MCH Series Dimension Table of Standard Products	C76
6.3 MCH Series Accessories.....	C83

C-1 Monocarrier

C-1-1 Features

NSK's Monocarrier is the culmination of technology and innovation in linear motion. This lightweight, compact single axis linear actuator integrates quality NSK ball screw, linear guide and support bearings into one unit.

1


Light weight, compact design

- › Available in two different shapes of cross-section, depending on application.
Light weight type: MCM Series
Rigid type: MCH Series

2

All -in-one structure

- › The all-in-one structure integrates a ball screw, a linear guide and support bearings into a single unit to significantly reduce design and installation time.
- › Multiple datum planes, the bottom and a lateral side of the rail, facilitate highly accurate installation.
- › Immediate operation after installation and run-in is possible.
- › A wide selection of fine to high helix leads are available.

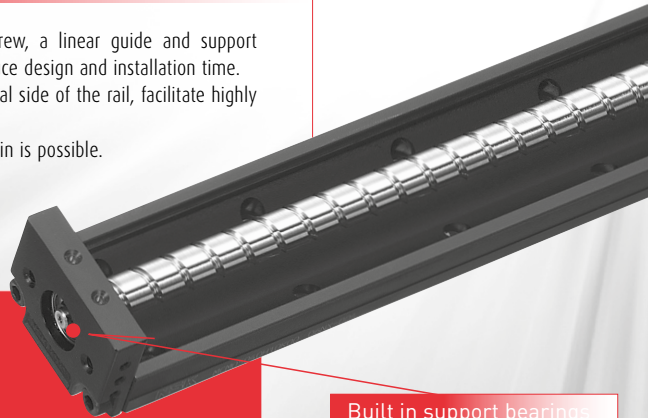

Built in support bearings


M O N O C

4 Long term maintenance free

- > Use of NSK K1 Lubrication Units and grease maintains a smooth lubricating performance for long periods in mechanical environments where lubrication is difficult to apply, where use of oil is not permitted because of hygienic issues, or where the mechanical equipment is subjected to frequent wash downs.
- > NSK K1 lubrication unit is available for food processing machines and medical equipment.
- > Grease for clean environments and for general machinery is available.

3 Superb antirust capability

- > Low temperature chrome plating is a standard feature for the bodies and sliders to control rusting in normal operating and storing environments. Fluoride low temperature chrome plating is optionally available for much higher rust prevention.

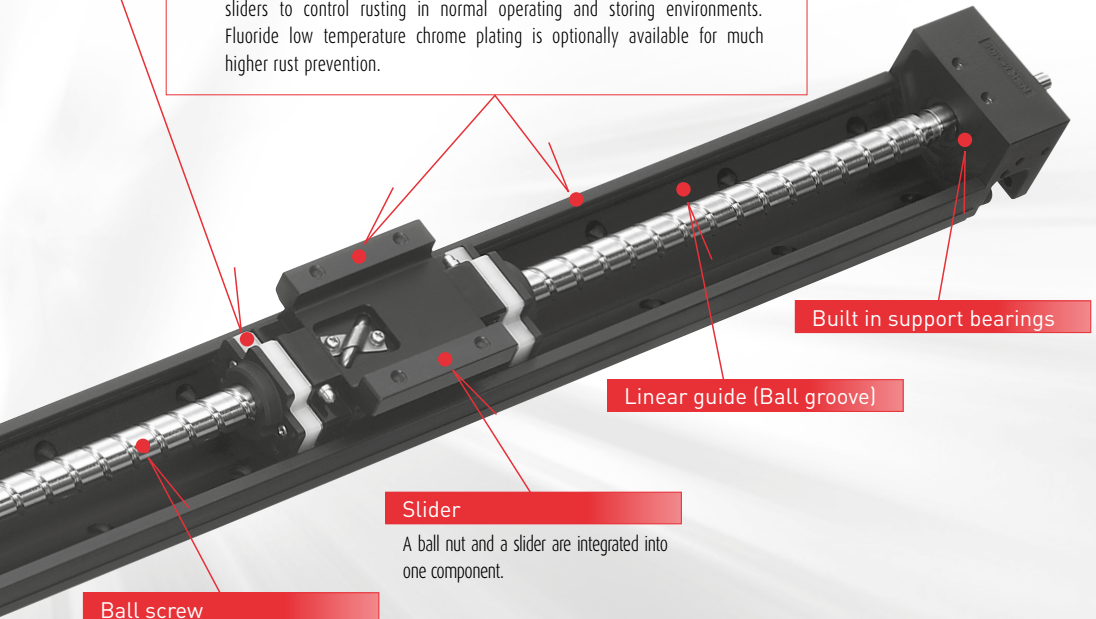

Ball screw

A wide variety of leads, from fine leads to high helix leads, is available.

Slider

A ball nut and a slider are integrated into one component.

Linear guide (Ball groove)

Built in support bearings

5 Quick Delivery

ARRIER

C-1-2 Classification and Series


Table 2.1

	Light Weight	Beam Rigidity	Moment Rigidity
MCM Series	◎	○	○
MCH Series	○	◎	○


◎: Excellent ○: Suitable in use

[MCM Series Cross-sections]

MCM02



MCM06




MCM03


(Lead 1 and 2 mm)

(Lead 5, 10 and 12 mm)


(Lead 15 mm)

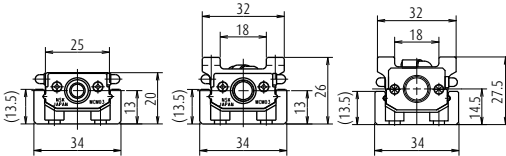

MCM08



MCM05



MCM10




Fig. 2.1

Accuracy	Long Stroke	Size Variation
○	○	○
◎	◎	○

[MCH Series Cross-sections]

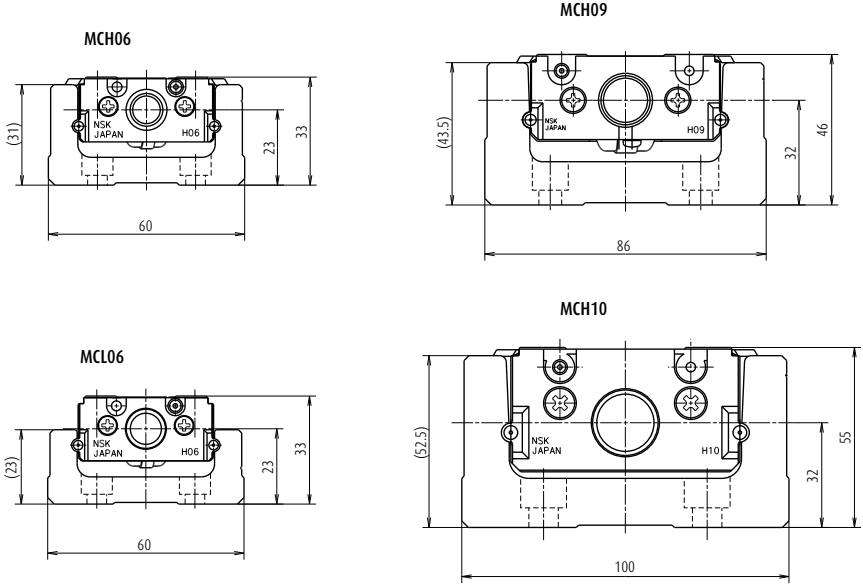


Fig. 2.2

C-1-3 Accessories

MCM Series

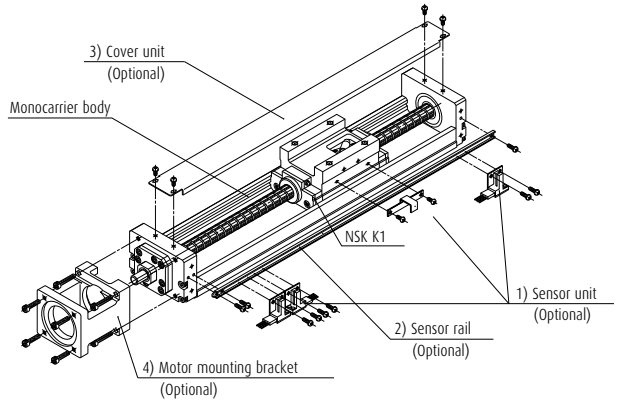


Fig. 3.1 Assembly: Accessories for MCM10 (example)

1) Sensor unit: Sensors, sensor mounting parts and a sensor dog are available in a set.

* When a sensor unit is used, the full cover unit cannot be used.

2) Sensor rail: Rail for sensor mounting is available.

3) Cover unit: Top cover or full cover (included top cover and side cover) is available.

4) Motor bracket for motor mounting: Available for a variety of models.

Note: We assemble accessories upon request.

MCH Series

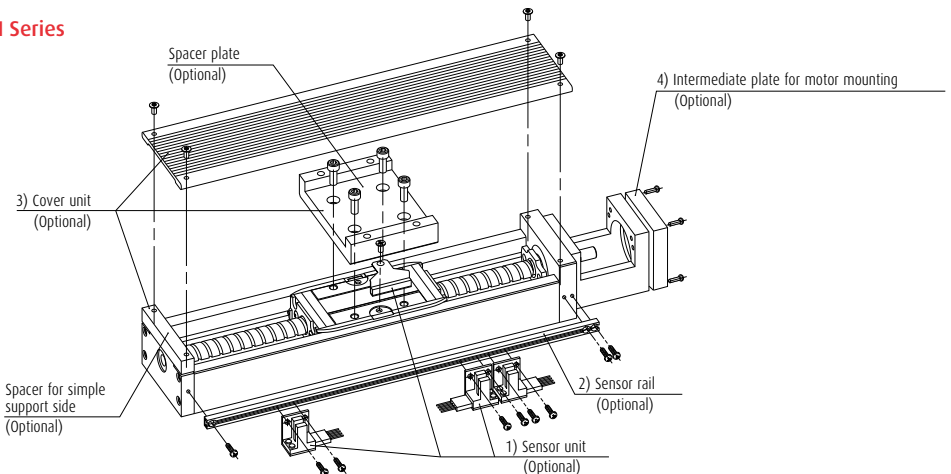


Fig. 3.2 Assembly: Accessories for MCH10 (example)

1) Sensor unit: Sensors, sensor mounting parts and a sensor dog are available in a set.

2) Sensor rail: Rail for sensor mounting is available.

3) Cover unit: Top cover (included spacer plate and spacer for simple support side) is available.

4) Intermediate plate for motor mounting: Available for a variety of models.

Note: We assemble accessories upon request.

Selection

C-1-4 Selection of Monocarrier

C-1-4. 1 Procedures for Selecting Monocarrier

Select a model number of Monocarrier based on stroke and rigidity (refer to Figs. 4.2, and 4.3).



Select a ball screw lead referring to "C-1-4.3 Maximum Speed" so that the rotational speed does not exceed the limit.



Study the loads to be applied to the linear guide and obtain the equivalent load (F_e) substituting them for equation 1) or 2) on page C19. Obtain the mean effective load (F_m) substituting them for equation 3) on page C20, then calculate the life.



Study the loads to be applied to the ball screw and support unit. Obtain the mean effective load (F_m) substituting them for equation 3) on page C20, then calculate the life.

C-1-4. 2 Rigidity

Rigidity of rail

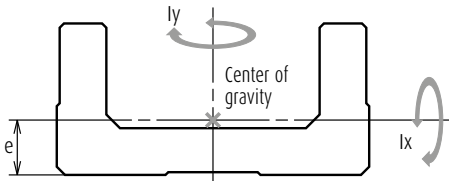


Fig. 4.1

Table 4.1 Rigidity of rail

Model No.	Geometrical moment of inertia $\times 10^4$ (mm ⁴)		Center of gravity (mm)	Mass (kg/100 mm)
	I_x	I_y	e	w
MCM02	0.097	1.32	3.3	0.11
MCM03	0.30	3.3	4.5	0.18
MCM05	0.78	11.4	6.0	0.31
MCM06	2.14	26.1	7.0	0.57
MCM08	5.90	81.0	9.2	0.88
MCM10	15.6	219	12.2	1.52
MCH06	6.5	38.2	10.8	0.67
MCL06	2.58	29.6	7.8	0.56
MCH09	28.7	172	15.5	1.48
MCH10	54.0	307	18	1.93

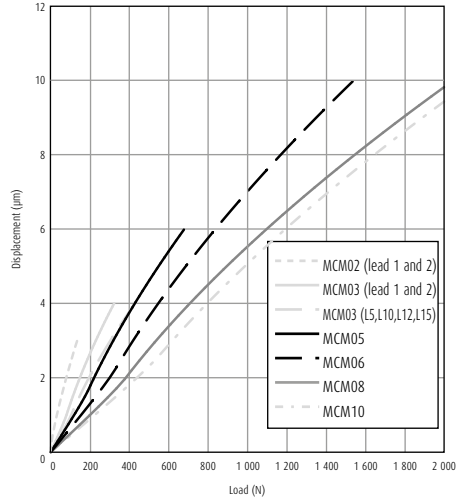


Fig. 4.2 MCM Series rigidity in radial direction

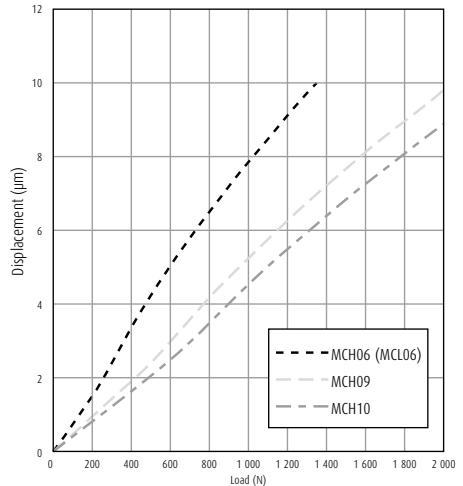


Fig. 4.3 MCH Series rigidity in radial direction

C-1-4. 3 Maximum Speed

(1) Maximum Speed of MCM Series

Maximum speed of Monocarrier is determined by critical speed of ball screw shaft and $d \cdot n$ value.

Do not exceed maximum speeds on the table below.

Table 4.2

	Ball screw lead	Stroke (mm)	Rail length L2 (mm)	Maximum speed (mm/s)	
MCM02 Single slider	1	50	100	50	
		100	150		
		150	200		
	2	50	100	100	
		100	150		
		150	200		
MCM03 Single slider	1	50	115	50	
		100	190		
		150	240		
	2	50	115	100	
		100	190		
		150	240		
	5	50 to 250	140 to 340	410	
	10	50 to 250	140 to 340	830	
	12	50 to 250	140 to 340	1 000	
	15	50 to 250	140 to 340	1 250	
	MCM05 Single slider	5	50 to 250	180 to 530	410
			500	630	370
600			730	270	
10		50 to 250	180 to 530	830	
		500	630	750	
		600	730	540	
20		50 to 250	180 to 530	1 660	
		500	630	1 470	
		600	730	1 070	
30		50 to 250	180 to 530	2 500	
		500	630	2 160	
		600	730	1 570	

	Ball screw lead	Stroke (mm)	Rail length L2 (mm)	Maximum speed (mm/s)	
MCM05 Double slider	10	60 to 410	280 to 630	830	
		510	730	710	
	20	60 to 410	280 to 630	1 660	
		510	730	1 460	
MCM06 Single slider	5	50 to 500	190 to 640	410	
		600	740	330	
		700	840	250	
		800	940	190	
	10	50 to 500	190 to 640	830	
		600	740	650	
		700	840	500	
		800	940	390	
	20	50 to 500	190 to 640	1 660	
		600	740	1 300	
		700	840	990	
		800	940	780	
	MCM06 Double slider	5	110 to 410	340 to 640	410
			110 to 510	190 to 640	830
		10	610	740	660
710			840	500	
210 to 510			440 to 640	1 660	
20		610	740	1 310	
		710	840	1 000	

- Notes: 1) Please consult NSK before operating Monocarrier near maximum speed.
 2) Maximum rotational speed is (5000 min⁻¹). (For lead 5,10,12,15,20,30)
 3) Refer to the above table for maximum speed for each stroke.

	Ball screw lead	Stroke (mm)	Rail length L2 (mm)	Maximum speed (mm/s)
MCM08 Single slider	5	50 to 500	220 to 670	410
		600	770	320
		700	870	250
		800	970	190
	10	50 to 500	220 to 670	830
		600	770	640
		700	870	490
		800	970	380
	20	50 to 500	220 to 670	1 660
		600	770	1 280
		700	870	980
		800	970	770
	30	400	570	2 500
		500	670	2 480
		600	770	1 830
		700	870	1 400
MCM08 Double slider	10	80 to 380	370 to 670	830
		480	770	810
		580	870	630
		680	970	500
	20	180 to 380	470 to 670	1 660
		480	770	1 640
		580	870	1 270
		680	970	1 010

	Ball screw lead	Stroke (mm)	Rail length L2 (mm)	Maximum speed (mm/s)	
MCM10 Single slider	10	50 to 600	280 to 780	830	
		700	880	660	
		800	980	520	
		900	1 080	420	
		1 000	1 180	340	
	20	50 to 600	280 to 780	1 660	
		700	880	1 310	
		800	980	1 030	
		900	1 080	840	
		1 000	1 180	690	
	30	500	680	2 500	
		800	780	2 430	
		900	880	1 870	
		1 000	980	1 480	
		MCM10 Double slider	10	70 to 570	380 to 880
	670			980	660
870	1 180			450	
20	170 to 570		480 to 880	1 660	
	670		980	1 340	
	870		1 180	910	

- Notes:** 1) Please consult NSK before operating Monocarrier near maximum speed.
2) Maximum rotational speed is (5000 min⁻¹). (For lead 5,10,12,15,20,30)
3) Refer to the above table for maximum speed for each stroke.

(2) Maximum Speed of MCH Series

Maximum speed of Monocarrier is determined by critical speed of ball screw shaft and $d \cdot n$ value.

Do not exceed maximum speeds on the table below.

Table 4.3

	Ball screw lead	Stroke (mm)	Rail length L2 (mm)	Maximum speed (mm/s)
MCH06 MCL06 Single slider	5	50 to 500	150 to 600	410
		10	50 to 500	150 to 600
	20		50 to 400	150 to 500
			500	600
MCH06 Double slider	5	100 to 300	300 to 500	410
	10	100 to 400	300 to 600	830
	20	400	600	1 660
MCH09 Single slider	5	100 to 500	240 to 640	410
		600	740	360
		700	840	270
		800	940	210
	10	100 to 500	240 to 640	830
		600	740	710
		700	840	530
		800	940	410
	20	100 to 500	240 to 640	1 660
		600	740	1 410
		700	840	1 060
		800	940	830
MCH09 Double slider	5	150 to 350	440 to 640	410
		10	150 to 450	440 to 740
	650		940	530
	450 to 650		740 to 940	1 660
	20	450 to 650	740 to 940	1 080

	Ball screw lead	Stroke (mm)	Rail length L2 (mm)	Maximum speed (mm/s)
MCH10 Single slider	10	50 to 600	280 to 780	830
		700	880	670
		800	980	530
		900	1 080	420
		1 000	1 180	350
		1 100	1 280	290
	20	1 200	1 380	250
		50 to 600	280 to 780	1 660
		700	880	1 330
		800	980	1 050
		900	1 080	840
		1 000	1 180	700
MCH10 Double slider	10	250 to 550	580 to 880	830
		650	980	660
	20	250 to 550	580 to 880	1 660
		650	980	1 340
		750	1 080	1 100
		850	1 180	910
950		1 280	760	
1 050		1 380	630	

- Notes:** 1) Please consult NSK before operating Monocarrier near maximum speed.
 2) Maximum rotational speed is (5000 min⁻¹). (For lead 5,10,12,15,20,30)
 3) Refer to the above table for maximum speed for each stroke.



C-1-4. 4 Accuracy Grade

The accuracy grade of Monocarrier standard series is high grade (H), except for lead 1 and 2 mm of MCM02, and MCM03. When you require strokes longer than 1 200 mm, please consult NSK about the accuracy grade.

Table 4.4

Unit : μm

Accuracy	High grade (H)			Precision (P)			
	Stroke (mm)	Repeatability	Running Parallelism (vertical)	Backlash	Repeatability	Positioning accuracy	Running Parallelism (vertical)
- 200	± 10	14	20 or less	± 3	20	8	3 or less
- 400	± 10	16	20 or less	± 3	25	10	3 or less
- 600	± 10	20	20 or less	± 3	30	12	3 or less
- 700	± 10	23	20 or less	± 3	30	15	3 or less
- 1 000	± 10	23	20 or less	± 3	35	15	3 or less
- 1 200	± 10	30	20 or less	± 3	40	20	3 or less

C-1-4. 5 Stroke and Ball Screw Lead

(1) MCM Series Standard Combinations of Stroke and Ball Screw Lead

Table 4.5 Single slider

Unit : mm

Model No.	MCM02		MCM03					MCM05			MCM06			MCM08			MCM10		
	1	2	1	2	5	10	12	15	5	10	20	30	5	10	20	30	10	20	30
50	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			
100	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
150	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
200					✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
250					✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
300									✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
400									✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
500									✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
600									✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
700										✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
800										✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
900																	✓	✓	
1 000																	✓	✓	

Table 4.6 Double slider

Unit : mm

Model No.	MCM05		MCM06			MCM08		MCM10	
	10	20	5	10	20	10	20	10	20
60	✓								
70									✓
80									
110	✓		✓	✓					
160	✓								
170									✓
180								✓	✓
210	✓	✓	✓	✓	✓				
270									✓
280								✓	✓
310	✓	✓	✓	✓	✓				
370									✓
380								✓	✓
410	✓	✓	✓	✓	✓				
470									✓
480								✓	✓
510	✓	✓		✓	✓				
570									✓
580								✓	✓
610				✓	✓				
670									✓
680								✓	✓
710				✓	✓				
870									✓

Note Please consult NSK about double slider of MCM02 and MCM03.

(2) MCH Series Standard Combinations of Stroke and Ball Screw Lead

Table 4.7 Single slider

Unit : mm

Model No.	MCH06			MCH09			MCH10	
	5	10	20	5	10	20	10	20
50	✓	✓	✓					
100	✓	✓	✓	✓	✓	✓	✓	✓
200	✓	✓	✓	✓	✓	✓	✓	✓
300	✓	✓	✓	✓	✓	✓	✓	✓
400	✓	✓	✓	✓	✓	✓	✓	✓
500	✓	✓	✓	✓	✓	✓	✓	✓
600				✓	✓	✓	✓	✓
700				✓	✓	✓	✓	✓
800				✓	✓	✓	✓	✓
900							✓	✓
1 000							✓	✓
1 100							✓	✓
1 200							✓	✓

Table 4.8 Double slider

Unit : mm

Model No.	MCH06			MCH09			MCH10	
	5	10	20	5	10	20	10	20
100	✓	✓						
150				✓	✓			
200	✓	✓						
250				✓	✓		✓	✓
300	✓	✓						
350				✓	✓		✓	✓
400		✓	✓					
450					✓	✓	✓	✓
550							✓	✓
650					✓	✓	✓	✓
750								✓
850								✓
950								✓
1 050								✓

Table 4.9 Limitations

	Model No.	Lead (mm)	Slider	Stroke (mm)
MCM series	MCM02	1,2	Single	150
	MCM03	1,2	Single	150
	MCM03	5,10,12,15	Single	350
	MCM05	5,10,20,30*	Single	900
	MCM05	5,10,20,30*	Double	810
	MCM06	5,10,20	Single	1 000
	MCM06	5,10,20	Double	910
	MCM08	5,10,20,30*	Single	1 000
	MCM08	5,10,20,30*	Double	880
	MCM10	10,20,30*	Single	1 750
MCM10	10,20,30*	Double	1 600	
MCH series	MCH06	5,10,20	Single	600
	MCH06	5,10,20	Double	500
	MCH09	5,10,20	Single	1 000
	MCH09	5,10,20	Double	850
	MCH10	10,20	Single	1 750
	MCH10	10,20	Double	1 600
	MCL06	5,10,20	Single	500

*) Applicable only to single slider

C-1-4. 6 Basic Load Rating

(1) MCM Series Basic Load Rating

Table 4.10 Basic Load Rating

Model No.	Lead l (mm)	Shaft dia d (mm)	Basic dynamic load rating(N)				Basic static load rating(N)		Support unit Limit load (N)
			Ball screw C _a	Linear guide C	Support unit C _a	Rated running distance L _a (km)	Ball screw C _{0a}	Linear guide C ₀	
MCM02	1	φ 6	405(High grade)	4 910	615	1	555(High grade)	2 120	490
MCM02	1	φ 6	480(Precision)	4 910	615	1	615(Precision)	2 120	490
MCM02	2	φ 6	400(High grade)	3 900	615	2	555(High grade)	2 120	490
MCM02	2	φ 6	475(Precision)	3 900	615	2	610(Precision)	2 120	490
MCM03	1	φ 6	870	10 900	2 670	1	1 230	4 900	1 040
MCM03	2	φ 6	865	8 650	2 670	2	1 220	4 900	1 040
MCM03	5	φ 8	2 090	7 850	2 670	5	2 830	6 620	1 040
MCM03	10	φ 8	1 310	6 250	2 670	10	1 710	6 620	1 040
MCM03	12	φ 8	1 320	5 880	2 670	12	1 730	6 620	1 040
MCM03	15	φ 10	2 000	5 440	2 670	15	2 740	6 620	1 040
MCM05	5	φ 12	4 390	15 600	4 400	5	6 260	10 900	1 450
MCM05	10	φ 12	2 740	12 400	4 400	10	3 820	10 900	1 450
MCM05	20	φ 12	2 660	9 850	4 400	20	3 800	10 900	1 450
MCM05	30	φ 12	3 300	8 600	6 550	30	5 390	10 900	2 730
MCM06	5	φ 15	8 300	25 200	6 550	5	12 700	17 000	2 730
MCM06	10	φ 15	8 140	20 000	6 550	10	12 800	17 000	2 730
MCM06	20	φ 15	5 080	15 900	6 550	20	7 460	17 000	2 730
MCM08	5	φ 15	8 300	30 800	7 100	5	12 700	22 800	3 040
MCM08	10	φ 15	8 140	24 400	7 100	10	12 800	22 800	3 040
MCM08	20	φ 15	5 080	19 400	7 100	20	7 460	22 800	3 040
MCM08	30	φ 15	5 500	16 930	7 100	30	8 580	22 800	3 040
MCM10	10	φ 20	12 800	33 500	7 600	10	21 400	29 400	3 380
MCM10	20	φ 20	8 190	26 600	7 600	20	12 600	29 400	3 380
MCM10	30	φ 20	13 200	23 200	7 600	30	22 900	29 400	3 380

Notes > Basic dynamic and static load ratings indicate values for one slider. > Basic dynamic load rating of linear guide is load of perpendicular direction to the axis that allows 90% of a group of the same Monocarriers to operate "Rated running distance" in table, that is equivalent to 1 million revolutions of ball screw and support unit under the same conditions without causing flaking by rolling contact fatigue. > Basic dynamic load rating of ball screw is load in the axial direction that allows 90% of ball screws of a group of the same Monocarriers to rotate 1 million revolutions under the same conditions without causing flaking by rolling contact fatigue. > Basic dynamic load rating of support unit is constant load in the axial direction that allows 90% of support units of the same group of Monocarriers to rotate 1 million revolutions under the same conditions without causing flaking by rolling contact fatigue. > Basic static load rating is load that results in combined permanent deformations at contact points of balls and ball grooves of respective parts at diameter of 0.01%.

Table 4.11 Basic static moment load of linear guide

Model No.	Lead (mm)	Slider	Basic static moment (N × m)		
			Rolling M _{Ro}	Pitching M _{Po}	Yawing M _{Yo}
MCM02	1, 2	Single	24	8	8
MCM03	1, 2	Single	68	28	28
MCM03	5, 10, 12, 15	Single	92	51	51
MCM05	5, 10, 20, 30°	Single	229	89	89
MCM05	5, 10, 20, 30°	Double	455	765	765
MCM06	5, 10, 20	Single	415	174	174
MCM06	5, 10, 20	Double	825	1 220	1 220
MCM08	5, 10, 20, 30°	Single	770	300	300
MCM08	5, 10, 20, 30°	Double	1 540	2 050	2 050

Table 4.11 Basic static moment load of linear guide

Model No.	Lead (mm)	Slider	Basic static moment (N × m)		
			Rolling M_{Ro}	Pitching M_{Po}	Yawing M_{Yo}
MCM10	10, 20, 30*	Single	1 170	425	425
MCM10	10, 20, 30*	Double	2 340	2 940	2 940

- Notes**
- Basic static moment of double slider is value when two sliders equipped with NSK K1 are butted against each other.
 - Basic static moment is value when rolling contact pressure of balls exceeds 4 000 N/mm².
 - If extremely heavy load is required, please consult NSK for estimation of fatigue life.

*) Applicable only to single slider

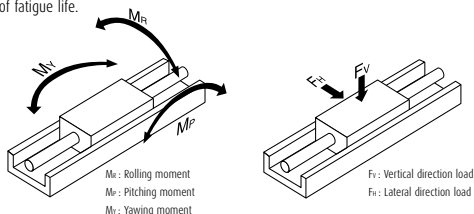


Fig. 4.4

(2) MCH Series Basic Load Rating

Table 4.12 Basic Load Rating

Model No.	Lead l (mm)	Shaft dia d (mm)	Basic dynamic load rating(N)				Basic static load rating(N)		
			Ball screw C_a	Linear guide C	Support unit C_a	Rated running distance L_a (km)	Ball screw C_{0a}	Linear guide C_0	Support unit Limit load (N)
MCH06 (MCL06)	5	φ 12	4 390	22 800	4 400	5	6 260	16 300	1 450
	10	φ 12	2 740	18 100	4 400	10	3 820	16 300	1 450
	20	φ 12	2 660	14 400	4 400	20	3 800	16 300	1 450
MCH09	5	φ 15	8 300	40 600	7 100	5	12 700	30 500	3 040
	10	φ 15	8 140	32 200	7 100	10	12 800	30 500	3 040
	20	φ 15	5 080	25 500	7 100	20	7 460	30 500	3 040
MCH10	10	φ 20	12 800	44 600	7 600	10	21 400	42 000	3 380
	20	φ 20	8 190	35 400	7 600	20	12 600	42 000	3 380

- Notes**
- Basic dynamic and static load ratings indicate values for one slider.
 - Basic dynamic load rating of linear guide is load of perpendicular direction to the axis that allows 90% of a group of the same Monocarriers to operate "Rated running distance" in table, that is equivalent to 1 million revolutions of ball screw and support unit under the same conditions without causing flaking by rolling contact fatigue.
 - Basic dynamic load rating of ball screw is load in the axial direction that allows 90% of ball screws of a group of the same Monocarriers to rotate 1 million revolutions under the same conditions without causing flaking by rolling contact fatigue.
 - Basic dynamic load rating of support unit is constant load in the axial direction that allows 90% of support units of the same group of Monocarriers to rotate 1 million revolutions under the same conditions without causing flaking by rolling contact fatigue.
 - Basic static load rating is load that results in combined permanent deformations at contact points of balls and ball grooves of respective parts at a diameter of 0.01%.

Table 4.13 Basic static moment load of linear guide

Model No.	Slider	Basic static moment (N × m)		
		Rolling M_{Ro}	Pitching M_{Po}	Yawing M_{Yo}
MCH06 (MCL06)	Single	335	133	133
MCH06 (MCL06)	Double	770	730	730
MCH09	Single	890	385	385
MCH09	Double	1 780	2 070	2 070
MCH10	Single	1 460	610	610
MCH10	Double	2 920	3 430	3 430

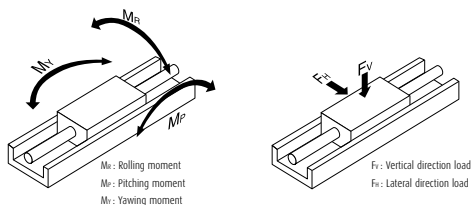


Fig. 4.5

- Notes**
- Basic static moment of double slider is value when two sliders equipped with NSK K1 are butted against each other.
 - Basic static moment is value when rolling contact pressure of balls exceeds 4 000 N/mm².
 - If extremely heavy load is required, please consult NSK for estimation of fatigue life.

*) Applicable only to single slider

C-1-4. 7 Estimation of Life Expectancy

(1) Life of Linear Guide

Study the load to be applied to the linear guide of Monocarrier (Fig. 4.6). The equivalent load (F_e) is determined by substituting the load for equation 1) (Eq. 2): in case of the tightly coupled double slider type).

> In case of the single slider

$$F_e = Y_H F_H + Y_V F_V + Y_R \epsilon_R M_R + Y_P \epsilon_P M_P + Y_Y \epsilon_Y M_Y \dots\dots\dots 1)$$

> In case of the double slider

$$F_e = \frac{Y_H F_H}{2} + \frac{Y_V F_V}{2} + Y_R \epsilon_{Rd} M_R + Y_P \epsilon_{Pd} M_P + Y_Y \epsilon_{Yd} M_Y \dots\dots\dots 2)$$

- F_H : Lateral direction load acting on the slider (N)
 - F_V : Vertical direction load acting on the slider (N)
 - M_R : Rolling moment acting on the slider (N × m)
 - M_P : Pitching moment acting on the slider (N × m)
 - M_Y : Yawing moment acting on the slider (N × m)
 - $\epsilon_R, \epsilon_{Rd}$: Dynamic equivalent coefficient to rolling moment
 - $\epsilon_P, \epsilon_{Pd}$: Dynamic equivalent coefficient to pitching moment
 - $\epsilon_Y, \epsilon_{Yd}$: Dynamic equivalent coefficient to yawing moment
- Refer to **Table 4.14** about Dynamic equivalent coefficient.

Y_H, Y_V, Y_R, Y_P, Y_Y
: 1.0 or 0.5

At equations 1) and 2) for obtaining equivalent load F_e , among $F_H, F_V, \epsilon_P M_P, \epsilon_R M_R, \epsilon_Y M_Y$, the maximum load is assumed to be 1.0, and others are to be 0.5.

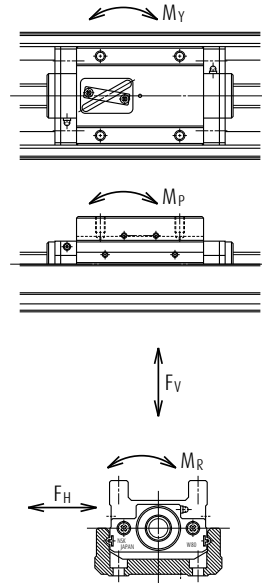


Fig. 4.6 Direction of load

Table 4.14 Dynamic equivalent coefficient

Model No.	MCM02	MCM03		MCM05	MCM06	MCM08	MCM10	MCH06 MCL06	MCH09	MCH10
		Lead 1, 2	Lead 5, 10, 12, 15							
ϵ_R	95.2	79.4	79.4	52.6	45.5	32.5	27.8	48.3	34.5	28.6
ϵ_P	174	113.9	84.2	81.3	65.1	48.8	45.2	75.1	47.9	41.0
ϵ_Y	174	113.9	84.2	81.3	65.1	48.8	45.2	75.1	47.9	41.0
ϵ_{Rd}	-	-	-	26.3	22.7	16.3	13.9	24.2	17.2	14.3
ϵ_{Pd}	-	-	-	10.4 (12.2)	9.7 (11.5)	7.6 (8.6)	7.1 (8.0)	11.4 (13.2)	8.11 (9.10)	6.98 (7.82)
ϵ_{Yd}	-	-	-	10.4 (12.2)	9.7 (11.5)	7.6 (8.6)	7.1 (8.0)	11.4 (13.2)	8.11 (9.10)	6.98 (7.82)

Note Parenthesized figures are dynamic equivalent coefficient in case of the Monocarrier without NSK K1.

In case when the load acting on the slider may fluctuate (In general, M_p , M_V may fluctuate with the acceleration/ deceleration of slider), the mean effective load is determined by Eq. 3).




Fig. 4.7 Stepwise Fluctuating Load

Travelling distance under the equivalent load Fe_1 : L_1

Travelling distance under the equivalent load Fe_2 : L_2

Travelling distance under the equivalent load Fe_n : L_n

$$F_m = \sqrt[3]{\frac{1}{L} (Fe_1^3 L_1 + Fe_2^3 L_2 + \dots + Fe_n^3 L_n)} \quad 3)$$

F_m : Mean effective load of fluctuating loads

L : Total travelling distance

The life of linear guide is calculated by Eq. 4).

$$L = L_a \times \left(\frac{C}{f_w \cdot F_m} \right)^3 \dots\dots\dots 4)$$

L : Life of linear guide (km)

F_m : Mean effective load acting on the linear guide (N)

C : Basic dynamic load rating of the linear guide (N)

L_a : Travelling distance (km)

f_w : Load factor (refer to **Table 4.15**)

When the estimated life does not clear the required life, the life of the linear guide is to be calculated again after the following measures are taken:

1. Change from the single slider type to double slider type.
2. Use a larger size Monocarrier.

(2) Life of Ball Screw (Support unit)

The mean effective load is determined from the axial loads.

For calculation of the mean effective load, use Eq. 3.

The life of ball screw is calculated by Eq. 5).

$$L = \ell \times \left(\frac{C_a}{f_w \cdot F_m} \right)^3 \times 10^6 \dots\dots\dots 5)$$

ℓ : Lead of ball screw (mm)

L : Life of ball screw (mm)

C_a : Basic dynamic load rating of the ball screw (N)

F_m : Mean effective load acting on the ball screw (N)

f_w : Load factor (refer to **Table 4.15**)

The life of a support unit is calculated by Eq. 5).

If the life of ball screw/support unit does not clear the required life, use a larger size Monocarrier.

After applying the calculations mentioned above, selection of the Monocarrier is completed.

Table 4.15 Values of load factor f_w

Operating conditions	Load factor f_w
At smooth operation with no mechanical shock	1.0 - 1.2
At normal operation	1.2 - 1.5
At operation with mechanical shock and vibrations	1.5 - 3.0

C-1-4. 8 Example of Life Estimation

This section offers an example how to estimate the life of Monocarrier based on the life of each component.

<<Example of calculation-1>>

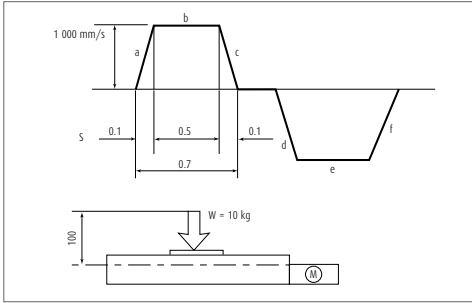


Fig. 4.8

1. Use condition

- Stroke : 600 mm
- Maximum speed : 1000 mm/s
- Load mass : $W = 10 \text{ kg}$
- Acceleration : $g = 9.8 \text{ m/s}^2$
- Setting position : Horizontal
- Operating profile : See above figure

2. Selection of Model number (Interim Selection)

Firstly, select a greater ball screw lead as the maximum speed is 1000 mm/s. The interim selection is MCM06060H20K00, a single slider specification MCM06 that has 600 mm stroke, as the stroke is 600 mm.

3. Calculation

3-1. Linear guide

3-1-1. Fatigue life:

Multiply the result of the Eq. 1) by the dynamic equivalent coefficient (Table 4.14 single slider) to convert the load volume. From above operation profile,

- i) Constant speed $Fe_1 = Y_V \cdot F_V = Y_V \cdot W_g = W \cdot g$
 $= 1 \cdot 10 \cdot 9.8 = 98 \text{ N}$
- ii) Accelerating $Fe_2 = Y_V \cdot F_V + Y_P \cdot \epsilon_P \cdot M_p$
 $= 0.5 \cdot 10 \cdot 9.8 + 1 \cdot 65.1 \cdot 0.1 \cdot 100$
 $= 700 \text{ N}$
- iii) Decelerating $Fe_3 = Y_V \cdot F_V + Y_P \cdot \epsilon_P \cdot M_p$
 $= 0.5 \cdot 10 \cdot 9.8 + 1 \cdot 65.1 \cdot 0.1 \cdot 100$
 $= 700 \text{ N}$

Mean effective load F_m

$$F_m = \sqrt[3]{\frac{1}{L} (Fe_1^3 \cdot L_1 + Fe_2^3 \cdot L_2 + Fe_3^3 \cdot L_3)}$$

$$= \sqrt[3]{\frac{1}{600} (98^3 \cdot 500 + 700^3 \cdot 50 + 700^3 \cdot 50)}$$

$$= 387 \text{ N}$$

$$L = \left(\frac{C}{f_w \cdot F_m} \right)^3 \times L_a$$

$$= \left(\frac{15900}{1.2 \cdot 387} \right)^3 \times 20$$

$$= 8.02 \times 10^5 \text{ km}$$

3-1-2. Static safety factor: Divide the basic static load rating by the maximum load.

$$F_S = \frac{C_0}{Fe} = \frac{C_0}{Fe_2} = \frac{17000}{700} = 24.2$$

3-2. Ball screw

3-2-1. Fatigue life: Obtain the axial load of each stage of operation referring to the operation profile, then calculate the mean load.

By the process above,

- i) Constant speed $Fe_1 = \mu \cdot W \times g = 0.01 \times 10 \times 9.8 = 0.98$
- ii) Accelerating $Fe_2 = Fe_1 + W\alpha = 101 \text{ N}$
- iii) Decelerating $Fe_3 = Fe_1 - W\alpha = 99 \text{ N}$

Axial mean effective load F_m

$$F_m = \sqrt[3]{\frac{1}{L} (Fe_1^3 \cdot L_1 + Fe_2^3 \cdot L_2 + Fe_3^3 \cdot L_3)}$$

$$= \sqrt[3]{\frac{1}{600} (0.98^3 \cdot 500 + 101^3 \cdot 50 + 99^3 \cdot 50)}$$

$$= 55 \text{ N}$$

$$L = \left(\frac{C_a}{f_w \cdot F_m} \right)^3 \times L \times 10^6$$

$$= \left(\frac{5080}{1.2 \cdot 55} \right)^3 \times 20 \times 10^6 \text{ (mm)}$$

$$= 9.1 \times 10^6 \text{ km}$$

3-2-2. Static safety factor: Divide the basic static load rating by the maximum axial load.

$$F_S = \frac{C_{0a}}{Fe} = \frac{C_{0a}}{Fe_2} = \frac{7460}{101} = 73.8$$

3-2-3. Maximum rotational speed: According to the table of maximum speed on page C9, MCM06 with 20 mm lead and 600 mm stroke, is possible to operate under the maximum speed of 1300 mm/s.

3-3. Support unit

3-3-1. Fatigue life: Use the axial load $F_m = 55 \text{ N}$, that is the

result of above calculation 3-2-1.

$$L = \left(\frac{C_a}{f_w \cdot F_m} \right)^3 \times \ell \times 10^6 = \left(\frac{6\,550}{1.2 \times 55} \right)^3 \times 20 \times 10^6 \text{ (mm)}$$

$$= 1.95 \times 10^7 \text{ km}$$

3-3-2. Static safety factor: Divide the limit load by the maximum axial load.

$$F_s = \frac{C_{0a}}{F_e} = \frac{C_{0a}}{F_{e2}} = \frac{2\,730}{101} = 27.0$$

3-4. Result

MCM06060H20K00	Linear guide	Ball screw	Support unit
	8.02 ·	6.5 ·	1.95 ·
Fatigue life	10 ⁵ km	10 ⁶ km	10 ⁷ km
Static safety factor	24.2	76.5	27.0

In this case, the linear guide has the shortest fatigue life of the components. Therefore, the linear guide fatigue life is used as the life of the Monocarrier. The interim selection of MCM06060H20K00, that is chosen based on the use conditions, satisfies the required life.

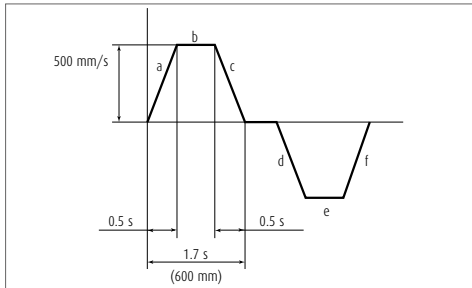


Fig. 4.9

<<Example of calculation-2>>

1. Use condition

- Stroke : 600 mm
- Maximum speed : 500 mm/s
- Load mass : W = 20 kg
- Acceleration : 9.8 m/s²
- Setting position : Horizontal
- Operating profile : See above figure




Fig. 4.10

2. Selection of Model number (Interim Selection)

Select a 10 mm lead ball screw as the maximum speed is 500 mm/s.

The interim selection is MCM08068H10D00 as a double slider

specification of MCM08 has 680 mm stroke, and the setting position is vertical.

3. Calculation

3-1. Linear guide

3-1-1. Fatigue life: Multiply the result of the Eq. 2) by the dynamic equivalent coefficient (Table 4.14, double slider) to convert the load volume. From operation profile (Fig. 4.9), the acceleration is 1 m/s².

i) Constant speed $F_{e1} = Y_p \cdot \epsilon_{pd} \cdot M_p + Y_Y \cdot \epsilon_{Yd} \cdot M_Y$
 $= 1 \cdot 7.6 \cdot 20 \cdot 9.8 \cdot 0.15$
 $+ 0.5 \cdot 7.6 \cdot 20 \cdot 9.8 \cdot 0.1$
 $= 298 \text{ N}$

ii) Accelerating $F_{e2} = Y_p \cdot \epsilon_{pd} \cdot M_p + Y_Y \cdot \epsilon_{Yd} \cdot M_Y$
 $= 1 \cdot 7.6 \cdot 20 \cdot (9.8 + 1.0) \cdot 0.15$
 $+ 0.5 \cdot 7.6 \cdot 20 \cdot (9.8 + 1.0) \cdot 0.1$
 $= 329 \text{ N}$

iii) Decelerating $F_{e3} = Y_p \cdot \epsilon_{pd} \cdot M_p + Y_Y \cdot \epsilon_{Yd} \cdot M_Y$
 $= 1 \cdot 7.6 \cdot 20 \cdot (9.8 - 1.0) \cdot 0.15 + 0.5$
 $\cdot 7.6 \cdot 20 \cdot (9.8 - 1.0) \cdot 0.1$
 $= 268 \text{ N}$

Mean effective load F_m

$$F_m = \sqrt[3]{\frac{1}{L} (F_{e1}^3 \cdot L_1 + F_{e2}^3 \cdot L_2 + F_{e3}^3 \cdot L_3)}$$

$$= \sqrt[3]{\frac{1}{600} (298^3 \cdot 350 + 329^3 \cdot 125 + 268^3 \cdot 125)}$$

$$= 300 \text{ N}$$

$$L = L_a \times \left(\frac{C}{f_w \cdot F_m} \right)^3$$

$$= 10 \times \left(\frac{24\,400}{1.2 \cdot 300} \right)^3$$

$$= 3.11 \times 10^6 \text{ km}$$

3-1-2. Static safety factor: Divide the basic static load rating by the maximum load.

$$F_s = \frac{C_0}{F_e} = \frac{C_0}{F_{e2}} = \frac{22\,800}{329} = 69.3$$

3-2. Ball screw

3-2-1. Fatigue life: Obtain the axial load of each stage of operation referring to the operation profile, then calculate the mean load.

i) Constant speed
 $F_{e1} = W \cdot g = 20 \cdot 9.8 = 196 \text{ N}$

ii) Accelerating
 $F_{e2} = F_{e1} + W \cdot \alpha = 196 + 20 \cdot 1 = 216 \text{ N}$

iii) Decelerating
 $F_{e3} = F_{e1} - W \cdot \alpha = 196 - 20 \cdot 1 = 176 \text{ N}$

Axial mean effective load F_m

$$F_m = \sqrt[3]{\frac{1}{L} (F_e \cdot L_1 + F_e \cdot L_2 + F_e \cdot L_3)}$$

$$= \sqrt[3]{\frac{1}{600} (196^3 \cdot 350 + 216^3 \cdot 125 + 176^3 \cdot 125)}$$

$$= 197 \text{ N}$$

$$L = \ell \times \left(\frac{C_a}{f_w \cdot F_m} \right)^3 \times 10^6$$

$$= 10 \times \left(\frac{8\,140}{1.2 \cdot 197} \right)^3 \times 10^6 \text{ (mm)}$$

$$= 4.08 \times 10^5 \text{ km}$$

3-2-2. Static safety factor: Divide the basic static load rating by the maximum axial load.

$$F_S = \frac{C_{0a}}{F_e} = \frac{C_{0a}}{F_{e2}} = \frac{12\,800}{216} = 59.2$$

3-3. Support unit

3-3-1. Fatigue life: Use the axial load $F_m = 197 \text{ N}$, that is the result of above calculation 3-2-1.

$$L = \ell \times \left(\frac{C_a}{f_w \cdot F_m} \right)^3 \times 10^6 = 10 \times \left(\frac{7\,100}{1.2 \times 197} \right)^3 \times 10^6 \text{ (mm)}$$

$$= 2.70 \times 10^5 \text{ km}$$

3-3-2. Static safety factor: Divide the limit load by the maximum axial load.

$$F_S = \frac{C_{0a}}{F_e} = \frac{C_{0a}}{F_{e2}} = \frac{3\,040}{216} = 14.0$$

3-4. Result

MCM08068H10D00	Linear guide	Ball screw	Support unit
	3.11 ·	2.67 ·	2.70 ·
Fatigue life	10 ⁶ km	10 ⁵ km	10 ⁵ km
Static safety factor	69.3	59.2	14.0





C-1-5 MCM Series

	Page
1 MCM Series Reference Number Coding.....	C27
2 MCM Series Dimension Table of Standard Products	
MCM02.....	C28
MCM03.....	C29
MCM05.....	C33
MCM06.....	C37
MCM08.....	C41
MCM10.....	C45
3 MCM Series Accessories	
3.1 Sensor Unit.....	C49
3.2 Cover Unit	C53
3.3 Motor Bracket	C55

C-1-5 MCM Series

C-1-5.1 MCM Series Reference Number Coding

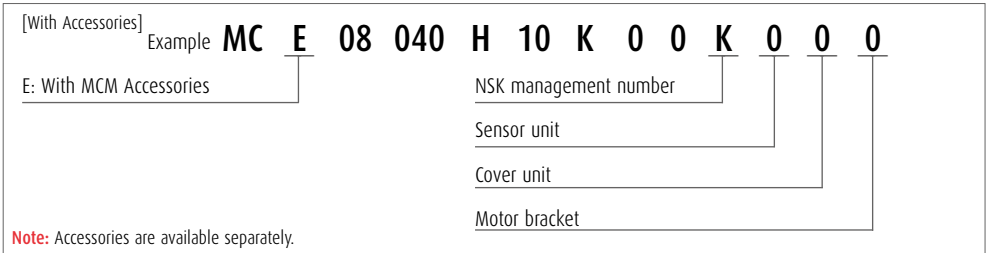
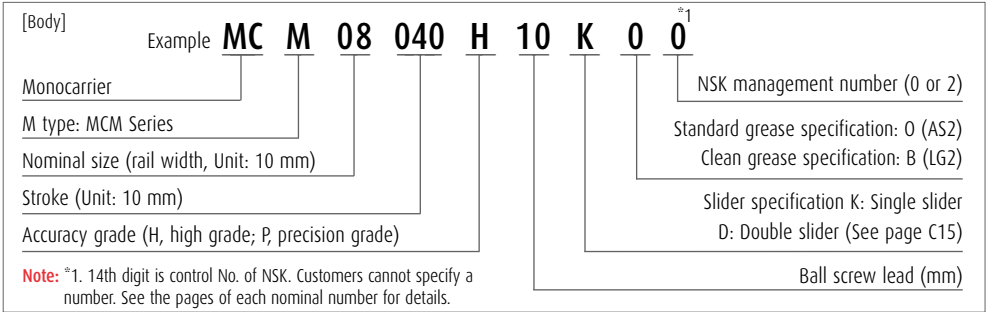


Table 1 Sensor unit (See page C49)

Reference No. code	Specification	Reference No.
0	N/A	—
1	Proximity switch (normally close contact 3 pieces)	MC - SRxx - 10
2	Proximity switch (normally open contact 3 pieces)	MC - SRxx - 11
3	Proximity switch (normally open contact 1 piece, normally close contact 2 pieces)	MC - SRxx - 12
4	Photo sensor 3 pieces	MC - SRxx - 13

Note 1) xx: Reference number 2) Sensor rail is not included in sensor unit. If you require the rail, please request separately. (See page C50 to C52)

Table 2 Cover unit (See pages C53 to C54)

Reference No. code	Specification	Reference No.
0	N/A	—
1	With top cover	MC - CVxxxx - 01 (02) *
—	Full cover	MC - CVxxxx - 00

Note 1) xxxx: Reference number and stroke number 2)*: "-02" is only used for Monocarrier MCM03. 3) When a sensor unit is used, full cover unit cannot be used.


Table 3 Motor bracket (See pages C55 to C71)

Reference No. code	Reference No.				
	MCM03	MCM05	MCM06	MCM08	MCM10
0	N/A	N/A	N/A	N/A	N/A
1	MC-BK03-146-00	MC-BK05-145-00	MC-BK06-145-00	MC-BK08-145-00	MC-BK10-170-00
2	MC-BK03-148-01	MC-BK05-146-00	MC-BK06-146-00	MC-BK08-146-00	MC-BK10-170-01
3	MC-BK03-231-00	MC-BK05-148-00	MC-BK06-148-00	MC-BK08-160-00	MC-BK10-190-00
4	—	MC-BK05-160-00	MC-BK06-160-00	MC-BK08-170-00	MC-BK10-270-00
5	—	MC-BK05-250-00	MC-BK06-170-00	MC-BK08-170-01	—
6	—	—	MC-BK06-170-01	MC-BK08-190-00	—
7	—	—	MC-BK06-250-00	MC-BK08-250-00	—
8	—	—	—	MC-BK08-270-00	—

N/A: Not applicable

C-1-5.2 MCM Series Dimension Table of Standard Products

MCM02

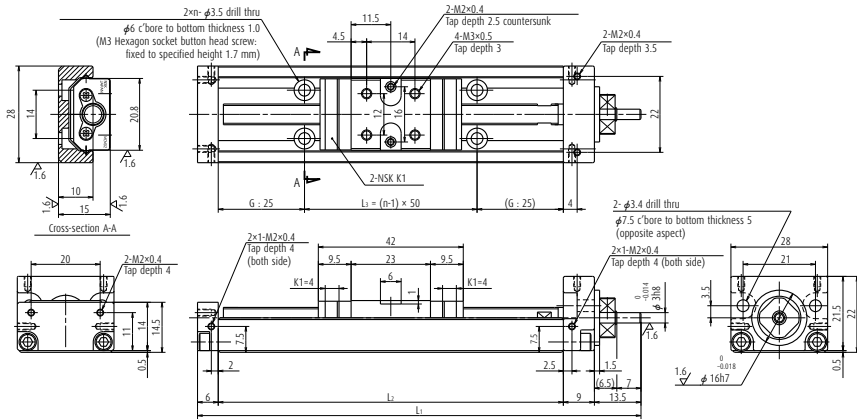

Dimension of MCM02 (Single slider)

Reference No.	Nominal stroke (mm)	Stroke limit (mm)	Ball screw lead (mm)	Body length (mm)			No. of mounting hole n	Inertia $\times 10^{-7}$ (kg · m ²)	Mass (kg)
				L ₁	L ₂	L ₃			
MCM02005H01K	50	58	1	128.5	100	50	2	0.93	0.26
MCM02005P01K	50	58	1	128.5	100	50	2	0.93	0.26
MCM02005H02K	50	58	2	128.5	100	50	2	0.93	0.26
MCM02005P02K	50	58	2	128.5	100	50	2	0.93	0.26
MCM02010H01K	100	108	1	178.5	150	100	3	1.36	0.32
MCM02010P01K	100	108	1	178.5	150	100	3	1.36	0.32
MCM02010H02K	100	108	2	178.5	150	100	3	1.36	0.32
MCM02010P02K	100	108	2	178.5	150	100	3	1.36	0.32
MCM02015H01K	150	158	1	228.5	200	150	4	1.81	0.39
MCM02015P01K	150	158	1	228.5	200	150	4	1.81	0.39
MCM02015H02K	150	158	2	228.5	200	150	4	1.81	0.39
MCM02015P02K	150	158	2	228.5	200	150	4	1.81	0.39

Monocarrier dynamic torque specification (N · cm)

Ball screw lead (mm)	High grade		Precision	
	1	0.1 - 1.3	0.2 - 1.6	0.1 - 1.3
2	0.1 - 1.3	0.2 - 1.6	0.1 - 1.3	0.2 - 1.6

Note

1. Frictional resistance of NSK K1 is included in dynamic torque in table.
2. Grease is packed into ball screw, linear guide parts and support unit.
3. Consult NSK for life estimates under large moment loads.
4. There is no LG2 specification for MCM02.

Basic load rating


Lead l (mm)	Shaft dia d (mm)	Basic dynamic load rating (N)				Basic static load rating (N)		Support unit load limit (N)
		Ball screw C _a	Linear guides C	Support unit C _a	Rated running distance L _a (km)	Ball screw C _{0a}	Linear guides C ₀	
1	φ 6	405 (High grade)	4 910	615	1	555 (High grade)	2 120	490
1	φ 6	480 (Precision)	4 910	615	1	615 (Precision)	2 120	490
2	φ 6	400 (High grade)	3 900	615	2	555 (High grade)	2 120	490
2	φ 6	475 (Precision)	3 900	615	2	610 (Precision)	2 120	490

Slider	Basic static moment load (N · m)		
	Rolling M _{RO}	Pitching M _{PO}	Yawing M _{YO}
Single	24	8	8

MCM03

Ball screw lead 1 and 2

Accuracy grade: Precision (P)

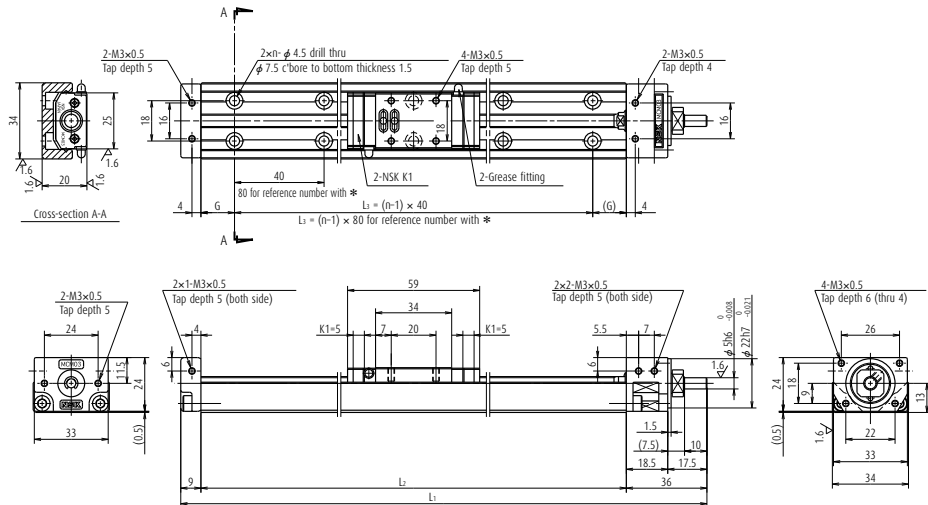

Dimension of MCM03 (Single slider)

Reference No.	Nominal stroke (mm)	Stroke limit (mm) (without K1)	Ball screw lead (mm)	Body length (mm)				No. of mounting hole n	Inertia $\times 10^{-5}$ (kg · m ²)	Mass (kg)
				L ₁	L ₂	G	L ₃			
*MCM03005P01K00	50	56	1	160	115	17.5	80	2	0.015	0.6
*MCM03005P02K00	50	(66)	2	160	115	17.5	80	2	0.016	0.6
MCM03010P01K00	100	131	1	235	190	15	160	5	0.021	0.7
MCM03010P02K00	100	(141)	2	235	190	15	160	5	0.022	0.7
MCM03015P01K00	150	181	1	285	240	20	200	6	0.025	0.8
MCM03015P02K00	150	(191)	2	285	240	20	200	6	0.026	0.8

Note Bolt hole pitch L₃ on items marked with * is 80 mm.

Monocarrier dynamic torque specification (N · cm)

Ball screw lead (mm)	1	0.2 - 1.7
	2	0.2 - 1.7

Note

1. Frictional resistance of NSK K1 is included in dynamic torque in table.
2. Grease is packed into ball screw, linear guide parts and support unit.
3. Consult NSK for life estimates under large moment loads.
4. A spacer plate is required when using a cover unit or sensor unit for MCM03 with the lead of 1 or 2 mm. (See page C53)

Basic load rating

Lead	Shaft dia	Basic dynamic load rating (N)				Basic static load rating (N)		Support unit load limit (N)
		Ball screw C _a	Linear guides C	Support unit C _a	Rated running distance L _a (km)	Ball screw C _{0a}	Linear guides C ₀	
1	φ 6	870	10 900	2 670	1	1 230	4 900	1 040
1	φ 6	865	8 650	2 670	2	1 220	4 900	1 040


Basic static moment load of linear guide

Slider	Basic static moment load (N · m)		
	Rolling M _{R0}	Pitching M _{P0}	Yawing M _{Y0}
Single	68	28	28

MCM03

Ball screw lead 5, 10 and 12

Accuracy grade: High grade (H)

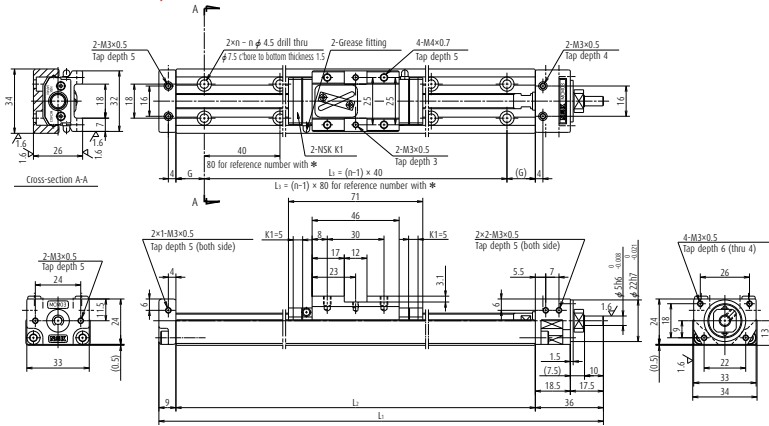

Dimension of MCM03 (Single slider)

Reference No.	Nominal stroke (mm)	Stroke limit (mm) (without K1)	Ball screw lead (mm)	Body length (mm)				No. of mounting hole n	Inertia $\times 10^{-5}$ (kg · m ²)	Mass (kg)
				L ₁	L ₂	G	L ₃			
^o MCM03005H05K00	50	69 (79)	5	185	140	30	80	2	0.057	0.6
^o MCM03005H10K00	50	69 (79)	10	185	140	30	80	2	0.080	0.6
^o MCM03005H12K00	50	69 (79)	12	185	140	30	80	2	0.097	0.6
MCM03010H05K00	100	119 (129)	5	235	190	15	160	5	0.073	0.7
MCM03010H10K00	100	119 (129)	10	235	190	15	160	5	0.092	0.7
MCM03010H12K00	100	119 (129)	12	235	190	15	160	5	0.109	0.7
MCM03015H05K00	150	169 (179)	5	285	240	20	200	6	0.089	0.8
MCM03015H10K00	150	169 (179)	10	285	240	20	200	6	0.105	0.8
MCM03015H12K00	150	169 (179)	12	285	240	20	200	6	0.122	0.8
MCM03020H05K00	200	219 (229)	5	335	290	25	240	7	0.104	0.9
MCM03020H10K00	200	219 (229)	10	335	290	25	240	7	0.118	0.9
MCM03020H12K00	200	219 (229)	12	335	290	25	240	7	0.135	0.9
MCM03025H05K00	250	269 (279)	5	385	340	30	280	8	0.120	1.0
MCM03025H10K00	250	269 (279)	10	385	340	30	280	8	0.131	1.0
MCM03025H12K00	250	269 (279)	12	385	340	30	280	8	0.147	1.0

Note Bolt hole pitch L₃ on items marked with ^o is 80 mm.

Monocarrier dynamic torque specification (N · cm)

Ball screw lead(mm)	Accuracy grade	
	High grade	Precision
5	0.2 - 2.5	0.6 - 4.4
10	0.3 - 3.0	0.7 - 4.9
12		

Note

1. Frictional resistance of NSK K1 is included in dynamic torque in table.
2. Grease is packed into ball screw, linear guide parts and support unit.
3. Consult NSK for life estimates under large moment loads.

Basic load rating


Lead l (mm)	Shaft dia d (mm)	Basic dynamic load rating (N)				Basic static load rating (N)		Support unit load limit (N)
		Ball screw C _a	Linear guides C	Support unit C _o	Rated running distance L _a (km)	Ball screw C _{0a}	Linear guides C ₀	
5	φ 8	2 090	7 850	2 670	5	2 830	6 620	1 040
10	φ 8	1 310	6 250	2 670	10	1 710	6 620	1 040
12	φ 8	1 320	5 880	2 670	12	1 730	6 620	1 040

Slider	Basic static moment load (N · m)		
	Rolling	Pitching	Yawing
	M _{RO}	M _{PO}	M _{YO}
Single	92	51	51

MCM03

Ball screw lead 15

Accuracy grade: High grade (H)

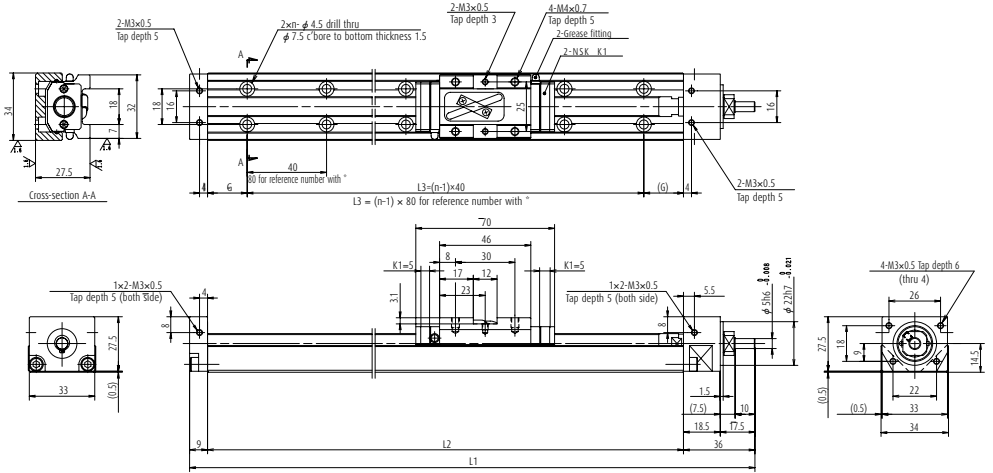

Dimension of MCM03 (Single slider)

Reference No.	Nominal stroke (mm)	Stroke limit (mm) (without K1)	Ball screw lead (mm)	Ball screw diameter (mm)	Body length (mm)				No. of mounting hole n	Inertia $\times 10^{-4}$ (kg · m ²)	Mass (kg)
					L ₁	L ₂	G	L ₃			
*MCM03005H15K00	50	70 (80)	15	φ 10	185	140	30	80	2	0.183	0.67
MCM03010H15K00	100	120(130)	15	φ 10	235	190	15	160	5	0.222	0.77
MCM03015H15K00	150	170(180)	15	φ 10	285	240	20	200	6	0.260	0.87
MCM03020H15K00	200	220(230)	15	φ 10	335	290	25	240	7	0.298	0.97
MCM03025H15K00	250	270(280)	15	φ 10	385	340	30	280	8	0.336	1.07

Note Bolt hole pitch L₃ on items marked with * is 80 mm.

Monocarrier dynamic torque specification (N · cm)		
Ball screw lead (mm)	15	0.3 – 5.6

Note

1. Frictional resistance of NSK K1 is included in dynamic torque in table.
2. Grease is packed into ball screw, linear guide parts and support unit.
3. Consult NSK for life estimates under large moment loads.
4. When a cover unit is added, an optional spacer plate is required. (See page C53)
5. There is no P grade (precision grade) for Lead 15.

Basic load rating

Lead (mm)	Shaft dia (mm)	Basic dynamic load rating (N)				Basic static load rating (N)		Support unit load limit (N)
		Ball screw C _a	Linear guides C	Support unit C _a	Rated running distance L _a (km)	Ball screw C _{0a}	Linear guides C ₀	
15	φ 10	2 000	5 440	2 670	15	2 740	6 620	1 040

Basic static moment load of linear guide


Slider	Basic static moment load (N · m)		
	Rolling M _{RO}	Pitching M _{PO}	Yawing M _{YO}
Single	92	51	51



MCM05

Ball screw lead 5, 10 and 20

Accuracy grade: High grade (H)

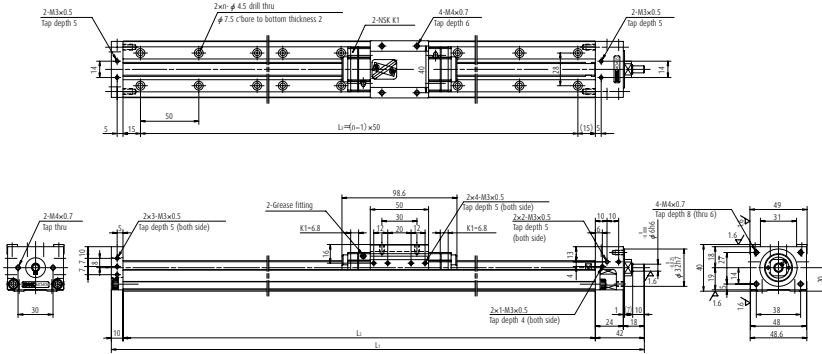

Dimension of MCM05 (Single slider)

Reference No.	Nominal stroke (mm)	Stroke limit (mm) (without K1)	Ball screw lead (mm)	Body length (mm)			No. of mounting hole n	Inertia $\times 10^{-5}$ (kg · m ²)	Mass (kg)
				L ₁	L ₂	L ₃			
MCM05005H05K00	50	81 (95)	5	232	180	150	4	0.025	1.4
MCM05005H10K00	50	81 (95)	10	232	180	150	4	0.035	1.4
MCM05005H20K00	50	81 (95)	20	232	180	150	4	0.073	1.4
MCM05010H05K00	100	131 (145)	5	282	230	200	5	0.031	1.6
MCM05010H10K00	100	131 (145)	10	282	230	200	5	0.040	1.6
MCM05010H20K00	100	131 (145)	20	282	230	200	5	0.078	1.6
MCM05015H05K00	150	181 (195)	5	332	280	250	6	0.036	1.8
MCM05015H10K00	150	181 (195)	10	332	280	250	6	0.046	1.8
MCM05015H20K00	150	181 (195)	20	332	280	250	6	0.084	1.8
MCM05020H05K00	200	231 (245)	5	382	330	300	7	0.042	2.0
MCM05020H10K00	200	231 (245)	10	382	330	300	7	0.051	2.0
MCM05020H20K00	200	231 (245)	20	382	330	300	7	0.089	2.0
MCM05025H05K00	250	281 (295)	5	432	380	350	8	0.047	2.2
MCM05025H10K00	250	281 (295)	10	432	380	350	8	0.057	2.2
MCM05025H20K00	250	281 (295)	20	432	380	350	8	0.095	2.2

Monocarrier dynamic torque specification (N · cm)

Ball screw lead (mm)	Accuracy grade	
	High grade	Precision
5	1.0 - 4.8	1.9 - 7.7
10	1.1 - 5.8	2.1 - 8.7
20	1.6 - 7.9	2.5 - 10.7
30	1.8 - 13.1	—

Note

- Frictional resistance of NSK K1 is included in dynamic torque in table.
- Grease is packed into ball screw, linear guide parts and support unit.
- Consult NSK for life estimates under large moment loads.

Basic load rating

Lead l (mm)	Shaft dia d (mm)	Basic dynamic load rating (N)				Basic static load rating (N)		Support unit load limit (N)
		Ball screw C_a	Linear guides C	Support unit C_a	Rated running distance L_a (km)	Ball screw C_{0a}	Linear guides C_0	
5	ϕ 12	4 390	15 600	4 400	5	6 260	10 900	1 450
10	ϕ 12	2 740	12 400	4 400	10	3 820	10 900	1 450
20	ϕ 12	2 660	9 850	4 400	20	3 800	10 900	1 450
30	ϕ 12	3 300	8 600	6 550	30	5 390	10 900	2 730


Basic static moment load of linear guide

Slider	Basic static moment load (N · m)		
	Rolling M_{R0}	Pitching M_{P0}	Yawing M_{Y0}
Single	229	89	89

MCM05

Ball screw lead 30

Accuracy grade: High grade (H)

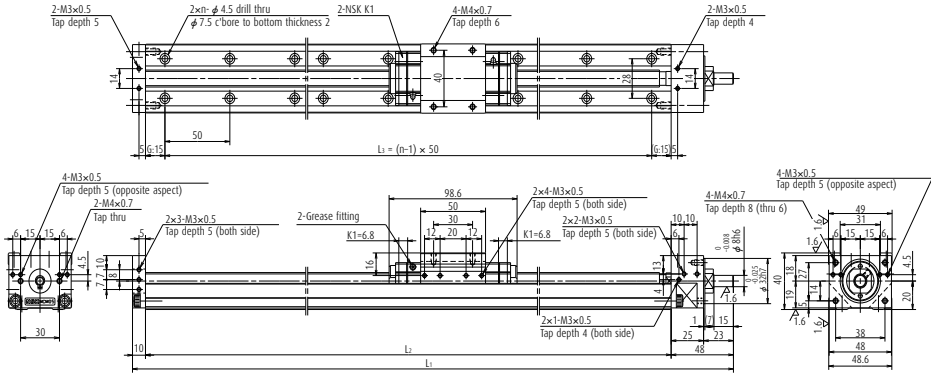

Dimension of MCM05 (Single slider)

Reference No.	Nominal stroke (mm)	Stroke limit (mm) (without K1)	Ball screw lead (mm)	Body length (mm)			No. of mounting hole n	Inertia $\times 10^{-4}$ (kg · m ²)	Mass (kg)
				L ₁	L ₂	L ₃			
MCM05030H05K00	300	331 (345)	5	482	430	400	9	0.053	2.3
MCM05030H10K00	300	331 (345)	10	482	430	400	9	0.063	2.3
MCM05030H20K00	300	331 (345)	20	482	430	400	9	0.101	2.3
MCM05030H30K00	300	331 (345)	30	488	430	400	9	0.164	2.3
MCM05040H05K00	400	431 (445)	5	582	530	500	11	0.064	2.7
MCM05040H10K00	400	431 (445)	10	582	530	500	11	0.074	2.7
MCM05040H20K00	400	431 (445)	20	582	530	500	11	0.112	2.7
MCM05040H30K00	400	431 (445)	30	588	530	500	11	0.175	2.8
MCM05050H05K00	500	531 (545)	5	682	630	600	13	0.076	3.1
MCM05050H10K00	500	531 (545)	10	682	630	600	13	0.085	3.1
MCM05050H20K00	500	531 (545)	20	682	630	600	13	0.123	3.1
MCM05050H30K00	500	531 (545)	30	688	630	600	13	0.186	3.2
MCM05060H05K00	600	631 (645)	5	782	730	700	15	0.087	3.5
MCM05060H10K00	600	631 (645)	10	782	730	700	15	0.096	3.5
MCM05060H20K00	600	631 (645)	20	782	730	700	15	0.134	3.5
MCM05060H30K00	600	631 (645)	30	788	730	700	15	0.198	3.6

Monocarrier dynamic torque specification (N · cm)

Ball screw lead (mm)	Accuracy grade	
	High grade	Precision
5	1.0 - 4.8	1.9 - 7.7
10	1.1 - 5.8	2.1 - 8.7
20	1.6 - 7.9	2.5 - 10.7
30	1.8 - 13.1	—

Note

- Frictional resistance of NSK K1 is included in dynamic torque in table.
- Grease is packed into ball screw, linear guide parts and support unit.
- Consult NSK for life estimates under large moment loads.

Basic load rating


Lead ℓ (mm)	Shaft dia d (mm)	Basic dynamic load rating (N)			Basic static load rating (N)			Support unit load limit (N)
		Ball screw C_a	Linear guides C	Support unit a	Ball screw C_{0a}	Linear guides C_0		
5	ϕ 12	4 390	15 600	4 400	5	6 260	10 900	1 450
10	ϕ 12	2 740	12 400	4 400	10	3 820	10 900	1 450
20	ϕ 12	2 660	9 850	4 400	20	3 800	10 900	1 450
30	ϕ 12	3 300	8 600	6 550	30	5 390	10 900	2 730

Basic static moment load of linear guide

Slider	Basic static moment load (N · m)		
	Rolling M_{R0}	Pitching M_{P0}	Yawing M_{Y0}
Single	229	89	89

MCM05 (Double slider)

Accuracy grade: High grade (H)

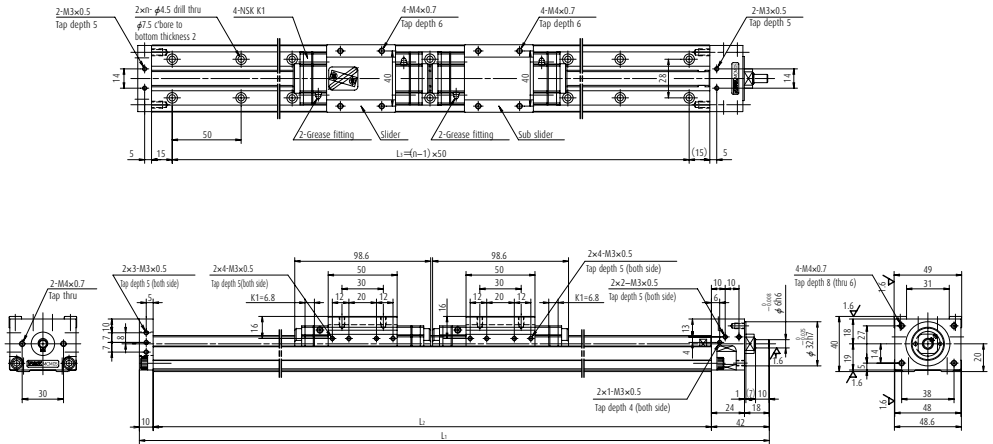

Dimension of MCM05 (Double slider)

Reference No.	Nominal stroke (mm)	Stroke limit (mm) (without K1)	Ball screw lead (mm)	Body length (mm)			No. of mounting hole n	Inertia x 10 ⁻⁴ (kg · m ²)	Mass (kg)
				L ₁	L ₂	L ₃			
MCM05031H10D00	310	332 (360)	10	582	530	500	11	0.086	3.2
MCM05031H20D00	310	332 (360)	20	582	530	500	11	0.162	3.2
MCM05041H10D00	410	432 (460)	10	682	630	600	13	0.098	3.6
MCM05041H20D00	410	432 (460)	20	682	630	600	13	0.174	3.6
MCM05051H10D00	510	532 (560)	10	782	730	700	15	0.109	4.2
MCM05051H20D00	510	532 (560)	20	782	730	700	15	0.185	4.2

Monocarrier dynamic torque specification (N · cm)

Ball screw lead (mm)	Accuracy grade	
	High grade	Precision
10	1.5 - 7.6	2.4 - 10.6
20	2.3 - 11.8	3.2 - 14.8

Note

- Frictional resistance of NSK K1 is included in dynamic torque in table.
- Grease is packed into ball screw, linear guide parts and support unit.
- Consult NSK for life estimates under large moment loads.

Basic load rating


Lead ℓ (mm)	Shaft dia d (mm)	Basic dynamic load rating (N)				Basic static load rating (N)		
		Ball screw C _a	Linear guides C	Support unit C _a	Rated running distance L _a (km)	Ball screw C _{0a}	Linear guides C ₀	Support unit load limit (N)
5	φ 12	4 390	15 600	4 400	5	6 260	10 900	1 450
10	φ 12	2 740	12 400	4 400	10	3 820	10 900	1 450
20	φ 12	2 660	9 850	4 400	20	3 800	10 900	1 450

Basic static moment load of linear guide

Slider	Basic static moment load (N · m)		
	Rolling M _{RO}	Pitching M _{PO}	Yawing M _{YO}
Double	455	765	765

MCM06

Accuracy grade: High grade (H)

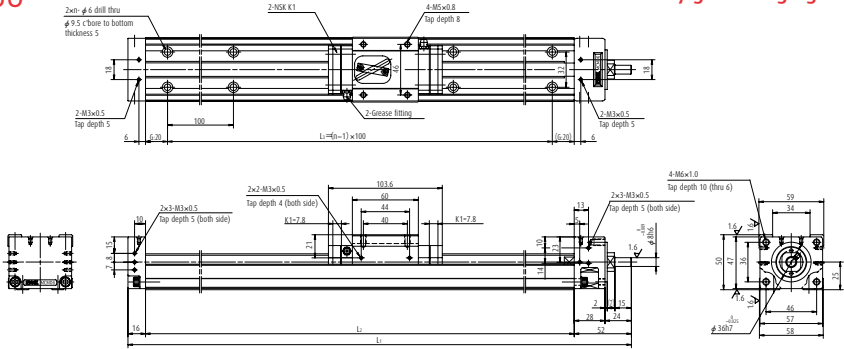

Dimension of MCM06 (Single slider)

Reference No.	Nominal stroke (mm)	Stroke limit (mm) (without K1)	Ball screw lead (mm)	Body length (mm)			No. of mounting hole n	Inertia $\times 10^{-4}$ (kg · m ²)	Mass (kg)
				L ₁	L ₂	L ₃			
◇MCM06005H05K02	50	86 (102)	5	258	190	100	2	0.066	2.7
◇MCM06005H10K00	50	86 (102)	10	258	190	100	2	0.077	2.7
◇MCM06005H20K00	50	86 (102)	20	258	190	100	2	0.122	2.7
MCM06010H05K02	100	136 (152)	5	308	240	200	3	0.080	3.0
MCM06010H10K00	100	136 (152)	10	308	240	200	3	0.092	3.0
MCM06010H20K00	100	136 (152)	20	308	240	200	3	0.137	3.0
◇MCM06015H05K02	150	186 (202)	5	358	290	200	3	0.095	3.5
◇MCM06015H10K00	150	186 (202)	10	358	290	200	3	0.106	3.5
◇MCM06015H20K00	150	186 (202)	20	358	290	200	3	0.152	3.5
MCM06020H05K02	200	236 (252)	5	408	340	300	4	0.110	3.8
MCM06020H10K00	200	236 (252)	10	408	340	300	4	0.121	3.8
MCM06020H20K00	200	236 (252)	20	408	340	300	4	0.167	3.8
◇MCM06025H05K02	250	286 (302)	5	458	390	300	4	0.125	4.2
◇MCM06025H10K00	250	286 (302)	10	458	390	300	4	0.136	4.2
◇MCM06025H20K00	250	286 (302)	20	458	390	300	4	0.181	4.2
MCM06030H05K02	300	336 (352)	5	508	440	400	5	0.139	4.5
MCM06030H10K00	300	336 (352)	10	508	440	400	5	0.150	4.5
MCM06030H20K00	300	336 (352)	20	508	440	400	5	0.196	4.5

Note 1. Dimension G is 45 for items marked with ◇. 2. The nominal number in the above table is for high-grade grease specifications. In the case of other specifications, see the following table for the 13th and 14th digits.

Coding for columns 13 and 14

Grease	Lead	High-grade, precision-grade
Standard	5	02
	10, 20	00
LG2	5	B2
	10, 20	B0

Monorail dynamic torque specification (N · cm)		
Ball screw lead (mm)	Accuracy grade	
	High grade	Precision
5	1.9 - 7.4	3.4 - 12.3
10	2.2 - 8.6	3.6 - 14.0
20	2.8 - 11.0	4.2 - 16.5

Note


1. Frictional resistance of NSK K1 is included in dynamic torque in table.
2. Grease is packed into ball screw, linear guide parts and support unit.
3. Consult NSK for life estimates under large moment loads.

Basic load rating

Lead ℓ (mm)	Shaft dia d (mm)	Basic dynamic load rating (N)				Basic static load rating (N)		
		Ball screw C _a	Linear guides C	Support unit C _a	Rated running distance L _a (km)	Ball screw C _{0a}	Linear guides C ₀	Support unit load limit (N)
5	φ 15	8 300	25 200	6 550	5	12 700	17 000	2 730
10	φ 15	8 140	20 000	6 550	10	12 800	17 000	2 730
20	φ 15	5 080	15 900	6 550	20	7 460	17 000	2 730

Basic static moment load of linear guide

Slider	Basic static moment load (N · m)		
	Rolling M _{RO}	Pitching M _{PO}	Yawing M _{YO}
Single	415	174	174

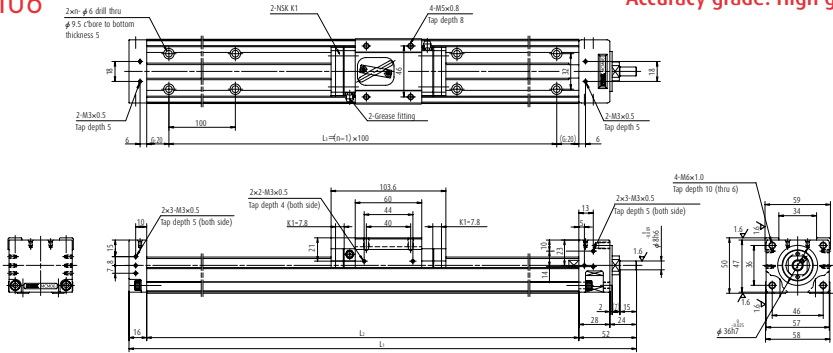

Dimension of MCM06 (Single slider)

Reference No.	Nominal stroke (mm)	Stroke limit (mm) (without K1)	Ball screw lead (mm)	Body length (mm)			No. of mounting hole n	Inertia $\times 10^{-4}$ (kg · m ²)	Mass (kg)
				L ₁	L ₂	L ₃			
MCM06040H05K02	400	436 (452)	5	608	540	500	6	0.169	5.2
MCM06040H10K00	400	436 (452)	10	608	540	500	6	0.180	5.2
MCM06040H20K00	400	436 (452)	20	608	540	500	6	0.225	5.2
MCM06050H05K02	500	536 (552)	5	708	640	600	7	0.198	6.0
MCM06050H10K00	500	536 (552)	10	708	640	600	7	0.209	6.0
MCM06050H20K00	500	536 (552)	20	708	640	600	7	0.255	6.0
MCM06060H05K02	600	636 (652)	5	808	740	700	8	0.228	6.7
MCM06060H10K00	600	636 (652)	10	808	740	700	8	0.239	6.7
MCM06060H20K00	600	636 (652)	20	808	740	700	8	0.284	6.7
MCM06070H05K02	700	736 (752)	5	908	840	800	9	0.257	7.4
MCM06070H10K00	700	736 (752)	10	908	840	800	9	0.268	7.4
MCM06070H20K00	700	736 (752)	20	908	840	800	9	0.314	7.4
MCM06080H05K02	800	836 (852)	5	1 008	940	900	10	0.286	8.1
MCM06080H10K00	800	836 (852)	10	1 008	940	900	10	0.298	8.1
MCM06080H20K00	800	836 (852)	20	1 008	940	900	10	0.343	8.1

Note The nominal number in the above table is for high-grade grease specifications. In the case of other specifications, see the following table for the 13th and 14th digits.

Coding for columns 13 and 14

Grease	Lead	High-grade, precision-grade
Standard	5	02
	10, 20	00
LG2	5	B2
	10, 20	B0

Monocarrier dynamic torque specification (N · cm)		
Ball screw lead(mm)	Accuracy grade	
	High grade	Precision
5	1.9 – 7.4	3.4 – 12.3
10	2.2 – 8.6	3.6 – 14.0
20	2.8 – 11.0	4.2 – 16.5

Note

- Frictional resistance of NSK K1 is included in dynamic torque in table.
- Grease is packed into ball screw, linear guide parts and support unit.
- Consult NSK for life estimates under large moment loads.

Basic load rating


Lead	Shaft dia	Basic dynamic load rating (N)				Basic static load rating (N)		
		Ball screw C _a	Linear guides C	Support unit C _a	Rated running distance L _a (km)	Ball screw C _{0a}	Linear guides C ₀	Support unit load limit (N)
5	∅ 15	8 300	25 200	6 550	5	12 700	17 000	2 730
10	∅ 15	8 140	20 000	6 550	10	12 800	17 000	2 730
20	∅ 15	5 080	15 900	6 550	20	7 460	17 000	2 730

Basic static moment load of linear guide

Slider	Basic static moment load (N · m)		
	Rolling M _{RO}	Pitching M _{PO}	Yawing M _{YO}
Single	415	174	174

MCM06 (Double slider)

Accuracy grade: High grade (H)

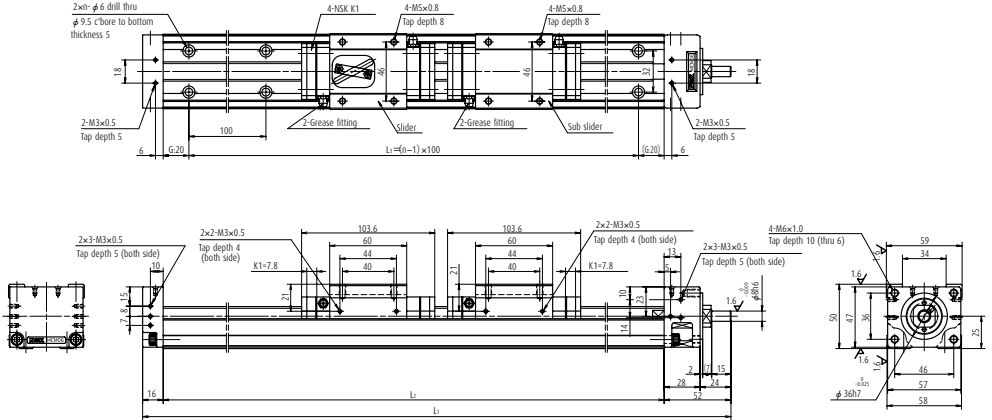

Dimension of MCM06 (Double slider)

Reference No.	Nominal stroke (mm)	Stroke limit (mm) (without K1)	Ball screw lead (mm)	Body length (mm)			No. of mounting hole n	Inertia × 10 ⁻⁴ (kg · m ²)	Mass (kg)
				L ₁	L ₂	L ₃			
MCM06011H05D02	110	132 (164)	5	408	340	300	4	0.114	4.4
MCM06011H10D00	110	132 (164)	10	408	340	300	4	0.136	4.4
MCM06021H05D02	210	232 (264)	5	508	440	400	5	0.143	5.1
MCM06021H10D00	210	232 (264)	10	508	440	400	5	0.166	5.1
MCM06021H20D00	210	232 (264)	20	508	440	400	5	0.257	5.1
MCM06031H05D02	310	332 (364)	5	608	540	500	6	0.173	5.8
MCM06031H10D00	310	332 (364)	10	608	540	500	6	0.195	5.8
MCM06031H20D00	310	332 (364)	20	608	540	500	6	0.286	5.8

Note The nominal number in the above table is for high-grade grease specifications. In the case of other specifications, see the following table for the 13th and 14th digits.

Coding for columns 13 and 14

Grease	Lead	High-grade, precision-grade
Standard	5	02
Standard	10, 20	00
LG2	5	B2
LG2	10, 20	B0

Monocarrier dynamic torque specification (N · cm)		
Ball screw lead(mm)	Accuracy grade	
	High grade	Precision
5	2.3 - 8.5	3.7 - 13.5
10	2.7 - 10.9	4.2 - 16.4
20	4.0 - 15.9	5.5 - 21.3

Note

- Frictional resistance of NSK K1 is included in dynamic torque in table.
- Grease is packed into ball screw, linear guide parts and support unit.
- Consult NSK for life estimates under large moment loads.

Basic load rating

Lead ℓ (mm)	Shaft dia d (mm)	Basic dynamic load rating (N)				Basic static load rating (N)		
		Ball screw C _a	Linear guides C	Support unit C _a	Rated running distance L _a (km)	Ball screw C _{0a}	Linear guides C ₀	Support unit load limit (N)
5	φ 15	8 300	25 200	6 550	5	12 700	17 000	2 730
10	φ 15	8 140	20 000	6 550	10	12 800	17 000	2 730
20	φ 15	5 080	15 900	6 550	20	7 460	17 000	2 730


Basic static moment load of linear guide

Slider	Basic static moment load (N · m)		
	Rolling M _{RO}	Pitching M _{PO}	Yawing M _{YO}
Double	825	1 220	1 220

MCM08

Ball screw lead 5, 10 and 20

Accuracy grade: High grade (H)

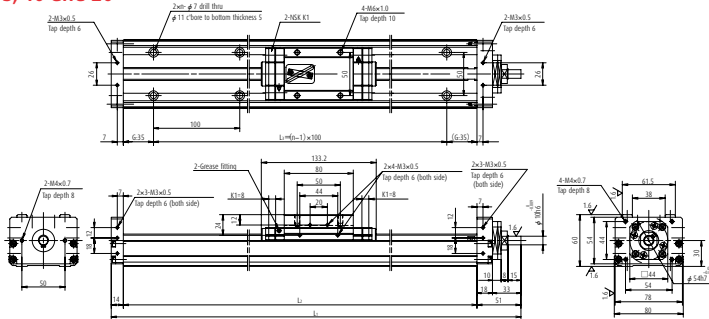

Dimension of MCM08 (Single slider)

Reference No.	Nominal stroke (mm)	Stroke limit (mm) (without K1)	Ball screw lead (mm)	Body length (mm)			No. of mounting hole n	Inertia × 10 ⁻⁴ (kg · m ²)	Mass (kg)
				L ₁	L ₂	L ₃			
◇MCM08005H05K02	50	86 (102)	5	285	220	100	2	0.082	4.1
◇MCM08005H10K00	50	86 (102)	10	285	220	100	2	0.100	4.1
MCM08010H05K02	100	136 (152)	5	335	270	200	3	0.097	4.6
MCM08010H10K00	100	136 (152)	10	335	270	200	3	0.114	4.6
MCM08010H20K00	100	136 (152)	20	335	270	200	3	0.190	4.6
◇MCM08015H05K02	150	186 (202)	5	385	320	200	3	0.111	5.1
◇MCM08015H10K00	150	186 (202)	10	385	320	200	3	0.129	5.1
◇MCM08015H20K00	150	186 (202)	20	385	320	200	3	0.205	5.1
MCM08020H05K02	200	236 (252)	5	435	370	300	4	0.126	5.5
MCM08020H10K00	200	236 (252)	10	435	370	300	4	0.144	5.5
MCM08020H20K00	200	236 (252)	20	435	370	300	4	0.220	5.5
◇MCM08025H05K02	250	286 (302)	5	485	420	300	4	0.141	6.0
◇MCM08025H10K00	250	286 (302)	10	485	420	300	4	0.159	6.0
◇MCM08025H20K00	250	286 (302)	20	485	420	300	4	0.235	6.0
MCM08030H05K02	300	336 (352)	5	535	470	400	5	0.156	6.5
MCM08030H10K00	300	336 (352)	10	535	470	400	5	0.173	6.5
MCM08030H20K00	300	336 (352)	20	535	470	400	5	0.249	6.5

Note 1. Dimension G is 60 for items marked with ◇. 2. The nominal number in the above table is for high-grade grease specifications. In the case of other specifications, see the following table for the 13th and 14th digits.

Coding for columns 13 and 14

Grease	Lead	High-grade, precision-grade
Standard	5	02
	10, 20	00
LG2	5	B2
	10, 20	B0

Ball screw lead(mm)	Monocarrier dynamic torque specification (N · cm)	
	Accuracy grade	
	High grade	Precision
5	1.0 - 5.9	3.1 - 11.5
10	2.0 - 7.8	3.2 - 13.3
20	2.5 - 10.8	4.0 - 16.4
30	2.8 - 12.0	—

Note

- Frictional resistance of NSK K1 is included in dynamic torque in table.
- Grease is packed into ball screw, linear guide parts and support unit.
- Consult NSK for life estimates under large moment loads.

Basic load rating


Lead ℓ (mm)	Shaft dia d (mm)	Basic dynamic load rating (N)				Basic static load rating (N)		Support unit load limit (N)
		Ball screw C _a	Linear guides C	Support unit C _a	Rated running distance L _a (km)	Ball screw C _{0a}	Linear guides C ₀	
5	φ 15	8 300	30 800	7 100	5	12 700	22 800	3 040
10	φ 15	8 140	24 400	7 100	10	12 800	22 800	3 040
20	φ 15	5 080	19 400	7 100	20	7 460	22 800	3 040
30	φ 15	5 500	16 930	7 100	30	8 580	22 800	3 040

Basic static moment load of linear guide

Slider	Basic static moment load (N · m)		
	Rolling M _{Ro}	Pitching M _{Po}	Yawing M _{Yo}
Single	770	300	300

MCM08 Ball screw lead 30

Accuracy grade: High grade (H)

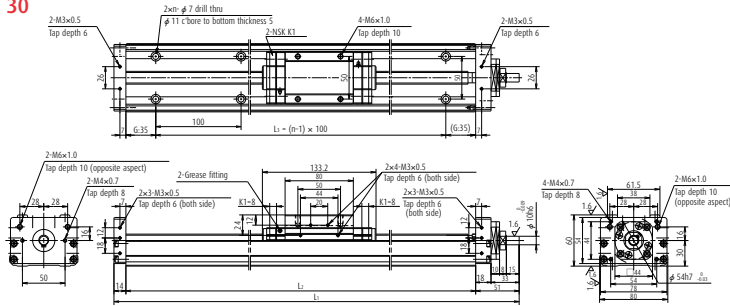

Dimension of MCM08 (Single slider)

Reference No.	Nominal stroke (mm)	Stroke limit (mm) (without K1)	Ball screw lead (mm)	Body length (mm)			No. of mounting hole n	Inertia × 10 ⁻⁴ (kg · m ²)	Mass (kg)
				L ₁	L ₂	L ₃			
MCM08040H05K02	400	436 (452)	5	635	570	500	6	0.185	7.4
MCM08040H10K00	400	436 (452)	10	635	570	500	6	0.203	7.4
MCM08040H20K00	400	436 (452)	20	635	570	500	6	0.279	7.4
MCM08040H30K00	400	436 (452)	30	635	570	500	6	0.405	7.4
MCM08050H05K02	500	536 (552)	5	735	670	600	7	0.214	8.4
MCM08050H10K00	500	536 (552)	10	735	670	600	7	0.232	8.4
MCM08050H20K00	500	536 (552)	20	735	670	600	7	0.308	8.4
MCM08050H30K00	500	536 (552)	30	735	670	600	7	0.435	8.4
MCM08060H05K02	600	636 (652)	5	835	770	700	8	0.244	9.3
MCM08060H10K00	600	636 (652)	10	835	770	700	8	0.262	9.3
MCM08060H20K00	600	636 (652)	20	835	770	700	8	0.338	9.3
MCM08060H30K00	600	636 (652)	30	835	770	700	8	0.464	9.3
MCM08070H05K02	700	736 (752)	5	935	870	800	9	0.273	10.5
MCM08070H10K00	700	736 (752)	10	935	870	800	9	0.291	10.5
MCM08070H20K00	700	736 (752)	20	935	870	800	9	0.367	10.5
MCM08070H30K00	700	736 (752)	30	935	870	800	9	0.494	10.5
MCM08080H05K02	800	836 (852)	5	1 035	970	900	10	0.303	11.2
MCM08080H10K00	800	836 (852)	10	1 035	970	900	10	0.320	11.2
MCM08080H20K00	800	836 (852)	20	1 035	970	900	10	0.396	11.2

Note The nominal number in the above table is for high-grade grease specifications. In the case of other specifications, see the following table for the 13th and 14th digits.

Coding for columns 13 and 14

Grease	Lead	High-grade, precision-grade
Standard	5	02
	10, 20	00
LG2	5	B2
	10, 20	B0

Monocarrier dynamic torque specification (N · cm)		
Ball screw lead(mm)	Accuracy grade	
	High grade	Precision
5	1.0 - 5.9	3.1 - 11.5
10	2.0 - 7.8	3.2 - 13.3
20	2.5 - 10.8	4.0 - 16.4
30	2.8 - 12.0	—

Note

- Frictional resistance of NSK K1 is included in dynamic torque in table.
- Grease is packed into ball screw, linear guide parts and support unit.
- Consult NSK for life estimates under large moment loads.

Basic load rating


Lead ℓ (mm)	Shaft dia d (mm)	Basic dynamic load rating (N)				Basic static load rating (N)		Support unit load limit (N)
		Ball screw C _a	Linear guides C	Support unit C _a	Rated running distance L _a (km)	Ball screw C _{0a}	Linear guides C ₀	
5	φ 15	8 300	30 800	7 100	5	12 700	22 800	3 040
10	φ 15	8 140	24 400	7 100	10	12 800	22 800	3 040
20	φ 15	5 080	19 400	7 100	20	7 460	22 800	3 040
30	φ 15	5 500	16 930	7 100	30	8 580	22 800	3 040

Basic static moment load of linear guide

Slider	Basic static moment load (N · m)		
	Rolling M _{RO}	Pitching M _{PO}	Yawing M _{YO}
Single	770	300	300

MCM08 (Double slider)

Accuracy grade: High grade (H)

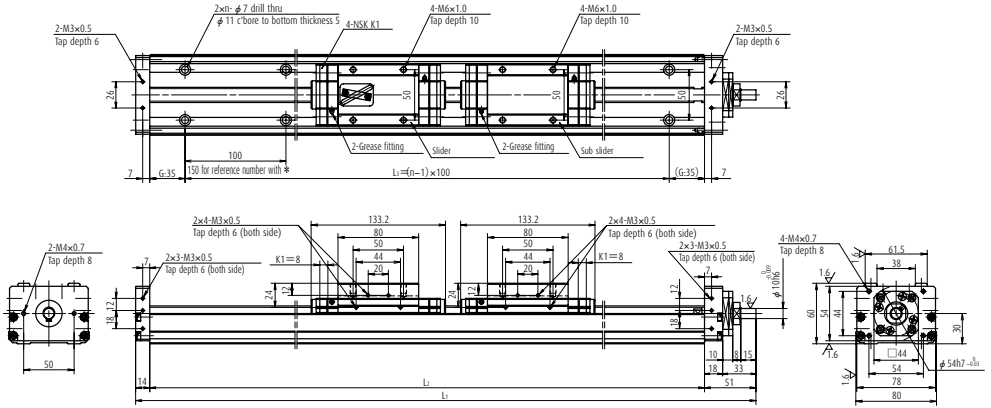

Dimension of MCM08 (Double slider)

Reference No.	Nominal stroke (mm)	Stroke limit (mm) (without K1)	Ball screw lead (mm)	Body length (mm)			No. of mounting hole n	Inertia $\times 10^{-4}$ (kg · m ²)	Mass (kg)
				L ₁	L ₂	L ₃			
*MCM08008H10D00	80	103 (135)	10	435	370	300	3	0.169	6.5
MCM08018H10D00	180	203 (235)	10	535	470	400	5	0.199	7.5
MCM08018H20D00	180	203 (235)	20	535	470	400	5	0.351	7.5
MCM08028H10D00	280	303 (335)	10	635	570	500	6	0.228	8.4
MCM08028H20D00	280	303 (335)	20	635	570	500	6	0.380	8.4
MCM08038H10D00	380	403 (435)	10	735	670	600	7	0.257	9.4
MCM08038H20D00	380	403 (435)	20	735	670	600	7	0.409	9.4

Note 1. Bolt hole pitch L3 on item marked with * is 150 mm. 2. The nominal number in the above table is for high-grade grease specifications. In the case of other specifications, see the following table for the 13th and 14th digits.

Coding for columns 13 and 14

Grease	Lead	High-grade, precision-grade
Standard	10, 20	00
LG2	10, 20	B0

Monocarrier dynamic torque specification (N · cm)		
Ball screw lead(mm)	Accuracy grade	
	High grade	Precision
10	2.5 - 10.8	3.9 - 16.2
20	4.0 - 17.2	5.4 - 22.6

Note

1. Frictional resistance of NSK K1 is included in dynamic torque in table.
2. Grease is packed into ball screw, linear guide parts and support unit.
3. Consult NSK for life estimates under large moment loads.

Basic load rating


Lead l (mm)	Shaft dia d (mm)	Basic dynamic load rating (N)				Basic static load rating (N)		
		Ball screw C_a	Linear guides C	Support unit C_a	Rated running distance L_a (km)	Ball screw C_{0a}	Linear guides C_0	Support unit load limit (N)
10	$\phi 15$	8 140	24 400	7 100	10	12 800	22 800	3 040
20	$\phi 15$	5 080	19 400	7 100	20	7 460	22 800	3 040

Basic static moment load of linear guide

Slider	Basic static moment load (N · m)		
	Rolling M_{R0}	Pitching M_{P0}	Yawing M_{Y0}
Double	1 540	2 050	2 050

MCM08 (Double slider)

Accuracy grade: High grade (H)

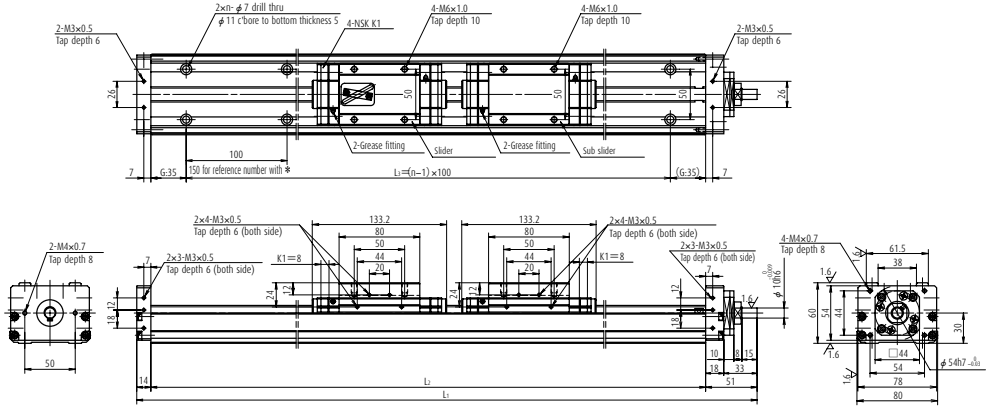

Dimension of MCM08 (Double slider)

Reference No.	Nominal stroke (mm)	Stroke limit (mm) (without K1)	Ball screw lead (mm)	Body length (mm)			No. of mounting hole n	Inertia $\times 10^{-4}$ (kg · m ²)	Mass (kg)
				L ₁	L ₂	L ₃			
MCM08048H10D00	480	503 (535)	10	835	770	700	8	0.287	10.3
MCM08048H20D00	480	503 (535)	20	835	770	700	8	0.439	10.3
MCM08058H10D00	580	603 (635)	10	935	870	800	9	0.316	11.5
MCM08058H20D00	580	603 (635)	20	935	870	800	9	0.468	11.5
MCM08068H10D00	680	703 (735)	10	1 035	970	900	10	0.346	12.2
MCM08068H20D00	680	703 (735)	20	1 035	970	900	10	0.498	12.2

Note The nominal number in the above table is for high-grade grease specifications. In the case of other specifications, see the following table for the 13th and 14th digits.

Coding for columns 13 and 14

Grease	Lead	High-grade, precision-grade
Standard	10, 20	00
LG2	10, 20	B0

Monocarrier dynamic torque specification (N · cm)		
Ball screw lead (mm)	Accuracy grade	
	High grade	Precision
10	2.5 - 10.8	3.9 - 16.2
20	4.0 - 17.2	5.4 - 22.6

Note

- Frictional resistance of NSK K1 is included in dynamic torque in table.
- Grease is packed into ball screw, linear guide parts and support unit.
- Consult NSK for life estimates under large moment loads.

Basic load rating


Lead ℓ (mm)	Shaft dia d (mm)	Basic dynamic load rating (N)				Basic static load rating (N)		Support unit load limit (N)
		Ball screw C_a	Linear guides C	Support unit C_a	Rated running distance L_a (km)	Ball screw C_{0a}	Linear guides C_0	
10	ϕ 15	8 140	24 400	7 100	10	12 800	22 800	3 040
20	ϕ 15	5 080	19 400	7 100	20	7 460	22 800	3 040

Basic static moment load of linear guide

Slider	Basic static moment load (N · m)		
	Rolling M_{P0}	Pitching M_{P0}	Yawing M_{Y0}
Double	1 540	2 050	2 050

MCM10 Ball screw lead 30

Accuracy grade: High grade (H)

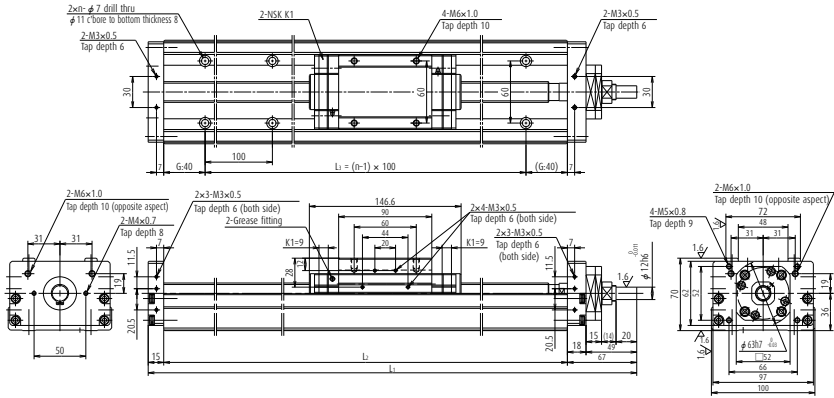

Dimension of MCM10 (Single slider)

Reference No.	Nominal stroke (mm)	Stroke limit (mm) (without K1)	Ball screw lead (mm)	Body length (mm)			No. of mounting hole n	Inertia $\times 10^{-4}$ (kg · m ²)	Mass (kg)
				L ₁	L ₂	L ₃			
MCM10060H10K00	600	633 (651)	10	862	780	700	8	0.800	16.3
MCM10060H20K00	600	633 (651)	20	862	780	700	8	0.914	16.3
MCM10060H30K00	600	633 (651)	30	862	780	700	8	1.104	16.3
MCM10070H10K00	700	733 (751)	10	962	880	800	9	0.893	18.0
MCM10070H20K00	700	733 (751)	20	962	880	800	9	1.007	18.0
MCM10070H30K00	700	733 (751)	30	962	880	800	9	1.197	18.0
MCM10080H10K00	800	833 (851)	10	1 062	980	900	10	0.987	19.7
MCM10080H20K00	800	833 (851)	20	1 062	980	900	10	1.101	19.7
MCM10080H30K00	800	833 (851)	30	1 062	980	900	10	1.291	19.7
MCM10090H10K00	900	933 (951)	10	1 162	1 080	1 000	11	1.081	21.4
MCM10090H20K00	900	933 (951)	20	1 162	1 080	1 000	11	1.195	21.4
◇MCM10100H10K00	1 000	1 033 (1 051)	10	1 262	1 180	1 000	11	1.174	23.1
◇MCM10100H20K00	1 000	1 033 (1 051)	20	1 262	1 180	1 000	11	1.288	23.1

Note Dimension G is 90 for items marked with ◇.

Monocarrier dynamic torque specification (N · cm)		
Ball screw lead (mm)	Accuracy grade	
	High grade	Precision
10	2.7 - 10.8	4.7 - 19.7
20	3.1 - 12.7	5.2 - 21.6
30	5.1 - 18.0	—

Notes

- Frictional resistance of NSK K1 is included in dynamic torque in table.
- Grease is packed into ball screw, linear guide parts and support unit.
- Consult NSK for life estimates under large moment loads.

Basic load rating


Lead ℓ (mm)	Shaft dia d (mm)	Basic dynamic load rating (N)				Basic static load rating (N)		
		Ball screw C _a	Linear guides C	Support unit C _a	Rated running distance L _a (km)	Ball screw C _{0a}	Linear guides C ₀	Support unit load limit (N)
10	φ 20	12 800	33 500	7 600	10	21 400	29 400	3 380
20	φ 20	8 190	26 600	7 600	20	12 600	29 400	3 380
30	φ 20	13 200	23 200	7 600	30	22 900	29 400	3 380

Basic static moment load of linear guide

Slider	Basic static moment load (N · m)		
	Rolling M _{RO}	Pitching M _{PO}	Yawing M _{YO}
Single	1 170	425	425

MCM10 (Double slider)

Accuracy grade: High grade (H)

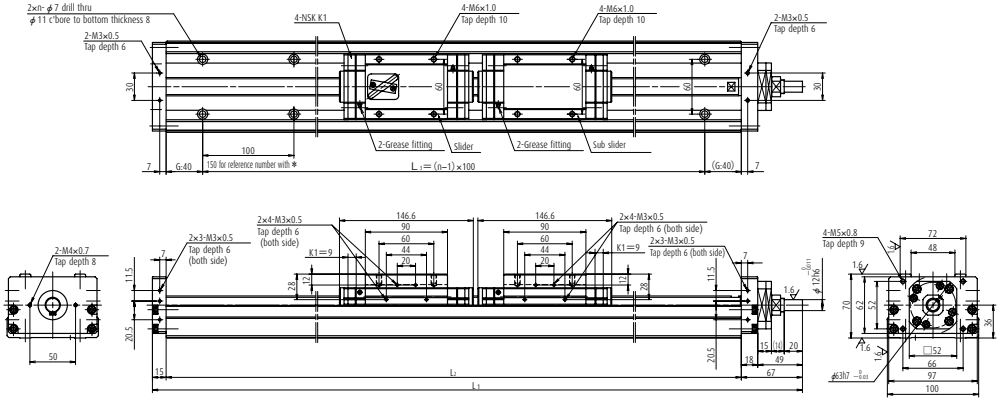

Dimension of MCM10 (Single slider)

Reference No.	Nominal stroke (mm)	Stroke limit (mm) (without K1)	Ball screw lead (mm)	Body length (mm)			No. of mounting hole n	Inertia $\times 10^{-4}$ (kg · m ²)	Mass (kg)
				L ₁	L ₂	L ₃			
*MCM10007H10D00	70	86 (122)	10	462	380	300	3	0.463	11.0
MCM10017H10D00	170	186 (222)	10	562	480	400	5	0.557	12.7
MCM10017H20D00	170	186 (222)	20	562	480	400	5	0.785	12.7
MCM10027H10D00	270	286 (322)	10	662	580	500	6	0.650	13.4
MCM10027H20D00	270	286 (322)	20	662	580	500	6	0.878	13.4
MCM10037H10D00	370	386 (422)	10	762	680	600	7	0.744	15.1
MCM10037H20D00	370	386 (422)	20	762	680	600	7	0.972	15.1
MCM10047H10D00	470	486 (522)	10	862	780	700	8	0.838	17.8
MCM10047H20D00	470	486 (522)	20	862	780	700	8	1.066	17.8

Note Bolt hole pitch L3 on item marked with * is 150 mm.

Monocarrier dynamic torque specification (N · cm)		
Ball screw lead(mm)	Accuracy grade	
	High grade	Precision
10	4.2 - 15.6	6.1 - 24.5
20	5.0 - 19.6	7.0 - 28.5

Notes

1. Frictional resistance of NSK K1 is included in dynamic torque in table.
2. Grease is packed into ball screw, linear guide parts and support unit.
3. Consult NSK for life estimates under large moment loads.

Basic load rating


Lead	Shaft dia	Basic dynamic load rating (N)				Basic static load rating (N)		Support unit load limit (N)
ℓ (mm)	d (mm)	Ball screw C _a	Linear guides C	Support unit C _a	Rated running distance L _a (km)	Ball screw C _{0a}	Linear guides C ₀	
10	ϕ 20	12 800	33 500	7 600	10	21 400	29 400	3 380
20	ϕ 20	8 190	26 600	7 600	20	12 600	29 400	3 380

Basic static moment load of linear guide

Slider	Basic static moment load (N · m)		
	Rolling M _{R0}	Pitching M _{P0}	Yawing M _{Y0}
Double	2 340	2 940	2 940

MCM10 (Double slider)

Accuracy grade: High grade (H)

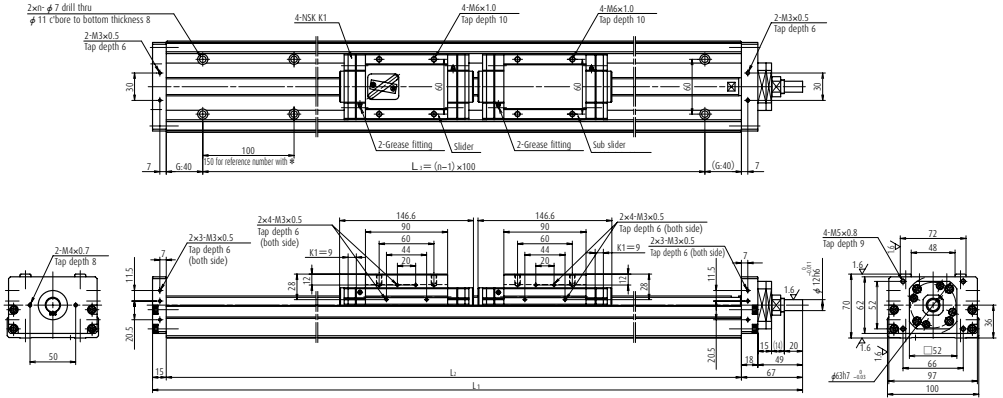

Dimension of MCM10 (Single slider)

Reference No.	Nominal stroke (mm)	Stroke limit (mm) (without K1)	Ball screw lead (mm)	Body length (mm)			No. of mounting hole n	Inertia $\times 10^{-4}$ (kg \cdot m 2)	Mass (kg)
				L ₁	L ₂	L ₃			
MCM10057H10D00	570	586 (622)	10	962	880	800	9	0.931	19.5
MCM10057H20D00	570	586 (622)	20	962	880	800	9	1.159	19.5
MCM10067H10D00	670	686 (722)	10	1 062	980	900	10	1.025	21.2
MCM10067H20D00	670	686 (722)	20	1 062	980	900	10	1.253	21.2
◇MCM10087H10D00	870	886 (922)	10	1 262	1 180	1 000	11	1.212	23.6
◇MCM10087H20D00	870	886 (922)	20	1 262	1 180	1 000	11	1.440	23.6

Note Dimension G is 90 for items marked with ◇.

Monocarrier dynamic torque specification (N \cdot cm)		
Ball screw lead(mm)	Accuracy grade	
	High grade	Precision
10	4.2 - 15.6	6.1 - 24.5
20	5.0 - 19.6	7.0 - 28.5

Notes

- Frictional resistance of NSK K1 is included in dynamic torque in table.
- Grease is packed into ball screw, linear guide parts and support unit.
- Consult NSK for life estimates under large moment loads.

Basic load rating

Lead l (mm)	Shaft dia d (mm)	Basic dynamic load rating (N)				Basic static load rating (N)		Support unit load limit (N)
		Ball screw C_a	Linear guides C	Support unit C_a	Rated running distance L_a (km)	Ball screw C_{0a}	Linear guides C_0	
10	ϕ 20	12 800	33 500	7 600	10	21 400	29 400	3 380
20	ϕ 20	8 190	26 600	7 600	20	12 600	29 400	3 380



Basic static moment load of linear guide

Slider	Basic static moment load (N \cdot m)		
	Rolling M_{R0}	Pitching M_{P0}	Yawing M_{Y0}
Double	2 340	2 940	2 940

C-1-5.3 MCM Series Accessories

C-1-5.3 1 Sensor Unit

> Proximity switch



(Example of assembly)

Model No.		Reference No.			A (mm)	B (mm)	Body width W (mm)
MCM02		MC-SR02-00	MC-SR02-01	MC-SR02-02	17	2	28
MCM03		MC-SR03-10	MC-SR03-11	MC-SR03-12	17	3	34
MCM05		MC-SR05-10	MC-SR05-11	MC-SR05-12	17	15	48.6
MCM06		MC-SR06-10	MC-SR06-11	MC-SR06-12	17	19	58
MCM08		MC-SR08-10	MC-SR08-11	MC-SR08-12	16	27	80
MCM10		MC-SR10-10	MC-SR10-11	MC-SR10-12	16	35	100
Quantity	Proximity switch (normally open contact)	—	3	1	E2S-W13 (OMRON Corp.)		
Quantity	Proximity switch (normally close contact)	3	—	2	E2S-W14 (OMRON Corp.)		



Notes 1. See page C137 for proximity switch specification.

2. A sensor unit consists of sensors, a sensor dog and sensor mounting parts.

3. Sensor unit for MCM02 contains two sensor dogs.

4. A spacer plate is required when using a cover unit or sensor unit for MCM03 with the lead of 1 or 2 mm. (Refer to page C53)

> Photo sensor



(Example of assembly)

Model No.	Reference No.	C (mm)	D (mm)	Body width W (mm)	Remarks
MCM03	MC-SR03-13	24	0.5	34	EE-SX674 (OMRON Corp.) 3 sets (EE-1001 connector attachment)
MCM05	MC-SR05-13	24	5	48.6	
MCM06	MC-SR06-13	24	9	58	
MCM08	MC-SR08-13	23	17	80	
MCM10	MC-SR10-13	22	24	100	


Notes 1. See page C138 for photo sensor specification.

2. A sensor unit consists of sensors, a sensor dog and sensor mounting parts.


3. A spacer plate is required when using a cover unit or sensor unit for MCM03 with the lead of 1 or 2 mm. (Refer to page C53)

(1) Sensor Rail

Sensor rail for MCM03: MC-SRL3- * * * *

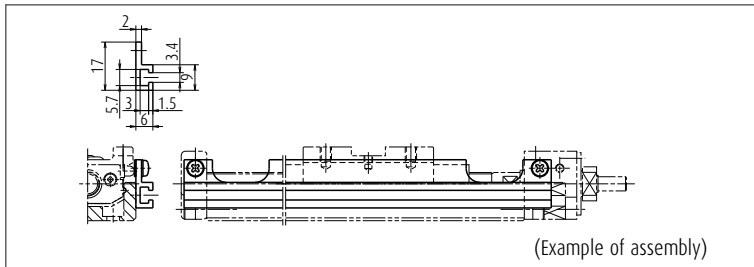

Sensor rail for MCM03: MC-SRL3- * * * *

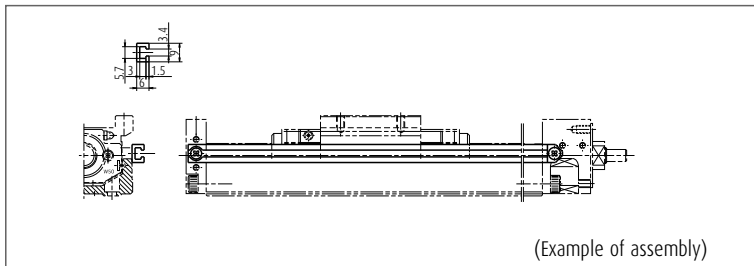


Sensor rail for MCM02: MC-SRL2- * * * *

Sensor rail for MCM06: MC-SRL6- * * * *

Sensor rail for MCM08: MC-SRL8- * * * *

Sensor rail for MCM10: MC-SRL1- * * * *

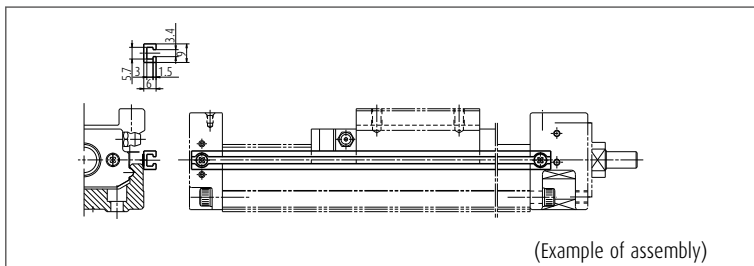

- Notes:**
1. * * * * is the same as rail dimension L_2 .
 2. Please assemble the attached seat between the sensor rail and the support unit for MCM03, MCM05, MCM06 and MCM08.
 3. For combinations of sensors and rails, see pages C51 to C52.

MCM Series and Sensor Rail Combination Table

Table 4

Model No.	Body length L ₂ mm	Reference No.	Sensor rail reference No.
MCM02	100	MCM02005H01K	MC-SRL2-0100*
MCM02	100	MCM02005P01K	MC-SRL2-0100*
MCM02	100	MCM02005H02K	MC-SRL2-0100*
MCM02	100	MCM02005P02K	MC-SRL2-0100*
MCM02	150	MCM02010H01K	MC-SRL2-0150
MCM02	150	MCM02010P01K	MC-SRL2-0150
MCM02	150	MCM02010H02K	MC-SRL2-0150
MCM02	150	MCM02010P02K	MC-SRL2-0150
MCM02	200	MCM02015H01K	MC-SRL2-0200
MCM02	200	MCM02015P01K	MC-SRL2-0200
MCM02	200	MCM02015H02K	MC-SRL2-0200
MCM02	200	MCM02015P02K	MC-SRL2-0200
MCM03	115	MCM03005P01K00	MC-SRL3-0115
MCM03	115	MCM03005P02K00	MC-SRL3-0115
MCM03	140	MCM03005H05K00	MC-SRL3-0140
MCM03	140	MCM03005H10K00	MC-SRL3-0140
MCM03	140	MCM03005H12K00	MC-SRL3-0140
MCM03	140	MCM03005H15K00	MC-SRL3-0140
MCM03	190	MCM03010P01K00	MC-SRL3-0190
MCM03	190	MCM03010P02K00	MC-SRL3-0190
MCM03	190	MCM03010H05K00	MC-SRL3-0190
MCM03	190	MCM03010H10K00	MC-SRL3-0190
MCM03	190	MCM03010H12K00	MC-SRL3-0190
MCM03	190	MCM03010H15K00	MC-SRL3-0190
MCM03	240	MCM03015P01K00	MC-SRL3-0240
MCM03	240	MCM03015P02K00	MC-SRL3-0240
MCM03	240	MCM03015H05K00	MC-SRL3-0240
MCM03	240	MCM03015H10K00	MC-SRL3-0240
MCM03	240	MCM03015H12K00	MC-SRL3-0240
MCM03	240	MCM03015H15K00	MC-SRL3-0240
MCM03	290	MCM03020H05K00	MC-SRL3-0290
MCM03	290	MCM03020H10K00	MC-SRL3-0290
MCM03	290	MCM03020H12K00	MC-SRL3-0290
MCM03	290	MCM03020H15K00	MC-SRL3-0290
MCM03	340	MCM03025H05K00	MC-SRL3-0340
MCM03	340	MCM03025H10K00	MC-SRL3-0340
MCM03	340	MCM03025H12K00	MC-SRL3-0340
MCM03	340	MCM03025H15K00	MC-SRL3-0340
MCM05	180	MCM05005H05K00	MC-SRL5-0180
MCM05	180	MCM05005H10K00	MC-SRL5-0180
MCM05	180	MCM05005H20K00	MC-SRL5-0180
MCM05	230	MCM05010H05K00	MC-SRL5-0230
MCM05	230	MCM05010H10K00	MC-SRL5-0230
MCM05	230	MCM05010H20K00	MC-SRL5-0230
MCM05	280	MCM05015H05K00	MC-SRL5-0280
MCM05	280	MCM05015H10K00	MC-SRL5-0280
MCM05	280	MCM05015H20K00	MC-SRL5-0280
MCM05	280	MCM05016H10D00	MC-SRL5-0280
MCM05	330	MCM05020H05K00	MC-SRL5-0330
MCM05	330	MCM05020H10K00	MC-SRL5-0330
MCM05	330	MCM05020H20K00	MC-SRL5-0330
MCM05	330	MCM05011H10D00	MC-SRL5-0330
MCM05	380	MCM05025H05K00	MC-SRL5-0380
MCM05	380	MCM05025H10K00	MC-SRL5-0380
MCM05	380	MCM05025H20K00	MC-SRL5-0380
MCM05	380	MCM05016H10D00	MC-SRL5-0380
MCM05	430	MCM05030H05K00	MC-SRL5-0430
MCM05	430	MCM05030H10K00	MC-SRL5-0430
MCM05	430	MCM05030H20K00	MC-SRL5-0430
MCM05	430	MCM05030H30K00	MC-SRL5-0430
MCM05	430	MCM05021H10D00	MC-SRL5-0430
MCM05	430	MCM05021H20D00	MC-SRL5-0430
MCM05	530	MCM05040H05K00	MC-SRL5-0530
MCM05	530	MCM05040H10K00	MC-SRL5-0530
MCM05	530	MCM05040H20K00	MC-SRL5-0530
MCM05	530	MCM05040H30K00	MC-SRL5-0530
MCM05	530	MCM05031H10D00	MC-SRL5-0530

Model No.	Body length L ₂ mm	Reference No.	Sensor rail reference No.
MCM05	530	MCM05031H20D00	MC-SRL5-0530
MCM05	630	MCM05050H05K00	MC-SRL5-0630
MCM05	630	MCM05050H10K00	MC-SRL5-0630
MCM05	630	MCM05050H20K00	MC-SRL5-0630
MCM05	630	MCM05050H30K00	MC-SRL5-0630
MCM05	630	MCM05041H10D00	MC-SRL5-0630
MCM05	630	MCM05041H20D00	MC-SRL5-0630
MCM05	730	MCM05060H05K00	MC-SRL5-0730
MCM05	730	MCM05060H10K00	MC-SRL5-0730
MCM05	730	MCM05060H20K00	MC-SRL5-0730
MCM05	730	MCM05060H30K00	MC-SRL5-0730
MCM05	730	MCM05051H10D00	MC-SRL5-0730
MCM05	730	MCM05051H20D00	MC-SRL5-0730
MCM06	190	MCM06005H05K02	MC-SRL6-0190
MCM06	190	MCM06005H10K00	MC-SRL6-0190
MCM06	190	MCM06005H20K00	MC-SRL6-0190
MCM06	240	MCM06010H05K02	MC-SRL6-0240
MCM06	240	MCM06010H10K00	MC-SRL6-0240
MCM06	240	MCM06010H20K00	MC-SRL6-0240
MCM06	290	MCM06015H05K02	MC-SRL6-0290
MCM06	290	MCM06015H10K00	MC-SRL6-0290
MCM06	290	MCM06015H20K00	MC-SRL6-0290
MCM06	340	MCM06020H05K02	MC-SRL6-0340
MCM06	340	MCM06020H10K00	MC-SRL6-0340
MCM06	340	MCM06020H20K00	MC-SRL6-0340
MCM06	340	MCM06011H05D02	MC-SRL6-0340
MCM06	340	MCM06011H10D00	MC-SRL6-0340
MCM06	390	MCM06025H05K02	MC-SRL6-0390
MCM06	390	MCM06025H10K00	MC-SRL6-0390
MCM06	390	MCM06025H20K00	MC-SRL6-0390
MCM06	440	MCM06030H05K02	MC-SRL6-0440
MCM06	440	MCM06030H10K00	MC-SRL6-0440
MCM06	440	MCM06030H20K00	MC-SRL6-0440
MCM06	440	MCM06021H05D02	MC-SRL6-0440
MCM06	440	MCM06021H10D00	MC-SRL6-0440
MCM06	440	MCM06021H20D00	MC-SRL6-0440
MCM06	540	MCM06040H05K02	MC-SRL6-0540
MCM06	540	MCM06040H10K00	MC-SRL6-0540
MCM06	540	MCM06040H20K00	MC-SRL6-0540
MCM06	540	MCM06031H05D02	MC-SRL6-0540
MCM06	540	MCM06031H10D00	MC-SRL6-0540
MCM06	540	MCM06031H20D00	MC-SRL6-0540
MCM06	640	MCM06050H05K02	MC-SRL6-0640
MCM06	640	MCM06050H10K00	MC-SRL6-0640
MCM06	640	MCM06050H20K00	MC-SRL6-0640
MCM06	640	MCM06041H05D02	MC-SRL6-0640
MCM06	640	MCM06041H10D00	MC-SRL6-0640
MCM06	640	MCM06041H20D00	MC-SRL6-0640
MCM06	740	MCM06060H05K02	MC-SRL6-0740
MCM06	740	MCM06060H10K00	MC-SRL6-0740
MCM06	740	MCM06060H20K00	MC-SRL6-0740
MCM06	740	MCM06051H10D00	MC-SRL6-0740
MCM06	740	MCM06051H20D00	MC-SRL6-0740
MCM06	840	MCM06070H05K02	MC-SRL6-0840
MCM06	840	MCM06070H10K00	MC-SRL6-0840
MCM06	840	MCM06070H20K00	MC-SRL6-0840
MCM06	840	MCM06061H10D00	MC-SRL6-0840
MCM06	840	MCM06061H20D00	MC-SRL6-0840
MCM06	940	MCM06080H05K02	MC-SRL6-0940
MCM06	940	MCM06080H10K00	MC-SRL6-0940
MCM06	940	MCM06080H20K00	MC-SRL6-0940
MCM06	940	MCM06071H10D00	MC-SRL6-0940
MCM06	940	MCM06071H20D00	MC-SRL6-0940

*) When using NSK standard sensors, prepare two sensor rails. Two sensor rails will also be required for another Monocarriers depending on signal points of sensors. Contact NSK for details.

Model No.	Body length L ₂ mm	Reference No.	Sensor rail reference No.
MCM08	220	MCM08005H05K02	MC-SRL8-0220
MCM08	220	MCM08005H10K00	MC-SRL8-0220
MCM08	270	MCM08010H05K02	MC-SRL8-0270
MCM08	270	MCM08010H10K00	MC-SRL8-0270
MCM08	270	MCM08010H20K00	MC-SRL8-0270
MCM08	320	MCM08015H05K02	MC-SRL8-0320
MCM08	320	MCM08015H10K00	MC-SRL8-0320
MCM08	320	MCM08015H20K00	MC-SRL8-0320
MCM08	370	MCM08020H05K02	MC-SRL8-0370
MCM08	370	MCM08020H10K00	MC-SRL8-0370
MCM08	370	MCM08020H20K00	MC-SRL8-0370
MCM08	370	MCM08008H10D00	MC-SRL8-0370
MCM08	420	MCM08025H05K02	MC-SRL8-0420
MCM08	420	MCM08025H10K00	MC-SRL8-0420
MCM08	420	MCM08025H20K00	MC-SRL8-0420
MCM08	470	MCM08030H05K02	MC-SRL8-0470
MCM08	470	MCM08030H10K00	MC-SRL8-0470
MCM08	470	MCM08030H20K00	MC-SRL8-0470
MCM08	470	MCM08018H10D00	MC-SRL8-0470
MCM08	470	MCM08018H20D00	MC-SRL8-0470
MCM08	570	MCM08040H05K02	MC-SRL8-0570
MCM08	570	MCM08040H10K00	MC-SRL8-0570
MCM08	570	MCM08040H20K00	MC-SRL8-0570
MCM08	570	MCM08040H30K00	MC-SRL8-0570
MCM08	570	MCM08028H10D00	MC-SRL8-0570
MCM08	570	MCM08028H20D00	MC-SRL8-0570
MCM08	670	MCM08050H05K02	MC-SRL8-0670
MCM08	670	MCM08050H10K00	MC-SRL8-0670
MCM08	670	MCM08050H20K00	MC-SRL8-0670
MCM08	670	MCM08050H30K00	MC-SRL8-0670
MCM08	670	MCM08038H10D00	MC-SRL8-0670
MCM08	670	MCM08038H20D00	MC-SRL8-0670
MCM08	770	MCM08060H05K02	MC-SRL8-0770
MCM08	770	MCM08060H10K00	MC-SRL8-0770
MCM08	770	MCM08060H20K00	MC-SRL8-0770
MCM08	770	MCM08060H30K00	MC-SRL8-0770
MCM08	770	MCM08048H10D00	MC-SRL8-0770
MCM08	770	MCM08048H20D00	MC-SRL8-0770
MCM08	870	MCM08070H05K02	MC-SRL8-0870
MCM08	870	MCM08070H10K00	MC-SRL8-0870
MCM08	870	MCM08070H20K00	MC-SRL8-0870
MCM08	870	MCM08070H30K00	MC-SRL8-0870
MCM08	870	MCM08058H10D00	MC-SRL8-0870
MCM08	870	MCM08058H20D00	MC-SRL8-0870
MCM08	970	MCM08080H05K02	MC-SRL8-0970
MCM08	970	MCM08080H10K00	MC-SRL8-0970
MCM08	970	MCM08080H20K00	MC-SRL8-0970
MCM08	970	MCM08080H30K00	MC-SRL8-0970
MCM08	970	MCM08068H10D00	MC-SRL8-0970
MCM08	970	MCM08068H20D00	MC-SRL8-0970

Model No.	Body length L ₂ mm	Reference No.	Sensor rail reference No.
MCM10	280	MCM10010H10K00	MC-SRL1-0280
MCM10	280	MCM10010H20K00	MC-SRL1-0280
MCM10	330	MCM10015H10K00	MC-SRL1-0330
MCM10	330	MCM10015H20K00	MC-SRL1-0330
MCM10	380	MCM10020H10K00	MC-SRL1-0380
MCM10	380	MCM10020H20K00	MC-SRL1-0380
MCM10	380	MCM10007H10K00	MC-SRL1-0380
MCM10	430	MCM10025H10K00	MC-SRL1-0430
MCM10	430	MCM10025H20K00	MC-SRL1-0430
MCM10	480	MCM10030H10K00	MC-SRL1-0480
MCM10	480	MCM10030H20K00	MC-SRL1-0480
MCM10	480	MCM10017H10K00	MC-SRL1-0480
MCM10	480	MCM10017H20K00	MC-SRL1-0480
MCM10	580	MCM10040H10K00	MC-SRL1-0580
MCM10	580	MCM10040H20K00	MC-SRL1-0580
MCM10	580	MCM10027H10K00	MC-SRL1-0580
MCM10	580	MCM10027H20K00	MC-SRL1-0580
MCM10	680	MCM10050H10K00	MC-SRL1-0680
MCM10	680	MCM10050H20K00	MC-SRL1-0680
MCM10	680	MCM10050H30K00	MC-SRL1-0680
MCM10	680	MCM10037H10K00	MC-SRL1-0680
MCM10	680	MCM10037H20K00	MC-SRL1-0680
MCM10	780	MCM10060H10K00	MC-SRL1-0780
MCM10	780	MCM10060H20K00	MC-SRL1-0780
MCM10	780	MCM10060H30K00	MC-SRL1-0780
MCM10	780	MCM10047H10K00	MC-SRL1-0780
MCM10	780	MCM10047H20K00	MC-SRL1-0780
MCM10	880	MCM10070H10K00	MC-SRL1-0880
MCM10	880	MCM10070H20K00	MC-SRL1-0880
MCM10	880	MCM10070H30K00	MC-SRL1-0880
MCM10	880	MCM10057H10K00	MC-SRL1-0880
MCM10	880	MCM10057H20K00	MC-SRL1-0880
MCM10	980	MCM10080H10K00	MC-SRL1-0980
MCM10	980	MCM10080H20K00	MC-SRL1-0980
MCM10	980	MCM10080H30K00	MC-SRL1-0980
MCM10	980	MCM10067H10K00	MC-SRL1-0980
MCM10	980	MCM10067H20K00	MC-SRL1-0980
MCM10	1 080	MCM10090H10K00	MC-SRL1-1080
MCM10	1 080	MCM10090H20K00	MC-SRL1-1080
MCM10	1 180	MCM10100H10K00	MC-SRL1-1180
MCM10	1 180	MCM10100H20K00	MC-SRL1-1180
MCM10	1 180	MCM10087H10K00	MC-SRL1-1180
MCM10	1 180	MCM10087H20K00	MC-SRL1-1180

C-1-5. 3 Cover Unit

Cover Unit for MCM02

Unit : μm

Stroke	Reference No.	Length (L)
50	MC-CV02005-00	115
100	MC-CV02010-00	165
150	MC-CV02015-00	215

Height of screw head is not included.

Cover Unit for MCM03

- Notes:**
- When the cover is used for leads 1 and 2, an optional spacer plate (nominal No.: MC-SP03-00) is required.
 - When the cover is used for lead 15, an optional spacer plate (nominal No.: MC-SP03-01) is required.
 - A full cover unit cannot be installed for lead 15.

Full cover unit

Section X-X

Top cover unit

Section X-X

Unit : mm

Stroke	Reference No.		Cover length	
	Top cover unit	Full cover unit	Length (L)	Length (M)
50 (lead 1, 2)	MC-CV03005-02	*MC-CV03005-01	139	133
50 (lead 5, 10, 12, 15)	MC-CV03005-02A	*MC-CV03005-01A	164	158
100	MC-CV03010-02	*MC-CV03010-01	214	208
150	MC-CV03015-02	*MC-CV03015-01	264	258
200	MC-CV03020-02	*MC-CV03020-01	314	308
250	MC-CV03025-02	*MC-CV03025-01	364	358

*) The full-cover unit cannot be used when the sensor unit is used.

Height of screw head is not included.

Spacer for MCM03 (Optional)


MC-SP03-00 (for ball screw lead 1 and 2 mm)

Note: Spacer is required when using sensor unit and cover unit.

MC-SP03-01 (for ball screw lead 15 mm)

Note: To use an upper surface cover, use it during assembly.

Cover unit for MCM05, 06, 08, and 10

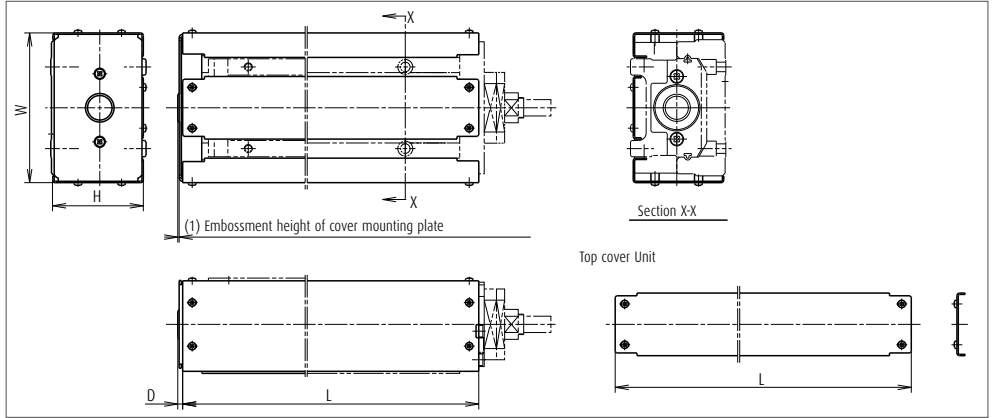

Unit : μm

Model No.	Stroke		Cover unit reference No.		Cover length			
	Single Slider	Double Slider	Top cover Unit	Full cover Unit*1	Length (L)	Height (H)	Width (W)	End part (D)
MCM05	50	—	MC-CV05005-01	MC-CV05005-00	200	38.5	65	2.6
MCM05	100	—	MC-CV05010-01	MC-CV05010-00	250	38.5	65	2.6
MCM05	150	60	MC-CV05015-01	MC-CV05015-00	300	38.5	65	2.6
MCM05	200	110	MC-CV05020-01	MC-CV05020-00	350	38.5	65	2.6
MCM05	250	160	MC-CV05025-01	MC-CV05025-00	400	38.5	65	2.6
MCM05	300	210	MC-CV05030-01	MC-CV05030-00	450	38.5	65	2.6
MCM05	400	310	MC-CV05040-01	MC-CV05040-00	550	38.5	65	2.6
MCM05	500	410	MC-CV05050-01	MC-CV05050-00	650	38.5	65	2.6
MCM05	600	510	MC-CV05060-01	MC-CV05060-00	750	38.5	65	2.6
MCM06	50	—	MC-CV06005-01	MC-CV06005-00	225	48.5	75	—*2
MCM06	100	—	MC-CV06010-01	MC-CV06010-00	275	48.5	75	—*2
MCM06	150	—	MC-CV06015-01	MC-CV06015-00	325	48.5	75	—*2
MCM06	200	110	MC-CV06020-01	MC-CV06020-00	375	48.5	75	—*2
MCM06	250	—	MC-CV06025-01	MC-CV06025-00	425	48.5	75	—*2
MCM06	300	210	MC-CV06030-01	MC-CV06030-00	475	48.5	75	—*2
MCM06	400	310	MC-CV06040-01	MC-CV06040-00	575	48.5	75	—*2
MCM06	500	410	MC-CV06050-01	MC-CV06050-00	675	48.5	75	—*2
MCM06	600	510	MC-CV06060-01	MC-CV06060-00	775	48.5	75	—*2
MCM06	700	610	MC-CV06070-01	MC-CV06070-00	875	48.5	75	—*2
MCM06	800	710	MC-CV06080-01	MC-CV06080-00	975	48.5	75	—*2
MCM08	50	—	MC-CV08005-01	MC-CV08005-00	248	56.5	90	2.6
MCM08	100	—	MC-CV08010-01	MC-CV08010-00	298	56.5	90	2.6
MCM08	150	—	MC-CV08015-01	MC-CV08015-00	348	56.5	90	2.6
MCM08	200	80	MC-CV08020-01	MC-CV08020-00	398	56.5	90	2.6
MCM08	250	—	MC-CV08025-01	MC-CV08025-00	448	56.5	90	2.6
MCM08	300	180	MC-CV08030-01	MC-CV08030-00	498	56.5	90	2.6
MCM08	400	280	MC-CV08040-01	MC-CV08040-00	598	56.5	90	2.6
MCM08	500	380	MC-CV08050-01	MC-CV08050-00	698	56.5	90	2.6
MCM08	600	480	MC-CV08060-01	MC-CV08060-00	798	56.5	90	2.6
MCM08	700	580	MC-CV08070-01	MC-CV08070-00	898	56.5	90	2.6
MCM08	800	680	MC-CV08080-01	MC-CV08080-00	998	56.5	90	2.6
MCM10	100	—	MC-CV10010-01	MC-CV10010-00	308	66.5	110	3.6
MCM10	150	—	MC-CV10015-01	MC-CV10015-00	358	66.5	110	3.6
MCM10	200	70	MC-CV10020-01	MC-CV10020-00	408	66.5	110	3.6
MCM10	250	—	MC-CV10025-01	MC-CV10025-00	458	66.5	110	3.6
MCM10	300	170	MC-CV10030-01	MC-CV10030-00	508	66.5	110	3.6
MCM10	400	270	MC-CV10040-01	MC-CV10040-00	608	66.5	110	3.6
MCM10	500	370	MC-CV10050-01	MC-CV10050-00	708	66.5	110	3.6
MCM10	600	470	MC-CV10060-01	MC-CV10060-00	808	66.5	110	3.6
MCM10	700	570	MC-CV10070-01	MC-CV10070-00	908	66.5	110	3.6
MCM10	800	670	MC-CV10080-01	MC-CV10080-00	1008	66.5	110	3.6
MCM10	900	—	MC-CV10090-01	MC-CV10090-00	1108	66.5	110	3.6
MCM10	1000	870	MC-CV10100-01	MC-CV10100-00	1208	66.5	110	3.6

Note: The dimensions of cover shown above do not include the head height of fixing machine screws. Add the head of machine screws of approximately 2.5 mm to the outer measurement of a cover unit. Set a margin for mechanical interference with surrounding components.

*1) When using sensor unit, full-cover unit cannot be used.

*2) A cover mounting plate is not used to MCM06.


C-1-5. 3 Motor Bracket

Motor models are subject to change at the motor manufacturers. For details, please contact the manufacturer.

Motor bracket for MCM02


Reference number

MC-BK02-128-00

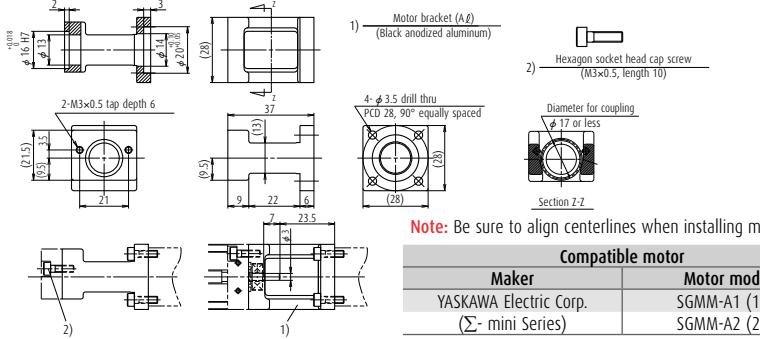


Reference number

MC-BK02-133-00

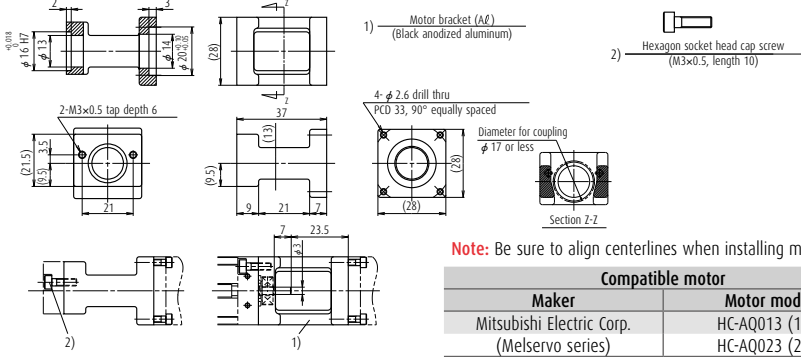

Reference number


MC-BK02-223-00

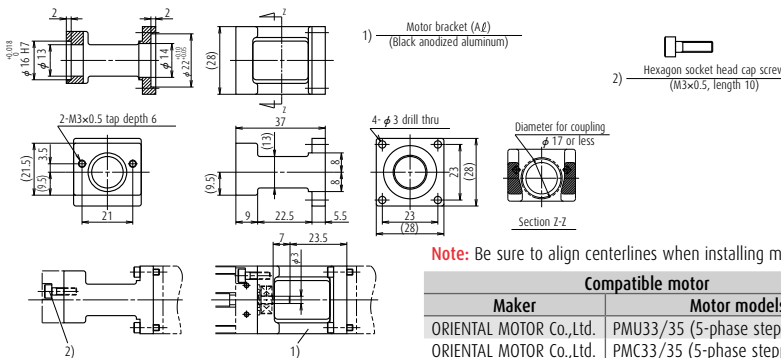

Motor bracket for MCM03

Reference number

MC-BK03-146-00

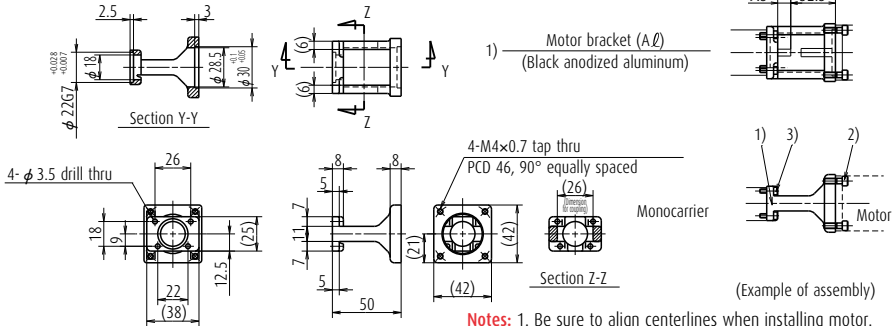

- 2) Hexagon socket head cap screw (M4, length 12)
- 3) Hexagon socket head cap screw (M3, length 10)


- Notes:**
1. Be sure to align centerlines when installing motor.
 2. Be careful in the assembly orientation of bracket.
 3. Because bracket is made by sand casting, external dimensions are for reference only.

Compatible motor	
Maker	Motor models
YASKAWA Electric Corp.	SGMAH-A3(30W), SGMJV-A5A(50W), SGMVA-A5A(50W) SGMJV-D1A(100W), SGMVA-D1A(100W), SGMAV-C2A(150W)
Mitsubishi Electric Corp.	HF-KP053(50W), HF-MP053(50W), HC-KFS053(50W), HC-MFS053(50W) HF-KP13(100W), HF-MP13(100W), HC-KFS13(100W), HC-MFS13(100W)
OMRON Corp.	R88M-W03(30W), R88M-W05(50W), R88M-W10(100W)
SANYO DENKI Co., Ltd.	P30B04003(30W), P30B04005(50W), P30B04010(100W)

Motor bracket for MCM03

Reference number

MC-BK03-148-01

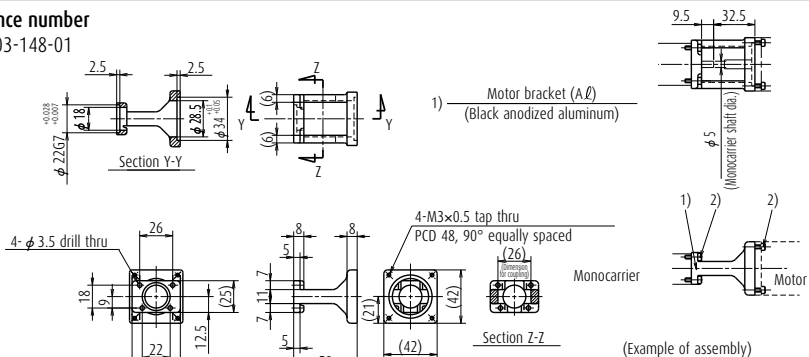

- 2) Hexagon socket head cap screw (M3, length 10)


- Notes:**
1. Be sure to align centerlines when installing motor.
 2. Be careful in the assembly orientation of bracket.
 3. Because bracket is made by sand casting, external dimensions are for reference only.

Compatible motor	
Maker	Motor models
SANYO DENKI Co., Ltd.	P50B04006 (60W), P50B04010 (100W)

Motor bracket for MCM03

Reference number

MC-BK03-231-00

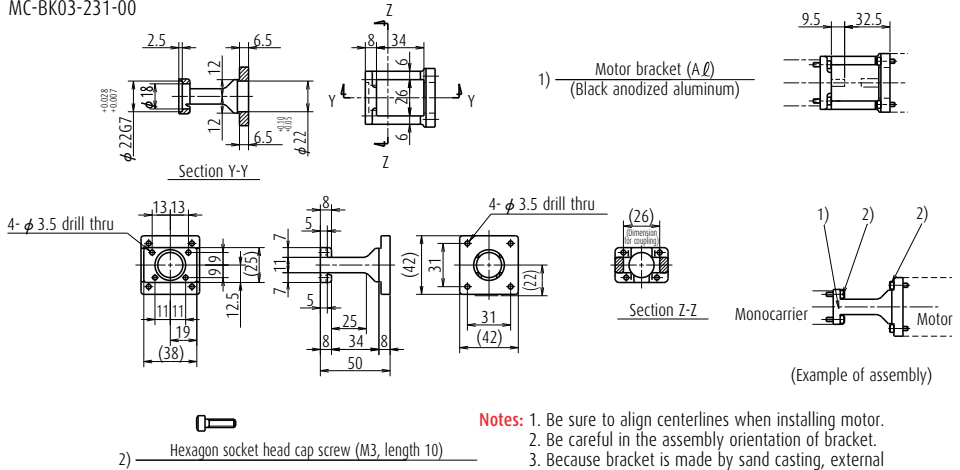


Compatible motor	
Maker	Motor models
SANYO DENKI Co., Ltd.	PBM423xxx, 103F55xx
ORIENTAL MOTOR Co., Ltd.	AS46, ASC46, UPK54x, PK54x, CSK54x, CFK54x, UMK24x, CSK24x, PK24x

Motor bracket for MCM05

Reference number

MC-BK05-145-00

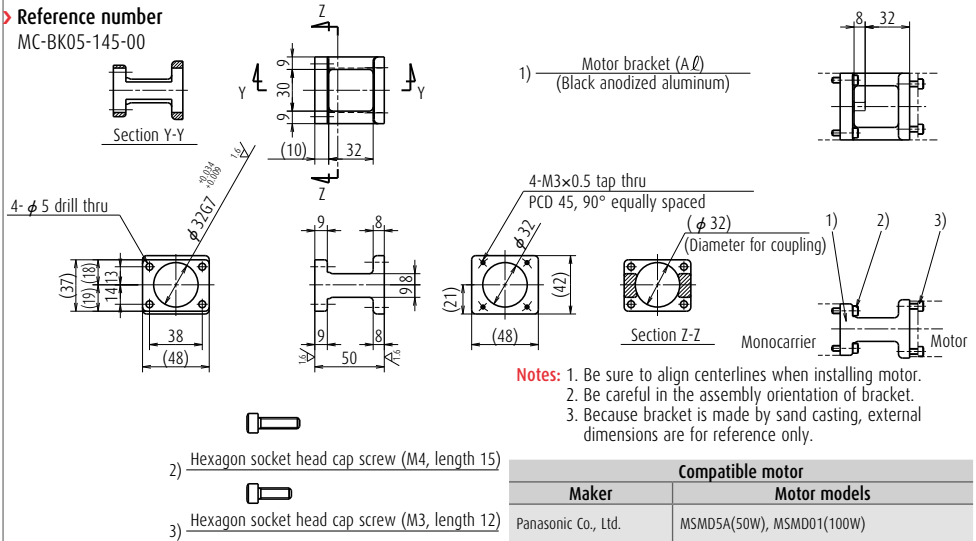


Compatible motor	
Maker	Motor models
Panasonic Co., Ltd.	MSMD5A(50W), MSMD01(100W)

Motor bracket for MCM05

Reference number

MC-BK05-146-00

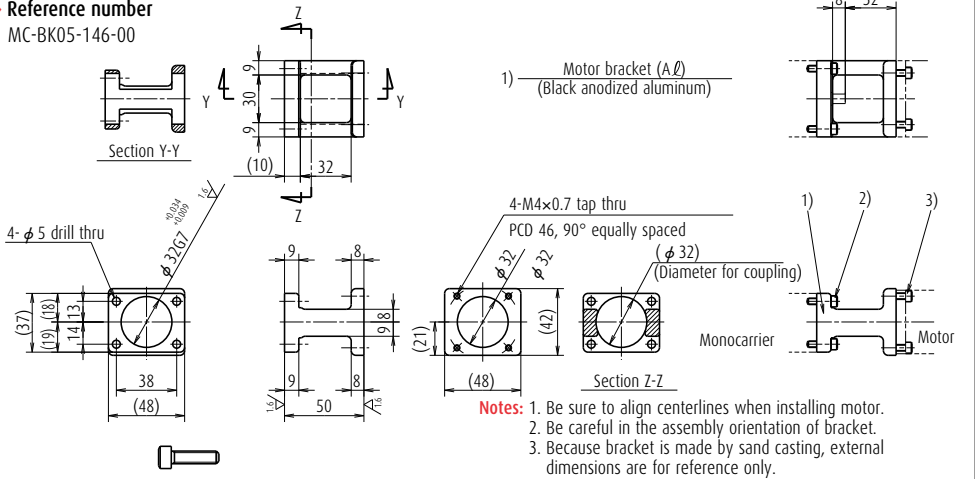

2) Hexagon socket head cap screw (M4, length 15)


3) Hexagon socket head cap screw (M4, length 12)

Compatible motor	
Maker	Motor models
YASKAWA Electric Corp.	SGMAH-A3(30W), SGMJV-A5A(50W), SGMVA-A5A(50W) SGMJV-01A(100W), SGMVA-01A(100W), SGMAV-C2A(150W)
Mitsubishi Electric Corp.	HF-KP053(50W), HF-MP053(50W), HC-KFS053(50W) HC-MFS053(50W), HF-KP13(100W), HF-MP13(100W), HC-KFS13(100W), HC-MFS13(100W)
OMRON Corp.	R88M-W03(30W), R88M-W05(50W), R88M-W10(100W)
SANYO DENKI Co., Ltd.	P30B04003(30W), P30B04005(50W), P30B04010(100W)

Motor bracket for MCM05

Reference number

MC-BK05-148-00

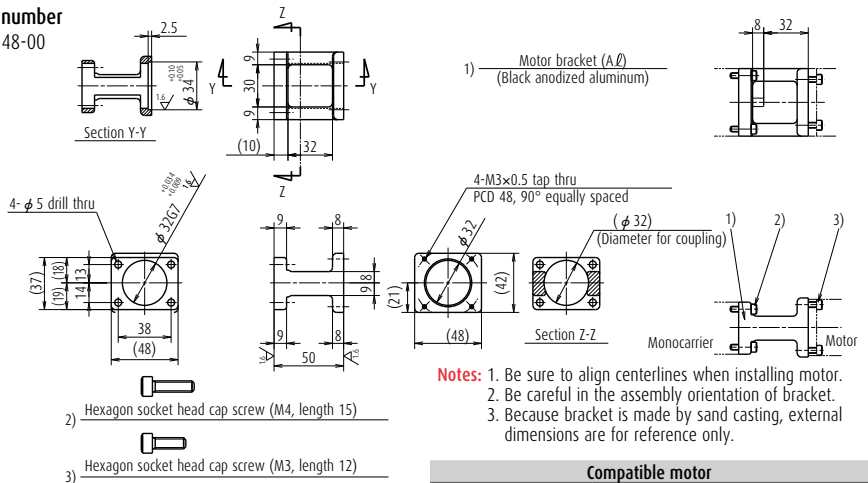

2) Hexagon socket head cap screw (M4, length 15)


3) Hexagon socket head cap screw (M3, length 12)

Compatible motor	
Maker	Motor models
Panasonic Co., Ltd.	MAMA01(100W)

Motor bracket for MCM05

Reference number

MC-BK05-160-00

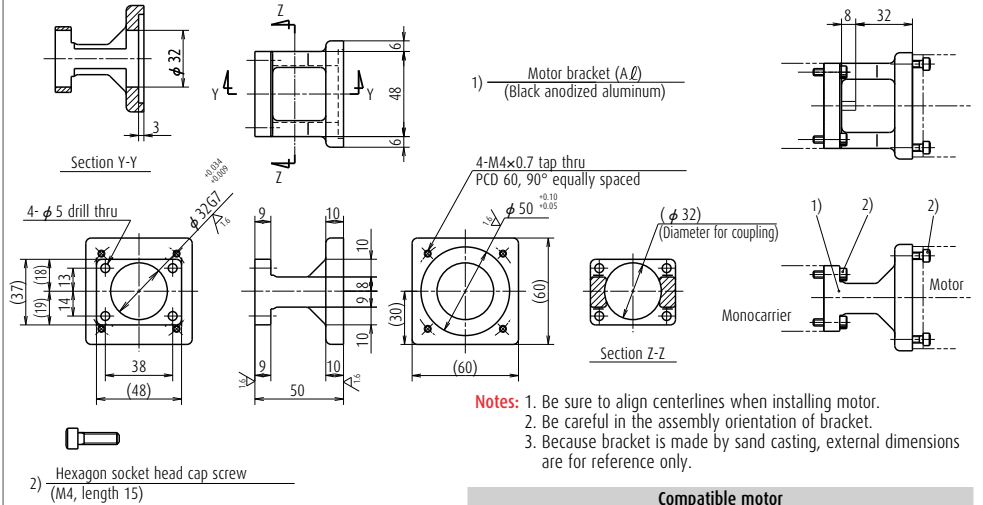


Compatible motor

Maker	Motor models
SANYO DENKI Co., Ltd.	P50B05005(50W), P50B05010(100W), P50B05020(200W)

Motor bracket for MCM05

Reference number

MC-BK05-250-00

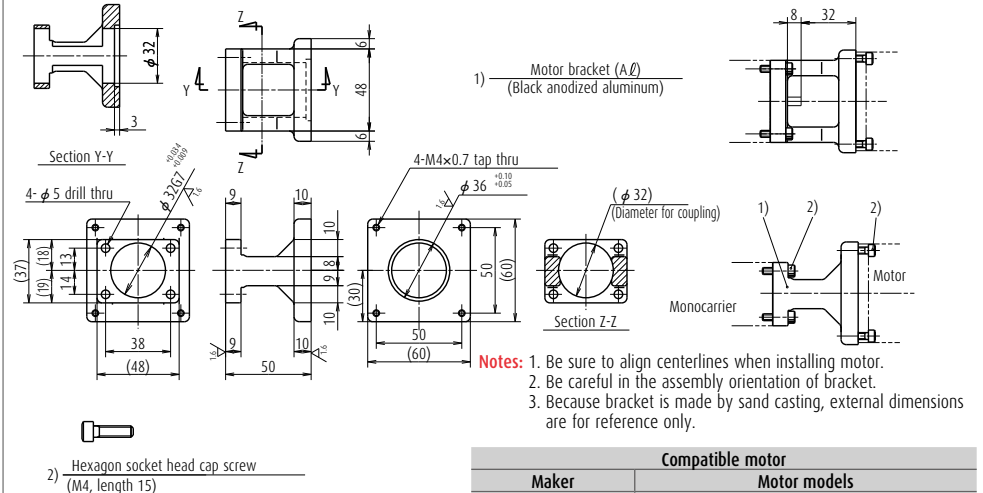

Compatible motor

Maker	Motor models
SANYO DENKI Co., Ltd.	PBM603xxx, PBM604xxx, 103F78xx
ORIENTAL MOTOR Co., Ltd.	AS66, ASC66, UPK56x, UFK56x, PK56x, CSK56x, CFK56x

Motor bracket for MCM06

Reference number

MC-BK06-148-00

1) Motor bracket (A Ø)
(Black anodized aluminum)

4-M3x0.5 tap thru
PCD 48, 90° equally spaced

4-φ 6.5 drill thru

φ 36G7 ^{+0.034}/_{+0.009}

φ 34^{+0.10}/_{+0.05}

(39)
(Dimension for coupling)

Section Z-Z Monocarrier

Section Y-Y

2) Hexagon socket head cap screw (M6, length 16)

3) Hexagon socket head cap screw (M3, length 12)

Notes: 1. Be sure to align centerlines when installing motor.
2. Be careful in the assembly orientation of bracket.
3. Because bracket is made by sand casting, external dimensions are for reference only.

Compatible motor	
Maker	Motor models
Panasonic Co., Ltd.	MAMA01(100W)
SANYO DENKI Co., Ltd.	P50B04006(60W), P50B04010(100W)

Motor bracket for MCM06

Reference number

MC-BK06-160-00

1) Motor bracket (A Ø)
(Black anodized aluminum)

4-M4x0.7 tap thru
PCD 60, 90° equally spaced

4-φ 6.5 drill thru

φ 36G7 ^{+0.034}/_{+0.009}

φ 50^{+0.10}/_{+0.05}

(39)
(Dimension for coupling)

Section Z-Z Monocarrier

Section Y-Y

2) Hexagon socket head cap screw (M6, length 16)

3) Hexagon socket head cap screw (M4, length 14)


Notes: 1. Be sure to align centerlines when installing motor.
2. Be careful in the assembly orientation of bracket.
3. Because bracket is made by sand casting, external dimensions are for reference only.

Compatible motor	
Maker	Motor models
SANYO DENKI Co., Ltd.	P50B05005(50W), P50B05010(100W), P50B05020(200W)

Motor bracket for MCM06

Reference number




MC-BK06-170-00

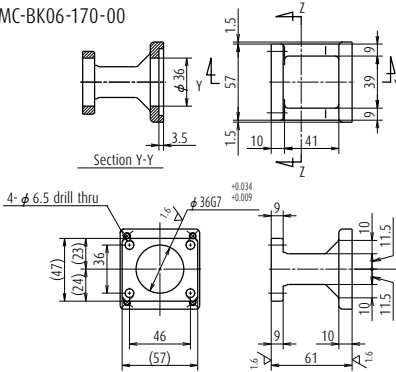

2) Hexagon socket head cap screw (M6, length 16)

3) Hexagon socket head cap screw (M5, length 14)

1) Motor bracket (A \emptyset)
(Black anodized aluminum)



- Notes:**
1. Be sure to align centerlines when installing motor.
 2. Be careful in the assembly orientation of bracket.
 3. Because bracket is made by sand casting, external dimensions are for reference only.


Compatible motor

Maker	Motor models
YASKAWA Electric Corp.	SGMJV-02A(200W), SGMJV-02A(200W), SGMJV-04A(400W), SGMJV-04A(400W), HF-KP23(200W), HF-MP23(200W), HF-KP43(400W), HF-MP43(400W)
Mitsubishi Electric Corp.	HC-KFS23(200W), HC-MFS23(200W), HC-KFS43(400W), HC-MFS43(400W)
OMRON Corp.	R88M-W20(200W), R88M-W40(400W)
SANYO DENKI Co., Ltd.	P30B06020(200W), P30B06040(400W)

Motor bracket for MCM06

Reference number




MC-BK06-170-01

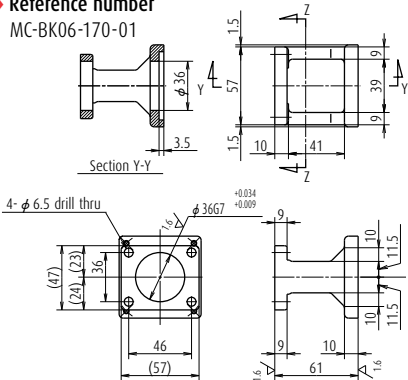

2) Hexagon socket head cap screw (M6, length 16)

3) Hexagon socket head cap screw (M4, length 14)

1) Motor bracket (A \emptyset)
(Black anodized aluminum)



- Notes:**
1. Be sure to align centerlines when installing motor.
 2. Be careful in the assembly orientation of bracket.
 3. Because bracket is made by sand casting, external dimensions are for reference only.


Compatible motor

Maker	Motor models
Panasonic Co., Ltd.	MSMD02(200W), MAMA02(200W), MSMD04(400W), MAMA04(400W)

Motor bracket for MCM06

Reference number

MC-BK06-250-00

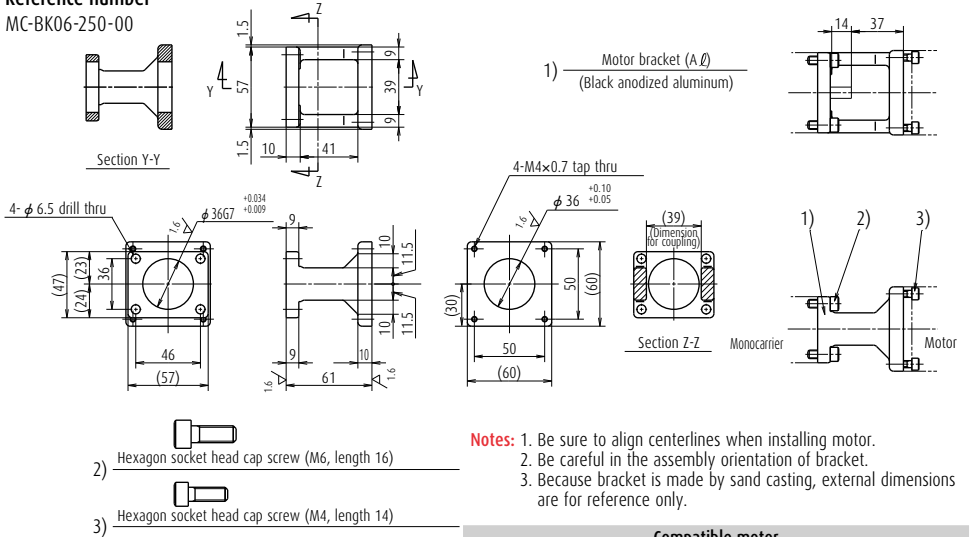


- Notes:**
1. Be sure to align centerlines when installing motor.
 2. Be careful in the assembly orientation of bracket.
 3. Because bracket is made by sand casting, external dimensions are for reference only.

Compatible motor	
Maker	Motor models
SANYO DENKI Co., Ltd.	PBM603xxx, PBM604xxx, 103F78xx
ORIENTAL MOTOR Co., Ltd.	AS66, ASC66, UPK56x, PK56x, CSK56x CFK56x, UFK56x

Motor bracket for MCM08

Reference number

MC-BK08-145-00

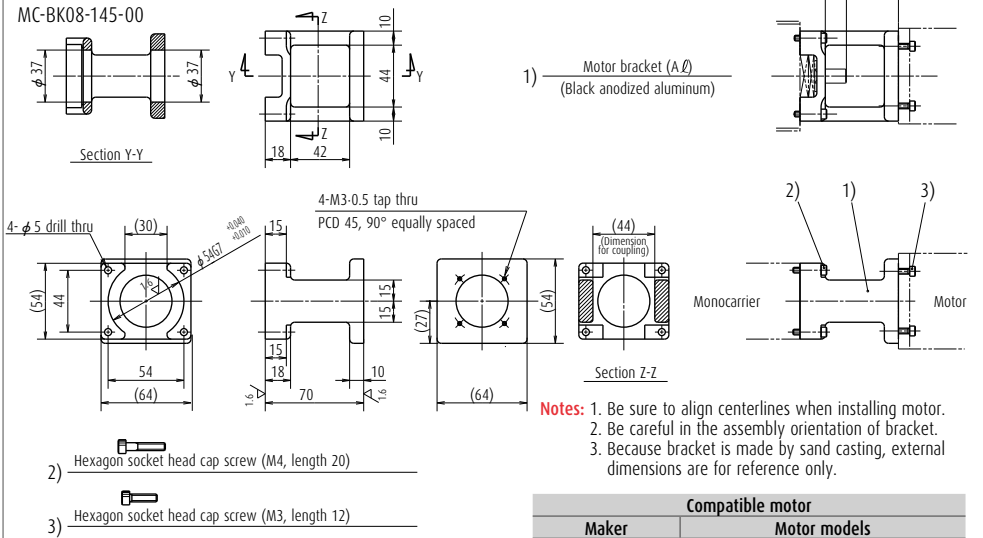


- Notes:**
1. Be sure to align centerlines when installing motor.
 2. Be careful in the assembly orientation of bracket.
 3. Because bracket is made by sand casting, external dimensions are for reference only.

Compatible motor	
Maker	Motor models
Panasonic Co., Ltd.	MSMD01(100W)

Motor bracket for MCM08

Reference number

MC-BK08-146-00

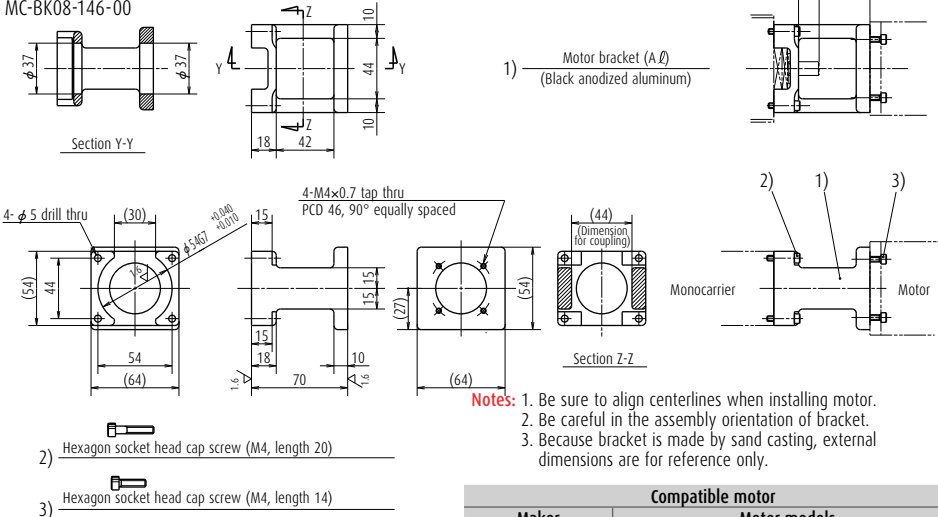


- 1) Hexagon socket head cap screw (M4, length 20)
- 2) Hexagon socket head cap screw (M4, length 14)

Compatible motor	
Maker	Motor models
YASKAWA Electric Corp.	SGMJV-01A(100W), SGMJV-01A(100W), SGMJV-C2A(150W)
Mitsubishi Electric Corp.	HF-KP13(100W), HF-MP13(100W), HC-KFS13(100W), HC-MFS13(100W)
SANYO DENKI Co., Ltd.	P30B04003(30W), P30B04005(50W), P30B04010(100W)

Motor bracket for MCM08

Reference number

MC-BK08-160-00

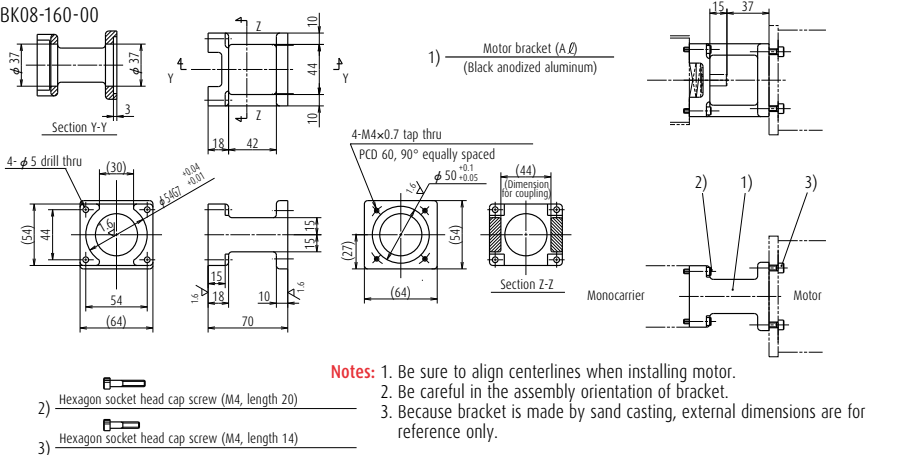


- 1) Hexagon socket head cap screw (M4, length 20)
- 2) Hexagon socket head cap screw (M4, length 14)

Compatible motor	
Maker	Motor models
SANYO DENKI Co., Ltd.	P50B05005(50W), P50B05010(100W), P50B05020(200W)

Motor bracket for MCM08

Reference number

MC-BK08-170-00

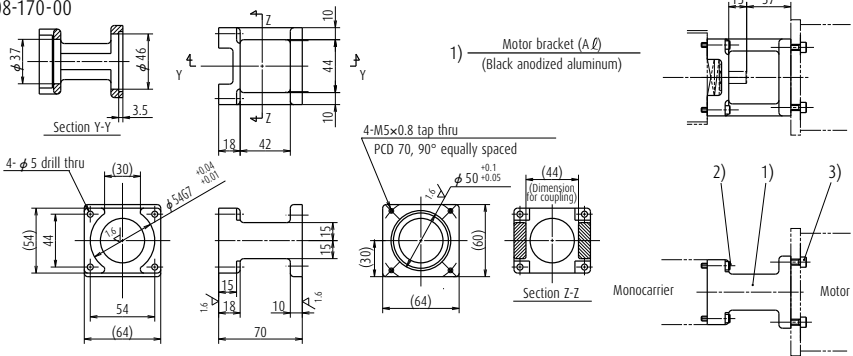

- 2) Hexagon socket head cap screw (M4, length 20)
- 3) Hexagon socket head cap screw (M5, length 14)


- Notes:**
1. Be sure to align centerlines when installing motor.
 2. Be careful in the assembly orientation of bracket.
 3. Because bracket is made by sand casting, external dimensions are for reference only.

Compatible motor	
Maker	Motor models
YASKAWA Electric Corp.	SGMJV-02A(200W), SGMJV-02A(200W), SGMJV-04A(400W), SGMJV-04A(400W)
Mitsubishi Electric Corp.	HF-KP23(200W), HF-MP23(200W), HF-KP43(400W), HF-MP43(400W)
OMRON Corp.	R88M-W20(200W), R88M-W40(400W)
SANYO DENKI Co., Ltd.	P30B06020(200W), P30B06040(400W)

Motor bracket for MCM08

Reference number

MC-BK08-170-01

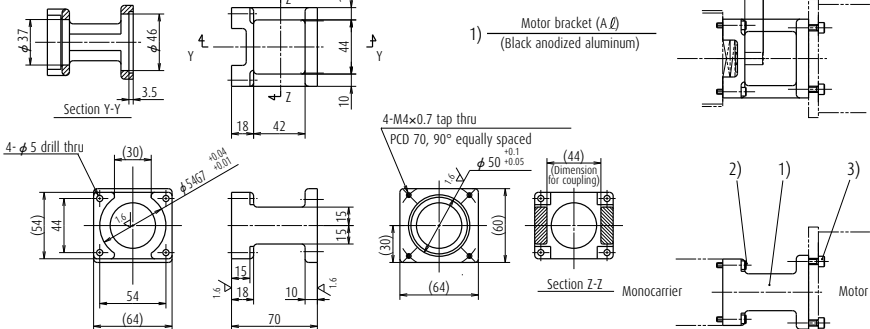

- 2) Hexagon socket head cap screw (M4, length 20)
- 3) Hexagon socket head cap screw (M4, length 14)


- Notes:**
1. Be sure to align centerlines when installing motor.
 2. Be careful in the assembly orientation of bracket.
 3. Because bracket is made by sand casting, external dimensions are for reference only.

Compatible motor	
Maker	Motor models
Panasonic Co., Ltd.	MSMD02(200W), MAMA02(200W), MSMD04(400W), MAMA04(400WW)

Motor bracket for MCM08

Reference number

MC-BK08-250-00

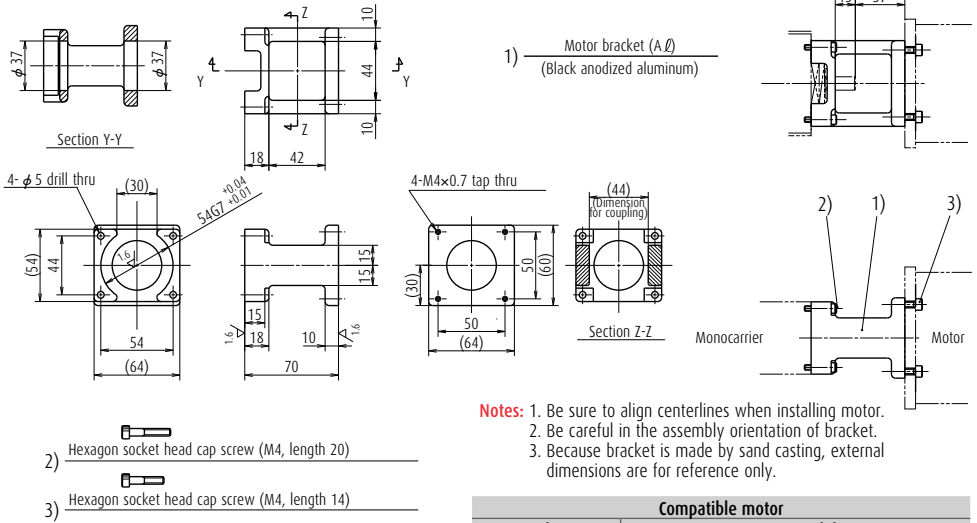


- Notes:**
1. Be sure to align centerlines when installing motor.
 2. Be careful in the assembly orientation of bracket.
 3. Because bracket is made by sand casting, external dimensions are for reference only.

Compatible motor	
Maker	Motor models
SANYO DENKI Co., Ltd.	PBM603xxx, PBM604xxx, 103F78xx
ORIENTAL MOTOR Co., Ltd.	AS66, ASC66, UPK56xx, PK56xx, CSK56x CFK56x, UFK56x

Motor bracket for MCM08

Reference number

MC-BK08-190-00

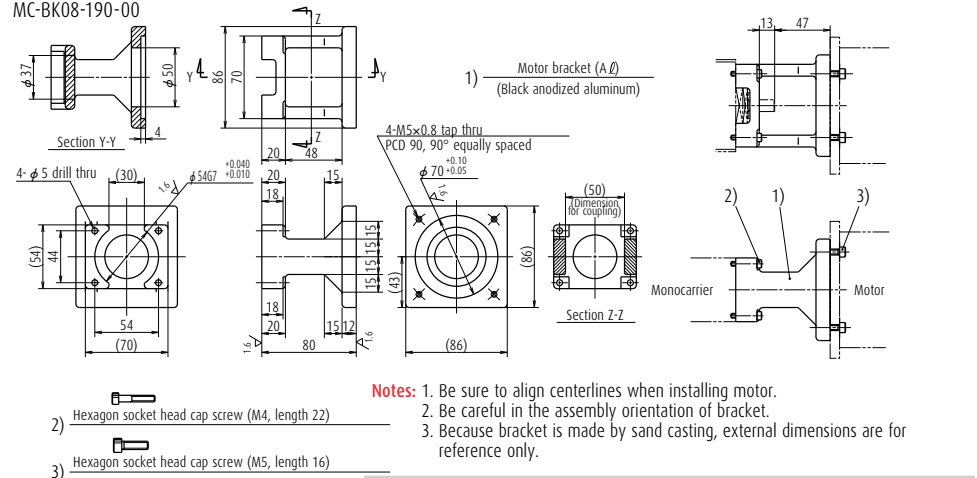


- Notes:**
1. Be sure to align centerlines when installing motor.
 2. Be careful in the assembly orientation of bracket.
 3. Because bracket is made by sand casting, external dimensions are for reference only.

Compatible motor	
Maker	Motor models
SANYO DENKI Co., Ltd.	P50B07020(200W), P50B07030(300W), P50B07040(400W)

Motor bracket for MCM08

Reference number

MC-BK08-270-00

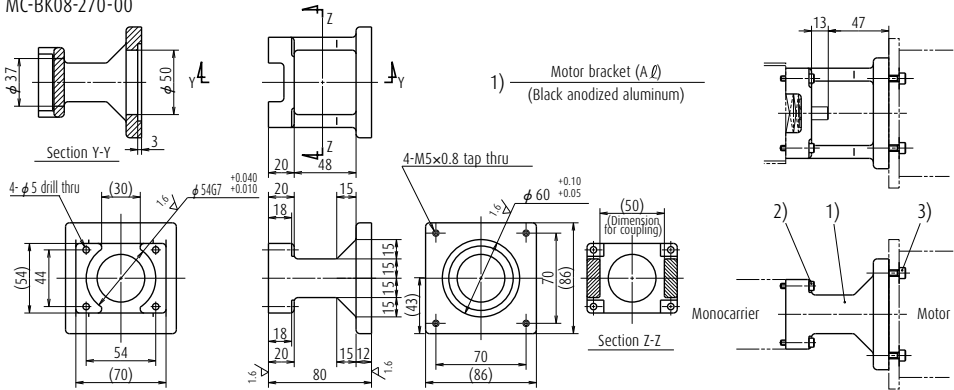

1) Motor bracket (A Ø)
(Black anodized aluminum)

- 2) Hexagon socket head cap screw (M4, length 22)
- 3) Hexagon socket head cap screw (M5, length 16)


Notes: 1. Be sure to align centerlines when installing motor.
2. Be careful in the assembly orientation of bracket.
3. Because bracket is made by sand casting, external dimensions are for reference only.

Compatible motor	
Maker	Motor models
ORIENTAL MOTOR Co., Ltd.	AS98, UPK59x, PK59x CSK59x, CFK59x, UFK59x
SANYO DENKI Co., Ltd.	103F85xx

Motor bracket for MCM10

Reference number

MC-BK08-170-01

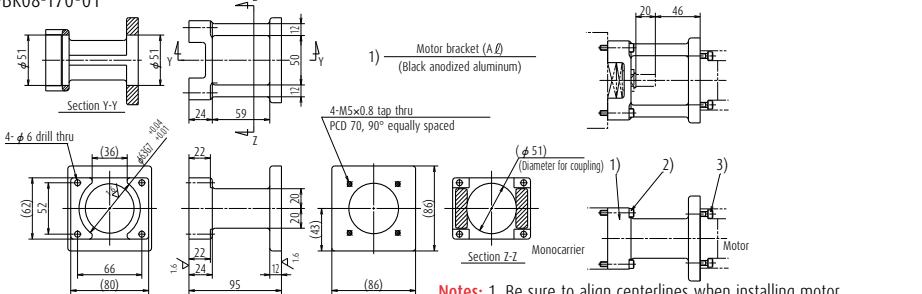

1) Motor bracket (A Ø)
(Black anodized aluminum)

- 2) Hexagon socket head cap screw (M5, length 30)
- 3) Hexagon socket head cap screw (M5, length 16)


Notes: 1. Be sure to align centerlines when installing motor.
2. Be careful in the assembly orientation of bracket.
3. Because bracket is made by sand casting, external dimensions are for reference only.

Compatible motor	
Maker	Motor models
YASKAWA Electric Corp.	SGMJV-02A(200W), SGM4V-02A(200W), SGMJV-04A(400W), SGM4V-04A(400W) HF-KP23(200W), HF-MP23(200W), HF-KP43(400W), HF-MP43(400W)
Mitsubishi Electric Corp.	HC-KFS23(200W), HC-MFS23(200W), HC-KF43(400W), HC-MFS43(400W)
OMRON Corp.	R88M-W20(200W), R88M-W40(400W)
SANYO DENKI Co., Ltd.	P30B06020(200W), P30B06040(400W)

Motor bracket for MCM10

Reference number

MC-BK10-170-01

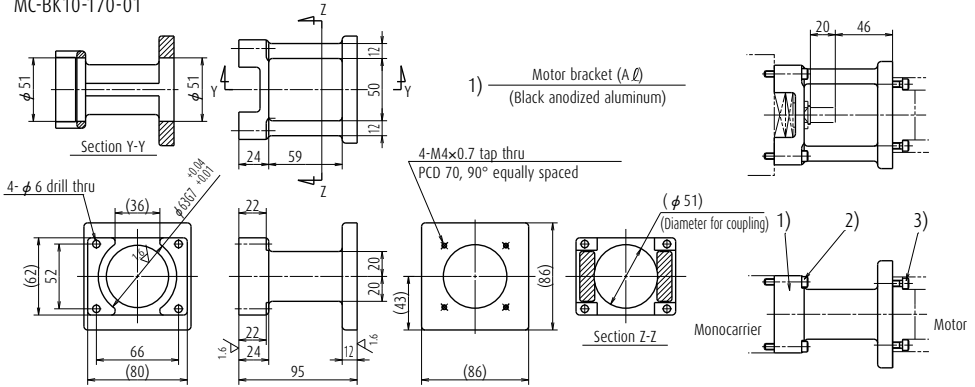

- 2) Hexagon socket head cap screw (M5, length 30)
- 3) Hexagon socket head cap screw (M4, length 16)


- Notes:**
1. Be sure to align centerlines when installing motor.
 2. Be careful in the assembly orientation of bracket.
 3. Because bracket is made by sand casting, external dimensions are for reference only.

Compatible motor	
Maker	Motor models
Panasonic Co., Ltd.	MSMD02(200W), MAMA02(200W), MSMD04(400W), MAMA04(400W)

Motor bracket for MCM10

Reference number

MC-BK08-190-00

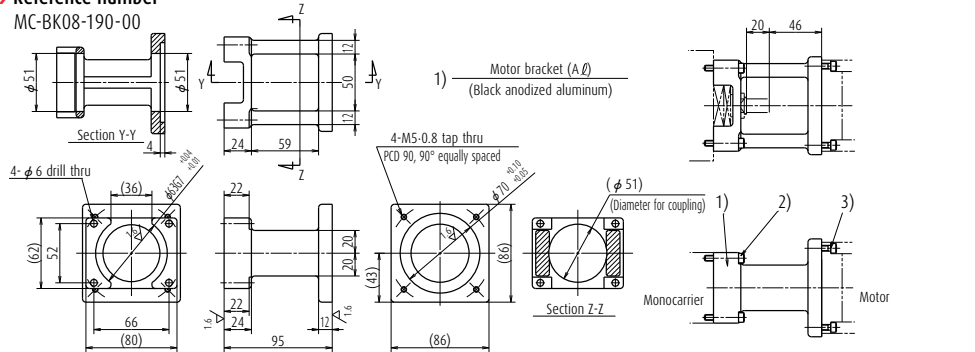

- 2) Hexagon socket head cap screw (M5, length 30)
- 3) Hexagon socket head cap screw (M5, length 16)


- Notes:**
1. Be sure to align centerlines when installing motor.
 2. Be careful in the assembly orientation of bracket.
 3. Because bracket is made by sand casting, external dimensions are for reference only.

Compatible motor	
Maker	Motor models
Panasonic Co., Ltd.	MSMD08(750W), MAMA08(750W)
SANYO DENKI Co., Ltd.	P50B07020(200W), P50B07030(300W), P50B07040(400W)



Motor bracket for MCM10

Reference number

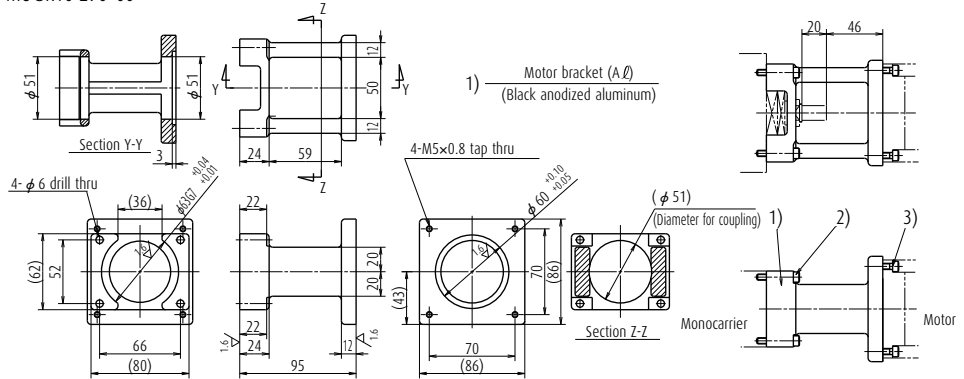MC-BK10-270-00



- Notes:
1. Be sure to align centerlines when installing motor.
 2. Be careful in the assembly orientation of bracket.
 3. Because bracket is made by sand casting, external dimensions are for reference only.

- 2)  Hexagon socket head cap screw (M5, length 30)
- 3)  Hexagon socket head cap screw (M5, length 18)

Compatible motor	
Maker	Motor models
SANYO DENKI Co., Ltd.	103F85xx
ORIENTAL MOTOR Co., Ltd.	AS98, UPK59x, PK59x, CSK59x CFK59x, UFK59x

Motor Availability Table of Motor Bracket for MCM Series

Table 5

Model No.	ref No. code	Motor bracket reference No.	Motor manufacturer	Stepping motor model No.	Wattage of AC servo motor											
					10	20	30	50	60	100	150	200	300	400	750	
MCM02	1	MC-BK02-128-00	YASKAWA Electric Corp.		SGMM-A1	SGMM-A2										
MCM02	2	MC-BK02-133-00	Mitsubishi Electric Corp.		HC-AQ013	HC-AQ023										
MCM02	3	MC-BK02-223-00	ORIENTAL MOTOR Co., Ltd.	PMU33/35 (5-phase)												
MCM02	3	MC-BK02-223-00	ORIENTAL MOTOR Co., Ltd.	PMC33/35 (5-phase)												
MCM03	1	MC-BK03-146-00	YASKAWA Electric Corp.			SGMAH-A3	SGMJV-A5A			SGMJV-01A	SGMAV-C2A					
MCM03	1	MC-BK03-146-00	YASKAWA Electric Corp.			SGMAH-A3	SGMAV-A5A			SGMAV-01A	SGMAV-C2A					
MCM03	1	MC-BK03-146-00	Mitsubishi Electric Corp.				HF-KP053			HF-KP13						
MCM03	1	MC-BK03-146-00	Mitsubishi Electric Corp.				HF-MP053			HF-MP13						
MCM03	1	MC-BK03-146-00	Mitsubishi Electric Corp.				HC-KFS053			HC-KFS13						
MCM03	1	MC-BK03-146-00	Mitsubishi Electric Corp.				HC-MFS053			HC-MFS13						
MCM03	1	MC-BK03-146-00	OMRON Corp.			R88M-W03	R88M-W05			R88M-W10						
MCM03	1	MC-BK03-146-00	SANYO DENKI Co., Ltd.			P30B04003	P30B04005			P30B04010						
MCM03	2	MC-BK03-148-01	SANYO DENKI Co., Ltd.						P50B04006	P50B04010						
MCM03	3	MC-BK03-231-00	SANYO DENKI Co., Ltd.	PBM423xxx												
MCM03	3	MC-BK03-231-00	SANYO DENKI Co., Ltd.	103F55xx												
MCM03	3	MC-BK03-231-00	ORIENTAL MOTOR Co., Ltd.	AS46, ASC46												
MCM03	3	MC-BK03-231-00	ORIENTAL MOTOR Co., Ltd.	UPK54x, PK54x												
MCM03	3	MC-BK03-231-00	ORIENTAL MOTOR Co., Ltd.	CSK54x, CFK54x												
MCM03	3	MC-BK03-231-00	ORIENTAL MOTOR Co., Ltd.	UMK24x, CSK24x												
MCM03	3	MC-BK03-231-00	ORIENTAL MOTOR Co., Ltd.	PK24x												
MCM05	1	MC-BK05-145-00	Panasonic Co., Ltd.						MSMD5A		MSMD01					
MCM05	2	MC-BK05-146-00	YASKAWA Electric Corp.				SGMAH-A3	SGMJV-A5A		SGMJV-01A	SGMAV-C2A					
MCM05	2	MC-BK05-146-00	YASKAWA Electric Corp.				SGMAH-A3	SGMAV-A5A		SGMAV-01A	SGMAV-C2A					
MCM05	2	MC-BK05-146-00	Mitsubishi Electric Corp.					HF-KP053		HF-KP13						
MCM05	2	MC-BK05-146-00	Mitsubishi Electric Corp.					HF-MP053		HF-MP13						
MCM05	2	MC-BK05-146-00	Mitsubishi Electric Corp.					HC-KFS053		HC-KFS13						
MCM05	2	MC-BK05-146-00	Mitsubishi Electric Corp.					HC-MFS053		HC-MFS13						
MCM05	2	MC-BK05-146-00	OMRON Corp.				R88M-W03	R88M-W05		R88M-W10						
MCM05	2	MC-BK05-146-00	SANYO DENKI Co., Ltd.				P30B04003	P30B04005		P30B04010						
MCM05	3	MC-BK05-148-00	Panasonic Co., Ltd.							MAMA01						
MCM05	4	MC-BK05-160-00	SANYO DENKI Co., Ltd.						P50B05005		P50B05010			P50B05020		

Model No.	ref No. code	Motor bracket reference No.	Motor manufacturer	Stepping motor model No.	Wattage of AC servo motor							300	400	750			
					10	20	30	50	60	100	150				200		
MCM05	5	MC-BK05-250-00	SANYO DENKI Co., Ltd.	PBM603xx, PBM604xx													
MCM05	5	MC-BK05-250-00	SANYO DENKI Co., Ltd.	103F78xx													
MCM05	5	MC-BK05-250-00	ORIENTAL MOTOR Co., Ltd.	AS66, ASC66													
MCM05	5	MC-BK05-250-00	ORIENTAL MOTOR Co., Ltd.	UPK56x, UFK56x													
MCM05	5	MC-BK05-250-00	ORIENTAL MOTOR Co., Ltd.	PK56x, CSK56x													
MCM05	5	MC-BK05-250-00	ORIENTAL MOTOR Co., Ltd.	CFK56x													
MCM06	1	MC-BK06-145-00	Panasonic Co., Ltd.					MSMD5A		MSMD01							
MCM06	2	MC-BK06-146-00	YASKAWA Electric Corp.					SGMJV-A5A		SGMJV-01A	SGMAV-C2A						
MCM06	2	MC-BK06-146-00	YASKAWA Electric Corp.					SGMAV-A5A		SGMAV-01A	SGMAV-C2A						
MCM06	2	MC-BK06-146-00	Mitsubishi Electric Corp.					HF-KP053		HF-KP13							
MCM06	2	MC-BK06-146-00	Mitsubishi Electric Corp.					HF-MP053		HF-MP13							
MCM06	2	MC-BK06-146-00	Mitsubishi Electric Corp.					HC-KFS053		HC-KFS13							
MCM06	2	MC-BK06-146-00	Mitsubishi Electric Corp.					HC-MFS053		HC-MFS13							
MCM06	2	MC-BK06-146-00	OMRON Corp.				R88M-W03	R88M-W05		R88M-W10							
MCM06	2	MC-BK06-146-00	SANYO DENKI Co., Ltd.				P30B04003	P30B04005		P30B04010							
MCM06	3	MC-BK06-148-00	SANYO DENKI Co., Ltd.						P50B04006	P50B04010							
MCM06	3	MC-BK06-148-00	Panasonic Co., Ltd.							MAMA01							
MCM06	4	MC-BK06-160-00	SANYO DENKI Co., Ltd.					P50B05005		P50B05010	P50B05020						
MCM06	4	MC-BK06-160-00															
MCM06	5	MC-BK06-170-00	YASKAWA Electric Corp.								SGMJV-02A						SGMJV-04A
MCM06	5	MC-BK06-170-00	YASKAWA Electric Corp.								SGMAV-02A						SGMAV-04A
MCM06	5	MC-BK06-170-00	Mitsubishi Electric Corp.								HF-KP23						HF-KP43
MCM06	5	MC-BK06-170-00	Mitsubishi Electric Corp.								HF-MP23						HF-MP43
MCM06	5	MC-BK06-170-00	Mitsubishi Electric Corp.								HC-KFS23						HC-KFS43
MCM06	5	MC-BK06-170-00	Mitsubishi Electric Corp.								HC-MFS23						HC-MFS43
MCM06	5	MC-BK06-170-00	OMRON Corp.								R88M-W20						R88M-W40
MCM06	5	MC-BK06-170-00	SANYO DENKI Co., Ltd.								P30B06020						P30B06040
MCM06	6	MC-BK06-170-01	Panasonic Co., Ltd.								MSMD02						MSMD04
MCM06	6	MC-BK06-170-01	Panasonic Co., Ltd.								MAMA02						MAMA04
MCM06	7	MC-BK06-250-00	SANYO DENKI Co., Ltd.	PBM603xxx													
MCM06	7	MC-BK06-250-00	SANYO DENKI Co., Ltd.	PBM604xxx													
MCM06	7	MC-BK06-250-00	SANYO DENKI Co., Ltd.	103F78xx													
MCM06	7	MC-BK06-250-00	ORIENTAL MOTOR Co., Ltd.	AS66, ASC66													
MCM06	7	MC-BK06-250-00	ORIENTAL MOTOR Co., Ltd.	UPK56x, PK56x													
MCM06	7	MC-BK06-250-00	ORIENTAL MOTOR Co., Ltd.	CSK56x, CFK56x													
MCM06	7	MC-BK06-250-00	ORIENTAL MOTOR Co., Ltd.	UFK56x													

Accessories

Model No.	ref No. code	Motor bracket reference No.	Motor manufacturer	Stepping motor model No.	Wattage of AC servo motor												
					10	20	30	50	60	100	150	200	300	400	750		
MCM08	1	MC-BK08-145-00	Panasonic Co., Ltd.							MSMD01							
MCM08	2	MC-BK08-146-00	YASKAWA Electric Corp							SGMJV-01A	SGMAV-C2A						
MCM08	2	MC-BK08-146-00	YASKAWA Electric Corp							SGMAV-01A	SGMAV-C2A						
MCM08	2	MC-BK08-146-00	Mitsubishi Electric Corp							HF-KP13							
MCM08	2	MC-BK08-146-00	Mitsubishi Electric Corp							HF-MP13							
MCM08	2	MC-BK08-146-00	Mitsubishi Electric Corp							HC-KFS13							
MCM08	2	MC-BK08-146-00	Mitsubishi Electric Corp							HC-MFS13							
MCM08	2	MC-BK08-146-00	SANYO DENKI Co., Ltd.				P30B04003	P30B04005		P30B04010							
MCM08	3	MC-BK08-160-00	SANYO DENKI Co., Ltd.					P50B05005		P50B05010		P50B05020					
MCM08	4	MC-BK08-170-00	YASKAWA Electric Corp.									SGMJV-02A				SGMJV-04A	
MCM08	4	MC-BK08-170-00	YASKAWA Electric Corp.									SGMAV-02A				SGMAV-04A	
MCM08	4	MC-BK08-170-00	Mitsubishi Electric Corp.									HF-KP23				HF-KP43	
MCM08	4	MC-BK08-170-00	Mitsubishi Electric Corp.									HF-MP23				HF-MP43	
MCM08	4	MC-BK08-170-00	Mitsubishi Electric Corp.									HC-KFS23				HC-KFS43	
MCM08	4	MC-BK08-170-00	Mitsubishi Electric Corp.									HC-MFS23				HC-MFS43	
MCM08	4	MC-BK08-170-00	OMRON Corp.									R88M-W20				R88M-W40	
MCM08	4	MC-BK08-170-00	SANYO DENKI Co., Ltd.									P30B06020				P30B06040	
MCM08	5	MC-BK08-170-01	Panasonic Co., Ltd.									MSMD02				MSMD04	
MCM08	5	MC-BK08-170-01	Panasonic Co., Ltd.									MAMA02				MAMA04	
MCM08	6	MC-BK08-190-00	SANYO DENKI Co., Ltd.									P50B07020	P50B07030		P50B07040		
MCM08	7	MC-BK08-250-00	SANYO DENKI Co., Ltd.	PBM603xxx,			SGMAH-A3	SGMJV-A5A		SGMJV-01A	SGMAV-C2A						
MCM08	7	MC-BK08-250-00	SANYO DENKI Co., Ltd.	PBM604xxx			SGMAH-A3	SGMAV-A5A		SGMAV-01A	SGMAV-C2A						
MCM08	7	MC-BK08-250-00	SANYO DENKI Co., Ltd.	103F78xx				HF-KP053		HF-KP13							
MCM08	7	MC-BK08-250-00	Mitsubishi Electric Corp.					HF-MP053		HF-MP13							
MCM08	7	MC-BK08-250-00	Mitsubishi Electric Corp.					HC-KFS053		HC-KFS13							
MCM08	7	MC-BK08-250-00	Mitsubishi Electric Corp.					HC-MFS053		HC-MFS13							
MCM08	7	MC-BK08-250-00	OMRON Corp.				R88M-W03	R88M-W05		R88M-W10							
MCM08	8	MC-BK08-270-00	SANYO DENKI Co., Ltd.	103F85xx				P30B04003	P30B04005	P30B04010							
MCM08	8	MC-BK08-270-00	ORIENTAL MOTOR Co., Ltd.	AS98						MAMA01							
MCM08	8	MC-BK08-270-00	ORIENTAL MOTOR Co., Ltd.	UPK59x, PK59x				P50B05005		P50B05010		P50B05020					
MCM08	8	MC-BK08-270-00	ORIENTAL MOTOR Co., Ltd.	CSK59x, CFK59x													
MCM08	8	MC-BK08-270-00	ORIENTAL MOTOR Co., Ltd.	UFK59x													
MCM10	1	MC-BK10-170-00	YASKAWA Electric Corp.									SGMJV-02A				SGMJV-04A	
MCM10	1	MC-BK10-170-00	YASKAWA Electric Corp.									SGMAV-02A				SGMAV-04A	
MCM10	1	MC-BK10-170-00	Mitsubishi Electric Corp.									HF-KP23				HF-KP43	
MCM10	1	MC-BK10-170-00	Mitsubishi Electric Corp.									HF-MP23				HF-MP43	
MCM10	1	MC-BK10-170-00	Mitsubishi Electric Corp.									HC-KFS23				HC-KFS43	
MCM10	1	MC-BK10-170-00	Mitsubishi Electric Corp.									HC-MFS23				HC-MFS43	
MCM10	1	MC-BK10-170-00	OMRON Corp.									R88M-W20				R88M-W40	
MCM10	1	MC-BK10-170-00	SANYO DENKI Co., Ltd.									P30B06020				P30B06040	
MCM10	2	MC-BK10-170-01	Panasonic Co., Ltd.									MSMD02				MSMD04	
MCM10	2	MC-BK10-170-01	Panasonic Co., Ltd.									MAMA02				MAMA04	
MCM10	3	MC-BK10-190-00	Panasonic Co., Ltd.						HC-MFS053	HC-MFS13							
MCM10	3	MC-BK10-190-00	Panasonic Co., Ltd.									R88M-W20				R88M-W40	
MCM10	3	MC-BK10-190-00	SANYO DENKI Co., Ltd.									P50B07020	P50B07030		P50B07040		
MCM10	4	MC-BK10-270-00	SANYO DENKI Co., Ltd.	103F85xx													
MCM10	4	MC-BK10-270-00	ORIENTAL MOTOR Co., Ltd.	AS98													
MCM10	4	MC-BK10-270-00	ORIENTAL MOTOR Co., Ltd.	UPK59x, PK59x													
MCM10	4	MC-BK10-270-00	ORIENTAL MOTOR Co., Ltd.	CSK59x, CFK59x													
MCM10	4	MC-BK10-270-00	ORIENTAL MOTOR Co., Ltd.	UFK59x													



C-1-6 MCH Series

	Page
1. MCH Series Reference Number Coding	C75
2. MCH Series Dimension Table of Standard Products	
MCL06.....	C76
MCH06.....	C77
MCH09.....	C79
MCH10.....	C81
3. MCH Series Accessories	
3.1 Sensor Unit.....	C83
3.2 Cover Unit.....	C85
3.3 Intermediate Plate for Motor.....	C89

C-1-6 MCH Series

C-1-6. 1 MCH Series Reference Number Coding

[Body] Example: **MC H 06 040 H 10 K (B 2)^{*1}**

Monocarrier

H Type: MCH Series
L Type: MCH Series low profile rail (only for 06 size)

Nominal size (rail width, Unit: 10mm)

Stroke (Unit: 10mm)

Accuracy grade (H, high grade; P, precision grade)

14th digit is control No. of NSK. Customers cannot specify a number. See the pages of each nominal number for details.

NSK management number (0 or 2)

Grease specification: B (LG2)
(See page C142)

Slider specification K: Single slider
D: Double slider (See page C16)

Ball screw lead (mm)

Note: ^{*1}: These two code fields are added except for standard grease.

[With Accessories] Example **MC S 06 040 H 10 K 0 2 K 0 0 0**

S: With MCH Accessories
R: With MCL Accessories

NSK management number

Sensor unit

Cover unit

Intermediate plate for motor

Note: Option parts are available separately.

Table 1 Sensor unit (See page C83)

Reference No. code	Specification	Reference No.
0	N/A	—
1	Proximity switch (Normally close contact 3 pieces)	MC-SRHxx-10
2	Proximity switch (Normally open contact 3 pieces)	MC-SRHxx-11
3	Proximity switch (Normally open contact 1 piece, Normally close contact 2 pieces)	MC-SRHxx-12
4	Photo sensor 3 pieces	MC-SRHxx-13

Note 1) xx: Nominal size 2) Sensor rail is not included in a sensor unit. If you require the rail, please specify upon ordering. (See page C83 to C84)

Table 2 Cover unit (See page C85 to C87)

Reference No. code	Specification	Reference No.
0	N/A	—
1	For single slider	MC-HVxxxxx-00
1	For double slider	MC-HVxxxxxD00

Note xxxxx: Nominal size and stroke number

Table 3 Intermediate plate for motor (See page C89 to C92)


Reference No. code	Reference No.		
	MCH06 (MCL06)	MCH09	MCH10
0	N/A	N/A	N/A
1	MC-BKH06-145-00	MC-BKH09-145-00	MC-BKH10-170-00
2	MC-BKH06-146-00	MC-BKH09-146-00	MC-BKH10-170-01
3	MC-BKH06-231-00	MC-BKH09-170-00	MC-BKH10-190-00
4	MC-BKH06-250-00	MC-BKH09-170-01	MC-BKH10-190-01
5	—	MC-BKH09-231-00	MC-BKH10-250-00
6	—	MC-BKH09-250-00	MC-BKH10-270-00

N/A: Not applicable

C-1-6. 2 MCH Series Dimension Table of Standard Products

MCL06

Accuracy grade: High grade (H)

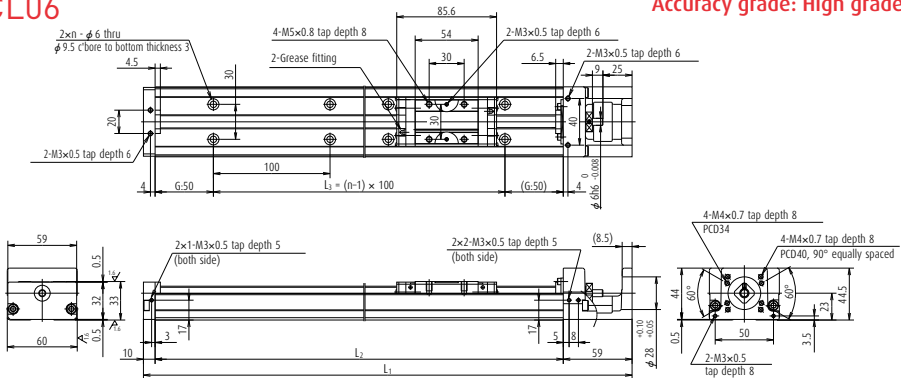

- > Rail of MCL 06 is made lighter than that of MCH 06 by lowering rail height. Weight ratio between MCH 06 and MCL 06 is 5 to 4.
- > Double slider specification is also available for MCL 06.
- > Combinations of stroke and ball screw lead of the MCL 06 are the same as those of MCH 06.

Dimension of MCL06 (Single slider)

Reference No.	Nominal stroke (mm)	Stroke limit (mm) (without K1)	Ball screw lead (mm)	Body length (mm)				Inertia $\times 10^{-6}$ (kg · m ²)	Mass (kg)
				L ₁	L ₂	L ₃	n		
◇ MCL06005H05K02	50	53 (65)	5	219	150	100	2	2.38	1.0
◇ MCL06005H10K02	50	53 (65)	10	219	150	100	2	3.45	1.0
MCL06010H05K02	100	103 (115)	5	269	200	100	2	3.17	1.3
MCL06010H10K02	100	103 (115)	10	269	200	100	2	4.12	1.3
MCL06020H05K02	200	203 (215)	5	369	300	200	3	4.51	1.9
MCL06020H10K02	200	203 (215)	10	369	300	200	3	5.46	1.9
MCL06030H10K02	300	303 (315)	10	469	400	300	4	6.80	2.6
MCL06030H20K02	300	303 (315)	20	469	400	300	4	10.6	2.6
MCL06040H10K02	400	403 (415)	10	569	500	400	5	8.13	3.2
MCL06040H20K02	400	403 (415)	20	569	500	400	5	11.9	3.2
MCL06050H10K02	500	503 (515)	10	669	600	500	6	9.47	3.9
MCL06050H20K02	500	503 (515)	20	669	600	500	6	13.3	3.9

Notes: 1. Dimension G is 25 for items marked with ◇. 2. The nominal number in the above table is for high-grade grease specifications. In the case of other specifications, see the following table for the 13th and 14th digits.

Coding for columns 13 and 14

Grease	High-grade	Precision-grade
Standard	02	(None)
LG2	B2	B0

Ball screw lead(mm)	Accuracy grade	
	High grade	Precision
5	1.0 - 4.8	1.9 - 7.6
10	1.1 - 5.8	2.1 - 8.9
20	1.6 - 7.9	2.5 - 10.6

Notes

- Frictional resistance of NSK K1 is included in dynamic torque in table.
- Grease is packed into ball screw, linear guide parts and support unit.
- Consult NSK for life estimates under large moment loads.

Basic load rating


Lead ℓ (mm)	Shaft dia d (mm)	Basic dynamic load rating (N)				Basic static load rating (N)		
		Ball screw C_a	Linear guides C	Support unit C_a	Rated running distance L_3 (km)	Ball screw C_{0a}	Linear guides C_0	Support unit load limit (N)
5	$\phi 12$	4 390	22 800	4 400	5	6 260	16 300	1 450
10	$\phi 12$	2 740	18 100	4 400	10	3 820	16 300	1 450
20	$\phi 12$	2 660	14 400	4 400	20	3 800	16 300	1 450

Basic static moment load of linear guide

Slider	Basic static moment load (N · m)		
	Rolling M_{R0}	Pitching M_{P0}	Yawing M_{Y0}
Single	335	133	133

MCH06

Accuracy grade: High grade (H)

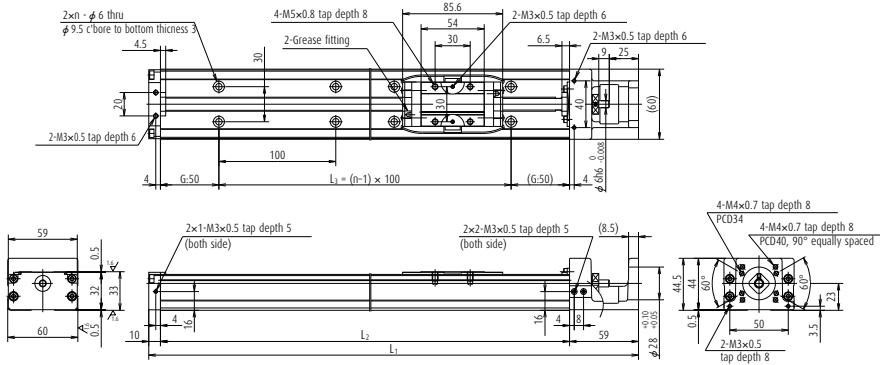

Dimension of MCH06 (Single slider)

Reference No.	Nominal stroke (mm)	Stroke limit (mm) (without K1)	Ball screw lead (mm)	Body length (mm)				Inertia $\times 10^{-6}$ (kg · m ²)	Mass (kg)
				L ₁	L ₂	L ₃	n		
◇ MCH06005H05K02	50	53 (65)	5	219	150	100	2	2.38	1.8
◇ MCH06005H10K02	50	53 (65)	10	219	150	100	2	3.45	1.8
◇ MCH06005H20K02	50	53 (65)	20	219	150	100	2	7.25	1.8
MCH06010H05K02	100	103 (115)	5	269	200	100	2	3.17	2.2
MCH06010H10K02	100	103 (115)	10	269	200	100	2	4.12	2.2
MCH06010H20K02	100	103 (115)	20	269	200	100	2	7.92	2.2
MCH06020H05K02	200	203 (215)	5	369	300	200	3	4.51	3.0
MCH06020H10K02	200	203 (215)	10	369	300	200	3	5.46	3.0
MCH06020H20K02	200	203 (215)	20	369	300	200	3	9.26	3.0
MCH06030H05K02	300	303 (315)	5	469	400	300	4	5.85	3.7
MCH06030H10K02	300	303 (315)	10	469	400	300	4	6.80	3.7
MCH06030H20K02	300	303 (315)	20	469	400	300	4	10.6	3.7
MCH06040H05K02	400	403 (415)	5	569	500	400	5	7.18	4.5
MCH06040H10K02	400	403 (415)	10	569	500	400	5	8.13	4.5
MCH06040H20K02	400	403 (415)	20	569	500	400	5	11.9	4.5
MCH06050H05K02	500	503 (515)	5	669	600	500	6	8.52	5.2
MCH06050H10K02	500	503 (515)	10	669	600	500	6	9.47	5.2
MCH06050H20K02	500	503 (515)	20	669	600	500	6	13.3	5.2

Notes 1. Dimension G is 25 for items marked with ◇. 2. The nominal number in the above table is for high-grade grease specifications. In the case of other specifications, see the following table for the 13th and 14th digits.

Coding for columns 13 and 14

Grease	High-grade	Precision-grade
Standard	O2	(None)
LG2	B2	B0

Monocarrier dynamic torque specification (N · cm)		
Ball screw lead(mm)	Accuracy grade	
	High grade	Precision
5	1.0 - 4.8	1.9 - 7.6
10	1.1 - 5.8	2.1 - 8.9
20	1.6 - 7.9	2.5 - 10.6

Notes

- Frictional resistance of NSK K1 is included in dynamic torque in table.
- Grease is packed into ball screw, linear guide parts and support unit.
- Consult NSK for life estimates under large moment loads.

Basic load rating


Lead l (mm)	Shaft dia d (mm)	Basic dynamic load rating (N)				Basic static load rating (N)		
		Ball screw C_a	Linear guides C	Support unit C_a	Rated running distance L_a (km)	Ball screw C_{0a}	Linear guides C_0	Support unit load limit (N)
5	$\phi 12$	4 390	22 800	4 400	5	6 260	16 300	1 450
10	$\phi 12$	2 740	18 100	4 400	10	3 820	16 300	1 450
20	$\phi 12$	2 660	14 400	4 400	20	3 800	16 300	1 450

Basic static moment load of linear guide

Slider	Basic static moment load (N · m)		
	Rolling M_{R0}	Pitching M_{P0}	Yawing M_{Y0}
Single	335	133	133

MCH06 (Double slider)

Accuracy grade: High grade (H)

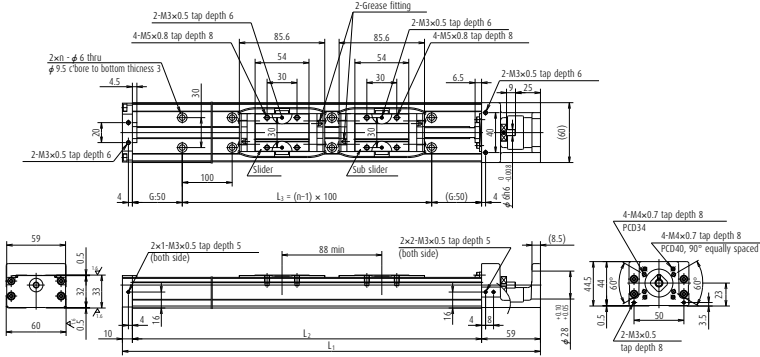

Dimension of MCH06 (Double slider)

Reference No.	Nominal stroke (mm)	Stroke limit (mm) (without K1)	Ball screw lead (mm)	Body length (mm)				Inertia $\times 10^{-6}$ (kg · m ²)	Mass (kg)
				L ₁	L ₂	L ₃	n		
MCH06010H05D02	100	115 (139)	5	369	300	200	3	4.82	3.5
MCH06010H10D02	100	115 (139)	10	369	300	200	3	6.72	3.5
MCH06020H05D02	200	215 (239)	5	469	400	300	4	8.06	4.2
MCH06020H10D02	200	215 (239)	10	469	400	300	4	15.7	4.2
MCH06030H05D02	300	315 (339)	5	569	500	400	5	9.40	5.0
MCH06030H10D02	300	315 (339)	10	569	500	400	5	17.0	5.0
MCH06040H10D02	400	415 (439)	10	669	600	500	6	10.7	5.7
MCH06040H20D02	400	415 (439)	20	669	600	500	6	18.3	5.7

Note The nominal number in the above table is for high-grade grease specifications. In the case of other specifications, see the following table for the 13th and 14th digits.

Coding for columns 13 and 14

Grease	High-grade	Precision-grade
Standard	02	(None)
LG2	B2	B0

Monocarrier dynamic torque specification (N · cm)		
Ball screw lead(mm)	Accuracy grade	
	High grade	Precision
5	1.2 - 5.2	2.1 - 8.5
10	1.5 - 9.6	2.5 - 10.7
20	2.3 - 11.8	3.4 - 14.1

Notes

- Frictional resistance of NSK K1 is included in dynamic torque in table.
- Grease is packed into ball screw, linear guide parts and support unit.
- Consult NSK for life estimates under large moment loads.

Basic load rating


Lead ℓ (mm)	Shaft dia d (mm)	Basic dynamic load rating (N)				Basic static load rating (N)		
		Ball screw C_a	Linear guides C	Support unit C_a	Rated running distance L_a (km)	Ball screw C_{0a}	Linear guides C_0	Support unit load limit (N)
5	ϕ 12	4 390	22 800	4 400	5	6 260	16 300	1 450
10	ϕ 12	2 740	18 100	4 400	10	3 820	16 300	1 450
20	ϕ 12	2 660	14 400	4 400	20	3 800	16 300	1 450

Basic static moment load of linear guide

Slider	Basic static moment load (N · m)		
	Rolling M_{RO}	Pitching M_{PO}	Yawing M_{YO}
Double	770	730	730

MCH09

Accuracy grade: High grade (H)

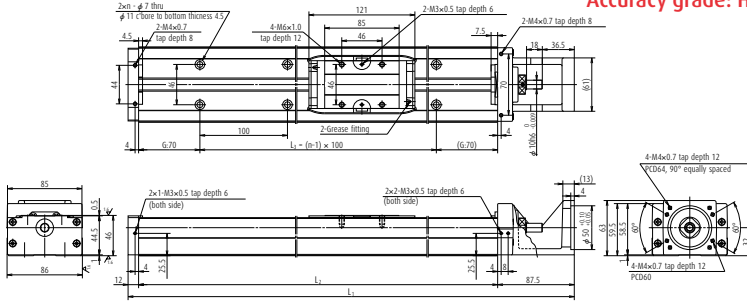

Dimension of MCH09 (Single slider)

Reference No.	Nominal stroke (mm)	Stroke limit (mm) (without K1)	Ball screw lead (mm)	Body length (mm)				Inertia × 10 ⁻⁶ (kg · m ²)	Mass (kg)
				L ₁	L ₂	L ₃	n		
MCH09010H05K02	100	107 (121)	5	339.5	240	100	2	9.2	5.0
MCH09010H10K02	100	107 (121)	10	339.5	240	100	2	10.7	5.0
MCH09010H20K02	100	107 (121)	20	339.5	240	100	2	16.8	5.0
MCH09020H05K02	200	207 (221)	5	439.5	340	200	3	12.4	6.5
MCH09020H10K02	200	207 (221)	10	439.5	340	200	3	13.9	6.5
MCH09020H20K02	200	207 (221)	20	439.5	340	200	3	20.0	6.5
MCH09030H05K02	300	307 (321)	5	539.5	440	300	4	15.6	8.1
MCH09030H10K02	300	307 (321)	10	539.5	440	300	4	17.1	8.1
MCH09030H20K02	300	307 (321)	20	539.5	440	300	4	23.2	8.1
MCH09040H05K02	400	407 (421)	5	639.5	540	400	5	18.8	9.7
MCH09040H10K02	400	407 (421)	10	639.5	540	400	5	20.3	9.7
MCH09040H20K02	400	407 (421)	20	639.5	540	400	5	26.4	9.7
MCH09050H05K02	500	507 (521)	5	739.5	640	500	6	22.0	11
MCH09050H10K02	500	507 (521)	10	739.5	640	500	6	23.5	11
MCH09050H20K02	500	507 (521)	20	739.5	640	500	6	29.6	11
MCH09060H05K02	600	607 (621)	5	839.5	740	600	7	25.2	13
MCH09060H10K02	600	607 (621)	10	839.5	740	600	7	26.7	13
MCH09060H20K02	600	607 (621)	20	839.5	740	600	7	32.8	13
MCH09070H05K02	700	707 (721)	5	939.5	840	700	8	28.4	14.5
MCH09070H10K02	700	707 (721)	10	939.5	840	700	8	30.0	14.5
MCH09070H20K02	700	707 (721)	20	939.5	840	700	8	36.0	14.5
MCH09080H05K02	800	807 (821)	5	1 039.5	940	800	9	31.6	16
MCH09080H10K02	800	807 (821)	10	1 039.5	940	800	9	33.2	16
MCH09080H20K02	800	807 (821)	20	1 039.5	940	800	9	39.2	16

Note The nominal number in the above table is for high-grade grease specifications. In the case of other specifications, see the following table for the 13th and 14th digits.

Coding for columns 13 and 14

Grease	High-grade	Precision-grade
Standard	02	(None)
LG2	B2	B0

Monocarrier dynamic torque specification (N · cm)

Ball screw lead(mm)	Accuracy grade	
	High grade	Precision
5	1.0 - 5.9	2.5 - 11.0
10	2.0 - 7.8	2.8 - 13.4
20	2.0 - 10.8	3.4 - 16.1

Note

1. Frictional resistance of NSK K1 is included in dynamic torque in table.
2. Grease is packed into ball screw, linear guide parts and support unit.
3. Consult NSK for life estimates under large moment loads.

Basic load rating


Lead ℓ (mm)	Shaft dia d (mm)	Basic dynamic load rating (N)				Basic static load rating (N)		Support unit load limit (N)
		Ball screw C _a	Linear guides C	Support unit C _a	Rated running distance L _a (km)	Ball screw C _{0a}	Linear guides C ₀	
5	φ 15	8 300	40 600	7 100	5	12 700	30 500	3 040
10	φ 15	8 140	32 200	7 100	10	12 800	30 500	3 040
20	φ 15	5 080	25 500	7 100	20	7 460	30 500	3 040

Basic static moment load of linear guide

Slider	Basic static moment load (N · m)		
	Rolling M _{RO}	Pitching M _{PO}	Yawing M _{YO}
Single	890	385	385

MCH09 (Double slider)

Accuracy grade: High grade (H)

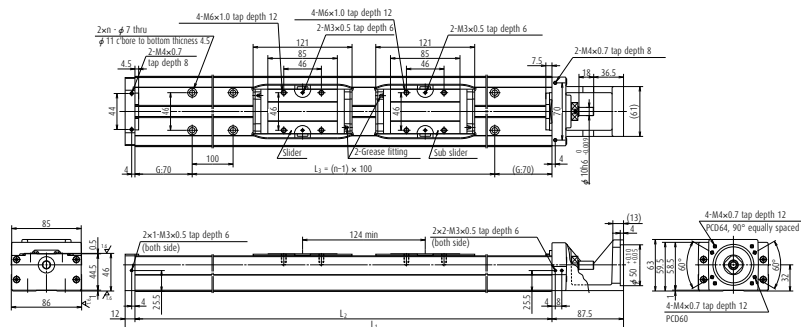

Dimension of MCH09 (Double slider)

Reference No.	Nominal stroke (mm)	Stroke limit (mm) (without K1)	Ball screw lead (mm)	Body length (mm)				Inertia $\times 10^{-6}$ (kg \cdot m 2)	Mass (kg)
				L1	L2	L3	n		
MCH09015H05D02	150	183 (211)	5	539.5	440	300	4	16.1	8.9
MCH09015H10D02	150	183 (211)	10	539.5	440	300	4	19.2	8.9
MCH09025H05D02	250	283 (311)	5	639.5	540	400	5	19.3	11
MCH09025H10D02	250	283 (311)	10	639.5	540	400	5	22.4	11
MCH09035H05D02	350	383 (411)	5	739.5	640	500	6	22.5	12
MCH09035H10D02	350	383 (411)	10	739.5	640	500	6	25.6	12
MCH09045H10D02	450	483 (511)	10	839.5	740	600	7	28.8	14
MCH09045H20D02	450	483 (511)	20	839.5	740	600	7	40.9	14
MCH09065H10D02	650	683 (711)	10	1 039.5	940	800	9	35.2	17
MCH09065H20D02	650	683 (711)	20	1 039.5	940	800	9	47.3	17

Note The nominal number in the above table is for high-grade grease specifications. In the case of other specifications, see the following table for the 13th and 14th digits.

Coding for columns 13 and 14

Grease	High-grade	Precision-grade
Standard	O2	(None)
LG2	B2	B0

Monocarrier dynamic torque specification (N \cdot cm)		
Ball screw lead(mm)	Accuracy grade	
	High grade	Precision
5	1.5 - 7.0	2.8 - 12.4
10	2.5 - 10.8	3.4 - 16.2
20	4.0 - 17.2	4.5 - 21.7

Notes

- Frictional resistance of NSK K1 is included in dynamic torque in table.
- Grease is packed into ball screw, linear guide parts and support unit.
- Consult NSK for life estimates under large moment loads.

Basic load rating


Lead l (mm)	Shaft dia d (mm)	Basic dynamic load rating (N)				Basic static load rating (N)		
		Ball screw C_a	Linear guides C	Support unit C_a	Rated running distance L_a (km)	Ball screw C_{0a}	Linear guides C_0	Support unit load limit (N)
5	ϕ 15	8 300	40 600	7 100	5	12 700	30 500	3 040
10	ϕ 15	8 140	32 200	7 100	10	12 800	30 500	3 040
20	ϕ 15	5 080	25 500	7 100	20	7 460	30 500	3 040

Basic static moment load of linear guide

Slider	Basic static moment load (N \cdot m)		
	Rolling M_{R0}	Pitching M_{P0}	Yawing M_{Y0}
Double	1 780	2 070	2 070

MCH10

Accuracy grade: High grade (H)

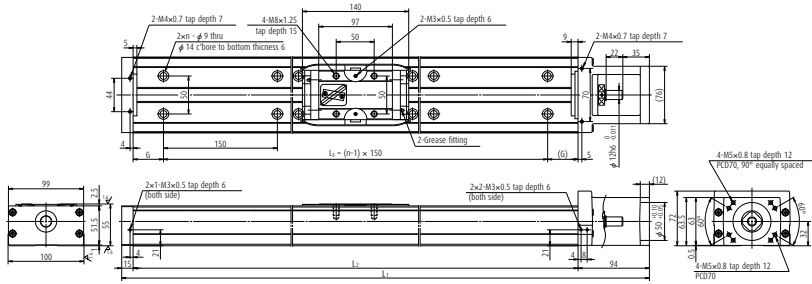

Dimension of MCH10 (Single slider)

Reference No.	Nominal stroke (mm)	Stroke limit (mm) (without K1)	Ball screw lead (mm)	Body length (mm)					Inertia $\times 10^{-6}$ (kg · m ²)	Mass (kg)
				L ₁	L ₂	G	L ₃	n		
MCH10010H10K02	100	126 (142)	10	389	280	65	150	2	33.2	7.3
MCH10010H20K02	100	126 (142)	20	389	280	65	150	2	41.1	7.3
MCH10020H10K02	200	226 (242)	10	489	380	40	300	3	43.4	9.5
MCH10020H20K02	200	226 (242)	20	489	380	40	300	3	51.3	9.5
MCH10030H10K02	300	326 (342)	10	589	480	15	450	4	53.7	12
MCH10030H20K02	300	326 (342)	20	589	480	15	450	4	61.6	12
MCH10040H10K02	400	426 (442)	10	689	580	65	450	4	62.4	14
MCH10040H20K02	400	426 (442)	20	689	580	65	450	4	71.8	14
MCH10050H10K02	500	526 (542)	10	789	680	40	600	5	74.7	16
MCH10050H20K02	500	526 (542)	20	789	680	40	600	5	82.3	16
MCH10060H10K02	600	626 (642)	10	889	780	15	750	6	84.9	19
MCH10060H20K02	600	626 (642)	20	889	780	15	750	6	92.5	19
MCH10070H10K02	700	726 (742)	10	989	880	65	750	6	95.1	21
MCH10070H20K02	700	726 (742)	20	989	880	65	750	6	103	21
MCH10080H10K02	800	826 (842)	10	1 089	980	40	900	7	105	23
MCH10080H20K02	800	826 (842)	20	1 089	980	40	900	7	113	23
MCH10090H10K02	900	926 (942)	10	1 189	1 080	15	1 050	8	116	25
MCH10090H20K02	900	926 (942)	20	1 189	1 080	15	1 050	8	123	25
MCH10100H10K02	1 000	1 026 (1 042)	10	1 289	1 180	65	1 050	8	126	27
MCH10100H20K02	1 000	1 026 (1 042)	20	1 289	1 180	65	1 050	8	133	27
MCH10110H10K02	1 100	1 126 (1 142)	10	1 389	1 280	40	1 200	9	136	29
MCH10110H20K02	1 100	1 126 (1 142)	20	1 389	1 280	40	1 200	9	143	29
MCH10120H10K02	1 200	1 226 (1 242)	10	1 489	1 380	15	1 350	10	146	32
MCH10120H20K02	1 200	1 226 (1 242)	20	1 489	1 380	15	1 350	10	154	32

Note The nominal number in the above table is for high-grade grease specifications. In the case of other specifications, see the following table for the 13th and 14th digits.

Coding for columns 13 and 14

Grease	High-grade	Precision-grade
Standard	02	(None)
LG2	B2	B0

Ball screw lead(mm)	Monocarrier dynamic torque specification (N · cm) Notes	
	Accuracy grade	
	High grade	Precision
10	2.7 – 10.8	3.3 – 17.5
20	3.1 – 12.7	3.8 – 20.4

1. Frictional resistance of NSK K1 is included in dynamic torque in table.

2. Grease is packed into ball screw, linear guide parts and support unit.


3. Consult NSK for life estimates under large moment loads.

Basic load rating

Lead	Shaft dia	Basic dynamic load rating (N)				Basic static load rating (N)		
		Ball screw C _a	Linear guides C	Support unit C _a	Rated running distance L _a (km)	Ball screw C _{0a}	Linear guides C ₀	Support unit load limit (N)
10	φ 20	12 800	44 600	7 600	10	21 400	42 000	3 380
20	φ 20	8 190	35 400	7 600	20	12 600	42 000	3 380

Basic static moment load of linear guide

Slider	Basic static moment load (N · m)		
	Rolling M _{RO}	Pitching M _{PO}	Yawing M _{YO}
Single	1 460	610	610

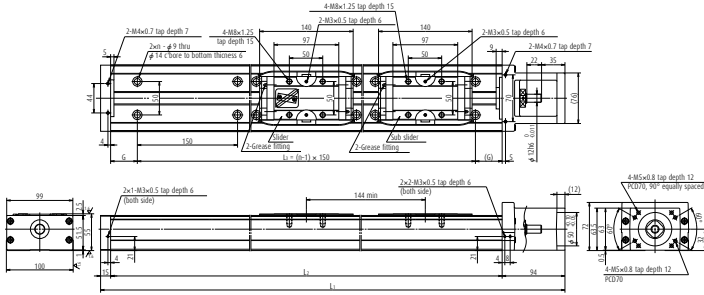

Dimension of MCH10 (Double slider)

Reference No.	Nominal stroke (mm)	Stroke limit (mm) (without K1)	Ball screw lead (mm)	Body length (mm)					Inertia $\times 10^{-6}$ (kg · m ²)	Mass (kg)
				L ₁	L ₂	G	L ₃	n		
MCH10025H10D02	250	282 (314)	10	689	580	65	450	4	67.1	15
MCH10025H20D02	250	282 (314)	20	689	580	65	450	4	82.4	15
MCH10035H10D02	350	382 (414)	10	789	680	40	600	5	77.3	17
MCH10035H20D02	350	382 (414)	20	789	680	40	600	5	92.5	17
MCH10045H10D02	450	482 (514)	10	889	780	15	750	6	87.5	20
MCH10045H20D02	450	482 (514)	20	889	780	15	750	6	103	20
MCH10055H10D02	550	582 (614)	10	989	880	65	750	6	97.7	22
MCH10055H20D02	550	582 (614)	20	989	880	65	750	6	113	22
MCH10065H10D02	650	682 (714)	10	1 089	980	40	900	7	108	24
MCH10065H20D02	650	682 (714)	20	1 089	980	40	900	7	123	24
MCH10075H20D02	750	782 (814)	20	1 189	1 080	15	1 050	8	133	26
MCH10085H20D02	850	882 (914)	20	1 289	1 180	65	1 050	8	143	28
MCH10095H20D02	950	982 (1 014)	20	1 389	1 280	40	1 200	9	154	30
MCH10105H20D02	1 050	1 082 (1 114)	20	1 489	1 380	15	1 350	10	164	33

Note: The nominal number in the above table is for high-grade grease specifications. In the case of other specifications, see the following table for the 13th and 14th digits.

Coding for columns 13 and 14

Grease	High-grade	Precision-grade
Standard	02	(None)
LG2	B2	B0

Monocarrier dynamic torque specification (N · cm)

Ball screw lead(mm)	Accuracy grade	
	High grade	Precision
10	4.2 - 15.6	4.4 - 21.6
20	5.0 - 19.6	5.6 - 27.4

Notes

- Frictional resistance of NSK K1 is included in dynamic torque in table.
- Grease is packed into ball screw, linear guide parts and support unit.
- Consult NSK for life estimates under large moment loads.

Basic load rating

Lead ℓ (mm)	Shaft dia d (mm)	Basic dynamic load rating (N)				Basic static load rating (N)		
		Ball screw C_a	Linear guides C	Support unit C_a	Rated running distance L_a (km)	Ball screw C_{0a}	Linear guides C_0	Support unit load limit (N)
10	ϕ 20	12 800	44 600	7 600	10	21 400	42 000	3 380
20	ϕ 20	8 190	35 400	7 600	20	12 600	42 000	3 380

Basic static moment load of linear guide



Slider	Basic static moment load (N · m)		
	Rolling M_{RO}	Pitching M_{PO}	Yawing M_{YO}
Double	2 920	3 430	3 430

C-1-6. 3 MCH Series Accessories

C-1-6. 3. 1 Sensor Unit

> Proximity switch

Sensor rail is not included in a sensor unit.





(Example of assembly)

Model No.		Reference No.			A (mm)	B (mm)	Body width W (mm)
MCH06		MC-SRH06-10	MC-SRH06-11	MC-SRH06-12	17	10	60
MCH09		MC-SRH09-10	MC-SRH09-11	MC-SRH09-12	16	21	86
MCH10		MC-SRH10-10	MC-SRH10-11	MC-SRH10-12	16	16	100
Quantity	Proximity switch (normally open contact)	—	3	1	E2S-W13 (OMRON Corp.)		
	Proximity switch (normally close contact)	3	—	2	E2S-W14 (OMRON Corp.)		

Notes 1. See page C137 for proximity switch specifications. 2. A sensor unit consists of sensors, a sensor dog and sensor mounting parts.

> Photo sensor

Sensor rail is not included in a sensor unit.



(Example of assembly)


Model No.	Reference No.	C (mm)	D (mm)	E (mm)	Body width W (mm)	Remarks
MCH06	MC-SRH06-13	24	2	11	60	EE-SX674 (OMRON Corp.) 3 sets (EE-1001 connector attachment)
MCH09	MC-SRH09-13	23	12	21	86	EE-SX674 (OMRON Corp.) 3 sets (EE-1001 connector attachment)
MCH10	MC-SRH10-13	23	29	16	100	EE-SX674 (OMRON Corp.) 3 sets (EE-1001 connector attachment)

Notes 1. See page C138 for proximity switch specifications. 2. A sensor unit consists of sensors, a sensor dog and sensor mounting parts.

(1) Sensor rail

Reference number: MC-SRL-****

> **** is the same as rail dimension L₂.



Note: For combinations of sensors and rails, see page C84.


Body of MCH Series and Sensor Rail Combination Table

Table 4

Model No.	Body length L ₂ (mm)	Reference No.	Sensor rail reference No.	Model No.	Body length L ₂ (mm)	Reference No.	Sensor rail reference No.
MCH06	150	MCH06005H05K02	MC-SRL-0150	MCH09	640	MCH09050H10K02	MC-SRL-0640
MCH06	150	MCH06005H10K02	MC-SRL-0150	MCH09	640	MCH09050H20K02	MC-SRL-0640
MCH06	150	MCH06005H20K02	MC-SRL-0150	MCH09	640	MCH09035H05D02	MC-SRL-0640
MCH06	200	MCH06010H05K02	MC-SRL-0200	MCH09	640	MCH09035H10D02	MC-SRL-0640
MCH06	200	MCH06010H10K02	MC-SRL-0200	MCH09	740	MCH09060H05K02	MC-SRL-0740
MCH06	200	MCH06010H20K02	MC-SRL-0200	MCH09	740	MCH09060H10K02	MC-SRL-0740
MCH06	300	MCH06020H05K02	MC-SRL-0300	MCH09	740	MCH09060H20K02	MC-SRL-0740
MCH06	300	MCH06020H10K02	MC-SRL-0300	MCH09	740	MCH09045H10D02	MC-SRL-0740
MCH06	300	MCH06020H20K02	MC-SRL-0300	MCH09	740	MCH09045H20D02	MC-SRL-0740
MCH06	300	MCH06010H05D02	MC-SRL-0300	MCH09	840	MCH09070H05K02	MC-SRL-0840
MCH06	300	MCH06010H10D02	MC-SRL-0300	MCH09	840	MCH09070H10K02	MC-SRL-0840
MCH06	400	MCH06030H05K02	MC-SRL-0400	MCH09	840	MCH09070H20K02	MC-SRL-0840
MCH06	400	MCH06030H10K02	MC-SRL-0400	MCH09	940	MCH09080H05K02	MC-SRL-0940
MCH06	400	MCH06030H20K02	MC-SRL-0400	MCH09	940	MCH09080H10K02	MC-SRL-0940
MCH06	400	MCH06020H05D02	MC-SRL-0400	MCH09	940	MCH09080H20K02	MC-SRL-0940
MCH06	400	MCH06020H10D02	MC-SRL-0400	MCH09	940	MCH09065H10D02	MC-SRL-0940
MCH06	500	MCH06040H05K02	MC-SRL-0500	MCH09	940	MCH09065H20D02	MC-SRL-0940
MCH06	500	MCH06040H10K02	MC-SRL-0500	MCH10	280	MCH10010H10K02	MC-SRL-0280
MCH06	500	MCH06040H20K02	MC-SRL-0500	MCH10	280	MCH10010H20K02	MC-SRL-0280
MCH06	500	MCH06030H05D02	MC-SRL-0500	MCH10	380	MCH10020H10K02	MC-SRL-0380
MCH06	500	MCH06030H10D02	MC-SRL-0500	MCH10	380	MCH10020H20K02	MC-SRL-0380
MCH06	600	MCH06050H05K02	MC-SRL-0600	MCH10	480	MCH10030H10K02	MC-SRL-0480
MCH06	600	MCH06050H10K02	MC-SRL-0600	MCH10	480	MCH10030H20K02	MC-SRL-0480
MCH06	600	MCH06050H20K02	MC-SRL-0600	MCH10	580	MCH10040H10K02	MC-SRL-0580
MCH06	600	MCH06040H10D02	MC-SRL-0600	MCH10	580	MCH10025H10D02	MC-SRL-0580
MCH06	600	MCH06040H20D02	MC-SRL-0600	MCH10	680	MCH10050H10K02	MC-SRL-0680
MCL06	150	MCL06005H05K02	MC-SRL-0150	MCH10	680	MCH10050H20K02	MC-SRL-0680
MCL06	150	MCL06005H10K02	MC-SRL-0150	MCH10	680	MCH10035H10D02	MC-SRL-0680
MCL06	200	MCL06010H05K02	MC-SRL-0200	MCH10	680	MCH10035H20D02	MC-SRL-0680
MCL06	200	MCL06010H10K02	MC-SRL-0200	MCH10	780	MCH10060H10K02	MC-SRL-0780
MCL06	300	MCL06020H05K02	MC-SRL-0300	MCH10	780	MCH10060H20K02	MC-SRL-0780
MCL06	300	MCL06020H10K02	MC-SRL-0300	MCH10	780	MCH10045H10D02	MC-SRL-0780
MCL06	400	MCL06030H10K02	MC-SRL-0400	MCH10	780	MCH10045H20D02	MC-SRL-0780
MCL06	400	MCL06030H20K02	MC-SRL-0400	MCH10	880	MCH10070H10K02	MC-SRL-0880
MCL06	500	MCL06040H10K02	MC-SRL-0500	MCH10	880	MCH10070H20K02	MC-SRL-0880
MCL06	500	MCL06040H20K02	MC-SRL-0500	MCH10	880	MCH10055H10D02	MC-SRL-0880
MCL06	600	MCL06050H10K02	MC-SRL-0600	MCH10	880	MCH10055H20D02	MC-SRL-0880
MCL06	600	MCL06050H20K02	MC-SRL-0600	MCH10	980	MCH10080H10K02	MC-SRL-0980
MCH09	240	MCH09010H05K02	MC-SRL-0240	MCH10	980	MCH10080H20K02	MC-SRL-0980
MCH09	240	MCH09010H10K02	MC-SRL-0240	MCH10	980	MCH10065H10D02	MC-SRL-0980
MCH09	240	MCH09010H20K02	MC-SRL-0240	MCH10	980	MCH10065H20D02	MC-SRL-0980
MCH09	340	MCH09020H05K02	MC-SRL-0340	MCH10	1 080	MCH10090H10K02	MC-SRL-1080
MCH09	340	MCH09020H10K02	MC-SRL-0340	MCH10	1 080	MCH10090H20K02	MC-SRL-1080
MCH09	340	MCH09020H20K02	MC-SRL-0340	MCH10	1 080	MCH10075H20D02	MC-SRL-1080
MCH09	440	MCH09030H05K02	MC-SRL-0440	MCH10	1 180	MCH10100H10K02	MC-SRL-1080
MCH09	440	MCH09030H10K02	MC-SRL-0440	MCH10	1 180	MCH10100H20K02	MC-SRL-1180
MCH09	440	MCH09030H20K02	MC-SRL-0440	MCH10	1 180	MCH10085H20D02	MC-SRL-1080
MCH09	440	MCH09015H05D02	MC-SRL-0440	MCH10	1 280	MCH10110H10K02	MC-SRL-1280
MCH09	440	MCH09015H10D02	MC-SRL-0440	MCH10	1 280	MCH10110H20K02	MC-SRL-1280
MCH09	540	MCH09040H05K02	MC-SRL-0540	MCH10	1 280	MCH10095H20D02	MC-SRL-1280
MCH09	540	MCH09040H10K02	MC-SRL-0540	MCH10	1 380	MCH10120H10K02	MC-SRL-1380
MCH09	540	MCH09040H20K02	MC-SRL-0540	MCH10	1 380	MCH10120H20K02	MC-SRL-1380
MCH09	540	MCH09025H05D02	MC-SRL-0540	MCH10	1 380	MCH10105H20D02	MC-SRL-1380
MCH09	540	MCH09025H10D02	MC-SRL-0540				
MCH09	640	MCH09050H05K02	MC-SRL-0640				


C-1-6. 3. 2 Cover Unit

Cover unit for MCH06 and MCL06

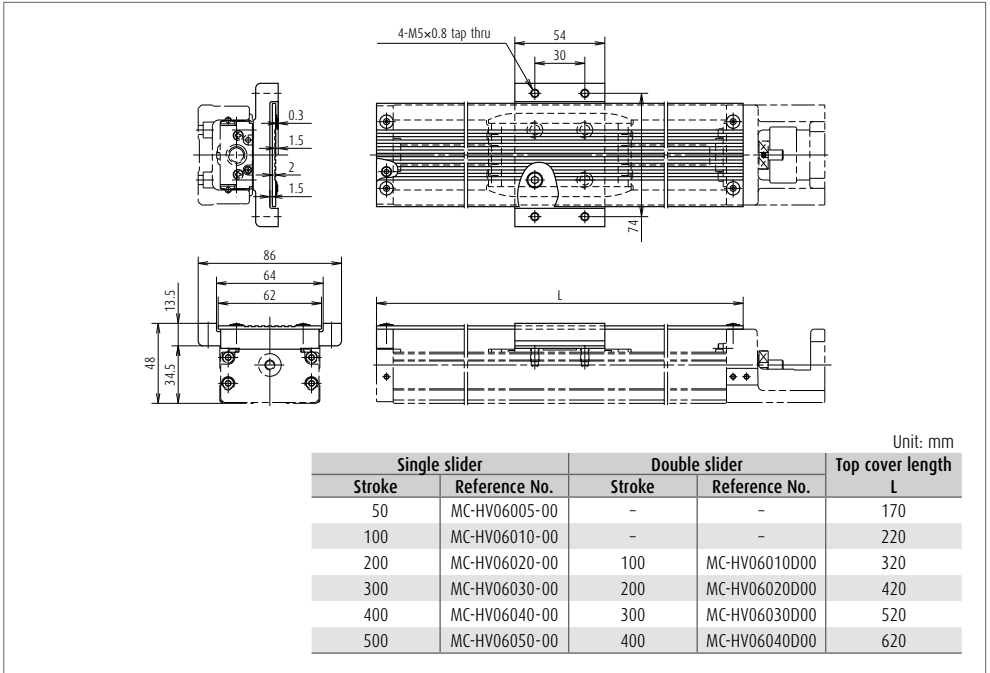


› Cover unit for double sliders

Two spacers are provided for double slider.

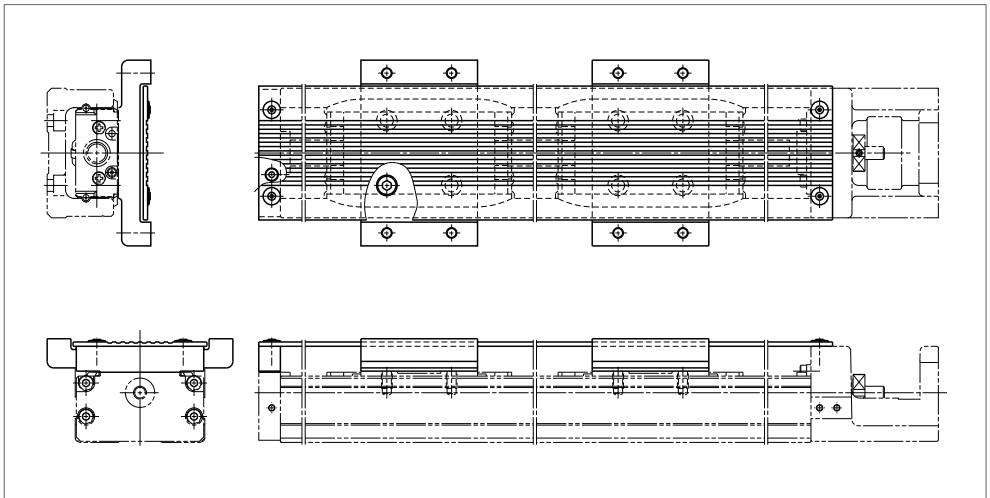


Cover unit for MCH09

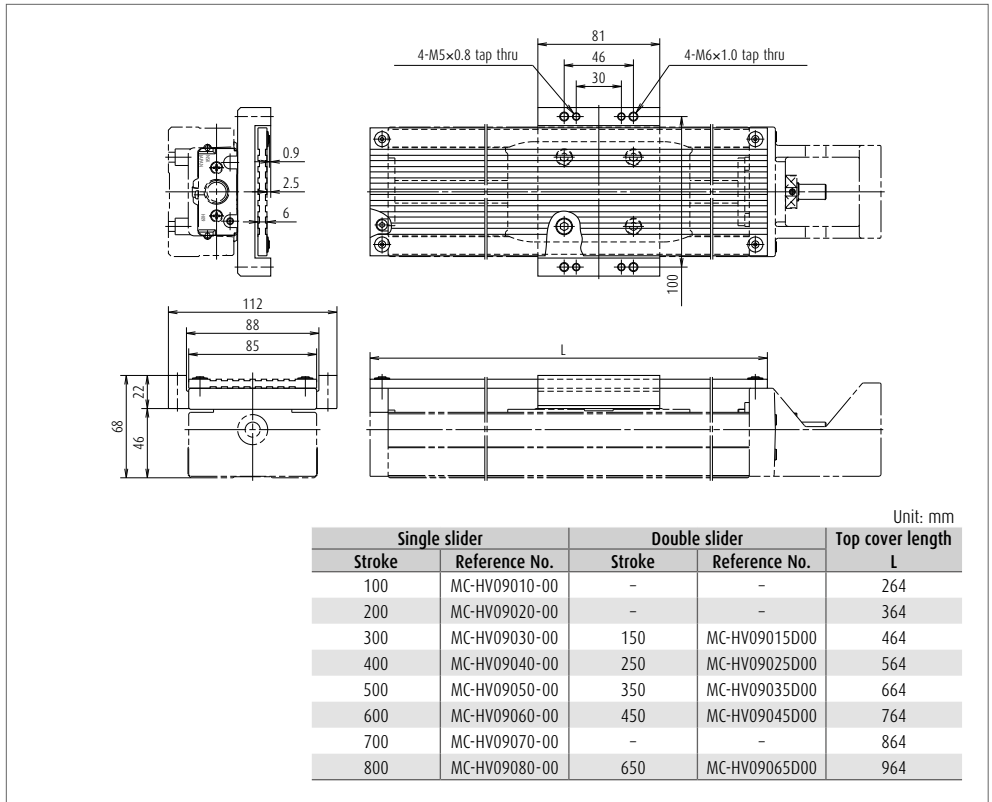


> Cover unit for double sliders

Two spacers are provided for double slider.

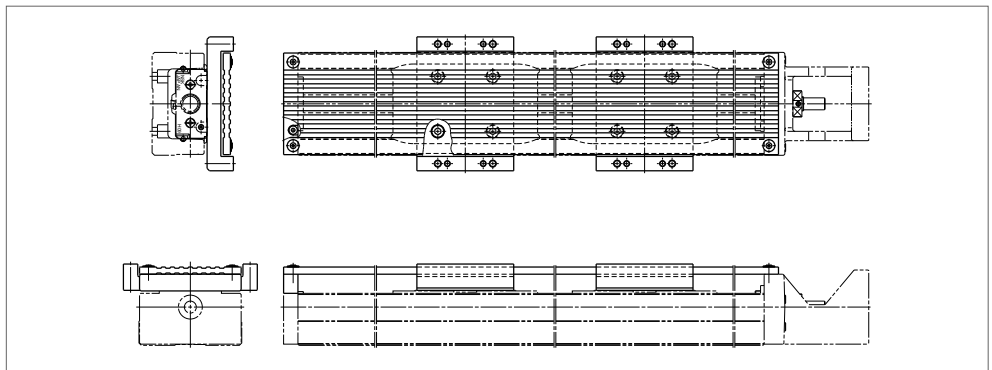


Cover unit for MCH10

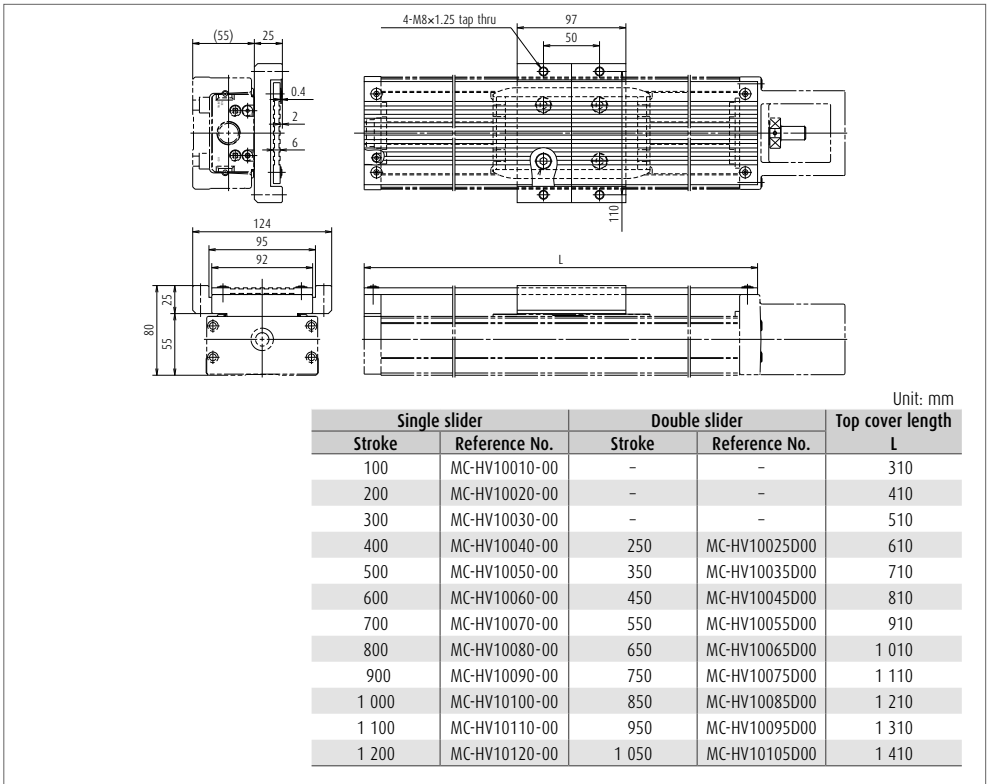

> Cover unit for double sliders





Two spacers are provided for double slider.

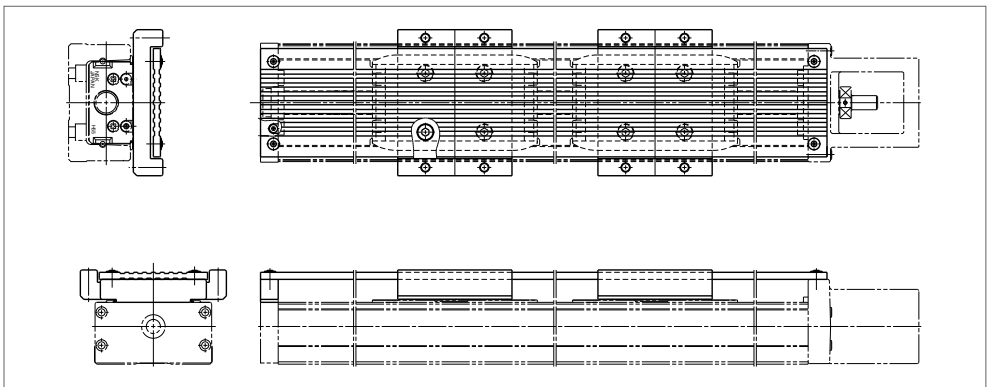


C-1-6. 3. 3 Intermediate Plate for Motor

- > Please ask NSK about motors not listed in compatible motor list.
- > In case of parallel motor mount, please consult with NSK.
- > Be sure to align centerlines when installing motor.
- > Motor models are subject to change at the motor manufacturers. For details, please contact the manufacturer.

Motor Bracket for MCH06 and MCL06

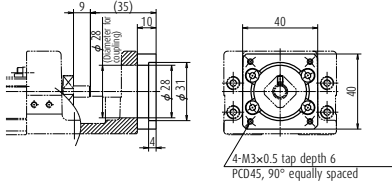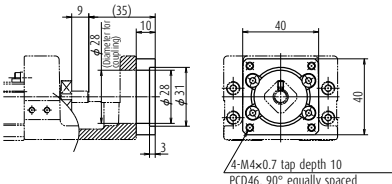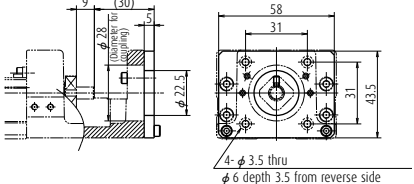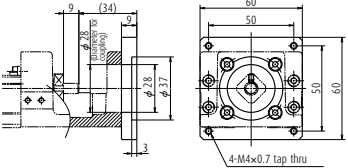
<p>Reference number: MC-BKH06-145-00</p>  <table border="1"> <thead> <tr> <th colspan="2">Compatible motor</th> </tr> <tr> <th>Maker</th> <th>Motor models</th> </tr> </thead> <tbody> <tr> <td>Panasonic Co., Ltd.</td> <td>MSMD5A(50W), MSMD01(100W)</td> </tr> </tbody> </table>	Compatible motor		Maker	Motor models	Panasonic Co., Ltd.	MSMD5A(50W), MSMD01(100W)	<p>Reference number: MC-BKH06-146-00</p>  <table border="1"> <thead> <tr> <th colspan="2">Compatible motor</th> </tr> <tr> <th>Maker</th> <th>Motor models</th> </tr> </thead> <tbody> <tr> <td>YASKAWA Electric Corp.</td> <td>SGMAH-A3(30W), SGMJV-ASA(50W), SGMAV-ASA(50W), SGMJV-01A(100W), SGMAV-01A(100W)</td> </tr> <tr> <td>Mitsubishi Electric Corp.</td> <td>HF-KP053(50W), HF-MP053(50W), HC-KFS053(50W), HC-MFS053(50W), HF-KP13(100W), HF-MP13(100W), HC-KFS13(100W), HC-MFS13(100W)</td> </tr> <tr> <td>OMRON Corp.</td> <td>R88M-W03(30W), R88M-W05(50W), R88M-W10(100W)</td> </tr> <tr> <td>SANYO DENKI Co., Ltd.</td> <td>P30B04xxx P Series</td> </tr> </tbody> </table>	Compatible motor		Maker	Motor models	YASKAWA Electric Corp.	SGMAH-A3(30W), SGMJV-ASA(50W), SGMAV-ASA(50W), SGMJV-01A(100W), SGMAV-01A(100W)	Mitsubishi Electric Corp.	HF-KP053(50W), HF-MP053(50W), HC-KFS053(50W), HC-MFS053(50W), HF-KP13(100W), HF-MP13(100W), HC-KFS13(100W), HC-MFS13(100W)	OMRON Corp.	R88M-W03(30W), R88M-W05(50W), R88M-W10(100W)	SANYO DENKI Co., Ltd.	P30B04xxx P Series
Compatible motor																			
Maker	Motor models																		
Panasonic Co., Ltd.	MSMD5A(50W), MSMD01(100W)																		
Compatible motor																			
Maker	Motor models																		
YASKAWA Electric Corp.	SGMAH-A3(30W), SGMJV-ASA(50W), SGMAV-ASA(50W), SGMJV-01A(100W), SGMAV-01A(100W)																		
Mitsubishi Electric Corp.	HF-KP053(50W), HF-MP053(50W), HC-KFS053(50W), HC-MFS053(50W), HF-KP13(100W), HF-MP13(100W), HC-KFS13(100W), HC-MFS13(100W)																		
OMRON Corp.	R88M-W03(30W), R88M-W05(50W), R88M-W10(100W)																		
SANYO DENKI Co., Ltd.	P30B04xxx P Series																		
<p>Reference number: MC-BKH06-231-00</p>  <table border="1"> <thead> <tr> <th colspan="2">Compatible motor</th> </tr> <tr> <th>Maker</th> <th>Motor models</th> </tr> </thead> <tbody> <tr> <td>ORIENTAL MOTOR Co., Ltd.</td> <td>AS46, ASC46, UPK54x, PK54x, CSK54x, CFK54x, UMK24x, CSK24x, PK24x</td> </tr> <tr> <td>SANYO DENKI Co., Ltd.</td> <td>PBM423xxx, 103F55xx</td> </tr> </tbody> </table>	Compatible motor		Maker	Motor models	ORIENTAL MOTOR Co., Ltd.	AS46, ASC46, UPK54x, PK54x, CSK54x, CFK54x, UMK24x, CSK24x, PK24x	SANYO DENKI Co., Ltd.	PBM423xxx, 103F55xx	<p>Reference number: MC-BKH06-250-00</p>  <table border="1"> <thead> <tr> <th colspan="2">Compatible motor</th> </tr> <tr> <th>Maker</th> <th>Motor models</th> </tr> </thead> <tbody> <tr> <td>ORIENTAL MOTOR Co., Ltd.</td> <td>AS66, ASC66, UPK56x, UFK56x, PK56x, CSK56x, CFK56x</td> </tr> <tr> <td>OMRON Corp.</td> <td>MUMS02(200W), MUMS04(400W)</td> </tr> <tr> <td>SANYO DENKI Co., Ltd.</td> <td>PBM603xx, PBM604xx, 103F78xx</td> </tr> </tbody> </table>	Compatible motor		Maker	Motor models	ORIENTAL MOTOR Co., Ltd.	AS66, ASC66, UPK56x, UFK56x, PK56x, CSK56x, CFK56x	OMRON Corp.	MUMS02(200W), MUMS04(400W)	SANYO DENKI Co., Ltd.	PBM603xx, PBM604xx, 103F78xx
Compatible motor																			
Maker	Motor models																		
ORIENTAL MOTOR Co., Ltd.	AS46, ASC46, UPK54x, PK54x, CSK54x, CFK54x, UMK24x, CSK24x, PK24x																		
SANYO DENKI Co., Ltd.	PBM423xxx, 103F55xx																		
Compatible motor																			
Maker	Motor models																		
ORIENTAL MOTOR Co., Ltd.	AS66, ASC66, UPK56x, UFK56x, PK56x, CSK56x, CFK56x																		
OMRON Corp.	MUMS02(200W), MUMS04(400W)																		
SANYO DENKI Co., Ltd.	PBM603xx, PBM604xx, 103F78xx																		

Diameter of ball screw shaft end to install a pulley for parallel motor mount of MCH06

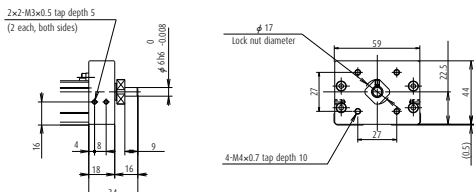


Motor Bracket for MCH09

Reference number: MC-BKH09-145-00, MC-BKH09-146-00

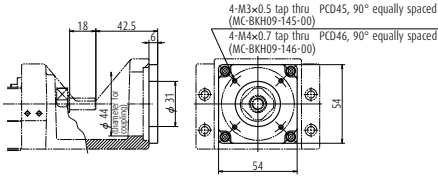


Reference No.	Compatible motor	
	Maker	Motor models
MC-BKH09-145-00	Panasonic Co., Ltd.	MSMD5A(50W), MSMD01(100W)
MC-BKH09-146-00	YASKAWA Electric Corp.	SGMJV-A5A(50W), SGMJV-01A(100W), SGMV-01A(100W)
MC-BKH09-146-00	Mitsubishi Electric Corp.	HF-KP053(50W), HF-MP05(50W), HC-KFS053(50W), HC-MFS053(50W), HF-KP13(100W), HF-MP13(100W), HC-KFS13(100W), HC-MFS13(100W)
MC-BKH09-146-00	OMRON Corp.	R88M-W05(50W), R88M-W10(100W)
MC-BKH09-146-00	SANYO DENKI Co., Ltd.	P30B04xxx P Series

Reference number: MC-BKH09-170-00, MC-BKH09-170-01

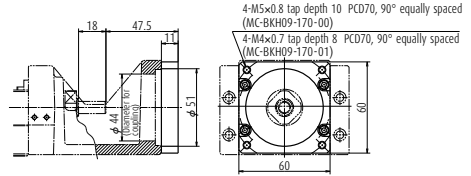


Reference No.	Compatible motor	
	Maker	Motor models
MC-BKH09-170-00	YASKAWA Electric Corp.	SGMJV-02A(200W), SGMV-02A(200W), SGMJV-04A(400W), SGMV-04A(400W)
MC-BKH09-170-00	Mitsubishi Electric Corp.	HF-KP23(200W), HF-MP23(200W), HF-KP43(400W), HF-MP43(400W), HC-KFS23(200W), HC-MFS23(200W), HC-KFS43(400W), HC-MFS43(400W)
MC-BKH09-170-00	OMRON Corp.	R88M-W20(200W), R88M-W40(400W)
MC-BKH09-170-00	SANYO DENKI Co., Ltd.	P30B06xxx P Series
MC-BKH09-170-01	Panasonic Co., Ltd.	MSMD02(200W), MSMA02(200W), MSMA04(400W), MSMD04(400W)

Reference number: MC-BKH09-231-00

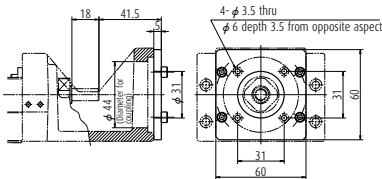


Compatible motor	
Maker	Motor models
SANYO DENKI Co., Ltd.	PBM423xxx, 103F55xx
ORIENTAL MOTOR Co., Ltd.	AS46, ASC46, UPK54x, PK54x, CSK54x, CFK54x, UMK24x, CSK24x, PK24x

Reference number: MC-BKH09-250-00

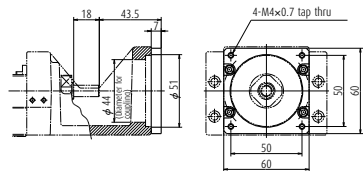


Compatible motor	
Maker	Motor models
SANYO DENKI Co., Ltd.	PBM603xx, PBM604xx, 103F78xx
ORIENTAL MOTOR Co., Ltd.	AS66, ASC66, UPK56x, UFK56x, PK56x, CSK56x, CFK56x

Diameter of ball screw shaft end to install a pulley for parallel motor mount of MCH09

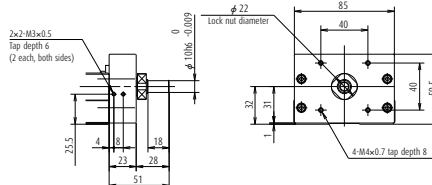


Motor Bracket for MCH10

Reference number: MC-BKH10-170-00, MC-BKH10-170-01

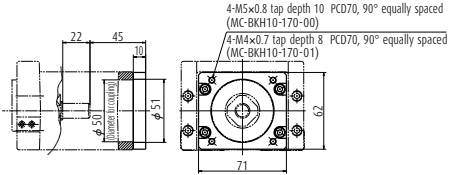


Reference No.	Compatible motor	
	Maker	Motor models
MC-BKH10-170-00	YASKAWA Electric Corp.	SGMJV-02A(200W), SGM4V-02A(200W), SGMJV-04A(400W), SGM4V-04A(400W)
MC-BKH10-170-00	Mitsubishi Electric Corp.	HF-KP23(200W), HF-MP23(200W), HF-KP43(400W), HF-MP43(400W), HC-KFS23(200W), HC-MFS23(200W), HC-KFS43(400W), HC-MFS43(400W)
MC-BKH10-170-00	OMRON Corp.	R88M-W20(200W), R88M-W40(400W)
MC-BKH10-170-00	SANYO DENKI Co., Ltd.	P30B06xxx P Series
MC-BKH10-170-01	Panasonic Co., Ltd.	MSMD02(200W), MSMA02(200W), MSMD04(400W), MSMA04(400W)

Reference number: MC-BKH10-190-00, MC-BKH10-190-01

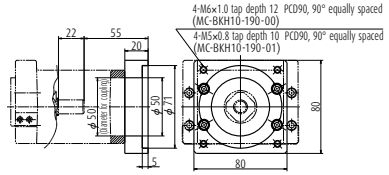


Reference No.	Compatible motor	
	Maker	Motor models
MC-BKH10-190-00	Mitsubishi Electric Corp.	HC-KFS73(750W), HC-MFS73(750W), HF-KP73(750W), HF-MP73(750W)
MC-BKH10-190-01	SANYO DENKI Co., Ltd.	P50B07xxx P Series

Reference number: MC-BKH10-250-00

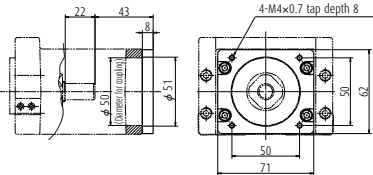


Compatible motor	
Maker	Motor models
SANYO DENKI Co., Ltd.	PBM603xx, PBM604xx, T03F78xx
ORIENTAL MOTOR Co., Ltd.	AS66, ASC66, UPK56x, PK56x, CSK56x, CFK56x, UMK56x, UFK56x

Reference number: MC-BKH10-270-00

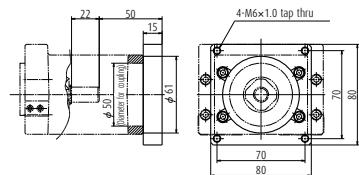

Compatible motor	
Maker	Motor models
ORIENTAL MOTOR Co., Ltd.	AS98, ASC98, UPK59x, PK59x, CSK59x, CFK59x, UMK59x, UFK59x

Diameter of ball screw shaft end to install a pulley for parallel motor mount of MCH10

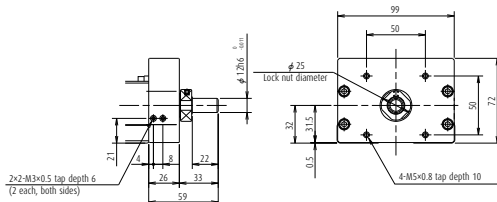

Motor Availability Table of Intermediate Plate for MCH Series

Table 5

Model No.	Reference No. code	Motor bracket reference No.	Motor manufacturers	Stepping motor model No.	Wattage of AC servo motor					
					30	50	100	200	400	750
MCH06 MCL06	1	MC-BKH06-145-00	Panasonic Co., Ltd.			MSMDSA	MSMD01			
	2	MC-BKH06-146-00	YASKAWA Electric Corp.		SGMAH-A3	SGMJV-ASA	SGMJV-01A			
		MC-BKH06-146-00	YASKAWA Electric Corp.				SGMAV-01A			
		MC-BKH06-146-00	Mitsubishi Electric Corp.				HF-KP053	HF-KP13		
		MC-BKH06-146-00	Mitsubishi Electric Corp.				HF-MP053	HF-MP13		
		MC-BKH06-146-00	Mitsubishi Electric Corp.				HC-KF0503	HC-KF513		
		MC-BKH06-146-00	Mitsubishi Electric Corp.				HC-MF0503	HC-MF513		
		MC-BKH06-146-00	OMRON Corp.			R88M-W03	R88M-W05	R88M-W10		
		MC-BKH06-146-00	SANYO DENKI Co., Ltd.		P30B04xxx (P Series)					
		MC-BKH06-231-00	SANYO DENKI Co., Ltd.		PBM423xxx					
		MC-BKH06-231-00	SANYO DENKI Co., Ltd.		103F55xx					
		MC-BKH06-231-00	ORIENTAL MOTOR Co., Ltd.		AS46, ASC46					
		MC-BKH06-231-00	ORIENTAL MOTOR Co., Ltd.		UPK54x, PK54x					
		MC-BKH06-231-00	ORIENTAL MOTOR Co., Ltd.		CSK54x, CFK54x					
		MC-BKH06-231-00	ORIENTAL MOTOR Co., Ltd.		UMK24x, CSK24x					
		MC-BKH06-231-00	ORIENTAL MOTOR Co., Ltd.		PK24x					
		MC-BKH06-250-00	SANYO DENKI Co., Ltd.		PBM603xx					
		MC-BKH06-250-00	SANYO DENKI Co., Ltd.		PBM604xx					
		MC-BKH06-250-00	SANYO DENKI Co., Ltd.		103F78xx					
		MC-BKH06-250-00	ORIENTAL MOTOR Co., Ltd.		AS66, ASC66					
		MC-BKH06-250-00	ORIENTAL MOTOR Co., Ltd.		UPK56x, UFK56x					
		MC-BKH06-250-00	ORIENTAL MOTOR Co., Ltd.		PK56x, CSK56x					
		MC-BKH06-250-00	ORIENTAL MOTOR Co., Ltd.		CFK56x					
		MC-BKH06-250-00	OMRON Corp.					MUMS02	MUMS04	
	1	MC-BKH09-145-00	Panasonic Co., Ltd.			MSMDSA	MSMD01			
	2	MC-BKH09-146-00	YASKAWA Electric Corp.			SGMJV-ASA	SGMJV-01A			
		MC-BKH09-146-00	YASKAWA Electric Corp.			SGMAV-ASA	SGMAV-01A			
		MC-BKH09-146-00	Mitsubishi Electric Corp.			HF-KP053	HF-KP13			
		MC-BKH09-146-00	Mitsubishi Electric Corp.			HF-MP053	HF-MP13			
		MC-BKH09-146-00	Mitsubishi Electric Corp.			HC-KF0503	HC-KF513			
		MC-BKH09-146-00	Mitsubishi Electric Corp.			HC-MF0503	HC-MF513			
		MC-BKH09-146-00	OMRON Corp.			R88M-W05	R88M-W10			
		MC-BKH09-146-00	SANYO DENKI Co., Ltd.		P30B04xxx (P Series)					
	3	MC-BKH09-170-00	YASKAWA Electric Corp.				SGMJV-02A	SGMJV-04A		
		MC-BKH09-170-00	YASKAWA Electric Corp.				SGMAV-02A	SGMAV-04A		
		MC-BKH09-170-00	Mitsubishi Electric Corp.				HF-KP23	HF-KP43		
		MC-BKH09-170-00	Mitsubishi Electric Corp.				HF-MP23	HF-MP43		
		MC-BKH09-170-00	Mitsubishi Electric Corp.				HC-KF523	HC-KF543		
		MC-BKH09-170-00	Mitsubishi Electric Corp.				HC-MF523	HC-MF543		
		MC-BKH09-170-00	OMRON Corp.				R88M-W20	R88M-W40		
		MC-BKH09-170-00	SANYO DENKI Co., Ltd.		P30B06xxx (P Series)					
	4	MC-BKH09-170-01	Panasonic Co., Ltd.				MSMD02	MSMD04		
		MC-BKH09-170-01	Panasonic Co., Ltd.				MSMA02	MSMA04		
	5	MC-BKH09-231-00	SANYO DENKI Co., Ltd.		PBM423xxx					
		MC-BKH09-231-00	SANYO DENKI Co., Ltd.		103F55xx					
		MC-BKH09-231-00	ORIENTAL MOTOR Co., Ltd.		AS46, ASC46					
		MC-BKH09-231-00	ORIENTAL MOTOR Co., Ltd.		UPK54x, PK54x					
		MC-BKH09-231-00	ORIENTAL MOTOR Co., Ltd.		CSK54x, CFK54x					
		MC-BKH09-231-00	ORIENTAL MOTOR Co., Ltd.		UMK24x, CSK24x					
		MC-BKH09-231-00	ORIENTAL MOTOR Co., Ltd.		PK24x					
	6	MC-BKH09-250-00	SANYO DENKI Co., Ltd.		PBM603xx					
		MC-BKH09-250-00	SANYO DENKI Co., Ltd.		PBM604xx					
		MC-BKH09-250-00	SANYO DENKI Co., Ltd.		103F78xx					
		MC-BKH09-250-00	ORIENTAL MOTOR Co., Ltd.		AS66, ASC66					
		MC-BKH09-250-00	ORIENTAL MOTOR Co., Ltd.		UPK56x, UFK56x					
		MC-BKH09-250-00	ORIENTAL MOTOR Co., Ltd.		PK56x, CSK56x					
		MC-BKH09-250-00	ORIENTAL MOTOR Co., Ltd.		CFK56x					
	1	MC-BKH10-170-00	YASKAWA Electric Corp.				SGMJV-02A	SGMJV-04A		
		MC-BKH10-170-00	YASKAWA Electric Corp.				SGMAV-02A	SGMAV-04A		
		MC-BKH10-170-00	Mitsubishi Electric Corp.				HF-KP23	HF-KP43		
		MC-BKH10-170-00	Mitsubishi Electric Corp.				HF-MP23	HF-MP43		
		MC-BKH10-170-00	Mitsubishi Electric Corp.				HC-KF523	HC-KF543		
		MC-BKH10-170-00	Mitsubishi Electric Corp.				HC-MF523	HC-MF543		
		MC-BKH10-170-00	OMRON Corp.				R88M-W20	R88M-W40		
		MC-BKH10-170-00	SANYO DENKI Co., Ltd.		P30B06xxx (P Series)					
	2	MC-BKH10-170-01	Panasonic Co., Ltd.				MSMD02	MSMD04		
		MC-BKH10-170-01	Panasonic Co., Ltd.				MSMA02	MSMA04		
	3	MC-BKH10-190-00	Mitsubishi Electric Corp.							HC-KF573
		MC-BKH10-190-00	Mitsubishi Electric Corp.							HC-MF573
		MC-BKH10-190-00	Mitsubishi Electric Corp.							HF-KP73
		MC-BKH10-190-00	Mitsubishi Electric Corp.							HF-MP73
	4	MC-BKH10-190-01	SANYO DENKI Co., Ltd.		P50B07xxx (P Series)					
	5	MC-BKH10-250-00	SANYO DENKI Co., Ltd.		PBM603xx					
		MC-BKH10-250-00	SANYO DENKI Co., Ltd.		PBM604xx					
		MC-BKH10-250-00	SANYO DENKI Co., Ltd.		103F78xx					
		MC-BKH10-250-00	ORIENTAL MOTOR Co., Ltd.		AS66, ASC66					
		MC-BKH10-250-00	ORIENTAL MOTOR Co., Ltd.		UPK56x, PK56x					
		MC-BKH10-250-00	ORIENTAL MOTOR Co., Ltd.		CSK56x, CFK56x					
		MC-BKH10-250-00	ORIENTAL MOTOR Co., Ltd.		UMK56x, UFK56x					
		MC-BKH10-270-00	ORIENTAL MOTOR Co., Ltd.		AS98, ASC98					
		MC-BKH10-270-00	ORIENTAL MOTOR Co., Ltd.		UPK59x, PK59x					
		MC-BKH10-270-00	ORIENTAL MOTOR Co., Ltd.		CSK59x, CFK59x					
		MC-BKH10-270-00	ORIENTAL MOTOR Co., Ltd.		UMK59x, UFK59x					

C-2 Toughcarrier

C-2 Toughcarrier

	Page
1. Features	C95
2. Classification and Series	C95
3. Accessories	C97
4. Selection of Toughcarrier	C98
4.1 Selection Procedures	C98
4.2 Stroke and Lead	C99
4.3 Reference Number Coding and Accuracy Grade	C100
4.4 Maximum Speed	C101
4.5 Rigidity	C103
4.6 Basic Load Rating	C104
4.7 Estimation of Life Expectancy	C105
4.8 Example of Life Estimation	C107
5. TCH Series Dimension Table for Standard Products	C111
5.1 TCH06 Series	C111
5.2 TCH09 Series	C113
5.3 TCH10 Series	C115
6. Accessories	C117
6.1 Sensor Unit	C117
6.2 Cover Unit	C118
6.3 Motor Bracket	C121
7. Motor Bracket Compatibility Table	C130
8. Sensor Rail and Top Cover Unit Combination Table	C131
9. Toughcarrier High-Thrust Series	C134

C-2 Toughcarrier

C-2-1 Features

Greatly improved load capacity due to switching of rolling elements to rollers.
Mounting dimensions are compatible with those of the MCH Series, allowing substitution.

> Light weight and compact design

Taking into account part composition and rigidity, the cross sections of the rail and slider are the same as MCH series.

> Superb rust-preventive ability

Low-temperature chrome plating comes standard.

> All-in-one structure


- 1) The all-in-one structure integrates a ball screw, a linear guide and a support unit into a single structure to significantly reduce design time.
- 2) The bottom and one side of the rail are datum surfaces to facilitate highly accurate installation. Models with pin holes are also available as standard.
- 3) Immediate operation after installation and run-in is possible due to pre-packed grease.
- 4) A wide selection of ball screw leads are available.

> Long-term maintenance-free operation

Use of NSK K1 lubrication unit and grease maintains smooth lubricating performance for long periods.

> Updated rolling elements

Rollers are installed as rolling elements for the first time anywhere.

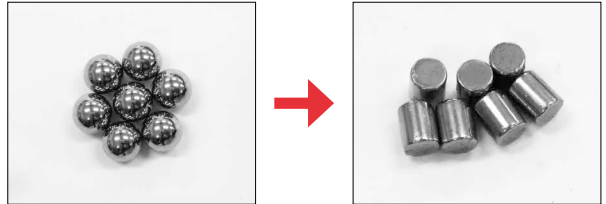


C-2-2 Classification and Series

Structure


Rolling elements: Balls


MCH Series




Rolling elements: Rollers

TCH Series




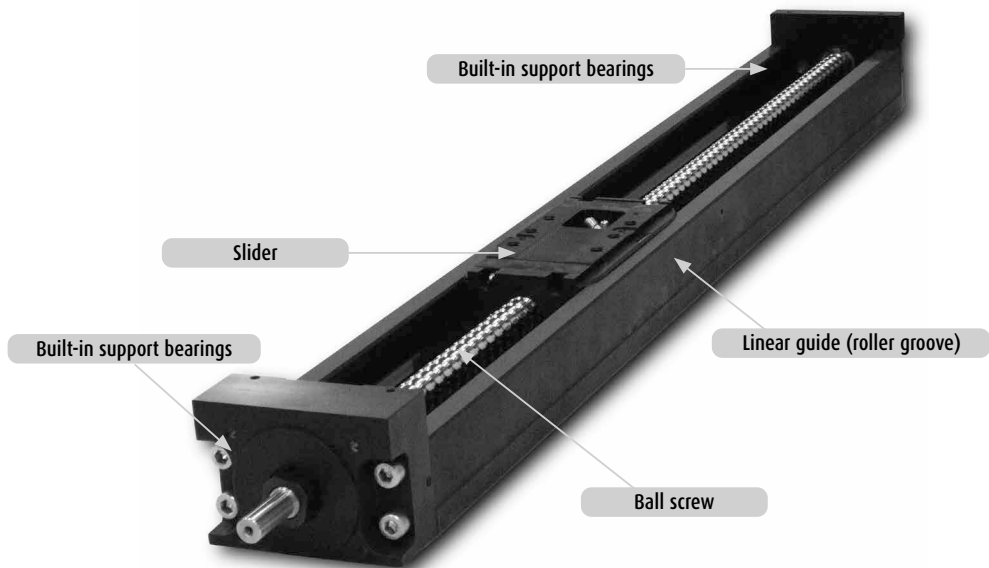

> High rigidity, long life (N)


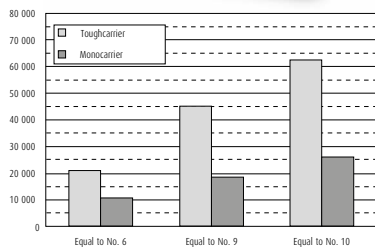


Twice the dynamic load rating and nine-times longer life compared to Monocarrier




Four-times higher rigidity than Monocarrier

Cross-sections of TCH Series

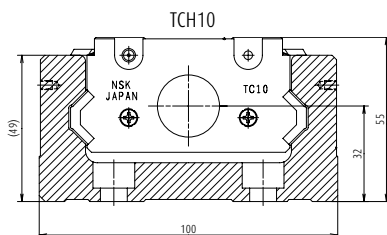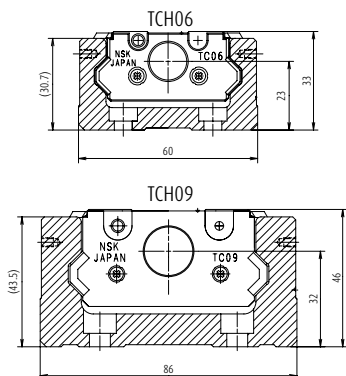

C-2-3 Accessories

Accessories for Toughcarrier

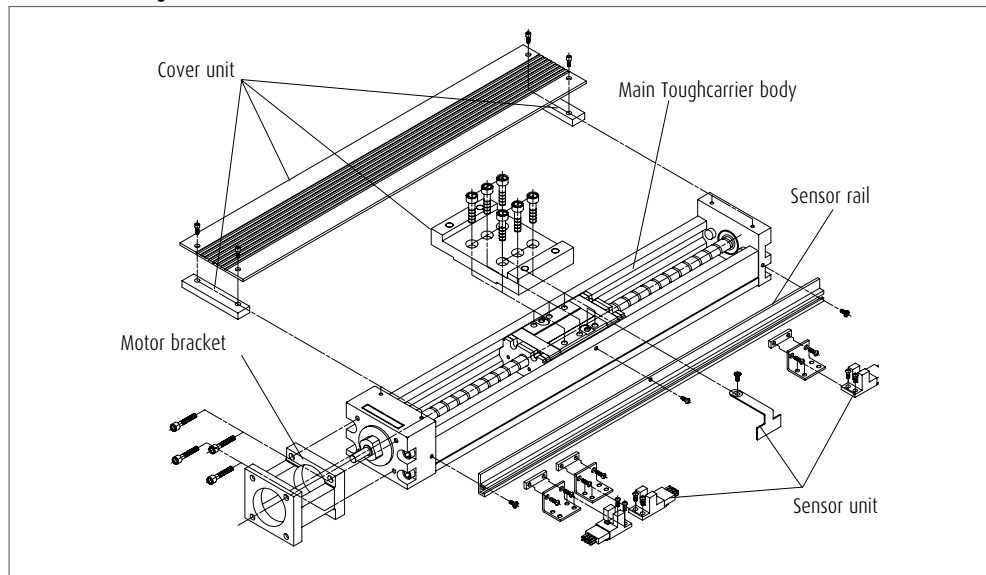**Assembly Example of accessories**

Sensor unit, cover unit, motor bracket and sensor rail are available as options for Toughcarrier.
Contact NSK for other specifications other than those of NSK standard accessories.

1. Sensor unit:

- > Photo sensor...Use of both OMRON EE-SX674 and EE-1001
- > Proximity switch...Use of OMRON E2S-W13, E2S-W14

Available in a unit including sensor fitting clamps.


2. Sensor rail : This rail holds the sensor. Please order the appropriate rail according to the stroke.

3. Cover unit : This unit consists of a top cover and spacer plate.

4. Motor bracket: Brackets are available for a variety of models from different motor manufacturers.
Please consult NSK when the mounting dimensions differ from your order.

C-2-4 Selection of Toughcarrier

C-2-4. 1 Selection Procedure for Toughcarrier

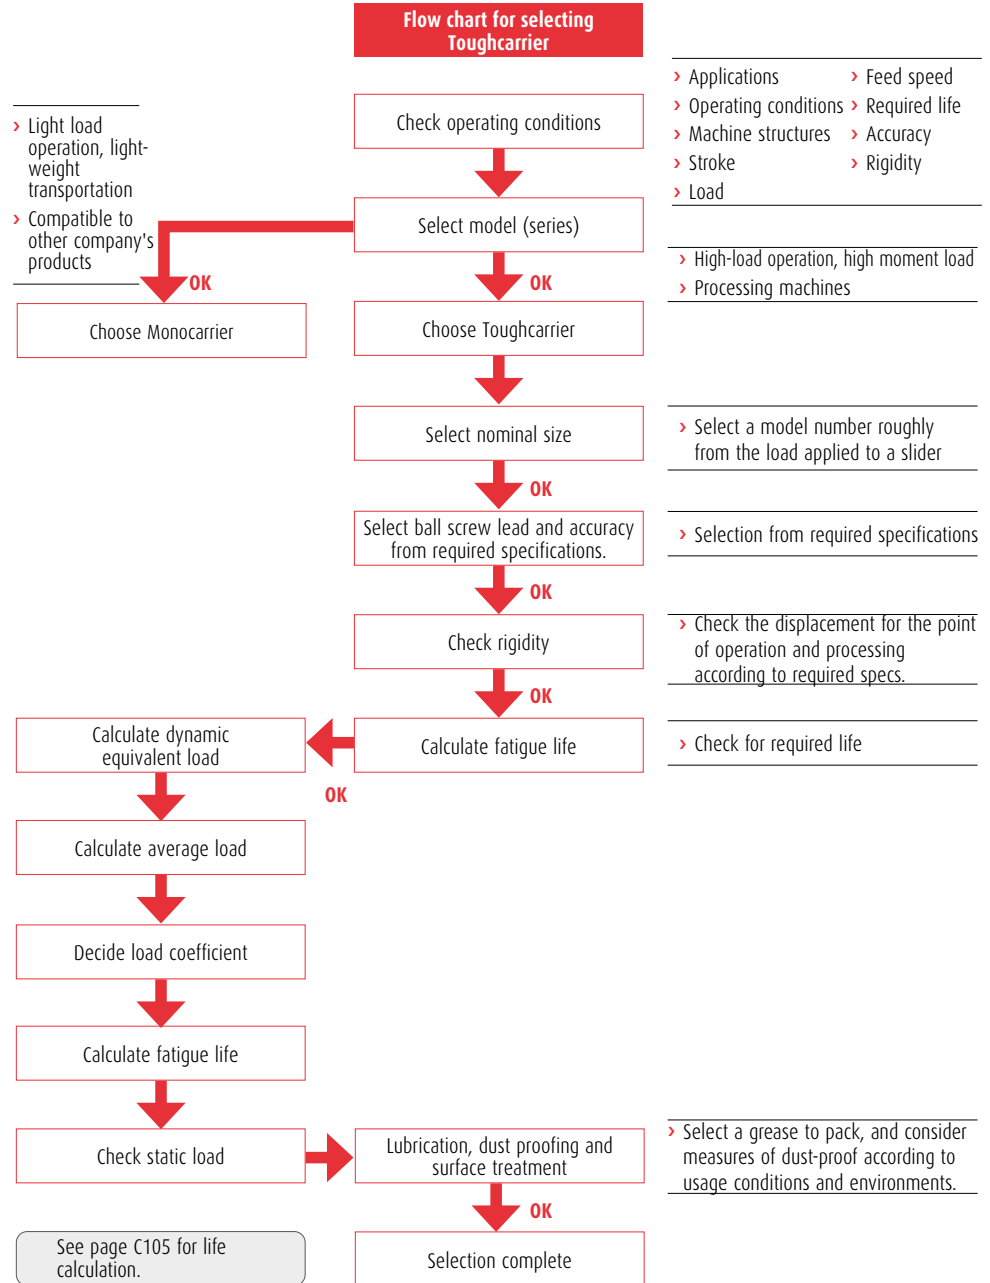

C-2-4. 2 Stroke and Lead

◆ Combinations of rail length and lead

> TCH06

Slider type	Standard slider						Short slider					
	Single slider			Double slider			Single slider			Double slider		
Lead (mm)	5	10	20	5	10	20	5	10	20	5	10	20
Rail length (mm)												
150	✓	✓	✓				✓	✓				
200	✓	✓	✓				✓	✓				
300	✓	✓	✓	✓	✓		✓	✓		✓	✓	
400	✓	✓	✓	✓	✓		✓	✓		✓	✓	
500	✓	✓	✓	✓	✓		✓	✓		✓	✓	
600	✓	✓	✓		✓	✓	✓	✓			✓	

*20 mm lead for short sliders not available.

> TCH09

Slider type	Standard slider						Short slider					
	Single slider			Double slider			Single slider			Double slider		
Lead (mm)	5	10	20	5	10	20	5	10	20	5	10	20
Rail length (mm)												
240	✓	✓	✓				✓	✓	✓			
340	✓	✓	✓				✓	✓	✓			
440	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	
540	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	
640	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	
740	✓	✓	✓		✓	✓	✓	✓	✓		✓	✓
840	✓	✓	✓				✓	✓	✓			
940	✓	✓	✓		✓	✓	✓	✓	✓		✓	✓

> TCH10

Slider type	Standard slider				Short slider			
	Single slider		Double slider		Single slider		Double slider	
Lead (mm)	10	20	10	20	10	20	10	20
Rail length (mm)								
280	✓	✓			✓	✓		
380	✓	✓			✓	✓		
480	✓	✓			✓	✓		
580	✓	✓	✓	✓	✓	✓	✓	✓
680	✓	✓	✓	✓	✓	✓	✓	✓
780	✓	✓	✓	✓	✓	✓	✓	✓
880	✓	✓	✓	✓	✓	✓	✓	✓
980	✓	✓	✓	✓	✓	✓	✓	✓
1 080	✓	✓		✓	✓	✓		✓
1 180	✓	✓		✓	✓	✓		✓
1 280	✓	✓		✓	✓	✓		✓
1 380	✓	✓		✓	✓	✓		✓

◆ Availability

Model No.	Lead (mm)	Slider	Rail length (mm)
TCH06	5, 10, 20	Single	600
TCH06	5, 10, 20	Double	600
TCH09	5, 10, 20	Single	940
TCH09	5, 10, 20	Double	940
TCH10	10, 20	Single	1 380
TCH10	10, 20	Double	1 380

Reference Number Coding and Accuracy Grade

C-2-4. 3 Reference Number Coding and Accuracy Grade

› Reference number coding for TCH Series

Body
Reference number: TC H 06 030 H 10 K 0 0

Toughcarrier
 Model: TCH Series
 (with accessories: TCS)
 Nominal size (rail width, 10 mm units)
 Stroke (10 mm units)
 Accuracy grade: H, High grade; P, Precision grade

NSK control number (0: without pin holes)
 (1: with pin holes)
 Grease (0: YS2, standard)
 Slider specification*
 Ball screw lead (mm)

* K: Single slider
 D: Double slider
 A: Single short slider
 B: Double short slider

Special specifications
Reference number: TC H 06 030 H 10 K - XXB

3: Toughcarrier for special specs
 5: Toughcarrier high-thrust series*
 * For the specifications of the High-Thrust Series, see page C134.

Design serial number

› Reference number for accessories

1. Sensor unit
Reference number: TC - SRH XX - 00
 Toughcarrier
 Sensor unit
 Nominal size: 06, 09 and 10
 Control no.: see page C117

2. Sensor rail
Reference number: TC - SRL X - XXXX
 Toughcarrier
 Sensor rail
 Nominal size: 06 is 6, 09 is 9, and 10 is 1.
 Body rail length

3. Cover unit
Reference number: TC - HV XX XXX - K 00
 Toughcarrier
 Cover unit
 Nominal size: 06, 09 and 10
 Stroke (nominal)
 Slider specs: refer to the body reference no.
 Control no.: See pages C118 to C120

4. Motor bracket
Reference number: TC - BKH XX - XXX - 00
 Toughcarrier
 Motor bracket
 Nominal size: 06, 09 and 10
 Dimension for motor mounting
 Control no.

◆ Accuracy grade

Unit: μm

Stroke (mm)	High grade (H grade)			Precision grade (P grade)			
	Repeatability	Running parallelism (vertical)	Backlash	Repeatability	Positioning accuracy	Running parallelism (vertical)	Backlash
~ 200	±10	14	20 or less	±3	20	8	3 or less
~ 400	±10	16	20 or less	±3	25	10	3 or less
~ 600	±10	20	20 or less	±3	30	12	3 or less
~ 700	±10	23	20 or less	±3	30	15	3 or less
~ 1 000	±10	23	20 or less	±3	35	15	3 or less
~ 1 200	±10	30	20 or less	±3	40	20	3 or less

High and precision grades are available for accuracy grade. Consult NSK for your requirements.

C-2-4. 4 Maximum Speed

› Maximum speed (standard slider)

Maximum speed of the Toughcarrier is determined by the critical speed of the ball screw shaft and the $d \cdot n$ value. Do not exceed the maximum speed in the table below.

	Stroke (nominal)	Ball screw lead (mm)	Body rail length L2 (mm)	Maximum speed (mm/s)
TCH06 Single slider	50	5	150	250
	100	5	200	250
	200	5	300	250
	300	5	400	250
	400	5	500	250
	500	5	600	250
	50	10	150	500
	100	10	200	500
	200	10	300	500
	300	10	400	500
	400	10	500	500
	500	10	600	500
	50	20	150	1 000
	100	20	200	1 000
	200	20	300	1 000
	300	20	400	1 000
	400	20	500	1 000
	500	20	600	1 000
TCH06 Double slider	130	5	300	250
	230	5	400	250
	330	5	500	250
	130	10	300	500
	230	10	400	500
	330	10	500	500
	430	10	600	500
430	20	600	1 000	
TCH09 Single slider	100	5	240	250
	200	5	340	250
	300	5	440	250
	400	5	540	250
	500	5	640	250
	600	5	740	250
	700	5	840	250
	800	5	940	210
	100	10	240	500
	200	10	340	500
	300	10	440	500
	400	10	540	500
	500	10	640	500
	600	10	740	500
	700	10	840	500
	800	10	940	410
	100	20	240	1 000
	200	20	340	1 000
300	20	440	1 000	
400	20	540	1 000	
500	20	640	1 000	
600	20	740	1 000	
700	20	840	1 000	
800	20	940	820	

	Stroke (nominal)	Ball screw lead (mm)	Body rail length L2 (mm)	Maximum speed (mm/s)
TCH09 Double slider	170	5	440	250
	270	5	540	250
	370	5	640	250
	170	10	440	500
	270	10	540	500
	370	10	640	500
	470	10	740	500
	670	10	940	500
	470	20	740	1 000
	670	20	940	1 000
TCH10 Single slider	100	10	280	500
	200	10	380	500
	300	10	480	500
	400	10	580	500
	500	10	680	500
	600	10	780	500
	700	10	880	500
	800	10	980	500
	900	10	1 080	440
	1 000	10	1 180	360
	1 100	10	1 280	300
	1 200	10	1 380	250
	100	20	280	1 000
	200	20	380	1 000
	300	20	480	1 000
	400	20	580	1 000
	500	20	680	1 000
	600	20	780	1 000
700	20	880	1 000	
800	20	980	1 000	
900	20	1 080	870	
1 000	20	1 180	720	
1 100	20	1 280	600	
1 200	20	1 380	510	
TCH10 Double slider	270	10	580	500
	370	10	680	500
	470	10	780	500
	570	10	880	500
	670	10	980	500
	270	20	580	1 000
	370	20	680	1 000
	470	20	780	1 000
	570	20	880	1 000
	670	20	980	1 000
770	20	1 080	1 000	
870	20	1 180	930	
970	20	1 280	780	
1 070	20	1 380	650	

Note 1) Please consult NSK before operating Monocarrier near maximum speed.
 2) Maximum rotational speed is (3000 min⁻¹).
 3) Refer to the above table for maximum speed for each stroke.

› **Maximum speed (short slider)**

Maximum speed of the Toughcarrier is determined by the critical speed of the ball screw shaft and the $d \cdot n$ value.
Do not exceed the maximum speed in the table below.


	Stroke (nominal)	Ball screw lead (mm)	Body rail length L2 (mm)	Maximum speed (mm/s)
TCH06 Single slider	70	5	150	250
	120	5	200	250
	220	5	300	250
	320	5	400	250
	420	5	500	250
	520	5	600	250
	70	10	150	500
	120	10	200	500
	220	10	300	500
	320	10	400	500
TCH06 Double slider	420	10	500	500
	520	10	600	500
	170	5	300	250
	270	5	400	250
	370	5	500	250
	470	5	600	500
TCH09 Single slider	140	5	240	250
	240	5	340	250
	340	5	440	250
	440	5	540	250
	540	5	640	250
	640	5	740	250
	740	5	840	240
	840	5	940	190
	140	10	240	500
	240	10	340	500
	340	10	440	500
	440	10	540	500
	540	10	640	500
	640	10	740	500
	740	10	840	480
	840	10	940	380
	140	20	240	1 000
	240	20	340	1 000
340	20	440	1 000	
440	20	540	1 000	
540	20	640	1 000	
640	20	740	1 000	
740	20	840	960	
840	20	940	760	

	Stroke (nominal)	Ball screw lead (mm)	Body rail length L2 (mm)	Maximum speed (mm/s)
TCH09 Double slider	250	5	440	250
	350	5	540	250
	450	5	640	250
	250	10	440	500
	350	10	540	500
	450	10	640	500
	550	10	740	500
	750	10	940	460
	550	20	740	1 000
	750	20	940	930
TCH10 Single slider	160	10	280	500
	260	10	380	500
	360	10	480	500
	460	10	580	500
	560	10	680	500
	660	10	780	500
	760	10	880	500
	860	10	980	490
	960	10	1 080	400
	1 060	10	1 180	330
	1 160	10	1 280	280
	1 260	10	1 380	240
	160	20	280	1 000
	260	20	380	1 000
	360	20	480	1 000
	460	20	580	1 000
	560	20	680	1 000
	660	20	780	1 000
	760	20	880	1 000
	860	20	980	980
960	20	1 080	800	
1 060	20	1 180	660	
1 160	20	1 280	560	
1 260	20	1 380	480	
TCH10 Double slider	360	10	580	500
	460	10	680	500
	560	10	780	500
	660	10	880	500
	760	10	980	500
	360	20	580	1 000
	460	20	680	1 000
	560	20	780	1 000
	660	20	880	1 000
	760	20	980	1 000
860	20	1 080	980	
960	20	1 180	800	
1 060	20	1 280	660	
1 160	20	1 380	560	

- Note** 1) Please consult NSK before operating Monocarrier near maximum speed.
2) Maximum rotational speed is (3000 min⁻¹).
3) Refer to the above table for maximum speed for each stroke.


C-2-4. 5 Rigidity

Rigidity of rail

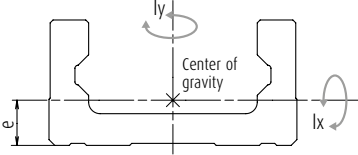


Model no.	Geometrical moment of inertia×10 ⁴ (mm ⁴)		Center of gravity (mm)	Mass (kg/100mm)
	I _x	I _y	e	w
TCH06	6.47	36.2	10.6	0.6
TCH09	28.4	162	15.7	1.32
TCH10	46	283	17.2	1.73

◆ Rigidity in radial direction

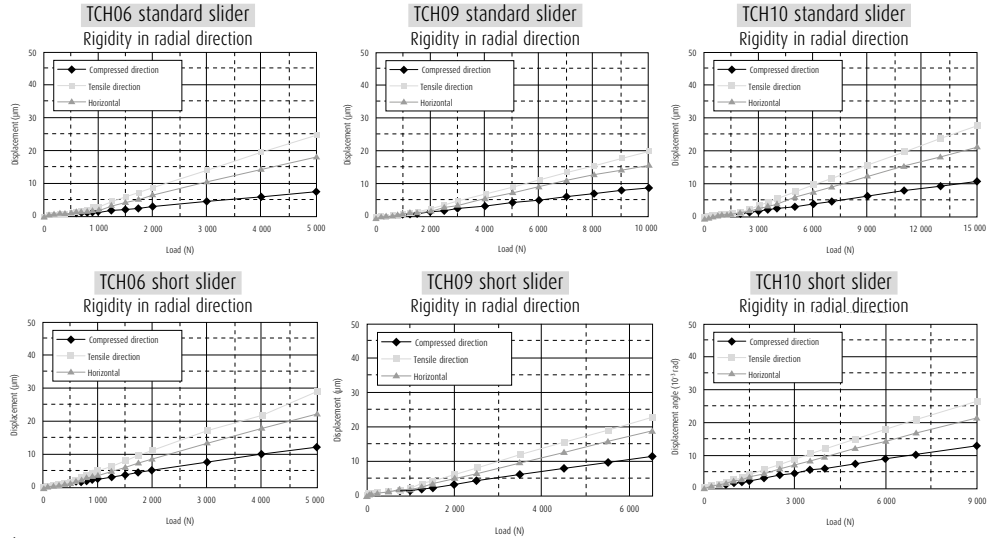

◆ Moment in radial direction

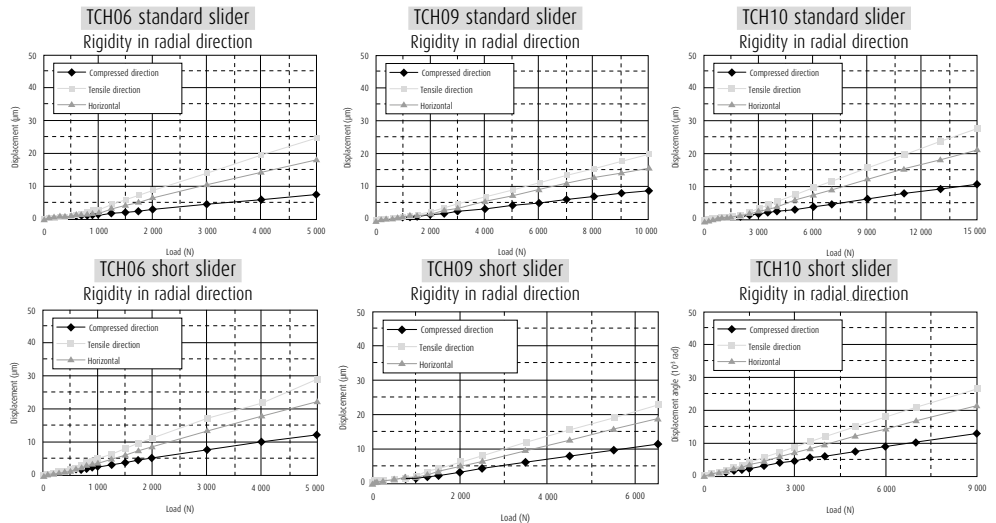

C-2-4. 6 Basic Load Rating

◆ Road rating for TCH series

Standard slider

Model no.	Lead l (mm)	Shaft dia. d (mm)	Basic dynamic load rating (N)			Basic static load rating (N)		Support bearing limit load (N)
			Ball screw C_a	Linear guide C	Support bearings C_a	Ball screw C_{0a}	Linear guide C_0	
TCH06	5	ϕ 12	4 390	20 900	6 600	6 260	45 000	2 700
TCH06	10	ϕ 12	2 740	20 900	6 600	3 820	45 000	2 700
TCH06	20	ϕ 12	2 660	20 900	6 600	3 800	45 000	2 700
TCH09	5	ϕ 15	8 300	44 900	8 800	12 700	96 900	5 090
TCH09	10	ϕ 15	8 140	44 900	8 800	12 800	96 900	5 090
TCH09	20	ϕ 15	5 080	44 900	8 800	7 460	96 900	5 090
TCH10	10	ϕ 20	12 800	62 400	9 600	21 400	132 000	5 670
TCH10	20	ϕ 20	8 190	62 400	9 600	12 600	132 000	5 670

Short slider

Model no.	Lead l (mm)	Shaft dia. d (mm)	Basic dynamic load rating (N)			Basic static load rating (N)		Support bearing limit load (N)
			Ball screw C_a	Linear guide C	Support bearings C_a	Ball screw C_{0a}	Linear guide C_0	
TCH06	5	ϕ 12	4 390	12 200	6 600	6 260	22 500	2 700
TCH06	10	ϕ 12	2 740	12 200	6 600	3 820	22 500	2 700
TCH09	5	ϕ 15	8 300	27 900	8 800	12 700	52 500	5 090
TCH09	10	ϕ 15	8 140	27 900	8 800	12 800	52 500	5 090
TCH09	20	ϕ 15	5 080	27 900	8 800	7 460	52 500	5 090
TCH10	10	ϕ 20	12 800	38 700	9 600	21 400	71 500	5 670
TCH10	20	ϕ 20	8 190	38 700	9 600	12 600	71 500	5 670

- Basic dynamic and static load ratings indicate values for one slider.
- Basic dynamic load rating of linear guide is a load that allows for a 50-km rating fatigue life and is a vertical and constant load on the ball mounting surface.
- Basic dynamic load rating of ball screw is load in the axial direction that allows 90% of ball screws of a group of the same Toughcarriers to rotate 1 million revolutions under the same condition without causing flaking by rolling contact fatigue.
- Basic dynamic load rating of support bearings is load that allows 1 million revolutions under the same condition.
- Basic static load rating is load that results in combined permanent deformations at contact points of rolling elements and rolling surfaces of respective parts at a diameter of 0.01%.


◆ Basic static moment load of linear guide

Standard slider

Model no.	Slider	Basic static moment load (N-m)		
		Rolling M_{RO}	Pitching M_{PO}	Yawing M_{YO}
TCH06	Single	800	340	340
TCH09	Single	2 510	1 340	1 340
TCH10	Single	3 980	2 150	2 150

Short slider

Model no.	Slider	Basic static moment load (N-m)		
		Rolling M_{RO}	Pitching M_{PO}	Yawing M_{YO}
TCH06	Single	400	85	85
TCH09	Single	1 350	390	390
TCH10	Single	2 150	630	630



M_{RO} : Rolling moment
 M_{PO} : Pitching moment
 M_{YO} : Yawing moment

C-2-4. 7 Estimation of Life Expectancy

(1) Life of linear guide for Toughcarrier

Study the load to be applied to the linear guide of Toughcarrier (**Fig. 1**). The equivalent load (F_e) is determined by substituting the load for equation 1) (Eq. 2) or 2') for tightly coupled double slider type).

> For single slider

$$F_e = Y_H F_H + Y_V F_V + Y_R \epsilon_R M_R + Y_P \epsilon_P M_P + Y_Y \epsilon_Y M_Y \dots\dots\dots 1)$$

> For double slider

For double sliders, calculation of the load applied to each slider is required.

Dynamic equivalent load is only for rolling moment. This is the same procedure as for linear guide selection where two sliders are installed in a rail. Check the mean load for each slider, and calculate shortest life becomes the life of linear guide.

When lateral direction (F_H) and vertical direction (F_V) loads are applied to the center of the coordinate in **Fig. 1**,

$$F_{HA} = \frac{F_H}{2} + \frac{M_Y}{\ell}, F_{VA} = \frac{F_V}{2} + \frac{M_P}{\ell}$$

$$F_{HB} = \frac{F_H}{2} + \frac{M_Y}{\ell}, F_{VB} = \frac{F_V}{2} + \frac{M_P}{\ell}$$

[Slider A]

$$F_{eA} = Y_H \cdot F_{HA} + Y_V \cdot F_{VA} + Y_R \epsilon_R \frac{M_R}{2} \dots\dots\dots 2)$$

$$= Y_H \left[\frac{F_H}{2} + \frac{M_Y}{\ell} \right] + Y_V \left[\frac{F_V}{2} + \frac{M_P}{\ell} \right] + Y_R \epsilon_R \frac{M_R}{2}$$

[Slider B]

$$F_{eA} = Y_H \cdot F_{HB} + Y_V \cdot F_{VB} + Y_R \epsilon_R \frac{M_R}{2} \dots\dots\dots 2')$$

$$= Y_H \left[\frac{F_H}{2} - \frac{M_Y}{\ell} \right] + Y_V \left[\frac{F_V}{2} - \frac{M_P}{\ell} \right] + Y_R \epsilon_R \frac{M_R}{2}$$

F_H : Lateral direction load acting on the slider (N)

F_V : Vertical direction load acting on the slider (N)

M_R : Rolling moment acting on the slider (N · m)

M_P : Pitching moment acting on the slider (N · m)

M_Y : Yawing moment acting on the slider (N · m)

ϵ_R : Dynamic equivalent coefficient to rolling moment

ϵ_P : Dynamic equivalent coefficient to pitching moment

ϵ_Y : Dynamic equivalent coefficient to yawing moment

ℓ : Sliders span (m)

*For dynamic equivalent coefficient, see **table 1**.

Y_H, Y_V, Y_R, Y_P, Y_Y : 1.0 or 0.5

At equations 1), 2) and 2') for obtaining equivalent load F_e , the maximum value of Y in the values for each equation is assumed to be 1.0. For others it is assumed to be 0.5.


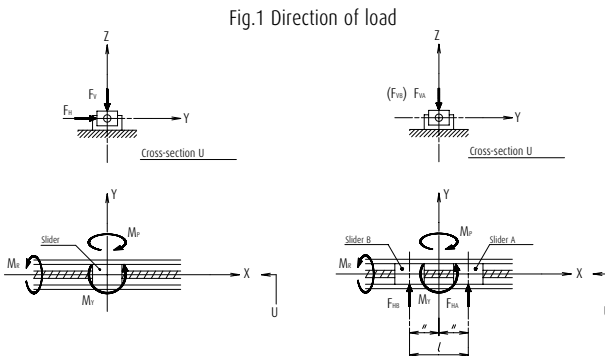


Fig.1 Direction of load

Fig. 2 Stepwise Fluctuating Load



If the loads acting on the slider fluctuate (in general, M_p and M_y may fluctuate with the acceleration/deceleration of slider), the mean effective load is determined by Eq. 3).

Travelling distance under the equivalent load Fe_1 : L_1

Travelling distance under the equivalent load Fe_2 : L_2

.....

Travelling distance under the equivalent load Fe_n : L_n

Mean effective load F_m is calculated by the following equation.

$$F_m = \sqrt[10]{\frac{1}{L} (Fe_1^{10} \cdot L_1 + Fe_2^{10} \cdot L_2 + \dots + Fe_n^{10} \cdot L_n)} \quad \text{.....3}$$

F_m : Mean effective load of fluctuating loads (N)

L : Total travelling distance (mm)

The life of linear guide for Toughcarrier is determined by Eq. 4).

$$L = 50 \times \left[\frac{C}{f_w \cdot F_m} \right]^{10} \quad \text{.....4}$$

L : Life of linear guide (km)

C : Basic dynamic load rating of linear guide (N)

F_m : Mean effective load acting on linear guide (N)

f_w : Load coefficient (see **table 2**)

When the estimated life does not meet the required life, the life of the linear guide is calculated again after following measures are taken,

- 1: Change from single slider type to double slider type.
- 2: Use a larger Toughcarrier.

Table 1 Dynamic equivalent coefficient

	TCH06			TCH09			TCH10		
	Rolling	Pitching	Yawing	Rolling	Pitching	Yawing	Rolling	Pitching	Yawing
Standard slider	56	93	93	39	51	51	33	44	44
Short slider	56	186	186	39	95	95	33	80	80

(2) Life of Ball Screw (Support Bearing)

The mean effective load is determined from the axial load.

Axial direction mean effective load F_m

$$F_m = \sqrt[3]{\frac{1}{L} (Fe_1^3 \cdot L_1 + Fe_2^3 \cdot L_2 + \dots + Fe_n^3 \cdot L_n)} \quad \text{.....5}$$

The life of ball screw is determined by Eq. 6).

$$L = \ell \times \left[\frac{C_a}{f_w \cdot F_m} \right]^3 \times 10^6 \quad \text{.....6}$$

ℓ : Ball screw lead (mm)

L : Life of ball screw (mm)

C_a : Basic dynamic load rating of ball screw (N)

F_m : Mean effective load acting on ball screw (N)

f_w : Load factor (see **table 2**)

The life of a support bearing is calculated by Eq. 6).

If the life of ball screw/support bearing does not meet the required life, use a larger size Toughcarrier. After applying the calculations mentioned above, selection of the Toughcarrier is completed.

Table 2 Value of load factor


Operating conditions	Load factor f_w
At smooth operation with no mechanical shock	1.0 ~ 1.2
At normal operation	1.2 ~ 1.5
At operation with mechanical shock and vibration	1.5 ~ 3.0

*When the bottom of rail is not fastened, the load factor is 1.5 or greater.

C-2-4. 8 Example of Life Estimation

Example of life estimation for Toughcarrier

Example-1

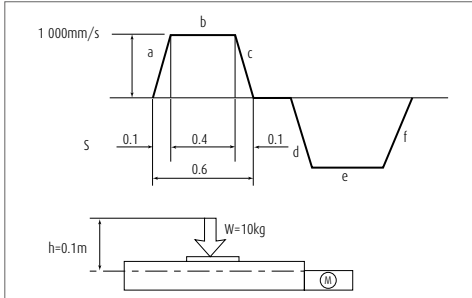

1. Use condition

Stroke	: 500 mm
Maximum speed	: 1 000 mm/s
Load mass	: W = 10 kg
Acceleration	: 9.80 m/s ²
Setting position	: Horizontal
Operating profile	: See figure to above

2. Selection of model number (Interim selection)

First, select a greater ball screw lead as the maximum speed is 1 000 mm/s.

The interim selection is TCH06050H20K00, a single slider specification TCH06 that has 500 mm stroke, as the stroke is 500 mm.

3. Calculation

3-1. Linear guide

3-1-1. Fatigue life: Multiply the result of Eq. 1) by the dynamic equivalent coefficient (**Table 1** single slider) to convert the load volume. From operation profile in the above figure, the acceleration is 10 m/s².

- i) Constant speed $F_{e1} = Y_V \cdot F_V = Y_V \cdot W \cdot g$
 $= 1 \cdot 10 \cdot 9.8 = 98 \text{ N}$
- ii) Accelerating $F_{e2} = Y_V \cdot F_V + Y_P \cdot \epsilon_p \cdot M_p$
 $= Y_V \cdot W \cdot g + Y_P \cdot \epsilon_p h W \alpha$
 $= 0.5 \cdot 10 \cdot 9.8 + 1 \cdot 93 \cdot 0.1 \cdot 10 \cdot 10$
 $= 979 \text{ N}$
- iii) Decelerating $F_{e3} = Y_V \cdot F_V + Y_P \cdot \epsilon_p \cdot M_p$
 $= Y_V \cdot W \cdot g + Y_P \cdot \epsilon_p h W \alpha$
 $= 0.5 \cdot 10 \cdot 9.8 + 1 \cdot 93 \cdot 0.1 \cdot 10 \cdot 10$
 $= 979 \text{ N}$

Mean effective load Fm

$$F_m = \sqrt[3]{\frac{1}{L} \left(F_e^{\frac{10}{3}} \cdot L_1 + F_e^{\frac{10}{3}} \cdot L_2 + F_e^{\frac{10}{3}} \cdot L_3 \right)}$$

$$= \sqrt[3]{\frac{1}{500} \left(98^{\frac{10}{3}} \cdot 400 + 979^{\frac{10}{3}} \cdot 50 + 979^{\frac{10}{3}} \cdot 50 \right)}$$

$$= 605 \text{ N}$$

$$L = 50 \times \left(\frac{C}{f_w \cdot F_m} \right)^{\frac{10}{3}}$$

$$= 50 \times \left(\frac{20\,900}{1.2 \cdot 605} \right)^{\frac{10}{3}}$$

$$= 3.65 \times 10^6 \text{ km}$$

3-1-2. Static safety factor: Divide the basic static load rating by the maximum load.

$$F_s = \frac{C_0}{F_e} = \frac{C_0}{F_{e2}} = \frac{45\,000}{979} = 45.9$$

3-2. Ball screw

3-2-1. Fatigue life: Obtain the axial load of each stage of operation referring to the operation profile, and then calculate the mean load.

By the process above,

- i) Constant speed $F_{e1} = \mu \cdot W \cdot g = 0.01 \cdot 10 \cdot 9.8 = 0.98 \text{ N}$
- ii) Accelerating $F_{e2} = F_{e1} + W \cdot \alpha = 0.98 + 10 \cdot 10 = 101 \text{ N}$
- iii) Decelerating $F_{e3} = F_{e1} + W \cdot \alpha = 0.98 - 10 \cdot 10 = 99 \text{ N}$

Axial mean effective load

$$F_m = \sqrt[3]{\frac{1}{L} \left(F_{e1}^3 \cdot L_1 + F_{e2}^3 \cdot L_2 + F_{e3}^3 \cdot L_3 \right)}$$

$$= \sqrt[3]{\frac{1}{500} \left(0.98^3 \cdot 400 + 101^3 \cdot 50 + 99^3 \cdot 50 \right)}$$

$$= 59 \text{ N}$$

$$L = \ell \times \left(\frac{C_a}{f_w \cdot F_m} \right)^3 \times 10^6$$

$$= 20 \times \left(\frac{2\,660}{1.2 \cdot 59} \right)^3 \times 10^6$$

$$= 10.6 \times 10^5 \text{ km}$$

3-2-2. Static safety factor: Divide the basic static load rating by the maximum axial load.

$$F_s = \frac{C_{0a}}{F_e} = \frac{C_{0a}}{F_{e2}} = \frac{3\,800}{101} = 37.6$$

3-3. Support bearings

3-3-1. Fatigue life: Use the axial load Fm = 59 N that is the result of the calculation in 3-2-1, above.

$$L = \ell \times \left(\frac{C_a}{f_w \cdot F_m} \right)^3 \times 10^6$$

$$= 20 \times \left(\frac{6\,600}{1.2 \cdot 59} \right)^3 \times 10^6$$

$$= 1.62 \times 10^7 \text{ km}$$

3-3-2. Static safety factor: Divide the limit load by the maximum axial load.


$$F_s = \frac{C_{0a}}{F_e} = \frac{C_{0a}}{F_{e2}} = \frac{2\,730}{101} = 26.7$$

3-4. Result

TCH06050H20K00	Linear guide	Ball screw	Support bearings
Fatigue life	3.65×10^6 km	6.50×10^5 km	1.62×10^7 km
Static safety factor	45.9	37.4	26.7


Example of life estimation

Example-2

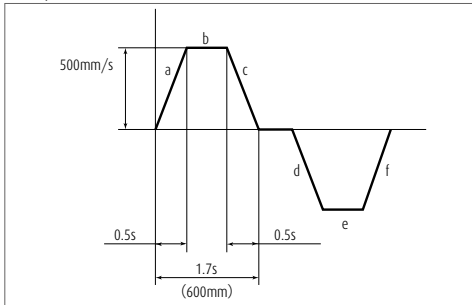

1. Use condition

Stroke	: 600 mm
Maximum speed	: 500 mm/s
Load mass	: W = 20 kg
Acceleration	: 9.8 m/s ²
Setting position	: Vertical
Operating profile	: See figure to above



2. Selection of model number (interim selection)

Select a 10 mm lead ball screw as the maximum speed is 500 mm/s.

The interim selection is TCH09067H10D00 (double slider specification) from the stroke and the vertical setting position.

3. Calculation

3-1. Linear guide

3-1-1. Fatigue life: Multiply the result of Eq. 2) and 2') by the dynamic equivalent coefficient (Table 1 double slider) to convert the load volume. From operation profile in the above figure, the acceleration is 1 m/s². The interim slider span is 0.13.

Under this condition,

$$F_H = 0, F_V = 0, M_R = 0$$

in Eq., and both sliders have the same load with different direction.

i) Constant speed

$$F_{e1} = \gamma_H \cdot \frac{M_Y}{\ell} + \gamma_V \cdot \frac{M_P}{\ell}$$

$$= 0.5 \cdot \frac{0.1 \cdot 20 \cdot 9.8}{0.13} + 1.0 \cdot \frac{0.15 \cdot 20 \cdot 9.8}{0.13}$$

$$= 302 \text{ N}$$

ii) Accelerating

$$F_{e2} = \gamma_H \cdot \frac{M_Y}{\ell} + \gamma_V \cdot \frac{M_P}{\ell}$$

$$= 0.5 \cdot \frac{0.1 \cdot 20 \cdot (9.8 + 1.0)}{0.13} + 1.0 \cdot \frac{0.15 \cdot 20 \cdot (9.8 + 1.0)}{0.13}$$

$$= 333 \text{ N}$$

iii) Decelerating

$$F_{e3} = \gamma_H \cdot \frac{M_Y}{\ell} + \gamma_V \cdot \frac{M_P}{\ell}$$

$$= 0.5 \cdot \frac{0.1 \cdot 20 \cdot (9.8 - 1.0)}{0.13} + 1.0 \cdot \frac{0.15 \cdot 20 \cdot (9.8 - 1.0)}{0.13}$$

$$= 271 \text{ N}$$

Mean effective load Fm

$$F_m = \sqrt[10]{\frac{1}{L} (F_{e1}^{10} \cdot L_1 + F_{e2}^{10} \cdot L_2 + F_{e3}^{10} \cdot L_3)}$$

$$= \sqrt[10]{\frac{1}{600} (302^{10} \cdot 350 + 333^{10} \cdot 125 + 271^{10} \cdot 125)}$$

$$= 304 \text{ N}$$

$$L = 50 \times \left(\frac{C}{f_w \cdot F_m} \right)^{\frac{10}{3}}$$

$$= 50 \times \left(\frac{44900}{1.2 \cdot 304} \right)^{\frac{10}{3}}$$

$$= 4.63 \times 10^8 \text{ km}$$

3-1-2. Static safety factor: Divide the basic static load rating by the maximum load.

$$F_s = \frac{C_0}{F_e} = \frac{C_0}{F_{e2}} = \frac{96900}{333} = 290$$

3-2. Ball screw

3-2-1. Fatigue life: Obtain the axial load of each stage of operation referring to the operation profile, and then calculate the mean load.

i) Constant speed

$$F_{e1} = W \cdot g = 20 \cdot 9.8 = 196 \text{ N}$$

ii) Accelerating

$$F_{e2} = F_{e1} + W \cdot \alpha = 196 + 20 \cdot 1.0 = 216 \text{ N}$$

iii) Decelerating

$$F_{e3} = F_{e1} - W \cdot \alpha = 196 - 20 \cdot 1.0 = 176 \text{ N}$$

Axial mean effective load Fm

$$F_m = \sqrt[10]{\frac{1}{L} (F_{e1}^{10} \cdot L_1 + F_{e2}^{10} \cdot L_2 + F_{e3}^{10} \cdot L_3)}$$

$$= \sqrt[10]{\frac{1}{600} (196^{10} \cdot 350 + 216^{10} \cdot 125 + 176^{10} \cdot 125)}$$

$$= 197 \text{ N}$$

$$L = \ell \times \left(\frac{C_s}{f_w \cdot F_m} \right)^3 \times 10^6$$

$$= 10 \times \left(\frac{8140}{1.2 \cdot 197} \right)^3 \times 10^6$$

$$= 4.08 \times 10^5 \text{ km}$$

3-2-2. Static safety factor: Divide the basic static load rating by the maximum axial load.

$$F_s = \frac{C_{0a}}{F_e} = \frac{C_{0a}}{F_{e2}} = \frac{12\,800}{216} = 59.2$$

3-3. Support bearings

3-3-1. Fatigue life: Use the axial load $F_m = 197\text{ N}$ that is the result of the calculation in 3-2-1, above.

$$\begin{aligned} L &= \ell \times \left(\frac{C_a}{f_w \cdot F_m} \right)^3 \times 10^6 \\ &= 10 \times \left(\frac{8\,800}{1.2 \cdot 197} \right)^3 \times 10^6 \\ &= 5.15 \times 10^5 \text{ km} \end{aligned}$$

3-3-2. Static safety factor: Divide the limit load by the maximum axial load.

$$F_s = \frac{C_{0a}}{F_e} = \frac{C_{0a}}{F_{e2}} = \frac{5\,090}{216} = 23.5$$

3-4. Result

TCH09067H10D00	Linear guide	Ball screw	Support bearings
Fatigue life	4.63×10^8 km	2.66×10^5 km	5.15×10^5 km
Static safety factor	290	58.7	23.5

TCH06 Standard Slider Specifications (Single)

Reference number	Nominal stroke (mm)	Stroke limit (mm)	Ball screw lead (mm)	Body length (mm)				No. of mounting holes n	Inertia × 10 ⁻⁶ (kg · m ²)	Mass (kg)
				L ₁	L ₂	L ₃	G			
* TCH06005H05K00 (01)	50	63	5	210	150	100	25	2	2.94	2.2
* TCH06005H10K00 (01)	50	63	10	210	150	100	25	2	3.38	2.2
* TCH06005H20K00 (01)	50	63	20	210	150	100	25	2	5.10	2.2
* TCH06010H05K00 (01)	100	113	5	260	200	100	50	2	3.74	2.5
* TCH06010H10K00 (01)	100	113	10	260	200	100	50	2	4.18	2.5
* TCH06010H20K00 (01)	100	113	20	260	200	100	50	2	5.90	2.5
TCH06020H05K00 (01)	200	213	5	360	300	200	50	3	5.34	3.3
TCH06020H10K00 (01)	200	213	10	360	300	200	50	3	5.78	3.3
TCH06020H20K00 (01)	200	213	20	360	300	200	50	3	7.50	3.3
TCH06030H05K00 (01)	300	313	5	460	400	300	50	4	6.84	3.9
TCH06030H10K00 (01)	300	313	10	460	400	300	50	4	7.28	3.9
TCH06030H20K00 (01)	300	313	20	460	400	300	50	4	9.00	3.9
TCH06040H05K00 (01)	400	413	5	560	500	400	50	5	8.44	4.6
TCH06040H10K00 (01)	400	413	10	560	500	400	50	5	8.88	4.6
TCH06040H20K00 (01)	400	413	20	560	500	400	50	5	10.6	4.6
TCH06050H05K00 (01)	500	513	5	660	600	500	50	6	10.1	5.3
TCH06050H10K00 (01)	500	513	10	660	600	500	50	6	10.5	5.3
TCH06050H20K00 (01)	500	513	20	660	600	500	50	6	12.2	5.3

Items marked with * are unavailable for upside-down operation.

TCH06 Standard Slider Specifications (Double)

Reference number	Nominal stroke (mm)	Stroke limit (mm)	Ball screw lead (mm)	Body length (mm)				No. of mounting holes n	Inertia × 10 ⁻⁶ (kg · m ²)	Mass (kg)
				L ₁	L ₂	L ₃	G			
* TCH06013H05D00 (01)	130	133	5	360	300	200	50	3	5.47	3.6
* TCH06013H10D00 (01)	130	133	10	360	300	200	50	3	6.32	4.2
* TCH06023H05D00 (01)	230	233	5	460	400	300	50	4	7.06	4.2
* TCH06023H10D00 (01)	230	233	10	460	400	300	50	4	7.91	4.2
* TCH06033H05D00 (01)	330	333	5	560	500	400	50	5	8.64	4.9
* TCH06033H10D00 (01)	330	333	10	560	500	400	50	5	9.49	4.9
TCH06043H10D00 (01)	430	433	10	660	600	500	50	6	11.08	5.6
TCH06043H20D00 (01)	430	433	20	660	600	500	50	6	14.4	5.6

Items marked with * are unavailable for upside-down operation.

TCH06 Standard Slider Specifications (Single)

Reference number	Nominal stroke (mm)	Stroke limit (mm)	Ball screw lead (mm)	Body length (mm)				No. of mounting holes n	Inertia × 10 ⁻⁶ (kg · m ²)	Mass (kg)
				L ₁	L ₂	L ₃	G			
* TCH06007H05A00 (01)	70	84	5	210	150	100	25	2	2.87	2.1
* TCH06007H10A00 (01)	70	84	10	210	150	100	25	2	3.06	2.1
* TCH06012H05A00 (01)	120	134	5	210	150	100	50	2	3.67	2.4
* TCH06012H10A00 (01)	120	134	10	260	200	100	50	2	3.86	2.4
TCH06022H05A00 (01)	220	234	5	260	200	100	50	3	5.27	3.2
TCH06022H10A00 (01)	220	234	10	260	200	100	50	3	5.46	3.2
TCH06032H05A00 (01)	320	334	5	360	300	200	50	4	6.77	3.8
TCH06032H10A00 (01)	320	334	10	360	300	200	50	4	6.96	3.8
TCH06042H05A00 (01)	420	434	5	360	300	200	50	5	8.37	4.5
TCH06042H10A00 (01)	420	434	10	460	400	300	50	5	8.56	4.5
TCH06052H05A00 (01)	520	534	5	460	400	300	50	6	9.97	5.2
TCH06052H10A00 (01)	520	534	10	460	400	300	50	6	10.2	5.2

Items marked with * are unavailable for upside-down operation.

TCH06 Standard Slider Specifications (Single)

Reference number	Nominal stroke (mm)	Stroke limit (mm)	Ball screw lead (mm)	Body length (mm)				No. of mounting holes n	Inertia × 10 ⁻⁶ (kg · m ²)	Mass (kg)
				L ₁	L ₂	L ₃	G			
* TCH06017H05B00 (01)	170	175	5	360	300	200	50	3	5.34	3.4
* TCH06017H10B00 (01)	170	175	10	360	300	200	50	3	5.81	3.4
TCH06027H05B00 (01)	270	275	5	460	400	300	50	4	6.93	4.0
TCH06027H10B00 (01)	270	275	10	460	400	300	50	4	7.40	4.0
TCH06037H05B00 (01)	370	375	5	560	500	400	50	5	8.51	4.7
TCH06037H10B00 (01)	370	375	10	560	500	400	50	5	8.98	4.7
TCH06047H10B00 (01)	470	475	10	660	600	500	50	6	10.57	5.4

Items marked with * are unavailable for upside-down operation.

TCH09 Standard Slider Specifications (Single)

Reference number	Nominal stroke (mm)	Stroke limit (mm)	Ball screw lead (mm)	Body length (mm)				No. of mounting holes	Inertia $\times 10^6$ (kg · m ²)	Mass (kg)
				L ₁	L ₂	L ₃	G			
* TCH09010H05K00 (01)	100	108	5	320	240	100	70	2	9.13	6.5
* TCH09010H10K00 (01)	100	108	10	320	240	100	70	2	11.0	6.5
* TCH09010H20K00 (01)	100	108	20	320	240	100	70	2	18.6	6.5
TCH09020H05K00 (01)	200	208	5	420	340	200	70	3	14.2	7.9
TCH09020H10K00 (01)	200	208	10	420	340	200	70	3	16.0	7.9
TCH09020H20K00 (01)	200	208	20	420	340	200	70	3	23.6	7.9
TCH09030H05K00 (01)	300	308	5	520	440	300	70	4	18.1	9.4
TCH09030H10K00 (01)	300	308	10	520	440	300	70	4	19.9	9.4
TCH09030H20K00 (01)	300	308	20	520	440	300	70	4	27.5	9.4
TCH09040H05K00 (01)	400	408	5	620	540	400	70	5	21.9	10.8
TCH09040H10K00 (01)	400	408	10	620	540	400	70	5	23.8	10.8
TCH09040H20K00 (01)	400	408	20	620	540	400	70	5	31.4	10.8
TCH09050H05K00 (01)	500	508	5	720	640	500	70	6	25.9	12.3
TCH09050H10K00 (01)	500	508	10	720	640	500	70	6	27.7	12.3
TCH09050H20K00 (01)	500	508	20	720	640	500	70	6	35.3	12.3
TCH09060H05K00 (01)	600	608	5	820	740	600	70	7	29.4	13.6
TCH09060H10K00 (01)	600	608	10	820	740	600	70	7	31.3	13.6
TCH09060H20K00 (01)	600	608	20	820	740	600	70	7	38.9	13.6
TCH09070H05K00 (01)	700	708	5	920	840	700	70	8	33.5	15.0
TCH09070H10K00 (01)	700	708	10	920	840	700	70	8	35.4	15.0
TCH09070H20K00 (01)	700	708	20	920	840	700	70	8	43.0	15.0
TCH09080H05K00 (01)	800	808	5	1 020	940	800	70	9	37.4	16.4
TCH09080H10K00 (01)	800	808	10	1 020	940	800	70	9	39.3	16.4
TCH09080H20K00 (01)	800	808	20	1 020	940	800	70	9	46.9	16.4

Items marked with * are unavailable for upside-down operation.

TCH09 Standard Slider Specifications (Double)

Reference number	Nominal stroke (mm)	Stroke limit (mm)	Ball screw lead (mm)	Body length (mm)				No. of mounting holes	Inertia $\times 10^6$ (kg · m ²)	Mass (kg)
				L ₁	L ₂	L ₃	G			
* TCH09017H10D00 (01)	170	184	5	520	440	300	70	4	19.47	10.3
* TCH09017H20D00 (01)	170	184	10	520	440	300	70	4	22.89	10.3
* TCH09027H05D00 (01)	270	284	5	620	540	400	70	5	23.35	11.7
* TCH09027H10D00 (01)	270	284	10	620	540	400	70	5	26.77	11.7
TCH09037H05D00 (01)	370	384	5	720	640	500	70	6	27.22	13.2
TCH09037H10D00 (01)	370	384	10	720	640	500	70	6	30.64	13.2
TCH09047H10D00 (01)	470	484	10	820	740	600	70	7	34.55	14.5
TCH09047H20D00 (01)	470	484	20	820	740	600	70	7	48.24	14.5
TCH09067H10D00 (01)	670	684	10	1 020	940	800	70	9	42.27	17.3
TCH09067H20D00 (01)	670	684	20	1 020	940	800	70	9	55.96	17.3

Items marked with * are unavailable for upside-down operation.

TCH09 Short Slider Specifications (Single)

Reference number	Nominal stroke (mm)	Stroke limit (mm)	Ball screw lead (mm)	Body length (mm)				No. of mounting holes	Inertia $\times 10^6$ (kg · m ²)	Mass (kg)
				L ₁	L ₂	L ₃	G			
* TCH09014H05A00 (01)	140	146	5	320	240	100	70	2	8.9	6.1
* TCH09014H10A00 (01)	140	146	10	320	240	100	70	2	10.1	6.1
* TCH09014H20A00 (01)	140	146	20	320	240	100	70	2	14.6	6.1
TCH09024H05A00 (01)	240	246	5	420	340	200	70	3	13.9	7.5
TCH09024H10A00 (01)	240	246	10	420	340	200	70	3	15.1	7.5
TCH09024H20A00 (01)	240	246	20	420	340	200	70	3	19.6	7.5
TCH09034H05A00 (01)	340	346	5	520	440	300	70	4	17.8	9.4
TCH09034H10A00 (01)	340	346	10	520	440	300	70	4	18.9	9.4
TCH09034H20A00 (01)	340	346	20	520	440	300	70	4	23.5	9.4
TCH09044H05A00 (01)	440	446	5	620	540	400	70	5	21.7	10.8
TCH09044H10A00 (01)	440	446	10	620	540	400	70	5	22.8	10.8
TCH09044H20A00 (01)	440	446	20	620	540	400	70	5	27.4	10.8
TCH09054H05A00 (01)	540	546	5	720	640	500	70	6	25.6	11.9
TCH09054H10A00 (01)	540	546	10	720	640	500	70	6	26.7	11.9
TCH09054H20A00 (01)	540	546	20	720	640	500	70	6	31.3	11.9
TCH09064H05A00 (01)	640	646	5	820	740	600	70	7	29.2	13.2
TCH09064H10A00 (01)	640	646	10	820	740	600	70	7	30.3	13.2
TCH09064H20A00 (01)	640	646	20	820	740	600	70	7	34.9	13.2
TCH09074H05A00 (01)	740	746	5	920	840	700	70	8	33.3	14.6
TCH09074H10A00 (01)	740	746	10	920	840	700	70	8	34.4	14.6
TCH09074H20A00 (01)	740	746	20	920	840	700	70	8	39.9	14.6
TCH09084H05A00 (01)	840	846	5	1 020	940	800	70	9	37.2	16.0
TCH09084H10A00 (01)	840	846	10	1 020	940	800	70	9	38.3	16.0
TCH09084H20A00 (01)	840	846	20	1 020	940	800	70	9	42.8	16.0


Items marked with * are unavailable for upside-down operation.

TCH09 Standard Slider Specifications (Double)

Reference number	Nominal stroke (mm)	Stroke limit (mm)	Ball screw lead (mm)	Body length (mm)				No. of mounting holes	Inertia $\times 10^6$ (kg · m ²)	Mass (kg)
				L ₁	L ₂	L ₃	G			
TCH09025H05B00 (01)	250	260	5	520	440	300	70	4	18.96	9.5
TCH09025H10B00 (01)	250	260	10	520	440	300	70	4	20.86	9.5
TCH09035H05B00 (01)	350	360	5	620	540	400	70	5	22.84	10.9
TCH09035H10B00 (01)	350	360	10	620	540	400	70	5	24.74	10.9
TCH09045H05B00 (01)	450	460	5	720	640	500	70	6	26.71	12.4
TCH09045H10B00 (01)	450	460	10	720	640	500	70	6	28.61	12.4
TCH09055H10B00 (01)	550	560	10	820	740	600	70	7	32.52	13.7
TCH09055H20B00 (01)	550	560	20	820	740	600	70	7	40.13	13.7
TCH09075H10B00 (01)	750	760	10	1 020	940	800	70	9	40.24	16.5
TCH09075H20B00 (01)	750	760	20	1 020	940	800	70	9	47.85	16.5

C-2-5. 3 TCH 10 Series

◆ TCH10 Standard Slider Specifications (with pin holes)

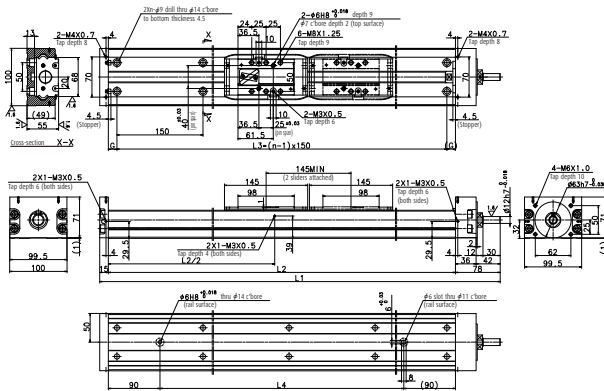


Toughcarrier dynamic torque specifications

Unit: N · cm

Model no.	Slider specifications	Ball screw lead (mm)	Accuracy grade	
			High grade	Precision grade
TCH10	Single standard slider	10	3.5 ~ 12.3	3.7 ~ 21.2
TCH10	Single standard slider	20	4.1 ~ 16.6	4.3 ~ 25.5
TCH10	Double standard sliders	10	4.1 ~ 16.6	4.3 ~ 25.5
TCH10	Double standard sliders	20	5.4 ~ 25.2	5.6 ~ 34.1

◆ TCH10 Short Slider Specifications (with pin holes)

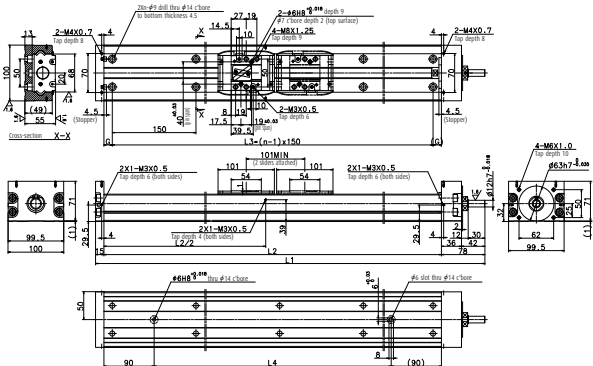

Toughcarrier dynamic torque specifications

Unit: N · cm

Model no.	Slider specifications	Ball screw lead (mm)	Accuracy grade	
			High grade	Precision grade
TCH10	Single short slider	10	3.6 ~ 11.7	3.8 ~ 20.5
TCH10	Single short slider	20	4.4 ~ 15.4	4.6 ~ 24.2
TCH10	Double short sliders	10	4.4 ~ 15.4	4.6 ~ 24.2
TCH10	Double short sliders	20	6.0 ~ 22.7	6.2 ~ 31.5

TCH10 Standard Slider Specifications (Single)

Reference number	Nominal stroke (mm)	Stroke limit (mm)	Ball screw lead (mm)	Body length (mm)					No. of mounting holes n	Inertia $\times 10^6$ (kg · m ²)	Mass (kg)
				L ₁	L ₂	L ₃	L ₄	G			
* TCH10010H10K00 (01)	100	126	10	373	280	150	100	65	2	42.72	9.6
* TCH10010H20K00 (01)	100	126	20	373	280	150	100	65	2	58.52	9.6
TCH10020H10K00 (01)	200	226	10	473	380	300	200	40	3	54.97	11.5
TCH10020H20K00 (01)	200	226	20	473	380	300	200	40	3	65.62	11.5
TCH10030H10K00 (01)	300	326	10	573	480	450	300	15	4	67.22	13.5
TCH10030H20K00 (01)	300	326	20	573	480	450	300	15	4	77.87	13.5
TCH10040H10K00 (01)	400	426	10	673	580	450	400	65	4	79.47	15.4
TCH10040H20K00 (01)	400	426	20	673	580	450	400	65	4	90.12	15.4
TCH10050H10K00 (01)	500	526	10	773	680	600	500	40	5	91.72	17.4
TCH10050H20K00 (01)	500	526	20	773	680	600	500	40	5	102.37	17.4
TCH10060H10K00 (01)	600	626	10	873	780	750	600	15	6	104.02	19.3
TCH10060H20K00 (01)	600	626	20	873	780	750	600	15	6	114.67	19.3
TCH10070H10K00 (01)	700	726	10	973	880	750	700	65	6	116.22	21.2
TCH10070H20K00 (01)	700	726	20	973	880	750	700	65	6	126.87	21.2
TCH10080H10K00 (01)	800	826	10	1073	980	900	800	40	7	128.52	23.2
TCH10080H20K00 (01)	800	826	20	1073	980	900	800	40	7	139.17	23.2
TCH10090H10K00 (01)	900	926	10	1173	1080	1050	900	15	8	140.70	25.2
TCH10090H20K00 (01)	900	926	20	1173	1080	1050	900	15	8	151.35	25.2
TCH10100H10K00 (01)	1 000	1 026	10	1 273	1 180	1 050	1 000	65	8	152.94	27.1
TCH10100H20K00 (01)	1 000	1 026	20	1 273	1 180	1 050	1 000	65	8	163.59	27.1
TCH10110H10K00 (01)	1 100	1 126	10	1 373	1 280	1 200	1 100	40	9	165.19	29.1
TCH10110H20K00 (01)	1 100	1 126	20	1 373	1 280	1 200	1 100	40	9	175.84	29.1
TCH10120H10K00 (01)	1 200	1 226	10	1 473	1 380	1 350	1 200	15	10	177.43	31.1
TCH10120H20K00 (01)	1 200	1 226	20	1 473	1 380	1 350	1 200	15	10	188.08	31.1

TCH10 Standard Slider Specifications (Double)

Reference number	Nominal stroke (mm)	Stroke limit (mm)	Ball screw lead (mm)	Body length (mm)					No. of mounting holes n	Inertia $\times 10^6$ (kg · m ²)	Mass (kg)
				L ₁	L ₂	L ₃	L ₄	G			
* TCH10027H10D00 (01)	270	281	10	673	580	450	400	65	4	83.02	16.8
* TCH10027H20D00 (01)	270	281	20	673	580	450	400	65	4	104.31	16.8
* TCH10037H10D00 (01)	370	381	10	773	680	600	500	40	5	95.27	18.8
* TCH10037H20D00 (01)	370	381	20	773	680	600	500	40	5	116.56	18.8
TCH10047H10D00 (01)	470	481	10	873	780	750	600	15	6	107.57	20.7
TCH10047H20D00 (01)	470	481	20	873	780	750	600	15	6	128.86	20.7
TCH10057H10D00 (01)	570	581	10	973	880	750	700	65	6	119.77	22.6
TCH10057H20D00 (01)	570	581	20	973	880	750	700	65	6	141.06	22.6
TCH10067H10D00 (01)	670	681	10	1 073	980	900	800	40	7	132.07	24.6
TCH10067H20D00 (01)	670	681	20	1 073	980	900	800	40	7	153.36	24.6
TCH10077H20D00 (01)	770	781	20	1 173	1 080	1 050	900	15	8	165.54	26.6
TCH10087H20D00 (01)	870	881	20	1 273	1 180	1 050	1 000	65	8	177.78	28.5
TCH10097H20D00 (01)	970	981	20	1 373	1 280	1 200	1 100	40	9	190.03	30.5
TCH10107H20D00 (01)	1 070	1 081	20	1 473	1 380	1 350	1 200	15	10	202.27	32.5

TCH10 Short Slider Specifications (Single)

Reference number	Nominal stroke (mm)	Stroke limit (mm)	Ball screw lead (mm)	Body length (mm)					No. of mounting holes n	Inertia $\times 10^6$ (kg · m ²)	Mass (kg)
				L ₁	L ₂	L ₃	L ₄	G			
* TCH10016H10A00 (01)	160	170	10	373	280	150	100	65	2	41.19	8.9
* TCH10016H20A00 (01)	160	170	20	373	280	150	100	65	2	47.36	8.9
TCH10026H10A00 (01)	260	270	10	473	380	300	200	40	3	53.45	10.9
TCH10026H20A00 (01)	260	270	20	473	380	300	200	40	3	59.54	10.9
TCH10036H10A00 (01)	360	370	10	573	480	450	300	15	4	65.70	12.8
TCH10036H20A00 (01)	360	370	20	573	480	450	300	15	4	71.79	12.8
TCH10046H10A00 (01)	460	470	10	673	580	450	400	65	4	77.95	14.8
TCH10046H20A00 (01)	460	470	20	673	580	450	400	65	4	84.04	14.8
TCH10056H10A00 (01)	560	570	10	773	680	600	500	40	5	90.20	16.7
TCH10056H20A00 (01)	560	570	20	773	680	600	500	40	5	99.29	16.7
TCH10066H10A00 (01)	660	670	10	873	780	750	600	15	6	102.50	18.6
TCH10066H20A00 (01)	660	670	20	873	780	750	600	15	6	108.59	18.6
TCH10076H10A00 (01)	760	770	10	973	880	750	700	65	6	114.70	20.6
TCH10076H20A00 (01)	760	770	20	973	880	750	700	65	6	120.79	20.6
TCH10086H10A00 (01)	860	870	10	1 073	980	900	800	40	7	127.00	22.6
TCH10086H20A00 (01)	860	870	20	1 073	980	900	800	40	7	133.09	22.6
TCH10096H10A00 (01)	960	970	10	1 173	1 080	1 050	900	15	8	139.18	24.5
TCH10096H20A00 (01)	960	970	20	1 173	1 080	1 050	900	15	8	145.27	24.5
TCH10106H10A00 (01)	1 060	1 070	10	1 273	1 180	1 050	1 000	65	8	151.42	26.5
TCH10106H20A00 (01)	1 060	1 070	20	1 273	1 180	1 050	1 000	65	8	157.51	26.5
TCH10116H10A00 (01)	1 160	1 170	10	1 373	1 280	1 200	1 100	40	9	163.67	28.4
TCH10116H20A00 (01)	1 160	1 170	20	1 373	1 280	1 200	1 100	40	9	169.76	28.4
TCH10126H10A00 (01)	1 260	1 270	10	1 473	1 380	1 350	1 200	15	10	175.91	30.4
TCH10126H20A00 (01)	1 260	1 270	20	1 473	1 380	1 350	1 200	15	10	182.00	30.4


TCH10 Short Slider Specifications (Double)

Reference number	Nominal stroke (mm)	Stroke limit (mm)	Ball screw lead (mm)	Body length (mm)					No. of mounting holes n	Inertia $\times 10^6$ (kg · m ²)	Mass (kg)
				L ₁	L ₂	L ₃	L ₄	G			
TCH10036H10B00 (01)	360	369	10	673	580	450	400	65	4	79.97	15.6
TCH10036H20B00 (01)	360	369	20	673	580	450	400	65	4	92.14	15.6
TCH10046H10B00 (01)	460	469	10	773	680	600	500	40	5	92.22	17.5
TCH10046H20B00 (01)	460	469	20	773	680	600	500	40	5	104.39	17.5
TCH10056H10B00 (01)	560	569	10	873	780	750	600	15	6	104.52	19.4
TCH10056H20B00 (01)	560	569	20	873	780	750	600	15	6	116.69	19.4
TCH10066H10B00 (01)	660	669	10	973	880	750	700	65	6	116.72	21.4
TCH10066H20B00 (01)	660	669	20	973	880	750	700	65	6	128.89	21.4
TCH10076H10B00 (01)	760	769	10	1 073	980	900	800	40	7	129.02	23.4
TCH10076H20B00 (01)	760	769	20	1 073	980	900	800	40	7	141.19	23.4
TCH10086H20B00 (01)	860	869	20	1 173	1 080	1 050	900	15	8	153.37	25.3
TCH10096H20B00 (01)	960	969	20	1 273	1 180	1 050	1 000	65	8	165.61	27.3
TCH10106H20B00 (01)	1 060	1 069	20	1 373	1 280	1 200	1 100	40	9	177.86	29.2
TCH10116H20B00 (01)	1 160	1 169	20	1 473	1 380	1 350	1 200	15	10	190.10	31.2

C-2-6 Accessories


C-2-6. 1 Sensor Unit

Reference number TC - SRH - 1




- Coding for model no.
- 0: Proximity switch (3 b-contacts)
 - 1: Proximity switch (3 a-contacts)
 - 2: Proximity switch (1 a-contact, 2 b-contacts)
 - 3: Photo sensor (3 sensors)

◆ Proximity switch

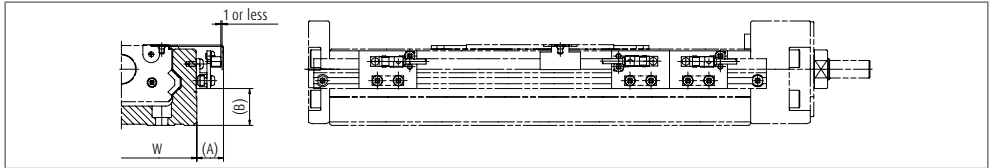

Model no.		Reference number			Dimensions		
					A (mm)	B (mm)	Body width W (mm)
TCH06		TC-SRH06-10	TC-SRH06-11	TC-SRH06-12	17	10	60
TCH09		TC-SRH09-10	TC-SRH09-11	TC-SRH09-12	16	21	86
TCH10		TC-SRH10-10	TC-SRH10-11	TC-SRH10-12	16	25	100
Quantity	Proximity switch (a-contact)	—	3	1	E2S-W13 (OMRON Corp.)		
Quantity	Proximity switch (b-contact)	3	—	2	E2S-W13 (OMRON Corp.)		



◆ Photo sensor

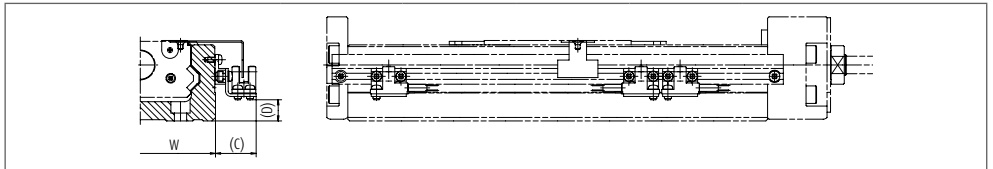

Model no.	Reference number	Dimensions			Note
		C (mm)	D (mm)	Body width W (mm)	
TCH06	TC-SRH06-13	24	2	60	EE-SX674 (OMRON Corp.) 3 sets (EE-1001 connector included)
TCH09	TC-SRH09-13	24	12	86	
TCH10	TC-SRH10-13	24	16	100	

(1) Sensor Rail

Reference number TC - SRL -

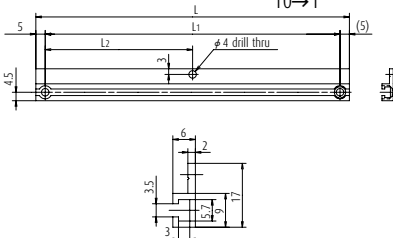

Model no.	Body rail length	Dimensions		
		L	L ₁	L ₂
TCH06	150	168	158	79
TCH06	200	218	208	104
TCH06	300	318	308	154
TCH06	400	418	408	204
TCH06	500	518	508	254
TCH06	600	618	608	304
TCH09	240	258	248	124
TCH09	340	358	348	174
TCH09	440	458	448	224
TCH09	540	558	548	274
TCH09	640	658	648	324
TCH09	740	758	748	374
TCH09	840	858	848	424
TCH09	958	958	948	474
TCH10	280	298	288	144
TCH10	380	398	388	194
TCH10	480	498	488	244
TCH10	580	598	588	294
TCH10	680	698	688	344
TCH10	780	798	788	394
TCH10	880	898	888	444
TCH10	980	998	988	494
TCH10	1 080	1 098	1 088	544
TCH10	1 180	1 198	1 188	594
TCH10	1 280	1 298	1 288	644
TCH10	1 380	1 398	1 388	694


Accessories

C-2-6. 2 Cover Unit

◆ Cover Unit


TC-HV06XXXXK00

TC-HV06XXXXD00

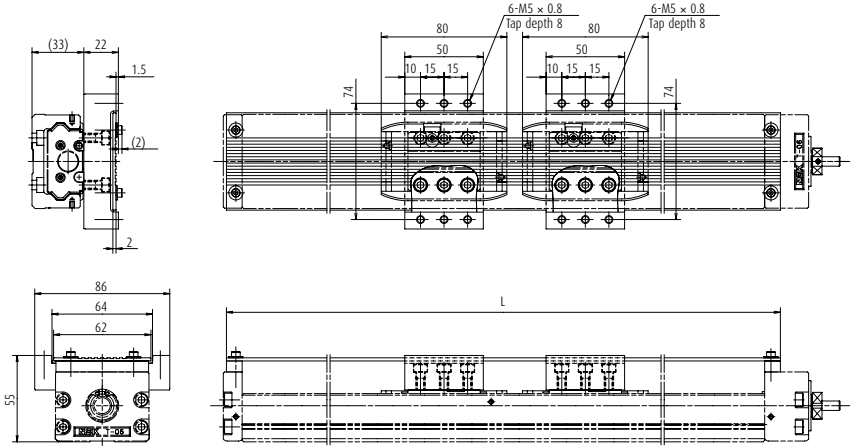

TC-HV06XXXA00


TC-HV06XXXB00

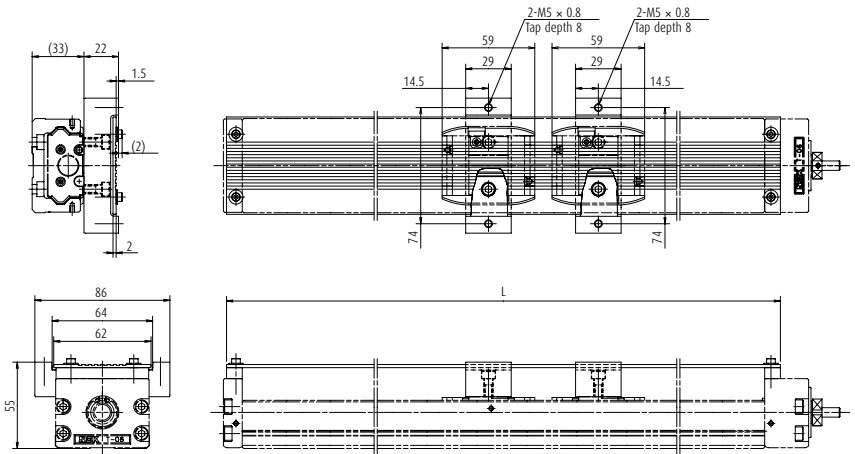


TCH06

Body rail length	Dimensions L	Slider specifications			
		Standard		Short	
		Single	Double	Single	Double
150	170	TC-HV06005K00	—	TC-HV06007A00	—
200	220	TC-HV06010K00	—	TC-HV06012A00	—
300	320	TC-HV06020K00	TC-HV06013D00	TC-HV06022A00	TC-HV06017B00
400	420	TC-HV06030K00	TC-HV06023D00	TC-HV06032A00	TC-HV06027B00
500	520	TC-HV06040K00	TC-HV06033D00	TC-HV06042A00	TC-HV06037B00
600	620	TC-HV06050K00	TC-HV06043D00	TC-HV06052A00	TC-HV06047B00

TC-HV09XXXK00
TC-HV09XXXD00

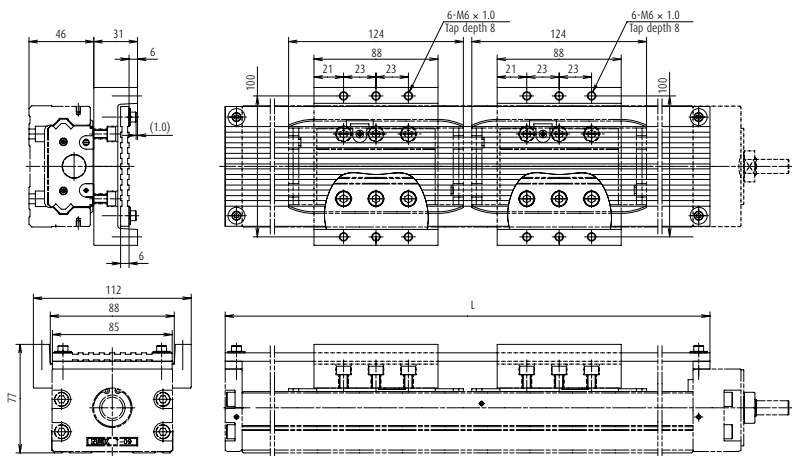

TC-HV09XXXA00
TC-HV09XXXB00

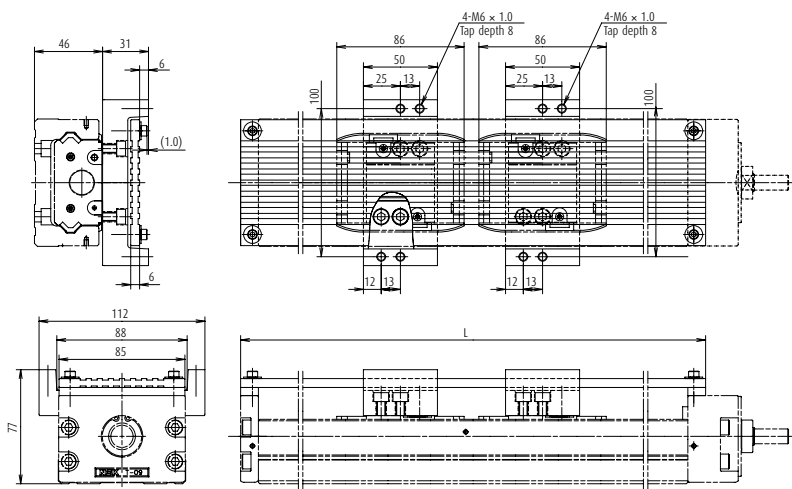


TCH09

Body rail length	Dimensions L	Slider specifications			
		Standard		Short	
		Single	Double	Single	Double
240	264	TC-HV09010K00	—	TC-HV09014A00	—
340	364	TC-HV09020K00	—	TC-HV09024A00	—
440	464	TC-HV09030K00	TC-HV09017D00	TC-HV09034A00	TC-HV09025B00
540	564	TC-HV09040K00	TC-HV09027D00	TC-HV09044A00	TC-HV09035B00
640	664	TC-HV09050K00	TC-HV09037D00	TC-HV09054A00	TC-HV09045B00
740	764	TC-HV09060K00	TC-HV09047D00	TC-HV09064A00	TC-HV09055B00
840	864	TC-HV09070K00	—	TC-HV09074A00	—
940	964	TC-HV09080K00	TC-HV09067D00	TC-HV09084A00	TC-HV09075B00

Accessories


TC-HV10XXXK00

TC-HV10XXXD00

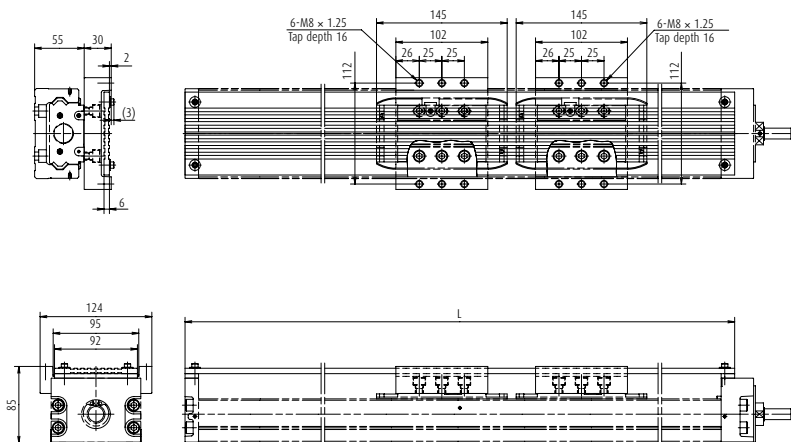

TC-HV10XXXA00

TC-HV10XXXB00

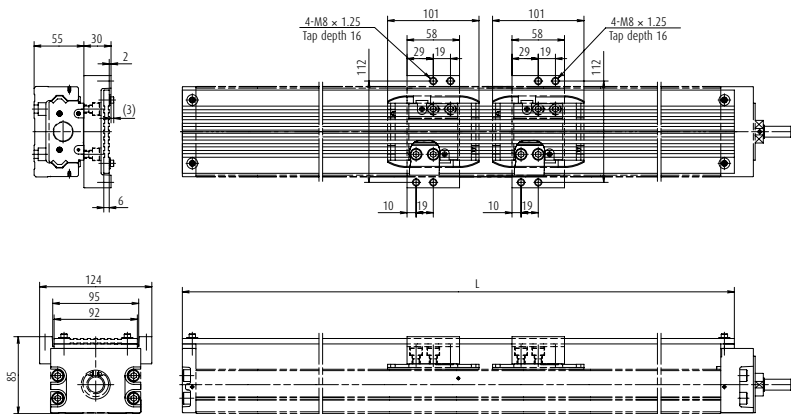

TCH10


Body rail length	Dimensions L	Slider specifications			
		Standard		Short	
		Single	Double	Single	Double
280	310	TC-HV10010K00	—	TC-HV10016A00	—
380	410	TC-HV10020K00	—	TC-HV10026A00	—
480	510	TC-HV10030K00	—	TC-HV10036A00	—
580	610	TC-HV10040K00	TC-HV10027D00	TC-HV10046A00	TC-HV10036B00
680	710	TC-HV10050K00	TC-HV10037D00	TC-HV10056A00	TC-HV10046B00
780	810	TC-HV10060K00	TC-HV10047D00	TC-HV10066A00	TC-HV10056B00
880	910	TC-HV10070K00	TC-HV10057D00	TC-HV10076A00	TC-HV10066B00
980	1 010	TC-HV10080K00	TC-HV10067D00	TC-HV10086A00	TC-HV10076B00
1 080	1 110	TC-HV10090K00	TC-HV10077D00	TC-HV10096A00	TC-HV10086B00
1 180	1 210	TC-HV10100K00	TC-HV10087D00	TC-HV10106A00	TC-HV10096B00
1 280	1 310	TC-HV10110K00	TC-HV10097D00	TC-HV10116A00	TC-HV10106B00
1 380	1 410	TC-HV10120K00	TC-HV10107D00	TC-HV10126A00	TC-HV10116B00

C-2-6. 3 Motor Bracket

◆ Motor bracket


> Reference number

TC-BKH06-145-00

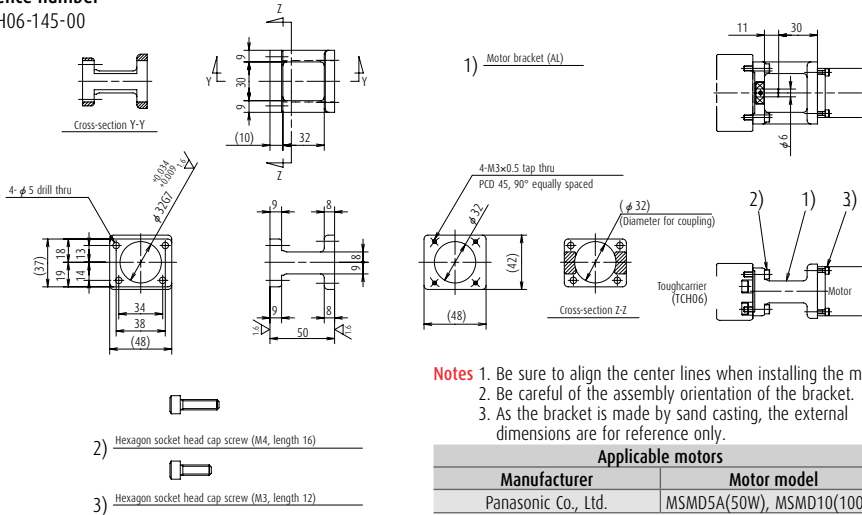


> Reference number

TC-BKH06-146-00

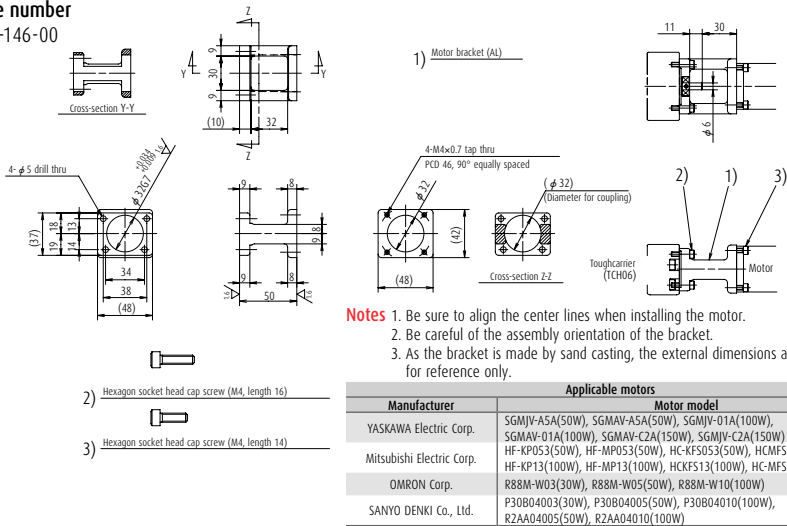

> Reference number




TC-BKH06-148-00

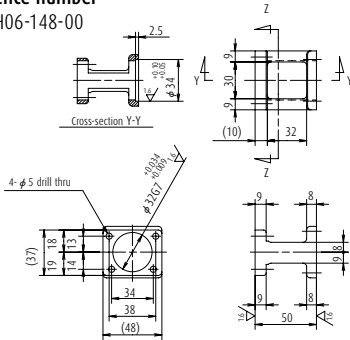

2) Hexagon socket head cap screw (M4, length 16)

3) Hexagon socket head cap screw (M3, length 12)

1) Motor bracket (AL)




- Notes**
1. Be sure to align the center lines when installing the motor.
 2. Be careful of the assembly orientation of the bracket.
 3. As the bracket is made by sand casting, the external dimensions are for reference only.

Applicable motors

Manufacturer	Motor model
Panasonic Co., Ltd.	MAMA01(100W)
SANYO DENKI Co., Ltd.	P50B04006(60W), P50B04010(100W)

> Reference number




TC-BKH06-160-00

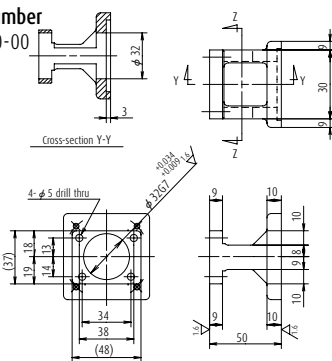

2) Hexagon socket head cap screw (M4, length 16)

3) Hexagon socket head cap screw (M4, length 14)

1) Motor bracket (AL)









- Notes**
1. Be sure to align the center lines when installing the motor.
 2. Be careful of the assembly orientation of the bracket.
 3. As the bracket is made by sand casting, the external dimensions are for reference only.



Applicable motors


Manufacturer	Motor model
SANYO DENKI Co., Ltd.	P50B05005(50W), P50B05010(100W), P50B05020(200W)

> Reference number
TC-BKH06-250-00



1) Motor bracket (AL)

- 2)  Hexagon socket head cap screw (M4, length 16)
- 3)  Hexagon socket head cap screw (M4, length 14)




- Notes**
1. Be sure to align the center lines when installing the motor.
 2. Be careful of the assembly orientation of the bracket.
 3. As the bracket is made by sand casting, the external dimensions are for reference only.

Applicable motors	
Manufacturer	Motor model
SANYO DENKI Co., Ltd.	PBM603XXX, PBM604XXX, 103F78XX
ORIENTAL MOTOR Co., Ltd.	AS66, ASC66, UPK56X, PK56X, CSK56X, CFK56X, UFK56X

> Reference number

TC-BKH09-145-00

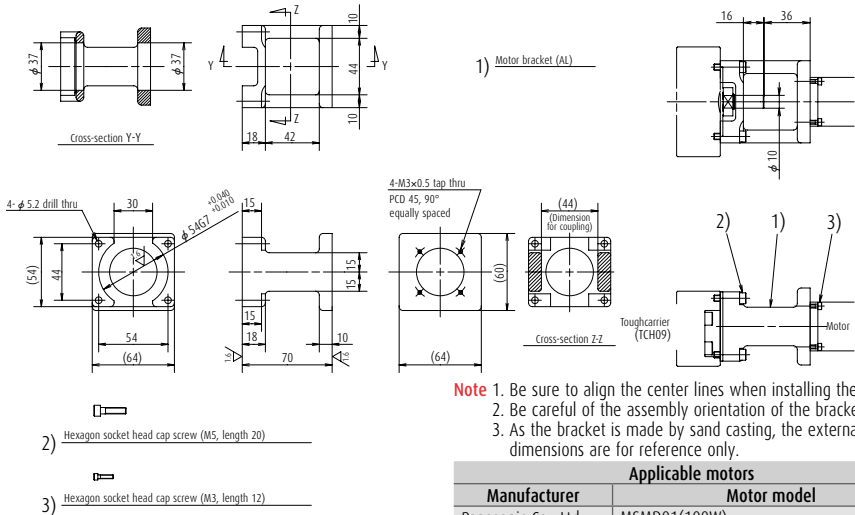


Applicable motors

Manufacturer	Motor model
Panasonic Co., Ltd.	MSMD01(100W)

> Reference number

TC-BKH09-146-00

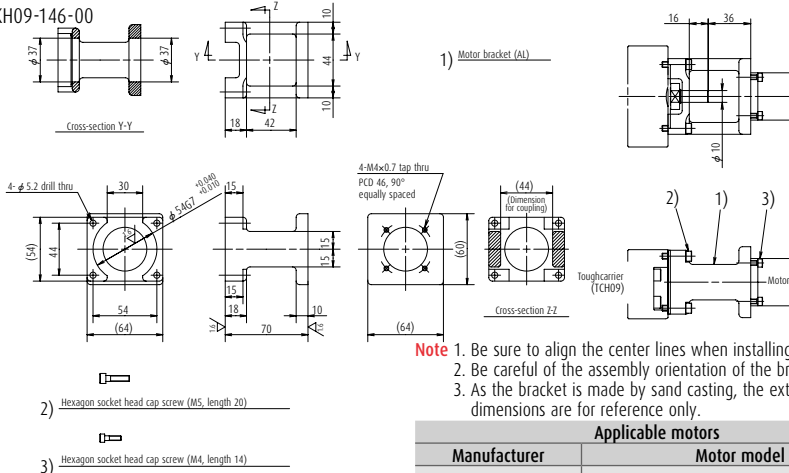


Applicable motors

Manufacturer	Motor model
YASKAWA Electric Corp.	SGMJV-01A(100W), SGM4V-01A(100W), SGM4V-C2A(150W), SGMJV-C2A(150W)
Mitsubishi Electric Corp.	HF-KP13(100W), HF-MP13(100W), HC-KFS13(100W), HC-MFS13(100W)
OMRON Corp.	P30B04005(50W), P30B04010(100W), R2AA04010(100W)

> Reference number

TC-BKH09-160-00

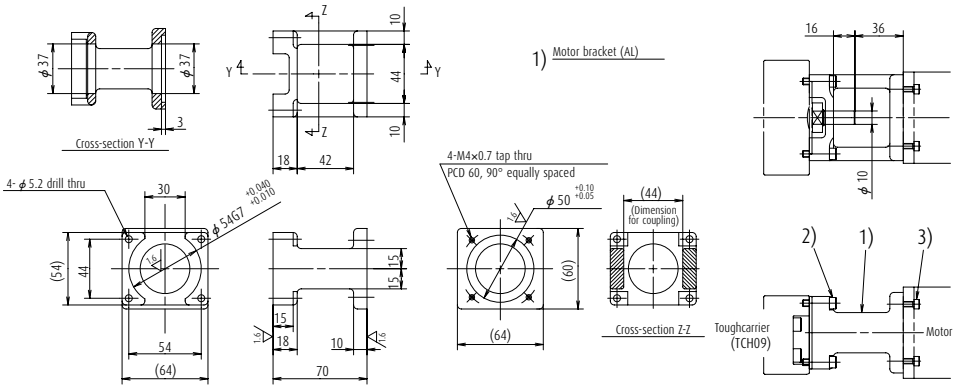


- 1) Motor bracket (AL)
- 2) Hexagon socket head cap screw (M5, length 20)
- 3) Hexagon socket head cap screw (M4, length 14)

- Notes**
1. Be sure to align the center lines when installing the motor.
 2. Be careful of the assembly orientation of the bracket.
 3. As the bracket is made by sand casting, the external dimensions are for reference only.

Applicable motors	
Manufacturer	Motor model
SANYO DENKI Co., Ltd.	P50B05005(50W), P50B05010(100W), P50B05020(200W)

> Reference number

TC-BKH09-170-00

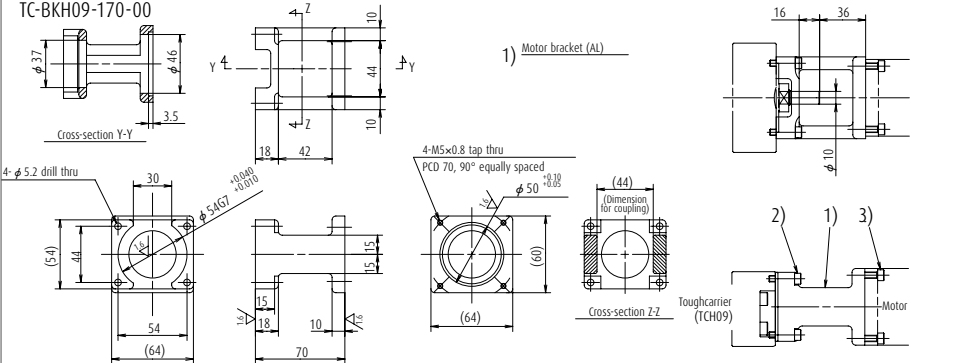


- 1) Motor bracket (AL)
- 2) Hexagon socket head cap screw (M5, length 20)
- 3) Hexagon socket head cap screw (M5, length 14)

- Notes**
1. Be sure to align the center lines when installing the motor.
 2. Be careful of the assembly orientation of the bracket.
 3. As the bracket is made by sand casting, the external dimensions are for reference only.

Applicable motors	
Manufacturer	Motor model
YASKAWA Electric Corp.	SGMJV-02A(200W), SGMJV-04A(400W), SGMJV-04A(400W)
Mitsubishi Electric Corp.	HF-KP23(200W), HF-MP23(200W), HF-KP43(400W), HF-MP43(400W), HC-KFS23(200W), HC-MFS23(200W), HC-KFS43(400W), HC-MFS43(400W)
OMRON Corp.	R88M-W20(200W), R88M-W40(400W)
SANYO DENKI Co., Ltd.	P50B06020(200W), P30B06040(400W), R2AA06010(100W), R2AA06020(200W), R2A06040(400W)

> Reference number
TC-BKH09-170-01

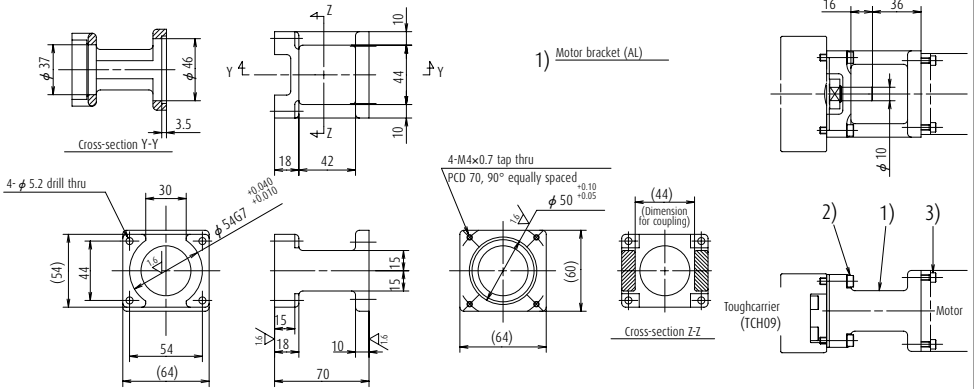


- 2) Hexagon socket head cap screw (M5, length 20)
- 3) Hexagon socket head cap screw (M4, length 14)

Notes

1. Be sure to align the center lines when installing the motor.
2. Be careful of the assembly orientation of the bracket.
3. As the bracket is made by sand casting, the external dimensions are for reference only.

Applicable motors	
Manufacturer	Motor model
Panasonic Co., Ltd.	MSMD02(200W), MAMA02(200W), MSMD04(400W), MAMA04(400W)

> Reference number
TC-BKH09-190-00

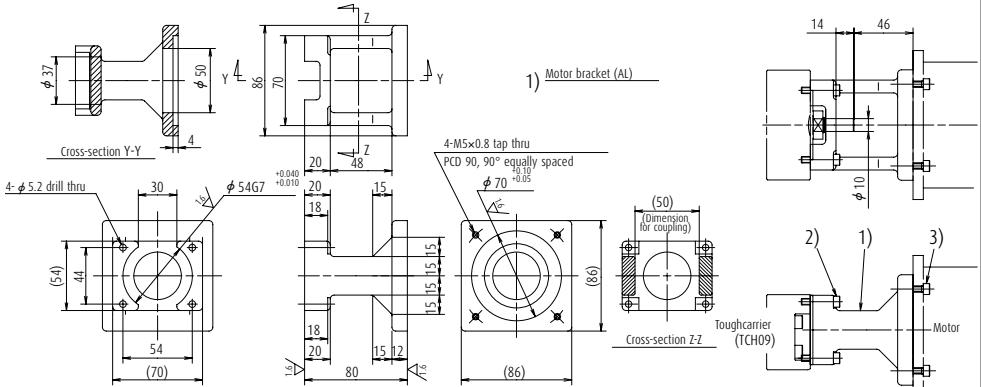

- 2) Hexagon socket head cap screw (M5, length 25)
- 3) Hexagon socket head cap screw (M5, length 16)


Notes



1. Be sure to align the center lines when installing the motor.
2. Be careful of the assembly orientation of the bracket.
3. As the bracket is made by sand casting, the external dimensions are for reference only.

Applicable motors	
Manufacturer	Motor model
SANYO DENKI Co., Ltd.	P50B07020(200W), P50B07030(300W), P50B07040(400W)

> Reference number

TC-BKH09-250-00

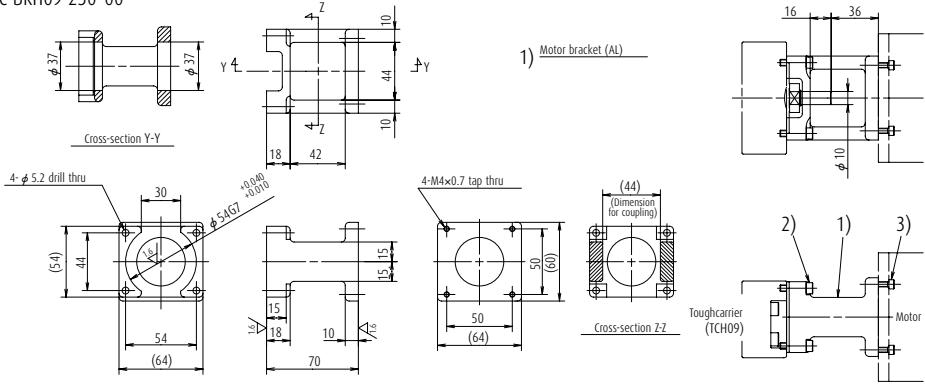

- 2)  Hexagon socket head cap screw (M5, length 20)
- 3)  Hexagon socket head cap screw (M4, length 14)


- Notes**
1. Be sure to align the center lines when installing the motor.
 2. Be careful of the assembly orientation of the bracket.
 3. As the bracket is made by sand casting, the external dimensions are for reference only.



Applicable motors

Manufacturer	Motor model
SANYO DENKI Co., Ltd.	PBM603XXX, PBM604XXX, 103F78XX
ORIENTAL MOTOR Co., Ltd.	AS66, ASC66, UPK56XX, PK56XX, CSK56X, CFK56X, UFK56X

> Reference number

TC-BKH09-270-00

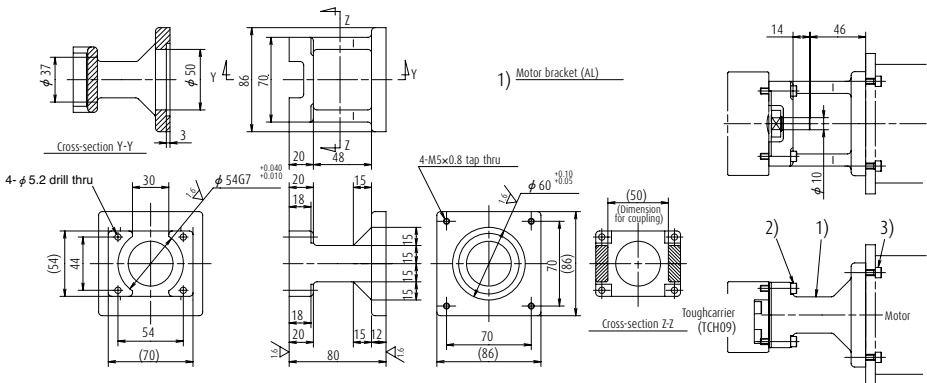

- 2)  Hexagon socket head cap screw (M5, length 25)
- 3)  Hexagon socket head cap screw (M5, length 16)


- Notes**
1. Be sure to align the center lines when installing the motor.
 2. Be careful of the assembly orientation of the bracket.
 3. As the bracket is made by sand casting, the external dimensions are for reference only.

Applicable motors

Manufacturer	Motor model
SANYO DENKI Co., Ltd.	103F85XX
ORIENTAL MOTOR Co., Ltd.	AS98, UPK59X, PK59X, CSK56X, CFK59X, UFK59X

> Reference number

TC-BKH10-170-00

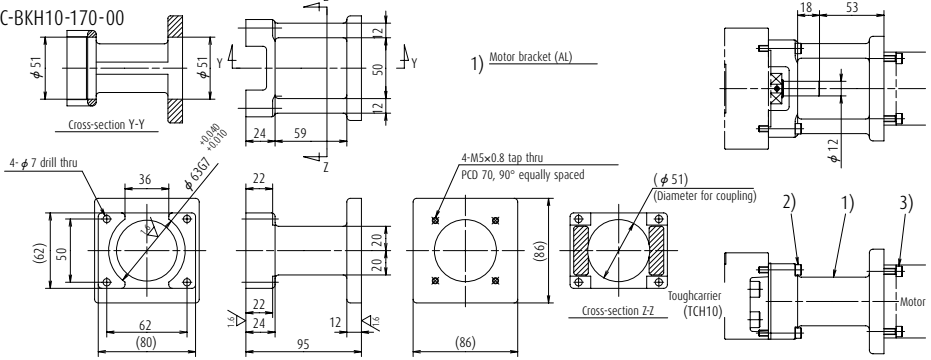

- 2) Hexagon socket head cap screw (M6, length 30)
- 3) Hexagon socket head cap screw (M5, length 20)


- Notes**
1. Be sure to align the center lines when installing the motor.
 2. Be careful of the assembly orientation of the bracket.
 3. As the bracket is made by sand casting, the external dimensions are for reference only.

Applicable motors

Manufacturer	Motor model
YASKAWA Electric Corp.	SGMJV-02A(200W), SGM4V-02A(200W), SGMJV-04A(400W), SGM4V-04A(400W)
Mitsubishi Electric Corp.	HF-KP23(200W), HF-MP23(200W), HF-KP43(400W), HF-MP43(400W), HC-KFS23(200W), HC-MFS23(200W), HC-KFS43(400W), HC-MFS43(400W)
OMRON Corp.	R88M-W20(200W), R88M-W40(400W)
SANYO DENKI Co., Ltd.	P30B06020(200W), P30B06040(400W), R2AA06020(200W), R2A06040(400W)

> Reference number

TC-BKH10-170-01

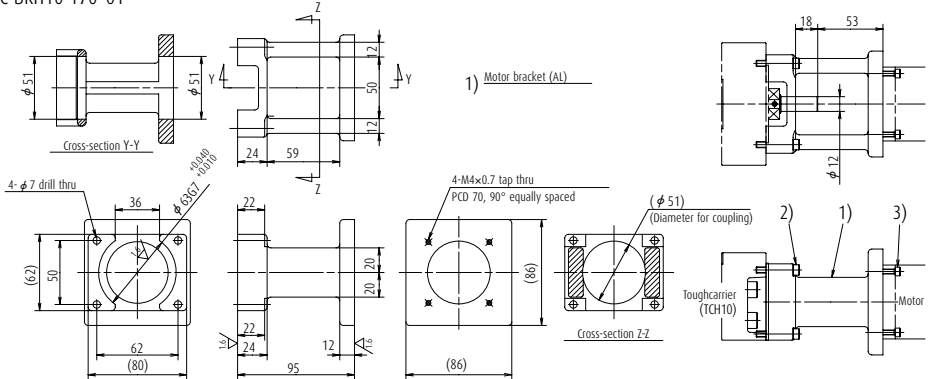

- 2) Hexagon socket head cap screw (M6, length 30)
- 3) Hexagon socket head cap screw (M4, length 16)


- Notes**
1. Be sure to align the center lines when installing the motor.
 2. Be careful of the assembly orientation of the bracket.
 3. As the bracket is made by sand casting, the external dimensions are for reference only.

Applicable motors

Manufacturer	Motor model
Panasonic Co., Ltd.	MSMD02(200W), MAMA02(200W), MSMD04(400W), MAMA04(400W)

> Reference number

TC-BKH10-190-00

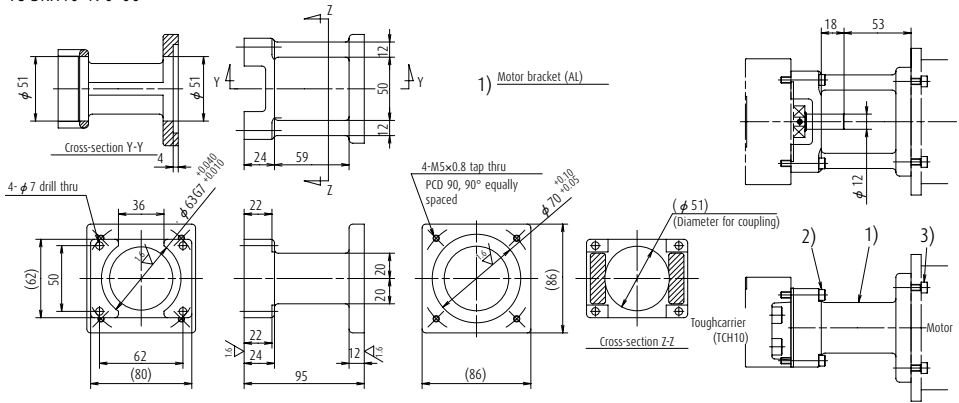

- Notes**
1. Be sure to align the center lines when installing the motor.
 2. Be careful of the assembly orientation of the bracket.
 3. As the bracket is made by sand casting, the external dimensions are for reference only.


Applicable motors

Manufacturer	Motor model
Panasonic Co., Ltd.	MSMD08(750W), MAMA08(750W)
SANYO DENKI Co., Ltd.	P50B07020(200W), P50B07030(300W), P50B07040(400W)

- 2) Hexagon socket head cap screw (M6, length 30)
- 3) Hexagon socket head cap screw (M5, length 16)

> Reference number

TC-BKH10-270-00

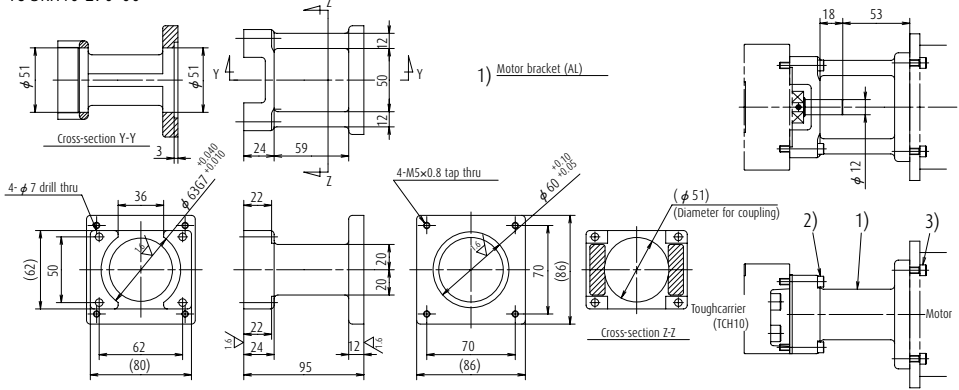

- Notes**
1. Be sure to align the center lines when installing the motor.
 2. Be careful of the assembly orientation of the bracket.
 3. As the bracket is made by sand casting, the external dimensions are for reference only.

Applicable motors

Manufacturer	Motor model
SANYO DENKI Co., Ltd.	103FB5XX
ORIENTAL MOTOR Co., Ltd.	AS98, UPK59X, PK59X, CSK59X, CFK59X, UFK59X

- 2) Hexagon socket head cap screw (M6, length 30)
- 3) Hexagon socket head cap screw (M5, length 16)

C-2-7 Motor Bracket Compatibility Table

Model No.	Reference number	Motor manufacturer	Stepping motor model No.	Wattage of AC servo motor									
				30W	50W	60W	100W	150W	200W	300W	400W	750W	
TCH06	TC-BKH06-146-00	Panasonic Co., Ltd.			MSMD5A		MSMD10						
		YASKAWA Electric Corp.			SGMJV-ASA SGMAV-ASA		SGMJV-01A SGMAV-01A	SGMJV-C2A SGMAV-C2A					
		Mitsubishi Electric Corp.			HF-KP053 HF-MP053 HC-KFS053 HC-MFS053		HF-KP13 HF-MP13 HC-KFS13 HC-MFS13						
		OMRON Corp.	R88M-W03	R88M-W05	R88M-W10								
	SANYO DENKI Co., Ltd.	P30B04003	P30B04005 R2AA04005		P30B04010 R2AA04010								
	Panasonic Co., Ltd.					MAMA01							
	SANYO DENKI Co., Ltd.				P50B04006	P50B04010							
	SANYO DENKI Co., Ltd.		P50B05005		P50B05010		P50B05020						
	SANYO DENKI Co., Ltd.	PBM603XXX PBM604XXX 103F78XX											
	ORIENTAL MOTOR Co., Ltd.	AS66 ASC66 UPKS6X PKS6X CSKS6X CFKS6X UFKS6X											
TCH09	TC-BKH09-145-00	Panasonic Co., Ltd.					MSMD01						
		YASKAWA Electric Corp.				SGMJV-01A SGMAV-01A	SGMJV-C2A SGMAV-C2A						
		Mitsubishi Electric Corp.				HF-KP13 HF-MP13 HC-KFS13 HC-MFS13							
		SANYO DENKI Co., Ltd.		P30B04005		P30B04010 R2AA04010							
	SANYO DENKI Co., Ltd.		P50B05005		P50B05010								
	YASKAWA Electric Corp.					SGMJV-02A SGMAV-02A		SGMJV-04A SGMAV-04A					
	Mitsubishi Electric Corp.					HF-KP23 HF-MP23 HC-KFS23 HC-MFS23		HF-KP43 HF-MP43 HC-KFS43 HC-MFS43					
	OMRON Corp.					R88M-W20		R88M-W40					
	SANYO DENKI Co., Ltd.				R2AA06010	P30B06020 R2AA06020		P30B06040 R2AA06040					
	Panasonic Co., Ltd.					MSMD02 MAMA02		MSMD04 MAMA04					
SANYO DENKI Co., Ltd.					P50B07020		P50B07030		P50B07040				
SANYO DENKI Co., Ltd.	PBM603XXX PBM604XXX 103F78XX												
ORIENTAL MOTOR Co., Ltd.	AS66 ASC66 UPKS6X PKS6X CSKS6X CFKS6X UFKS6X												
ORIENTAL MOTOR Co., Ltd.	AS98 UPKS9X PKS9X CSKS9X CFKS9X UFKS9X												
SANYO DENKI Co., Ltd.	103F85XX												
TCH10	TC-BKH10-170-00	YASKAWA Electric Corp.					SGMJV-02A SGMAV-02A		SGMJV-04A SGMAV-04A				
		Mitsubishi Electric Corp.				HF-KP23 HF-MP23 HC-KFS23 HC-MFS23		HF-KP43 HF-MP43 HC-KFS43 HC-MFS43					
		OMRON Corp.				R88M-W20		R88M-W40					
		SANYO DENKI Co., Ltd.				P30B06020 R2AA06020		P30B06040 R2AA06040					
	Panasonic Co., Ltd.					MSMD02 MAMA02		MSMD04 MAMA04					
	SANYO DENKI Co., Ltd.					P50B07020		P50B07030		P50B07040			
	SANYO DENKI Co., Ltd.										MSMD08 MSMD08		
	SANYO DENKI Co., Ltd.	103FB5XX											
	ORIENTAL MOTOR Co., Ltd.	AS98 UPKS9X PKS9X CSKS9X CFKS9X UFKS9X											

C-2-8 Sensor Rail and Top Cover Unit Combination Table

Model No.	Reference number	Rail length (L ₂)	Sensor rail reference number	Cover unit reference number
TCH06	TCH06005H05K00	150	TC-SRL6-0150	TC-HV06005K00
	TCH06005H10K00			
	TCH06005H20K00			
	TCH06007H05A00			
	TCH06007H10A00			
	TCH06010H05K00	200	TC-SRL6-0200	TC-HV06010K00
	TCH06010H10K00			
	TCH06010H20K00			
	TCH06012H05A00			
	TCH06012H10A00			
	TCH06020H05K00	300	TC-SRL6-0300	TC-HV06020K00
	TCH06020H10K00			
	TCH06020H20K00			
	TCH06013H05D00			
	TCH06013H10D00			
	TCH06022H05A00			
	TCH06022H10A00			
	TCH06017H05B00			
	TCH06017H10B00			
	TCH06030H05K00			
	TCH06030H10K00			
	TCH06030H20K00			
	TCH06023H05D00			
	TCH06023H10D00			
	TCH06032H05A00			
	TCH06032H10A00			
	TCH06027H05B00			
	TCH06027H10B00			
	TCH06040H05K00	500	TC-SRL6-0500	TC-HV06040K00
	TCH06040H10K00			
	TCH06040H20K00			
	TCH06033H05D00			
	TCH06033H10D00			
	TCH06042H05A00			
	TCH06042H10A00			
	TCH06037H05B00			
	TCH06037H10B00			
	TCH06050H05K00			
	TCH06050H10K00			
	TCH06050H20K00			
	TCH06043H10D00			
	TCH06043H20D00			
TCH06052H05A00				
TCH06052H10A00				
TCH06047H10B00				

- > Sensor rail reference numbers are determined according to the rail length. Select a sensor rail appropriate for your requirements.
- > Shapes and numbers of spacer plates for cover unit are selected according to slider specifications.

Accessories

Model No.	Reference number	Rail length (L ₂)	Sensor rail reference number	Cover unit reference number			
TCH09	TCH0910H05K00	240	TC-SRL9-0240	TC-HV09010K00			
	TCH0910H10K00						
	TCH0910H20K00						
	TCH0914H05A00						
	TCH0914H10A00						
	TCH0914H20A00						
	TCH0920H05K00	340	TC-SRL9-0340	TC-HV09020K00			
	TCH0920H10K00						
	TCH0920H20K00						
	TCH0924H05A00						
	TCH0924H10A00						
	TCH0924H20A00						
	TCH0930H05K00	440	TC-SRL9-0440	TC-HV09030K00			
	TCH0930H10K00						
	TCH0930H20K00						
	TCH0917H05D00						
	TCH0917H10D00						
	TCH0934H05A00						
	TCH0934H10A00						
	TCH0934H20A00						
	TCH0925H05B00						
	TCH0925H10B00						
	TCH0940H05K00				540	TC-SRL9-0540	TC-HV09040K00
	TCH0940H10K00						
	TCH0940H20K00						
	TCH0927H05D00						
	TCH0927H10D00						
	TCH0944H05A00						
	TCH0944H10A00						
	TCH0944H20A00						
	TCH0935H05B00						
	TCH0935H10B00						
	TCH0950H05K00	640	TC-SRL9-0640	TC-HV09050K00			
	TCH0950H10K00						
	TCH0950H20K00						
	TCH0937H05D00						
	TCH0937H10D00						
	TCH0954H05A00						
	TCH0954H10A00						
	TCH0954H20A00						
	TCH0945H05B00						
	TCH0945H10B00						
	TCH0960H05K00				740	TC-SRL9-0740	TC-HV09060K00
	TCH0960H10K00						
	TCH0960H20K00						
	TCH0947H10D00						
	TCH0947H20D00						
	TCH0964H05A00						
TCH0964H10A00							
TCH0964H20A00							
TCH0955H10B00							
TCH0955H20B00							
TCH0970H05K00	840	TC-SRL9-0840	TC-HV09070K00				
TCH0970H10K00							
TCH0970H20K00							
TCH0974H05A00							
TCH0974H10A00							
TCH0974H20A00							
TCH0980H05K00	940	TC-SRL9-0940	TC-HV09080K00				
TCH0980H10K00							
TCH0980H20K00							
TCH0967H10D00							
TCH0967H20D00							
TCH0984H05A00							
TCH0984H10A00							
TCH0984H20A00							
TCH0975H10B00							
TCH0975H20B00							
TCH0975B00							

- Sensor rail reference numbers are determined according to the rail length. Select a sensor rail appropriate for your requirements.
- Shapes and numbers of spacer plates for cover unit are selected according to slider specifications.

Model No.	Reference number	Rail length (L ₂)	Sensor rail reference number	Cover unit reference number
TCH10	TCH10010H10K00	280	TC-SRL1-0280	TC-HV10010K00
	TCH10010H20K00			TC-HV10016A00
	TCH10016H10A00			TC-HV10020K00
	TCH10016H20A00	380	TC-SRL1-0380	TC-HV10026A00
	TCH10020H10K00			TC-HV10030K00
	TCH10020H20K00			TC-HV10036A00
	TCH10026H10A00	480	TC-SRL1-0480	TC-HV10040K00
	TCH10026H20A00			TC-HV10046A00
	TCH10030H10K00			TC-HV10050K00
	TCH10030H20K00	580	TC-SRL1-0580	TC-HV10056A00
	TCH10036H10A00			TC-HV10060K00
	TCH10036H20A00			TC-HV10066A00
	TCH10040H10K00	680	TC-SRL1-0680	TC-HV10070K00
	TCH10040H20K00			TC-HV10076A00
	TCH10027H10D00			TC-HV10080K00
	TCH10027H20D00	780	TC-SRL1-0780	TC-HV10086A00
	TCH10046H10A00			TC-HV10090K00
	TCH10046H20A00			TC-HV10096A00
	TCH10036H10B00	880	TC-SRL1-0880	TC-HV10100K00
	TCH10036H20B00			TC-HV10106A00
	TCH10060H10K00			TC-HV10110K00
	TCH10060H20K00	980	TC-SRL1-0980	TC-HV10116A00
	TCH10047H10D00			TC-HV10120K00
	TCH10047H20D00			TC-HV10126A00
	TCH10066H10A00	1 080	TC-SRL1-1080	TC-HV10130K00
	TCH10066H20A00			TC-HV10136A00
	TCH10056H10B00			TC-HV10140K00
	TCH10056H20B00	1 180	TC-SRL1-1180	TC-HV10146A00
	TCH10070H10K00			TC-HV10150K00
	TCH10070H20K00			TC-HV10156A00
	TCH10057H20D00	1 280	TC-SRL1-1280	TC-HV10160K00
	TCH10076H10A00			TC-HV10166A00
	TCH10076H20A00			TC-HV10170K00
	TCH10066H10B00	1 380	TC-SRL1-1380	TC-HV10176B00
	TCH10066H20B00			TC-HV10180K00
	TCH10080H10K00			TC-HV10186A00
	TCH10080H20K00	1 080	TC-SRL1-1080	TC-HV10190K00
	TCH10067H10D00			TC-HV10196A00
	TCH10067H20D00			TC-HV10200K00
	TCH10086H10A00	1 180	TC-SRL1-1180	TC-HV10206A00
	TCH10086H20A00			TC-HV10210K00
	TCH10076H10B00			TC-HV10216A00
	TCH10076H20B00	1 280	TC-SRL1-1280	TC-HV10220K00
	TCH10090H10K00			TC-HV10226A00
	TCH10090H20K00			TC-HV10230K00
	TCH10077H20D00	1 380	TC-SRL1-1380	TC-HV10236A00
	TCH10096H20A00			TC-HV10240K00
	TCH10086H20B00			TC-HV10246A00
TCH10100H10K00	1 080	TC-SRL1-1080	TC-HV10250K00	
TCH10100H20K00			TC-HV10256A00	
TCH10087H20D00			TC-HV10260K00	
TCH10106H10A00	1 180	TC-SRL1-1180	TC-HV10266A00	
TCH10106H20A00			TC-HV10270K00	
TCH10096H20B00			TC-HV10276A00	
TCH10110H10K00	1 280	TC-SRL1-1280	TC-HV10280K00	
TCH10110H20K00			TC-HV10286A00	
TCH10097H20D00			TC-HV10290K00	
TCH10116H10A00	1 380	TC-SRL1-1380	TC-HV10296A00	
TCH10116H20A00			TC-HV10300K00	
TCH10106H20B00			TC-HV10306A00	
TCH10120H10K00	1 080	TC-SRL1-1080	TC-HV10310K00	
TCH10120H20K00			TC-HV10316A00	
TCH10107H20D00			TC-HV10320K00	
TCH10126H10A00	1 180	TC-SRL1-1180	TC-HV10326A00	
TCH10126H20A00			TC-HV10330K00	
TCH10116H20B00			TC-HV10336A00	
TCH10116H20B00	1 280	TC-SRL1-1280	TC-HV10340K00	
TCH10116H20B00			TC-HV10346A00	
TCH10116H20B00			TC-HV10350K00	
TCH10116H20B00	1 380	TC-SRL1-1380	TC-HV10356A00	
TCH10116H20B00			TC-HV10360K00	
TCH10116H20B00			TC-HV10366A00	

- Sensor rail reference numbers are determined according to the rail length. Select a sensor rail appropriate for your requirements.
- Shapes and numbers of spacer plates for cover unit are selected according to slider specifications.

C-2-9 Toughcarrier High-Thrust Series (Special product)

◆ Specifications

The life of the feeding system is improved by use of higher load capacity ball screw part and support bearings for standard Toughcarrier.

		TCH06	TCH09		TCH10	
Ball screw	Shaft diameter (mm)	12	20		25	
	Lead (mm)	10	10	20	20	25
	Basic dynamic load rating Ca (N)	4 260	13 400	10 100	11 400	11 400
	Basic static load rating Coa (N)	6 260	25 400	18 700	23 600	23 600
Linear guide	Basic dynamic load rating C (N)	20 900	44 900		62 400	
	Basic static load rating Co (N)	45 000	96 900		132 000	
Support bearings	Basic dynamic load rating (N)	5 900	21 000		23 000	
	Load limit (N)	3 500	18 600*		26 600*	

*Permissible axial load is 0.7 times the limiting axial load.

- 1) Only compatible with standard slider.
- 2) Applicable strokes are as follows.
TCH06: Stroke 500 mm
TCH09: Stroke 800 mm
TCH10: Stroke 1 200 mm
- 3) High and precision grades are available for accuracy

◆ Features

- 1) Mounting dimensions are the same as Monocarrier MCH Series and standard Toughcarrier. (Interchangeable)
- 2) Permissible rotational speed is faster than standard Toughcarrier due to different ball recirculation system.

C-3 Technical Materials

C-3 Technical Materials

	Page
1. Sensor Specification.....	C137
1.1 Proximity Switch	C137
1.2 Photo Sensor	C138
2. Characteristics and Evaluation Method.....	C139
2.1 Positioning Accuracy.....	C139
2.2 Repeatability	C139
2.3 Running Parallelism	C139
3. Special Specifications.....	C140
4. Maintenance.....	C141
4.1 Maintenance Method.....	C141
4.2 NSK K1 Lubricant Unit.....	C141
5. NSK Clean Grease LG2 Specification.....	C142

C-3-1 Sensor Specification

C-3-1. 1 Proximity Switch


Use of OMRON E2S-W13 and E2S-W14

Item	E2S-W13 type	E2S-W14 type
Setting surface	Front face	Front face
Sensing distance	1.6 mm ±15%	1.6 mm ±15%
Setting distance	0 to 1.2 mm	0 to 1.2 mm
Differential travel	10% max. of sensing distance	10% max. of sensing distance
Detectable object type	Ferrous metal	Ferrous metal
Standard sensing object	Iron, 12 × 12 × 1 mm	Iron, 12 × 12 × 1 mm
Response frequency	1 kHz min.	1 kHz min.
Power supply voltage (operating voltage range)	12 to 24 VDC; ripple (p-p), 10% max (10 to 30 VDC)	12 to 24 VDC; ripple (p-p), 10% max (10 to 30 VDC)
Current consumption	13 mA max. at 24 VDC with no load	13 mA max. at 24 VDC with no load
Control output (Switching Capacity)	NPN open collector output, 50 mA max. (30 VDC max.)	NPN open collector output, 50 mA max. (30 VDC max.)
Control output (Residual voltage)	1.0 V max. with a load current of 50 mA and a cable length of 1 m	1.0 V max. with a load current of 50 mA and a cable length of 1 m
Indicator	Operation indicator (orange)	Operation indicator (orange)
Operating status (with sensing object approaching)	NO (Normally open contact)	NC (Normally close contact)
Wire lead length	1 000 mm	1 000 mm

Notes 1) Do not make a wrong connection. 2) Please contact NSK for PNP output type.

Movement mode	Output type	Type	Time chart	Output circuit
NO	NPN	E2S-W13 type		
		E2S-W14 type		

E2S-W13 (Normally open contact)
 E2S-W14 (Normally close contact)
 The external appearances are the same.

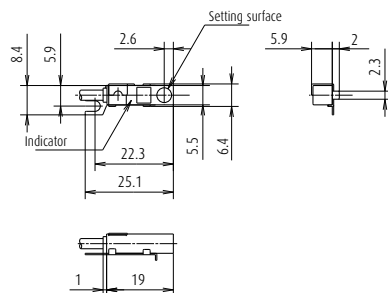

C-3-1. 2 Photo Sensor

Use of OMRON EE-SX674

Item	EE-SX674 type
Slot width	5 mm
Standard reference object	Opaque, 2 × 0.8 mm
Differential distance	0.025 mm
Light source	GaAs infrared LED with peak wavelength of 940 nm
Indicator (without detecting object)	ON GaP red LED (peak emission wavelength, 690 nm)
Supply voltage	5 to 24 VDC ±10%; ripple (p-p), 10% max.
Current consumption	35 mA max.
Control output	NPN open collector output models, 5 to 24 VDC, 100 mA load current
Response frequency	1 kHz max. (3 kHz typ.)
Ambient illumination	Fluorescent light, 1 000 lx max.
Ambient temperature	-25°C to 55°C (-13°F to 131°F) (for operating); -30°C to 80°C (-22°F to 176°F) (for storing)
Ambient humidity	5 to 85% RH (for operating); 5 to 95% RH (for storing)
Connecting method	EE-1001/1006 Connectors, soldering terminals


- Notes** 1) Do not make a wrong connection.
 2) Please contact NSK for PNP output type.

Type	Movement mode	Time chart	Connection terminal	Output circuit
EE-SX674 type	Light-ON		When terminals L and ⊕ are short circuited	
	Dark-ON		When terminals L and ⊕ are open circuited	

EE-SX674 (Sensor)

EE-1001 (Connector)

A connector is mounted to the sensor in the right figure.



C-3-2 Characteristics and Evaluation Method

C-3-2. 1 Positioning Accuracy

Perform successive positioning from the reference position in a specific direction. Measure the difference between the actual and desired travel distances for each point from the reference position. Repeat this measurement seven times to determine the average value. Measure such average value over the entire travel distance at the intervals specified for each model and take the maximum difference of the average values determined at respective positions as the measured value.

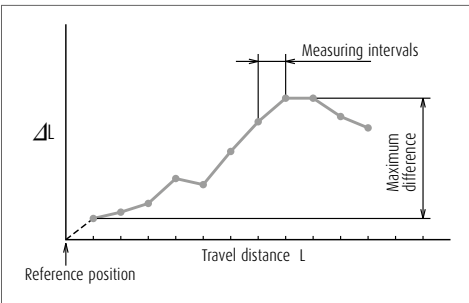


Fig. 1

C-3-2. 3 Running Parallelism (Vertical direction)

We specify the parallelism of slider to the datum bottom surface of rail. An indicator is moved in the axial slider making its stylus slightly touching on the rail bottom surface. The slider is moved in the axial direction for the checking. We define the total indicator reading as the running parallelism. During the checking, the rail is not fixed to the table base. Please be aware that, in general application, the rail is fixed to the machine base, and thus the wobbly rolling error will be added to the running parallelism.

C-3-2. 2 Repeatability

Repeat positioning at any point seven times from the same direction to measure the stopping position and determine one half of the maximum difference of readings. Repeat this measurement over the entire travel distance at the intervals specified for each model. Take the maximum difference of the determined values as the measured value. Express one half of the maximum difference with a plus-or-minus (\pm) sign.

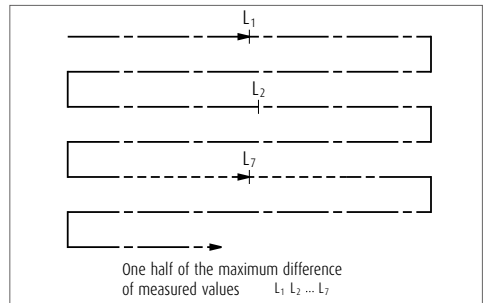


Fig. 2

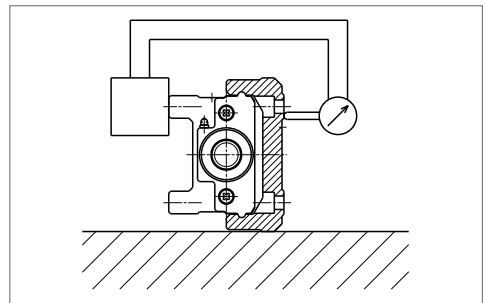


Fig. 3 Setting of indicator

C-3-3 Special Specifications

Please consult NSK if your requirement is not in the standard products.

(1) Surface Treatment

- › Fluoride low temperature chrome plating

Note: Ball screw parts (including low temperature chrome plating.)

(2) Special Machining (Processing)

- i) Shaft end processing
 - › Key way processing
 - › One flat or two flats processing
- ii) Pin hole processing
 - › Slider
 - › Rail

Note: Due to interference with the internal construction, the position of pin hole is limited. Please consult with NSK about the pin position.

(3) Motor Bracket and Intermediate Plate for Motor Mounting

- › We provide motor mounting brackets and intermediate plates that are not listed in the catalog.
- › We assemble motor upon request if the motor is provided in advance.

Note: Motion check of the motor is unavailable.

(4) Reversed Motor Mount

The reversed motor mount is available. Please consult NSK.

- Notes:** 1) We do not check motor running condition.
2) Please refer to the bottom of page C89 to C91 for the configuration of reversed motor mounting of the MCH series.

(5) Right and Left Turn Thread

Right and left turn ball screw is available. Please consult with NSK for available leads.

(6) Ball-Screw-Less Specification (Only Linear Guide Part)

A ball-screw-less rail part with the same cross section of standard Monocarriers is available for a driven linear guide. It will lessen a height adjustment work compared with a construction with two standard Monocarriers.

Note: Height grinding adjustment of the two axes assembly is not available.

C-3-4 Maintenance

C-3-4.1 Maintenance Method

1. For standard Monocarrier, we pack grease in the slider, linear guides and ball screw.
2. Monocarriers are equipped with NSK K1 Lubrication Unit as a standard feature, therefore, you may use it for 5 years or 10 000 km depending on your application, whichever comes first, without maintenance. However, replenishment of preceded grease may extend its life substantially.
3. The NSK K1 Lubrication Unit is ideal in environments where oily dust exists. However, the life may be shorter than described in Clause 2 above. In such a case, it requires increasing the frequency of replenishment.
4. A Nozzle for the NSK grease pump for MCH Monocarriers is available as an option.

NSK reference number: NSK HGP NZ8

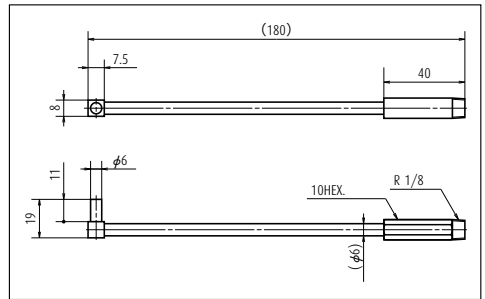


Fig. 4 NSK HGP NZ8

Precautions for handling

1. Please consult with NSK when the motor is coupled to the ball screw using a pulley because there is a restriction on allowable load to the end of ball screw shaft.
2. To extend high performance of NSK K1 lubrication unit, please observe the following.

- | | |
|----------------------|---|
| 1. Temperature range | Ambient temperature: 50°C
Max. instantaneous temperature: 80°C |
| 2. Use of chemicals | Never leave a Monocarrier in close proximity of grease removing organic solvents such as hexane or thinner. Never immerse it in an antirust solvent that contains kerosene. |

Note: Other oils, such as water-based and oil based cutting oil, and grease do not cause any problems.

C-3-4. 2 NSK K1 Lubricant Unit

NSK K1 lubrication unit exhibits outstanding features, confirmed by abundant experimental data, along with proven performance of linear guides and ball screws that are equipped with NSK K1.

(1) High-Speed Durability Test of Linear Guides without Lubricant

Results of high-speed durability testing of a linear guide without lubricant are shown in Fig. 5 While the linear guide cannot be operated without lubricant for even short periods without damage, the installation of the NSK K1 permits the linear guide to run over 25 000 km without any problem.

	Test piece: LH30AN (Preload Z1)
Conditions	Speed: 3.3 m/s Stroke: 1 800 mm
No lubricant	All grease removed
NSK K1	All grease removed + NSK K1

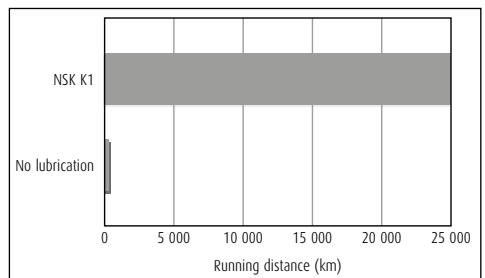


Fig. 5 Results of high-speed durability test of linear guides without lubricant

(2) High-Speed Durability Test of Ball Screws without Lubricant

Results of high-speed durability testing of ball screw without lubrication are shown in Fig. 6. While the ball screw cannot be operated without a lubricant at 8.5 km without damage, the installation of the NSK K1 permits the ball screw to run over 21 000 km without any problem.

	Test piece: BS2020 (Ball screw)
	Shaft diameter: 20 mm
Conditions	Lead: 20 mm
	Load: none
	Speed: 1.3 m/s (4 000 min ⁻¹)
	Stroke: 600 mm
No lubricant	All grease removed
NSK K1	All grease removed + NSK K1

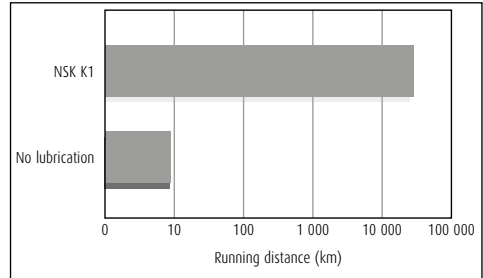


Fig. 6 Results of high-speed durability test of ball screws without lubricant

> NSK K1 Lubrication Units for food processing and medical devices are available.

For safety equipment of food processing and medical care, NSK provides the Monocarrier equipped with special NSK K1 Lubrication Unit that is made of materials approved by the FDA.

Dimensions are the same as the standard NSK K1 Lubrication Unit, and special handling care is not required.

C-3-5 NSK Clean Grease LG2 Specification

> Features

This grease was developed by NSK to be exclusively used for linear guides and ball screws in clean rooms. Compared to the fluoride grease which are commonly used in clean rooms, LG2 has several advantages such as: higher in lubrication function, longer lubrication life, more stable torque (resistant to wear), and higher rust prevention. In dust generation, LG2 is more than equal to fluoride grease in keeping dust volume low. Since the base oil is not a special oil but a mineral oil, LG2 can be handled in the same manner as general grease.

> Applications

LG2 is lubrication grease for rolling contact machine components such as linear guides and ball screws for processing equipment for semiconductors and LCD which require highly clean environment at normal pressure in normal temperatures. It cannot be used in a vacuum environment.

> Nature

Thickener	Lithium soap base
Base oil	Mineral oil + Synthetic hydrocarbon oil
Consistency	199
Dropping point	201°C
Volume of evaporation	1.40% (99°C, 22 hr)
Copper plate corrosion test	Satisfactory (Method B, 100°C, 24 hr)
Oil separation	0.8% (100°C, 24 hr)
Base oil kinematic Viscosity	32 mm ² /s (40°C)

Other

D BLOCK

Other

1. Special Environments	D1
1.1 Specifications for Special Environments	D1
1.2 Lubrication and Materials	D3
1.3 Rust Prevention and Surface Treatment	D5
1.4 Measures Against Special Environments	D7
1.5 Table to Cope with Special Environments	D11
1.6 Precautions for Handling	D12
2. Lubrication	D13
2.1 Grease Lubrication	D13
2.2 Oil Lubrication	D24
3. RoHS Compliant	D24

1 Special Environments

1.1 Specifications for Special Environments

1. Linear guide

Table 1.1 Linear guide specifications

Environment	Condition	NSK linear guide specifications				Technical Explanation Page No.
		Rail, slide	Steel balls/rollers	Ball recirculation component	Lubrication/surface treatment	
Clean	Atmosphere, normal temperature	Standard material	Standard material	Standard material	LG2, LGU Grease NSK K1 lubrication unit	D8 D10
		Martensitic stainless steel	Martensitic stainless steel	Austenitic stainless steel	LG2, LGU Grease NSK K1 lubrication unit Fluoride low temperature chrome plating	D8 D10 D5
	Atmosphere-Vacuum, normal temperature				Fluoride grease	
	Atmosphere-Vacuum up to 200°C					
Vacuum	Atmosphere-Vacuum, normal temperature	Martensitic stainless steel	Martensitic stainless steel	Austenitic stainless steel	Fluoride grease	
	Atmosphere-Vacuum up to 200°C					
	Atmosphere-Vacuum up to 300°C				Molybdenum disulfide	
	High vacuum up to 500°C				Special silver film	D7
Corrosion resistance	Vapor, steam	Martensitic stainless steel	Martensitic stainless steel	Austenitic stainless steel		
		Standard material	Standard material	Standard material		D5
	Acid, alkali				Fluoride low temperature chrome plating	D5 D5
		Martensitic stainless steel	Martensitic stainless steel	Austenitic stainless steel	Fluoride low temperature chrome LG2, LGU Grease plating	D5 D8
	Acid, alkali, clean				Fluoride low temperature chrome Fluoride grease plating	D5
	Strong acid, strong alkali					
Organic solvent				Fluoride grease		
High temperature	Atmosphere up to 150°C	Standard material	Standard material	Austenitic stainless steel	ET-100K Grease	
	Atmosphere up to 200°C				Fluoride grease	
	Atmosphere up to 200°C, Corrosion resistant	Martensitic stainless steel	Martensitic stainless steel		Fluoride grease	
Low temperature	-273°C and higher	Martensitic stainless steel	Martensitic stainless steel	Austenitic stainless steel	Solid lubricant	
Radiation resistance	Atmosphere	Standard material	Standard material	Standard material	Radiation resistant grease	
		Martensitic stainless steel	Martensitic stainless steel	Austenitic stainless steel		
Foreign matters	Fine particles, wooden chips	Standard material	Standard material	Standard material	NSK K1 lubrication unit	D10
			Martensitic stainless steel	Austenitic stainless steel		D10
	Martensitic stainless steel	Standard material	Standard material			D10
		Martensitic stainless steel	Austenitic stainless steel			D10

2. Ball screw

Table 1.2 Ball screw specifications

Environment	Condition	NSK linear guide specifications				Technical Explanation Page No.
		Rail, slide	Steel balls/rollers	Ball recirculation component	Lubrication/surface treatment	
Clean	Atmosphere, normal temperature	Standard material	Standard material	Standard material	LG2, LGU Grease NSK K1 lubrication unit	D8 D10
	Atmosphere-Vacuum, normal temperature	Martensitic stainless steel	Martensitic stainless steel	Austenitic stainless steel	LG2, LGU Grease NSK K1 lubrication unit Fluoride low temperature chrome plating	D8 D10 D5
	Atmosphere-Vacuum up to 200°C				Fluoride grease	
	Atmosphere-Vacuum up to 200°C, Corrosion resistant	Ceramic	Ceramic	Ceramic	Fluoride grease	
Vacuum	Atmosphere-Vacuum, normal temperature	Martensitic stainless steel	Martensitic stainless steel	Austenitic stainless steel	Fluoride grease	
	Atmosphere-Vacuum up to 200°C					
	Atmosphere-Vacuum up to 300°C				Molybdenum disulfide	
	High vacuum up to 500°C				Special silver film	D7
Corrosion resistance	Acid, alkali, clean	Standard material	Standard material	Austenitic stainless steel	Fluoride low temperature chrome plating	D5
		Martensitic stainless steel	Martensitic stainless steel			D5
	Precipitation hardening stainless steel	Precipitation hardening stainless steel	Fluoride grease			
	Strong acid, strong alkali, clean, nonmagnetic	Ceramic	Ceramic		Fluoride grease	
Nonmagnetic	Atmosphere-Vacuum, clean	Special austenitic stainless steel	Ceramic	Austenitic stainless steel	Fluoride grease	
	Atmosphere-Vacuum, up to 200°C, clean	Ceramic			Fluoroplastic	
High temperature	Atmosphere up to 200°C	Standard material	Standard material	Austenitic stainless steel	Fluoride grease	
		Martensitic stainless steel	Martensitic stainless steel		Fluoride low temperature chrome plating	D5
	Atmosphere up to 500°C, corrosion resistance	Ceramic	Ceramic		Fluoride grease	
Low temperature	-273°C and higher	Martensitic stainless steel	Martensitic stainless steel	Austenitic stainless steel	Solid lubricant	
Radiation resistance	Atmosphere	Standard material	Standard material	Standard material	Radiation resistant grease	
		Martensitic stainless steel	Martensitic stainless steel	Austenitic stainless steel		
Foreign matters	Fine particles, wooden chips	Standard material	Standard material	Standard material	NSK K1 lubrication unit	D10
		Martensitic stainless steel	Martensitic stainless steel	Austenitic stainless steel		D10
	Water, under water					D10

1.2 Lubrication and Materials

1. Lubrication

Grease can be used for high rotation and magnetic field. However, grease evaporates or solidifies in special environment such as vacuum, high temperature, and low temperature.

Solid lubricant is used when it is difficult to use grease. Functions of solid lubricant differ greatly by condition where it is used. It is important to select the most suitable solid lubrication for the environment.

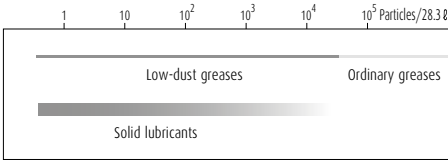


Fig. 2.1 Lubrication in clean environment

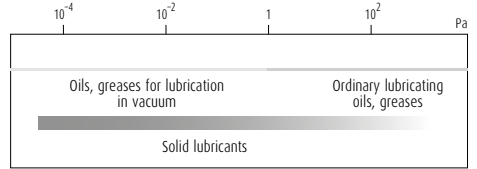


Fig. 2.2 Lubrication in vacuum

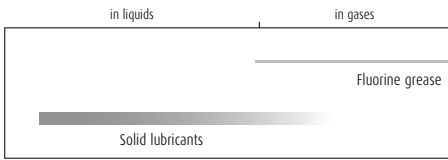


Fig. 2.3 Lubrication in corrosive environment

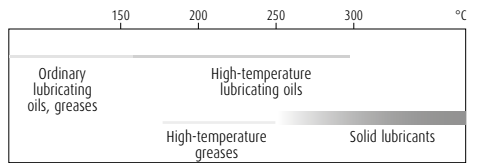


Fig. 2.4 Lubrication in high temperature

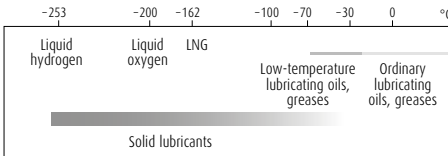


Fig. 2.5 Lubrication in low temperature

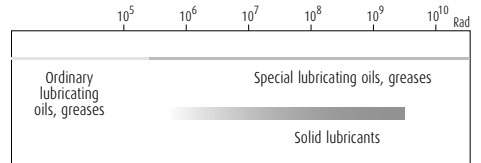


Fig. 2.6 Lubrication in radioactive environment

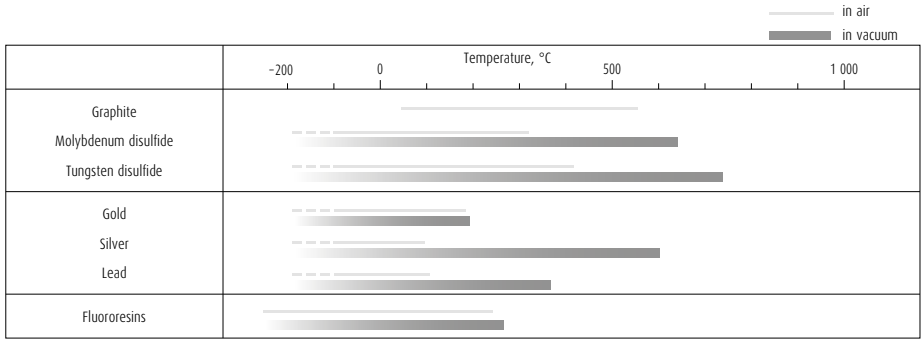


Fig. 2.7 Temperature range for using solid lubricants

2. Materials

Iron type metals are used in vacuum, high temperature, and high speed environments as the basic material. We generally use nonmagnetic stainless steel for nonmagnetic materials.

Table 2.1 Characteristics of metal materials

Application	Type of steel	Linear expansivity $\times 10^{-6}/^{\circ}\text{C}$	Young's modulus GPa	Hardness ^{a)} HB
For clean environment, vacuum environment, corrosion resistance, low temperature, high temperature, radioactive resistance	Martensitic stainless steel SUS440C	10.1	200	580
	Austenitic stainless steel SUS304	16.3	193	150
	Precipitation hardening stainless steel SUS630	10.8	200	277 - 363
Nonmagnetic	Nonmagnetic stainless steel	17.0	195	420

^{a)} Hardness of steel is usually indicated by Rockwell C Scale. For comparison, these figures are expressed by Brinell number.

1.3 Rust Prevention and Surface Treatment

1. Fluoride low temperature chrome plating

The use environment of NSK linear guides ball screws, and monocarriers is expanding from general industrial machines, semiconductor and liquid crystal manufacturing systems to aerospace equipment. Among all measures to cope with environment, rust prevention is the most challenging. Such environment includes:

- > Moisture for washing machines and other equipment
- > Chemicals used in the wet processing of semiconductor and liquid crystal display manufacturing equipment.

NSK has developed electrolytic rust prevention black film treatment (black chrome plating) which is added by fluoro resin impregnating treatment. (Hereinafter referred as "Fluoride low temperature chrome plating".) This surface treatment methods has proved its superiority as the rust prevention of linear guides and ball screws which are used in the above equipment.

- > Humidity chamber test











> What is "Fluoride low temperature chrome plating?"

This is a type of black chrome plating which forms a black film (1 to 2 μm in thickness) on the metal surface. Fluoroplastic coating is added to the film to increase corrosion resistance.

- > Accuracy control is easily manageable due to low temperature treatment and to the absence of hydrogen embrittlement.
- > Product accuracy is less affected due to the thin film which has high corrosion resistance.
- > This method is superior to other surface treatments in durability on the rolling surface.
- > Inexpensive compared with products with other surface treatment and stainless steel products.

Do not use organic solvent because it adversely affects antirust property of the plating.

Table 3.1 Results of the humidity test

Test sample		Fluoride low temperature chrome plating (recommended)	Hard chrome plating (reference)	Electroless nickel plating (reference)	Equivalent to SUS440C material	Standard steel	
							Characteristic
Corrosion-resistant property	Rusting	Top	(Ground) B	(Ground) B	(Ground) A	(Ground) C	(Ground) D
		Side	(Ground) A	(Ground) A	(Ground) A	(Ground) C	(Ground) E
		Bottom	(Ground) A	(Ground) A	(Ground) A	(Ground) C	(Ground) E
		End	(Machined) A	(Machined) C	(Machined) A	(Machined) C	(Machined) E
		Chamfer/grinding recess	(Drawn) A	(Drawn) D	(Drawn) A	(Drawn) C	(Drawn) E
Corrosion-resistant property	<Test conditions> > Testing chamber: High temperature, highly moist chamber (made by DABAI ESPEC) > Temperature: 70°C > Relative humidity: 95% > Testing time: 96 h Time to "ramp-up" and "ramp-down" condition of the temperature and the humidity conditions Ramp-up: 5h Ramp-down: 2h						
							
Film thickness		5 μm	0.5 - 7 μm	10 μm	—	—	

Rusting

A: No rust
C: Spotty rust

B: Not rusted, but slightly discolored
D: slightly rusted
E: Completely rusted

› Chemical corrosion resistance test

Table 3.2 Results of the corrosion resistance test

Test conditions Rail base material: Equivalent to SUS440C
Chemical density: 1 mol/ℓ

Fluoride low temperature chrome plating	Hard chrome plating	Hard chrome plating	None surface treatment
	Immersed in solution for 24 hrs Nitric acid		
	Immersed in solution for 24 hrs Nitric acid		
	Exposed to vapor for 72 hrs Hydrochloric acid type washing solution HCl : H ₂ O ₂ : H ₂ O = 1 : 1 : 8		
○	Hydrochloric acid (immersed)	○	▲
○	Sulfuric acid (immersed)	○	X
○	Ammonia or sodium hydroxide	○	△

○: Normal △: Partial surface damage ▲: Overall surface damage X: Corroded

› Surface treatment durability test

Peeling resistance of surface treatment

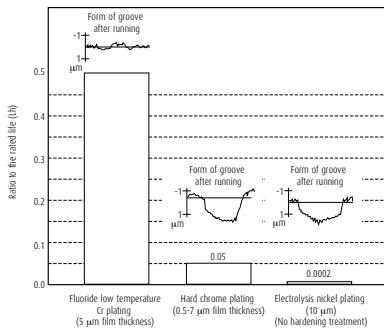


Fig. 3.1 Results of durability test

› Total evaluation

Table 3.3 Evaluation

	Available length	Rust prevention ability	Quality stability	Durability	Cost
Fluoride low temperature chrome plating	◎ (4 m)	◎	○	◎	◎
Hard chrome plating	△ (2 m)	○	X	△	△
Electroless nickel plating	◎ (4 m)	◎	△	X	△
Material equivalent to SUS440C	○ (3.5 m)	○	◎	◎	△

◎: Excellent ○: Suitable in use
△: Not so good for use X: Problem in use

1.4 Measures Against Special Environments

1. In vacuum

> Silver-film plated ball screw

Ball screws that are plated by soft metal (special silver film) as a solid lubricant are developed the application for vacuum environment such as semiconductor manufacturing equipment and surface modification systems.

> Durability test in high vacuum

Test equipment and conditions

Table 4.1 shows ball screw specifications. Fig. 4.1 is a schematic of the testing system in vacuum chamber.

Table 4.2 shows testing conditions.

Table 4.1 Ball screw specifications

Shaft diameter		12 mm
Lead		4 mm
Steel ball diameter		2.381 mm
Numbers of circuit of balls		2.5 turns, 1 circuit
Axis load (preload)		29.4 N
Maximum surface pressure (preload volume)		about 690 MPa
Material	Shaft	SUS630
	Nut	SUS440C
	Ball return tube	SUS304
	Steel balls	SUS440C
Solid lubricant		Special silver film

Table 4.2 Testing conditions

Rotational speed	300 min ⁻¹
Vacuum chamber pressure	$1.3 \times 10^{-5} - 1.3 \times 10^{-6}$ Pa
Stroke	160 mm

Evaluation method

It is understood that the rolling bearing with solid lubrication reaches end of life when the lubrication film deteriorates, resulting in sudden rise of friction torque. In this test, ball screw rotation torque was constantly measured to study durability and operation. Results were then evaluated.

Test results

Fig. 4.2 shows two distinctive examples obtained in the torque characteristic test.

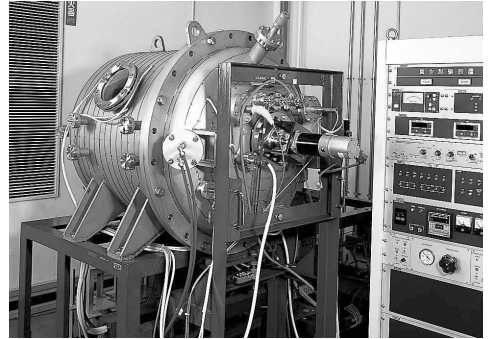


Photo 4.1 Vacuum testing system

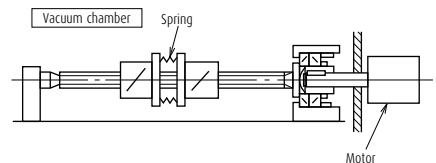


Fig. 4.1 Schematic of the testing system

Test results of the ball screw (a)

The torque tendency was stable until about 1×10^7 rev. Then the torque characteristics slightly deteriorated. At about 1.35×10^7 rev, the torque suddenly rose. At this point, it was determined that the ball screw reached the end of its life.

Test results of the ball screw (b)

Torque value is a little higher in the test (a). The value is also little unstable. The torque momentarily soared several times during the test (some 10 N·cm). It is thought this is attributable to the repeated peeling/sticking of the surface film made of soft metal (silver, etc.).

When the torque finally soared at 1.13×10^7 rev, it was determined that the ball screw reached the end of its life.

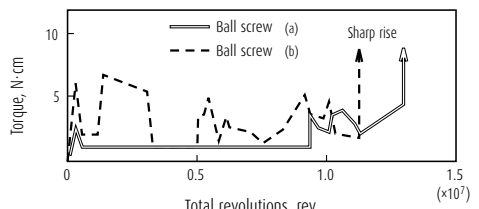


Fig. 4.2 Torque variation

Table 4.3 Ball screw durability

	Classification	Ball screw (a)	Ball screw (b)
Life	Total revolutions (rev.)	1.35×10 ⁷	1.13×10 ⁷
	Total traveling distance (km)	54.0	45.2
	Total traveling hours* (h)	750	628

* Total traveling hours when operated constantly at 300 min⁻¹

Conclusion

Table 4.3 explains results of the two ball screw durability tests. From these results and other findings, it is estimated that a life of more than 1×10⁷ rev. is possible with a load of about 29.4 N. Torque may soar momentarily before the ball screw reaches its final life due to peeling/sticking of the surface film made of soft metal like silver. For this reason, it is recommendable to select a drive motor with extra torque capacity.

2. Clean environment

› **NSK Clean Grease LG2 and LGU**

NSK Clean Grease LG2 is used in clean room for NSK linear guides, ball screws, Monocarriers, XY Modules, Megatorque motors, XY tables, etc. with low-dust emitting specifications. For its low dust emission and high durability, LG2 earns trust and high reputation of semiconductor equipment manufacturers. LG2 is superior in many areas to fluorine greases which are commonly used in clean room.

Features

- › Remarkably low dust emission
- › Long life -- More than ten times longer than fluoride greases, and equivalent to ordinary greases.
- › Excellent rust prevention -- Significantly higher capacity than fluorine greases.
- › Low and stable torque -- 20% or less than that of fluorine greases

Table 4.4 Nature of Clean Grease LG2 and LGU

Name	Thickener	Base oil	Base oil kinematic viscosity mm ² /s (40°C)	Consistency	Dropping point °C
Clean Grease LG2	Lithium soap	Synthetic hydrocarbon oil + mineral oil	32	199	201
Clean Grease LGU	Diurea	Synthetic hydrocarbon oil	95.8	201	260

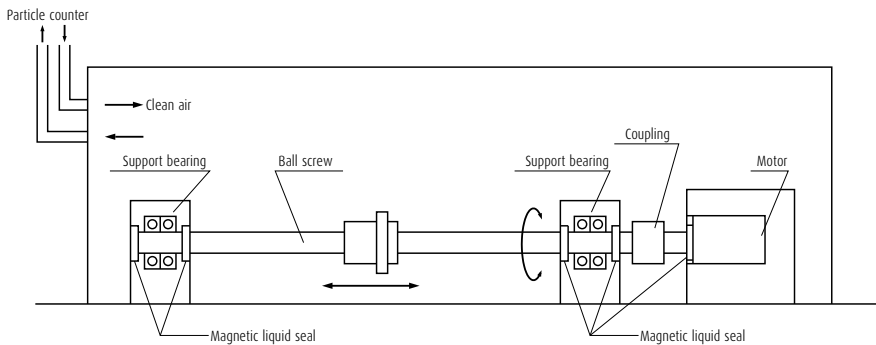


Fig. 4.3 Setting to measure dust generated by ball screw

➤ **Feature 1: Remarkably low dust emission**

Compared with fluoride greases, dust emission by LG2 is low and stable for long period of time.

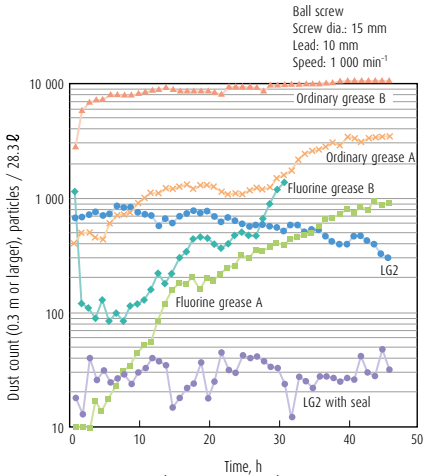


Fig. 4.4 Comparison in dust emission characteristics

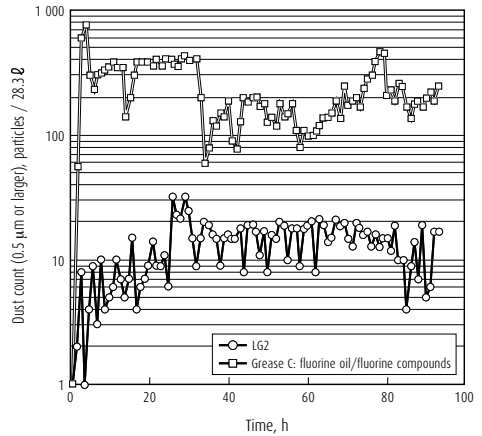


Fig. 4.5 Dust emission from linear guide (Linear guide: LU09)

➤ **Feature 2: Long life**

Life is ten times or longer than fluorine greases, and equivalent to ordinary greases. This stretches maintenance intervals.


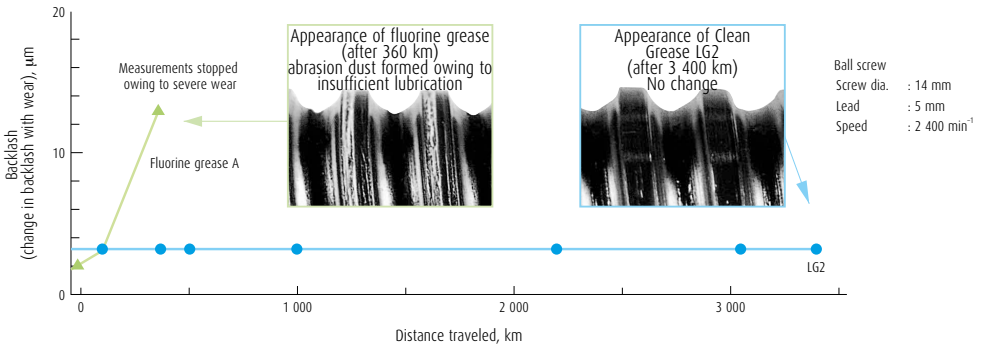


Fig. 4.6 Results of ball screw durability test

› Feature 3: Excellent rust prevention capacity

The rust prevention capacity is significantly higher than fluoride type greases. Handling and preparation for operation are easy.

Ball screw rust prevention test (test conditions: 96 hr at humidity 95%, temperature 70°C)

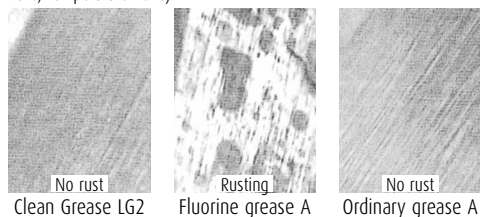

› Feature 4: Stable torque

Torque is 20% or lower than fluorine greases.

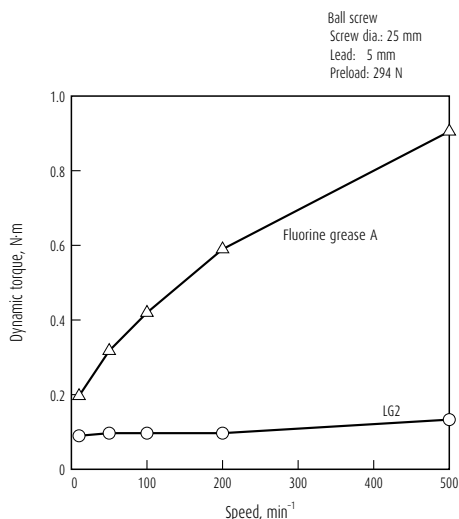


Fig. 4.7 Comparison of torque characteristics

Table 4.5 Rust prevention test on bearing

Type	Rusting after 7 days
NSK Clean Grease LG2	No rust
Fluorine grease B	Rusted

Test conditions :19 mg is sealed in ball bearing 695
:Temp. 90°C, Humidity 60%
Evaluation :Studied by microscope

› Total evaluation

Table 4.6 Evaluation

Characteristic	LG2	Fluorine grease	General grease
Dust generation	○	○ - △	△ - X
Torque	○	X	○ - △
Durability	○	△ - X	○
Rust prevention ability	○	△ - X	○

○: Suitable △: Not very suitable X: Problem in use

3. Environment with foreign matters

› NSK K1 lubrication unit (linear guide and ball screw)

Molded oil is made of a lubrication oil and polyolefin which has affinity with the lubrication oil. More than 70% of the mass is lubrication oil.

Molded oil which is formed into NSK K1 lubrication unit effectively seals linear guides, continually supplying lubrication oil. NSK K1 lubrication unit has made it possible to use linear guides in water or powder dust.

NSK K1 lubrication unit for ball screws is also available. For monocarriers, NSK K1 is equipped as a standard feature.

Features

- › Extend maintenance-free intervals
- › No contamination of surrounding environment
- › Prolong life of the products exposed to water

Refer to pages A38, B601 and C139 for details of NSK K1 lubrication unit.

1.5 Table to Cope With Special Environments

1. Linear guides.

Series	Model No.	Special environment which linear guide can tolerate					
		Clean	Vacuum	Corrosion	High temp.	Hygienic	High dust proofing
NH	NH15	○		○		○	
	NH20	○	○	○	○	○	
	NH25	○	○	○	○	○	
	NH30	○	○	○	○	○	
	NH35	○		○	○	○	
	NH45	○		○	○		
	NH55	○		○			
	NH65	○		○			
VH	VH15	○		○			○
	VH20	○		○			○
	VH25	○		○			○
	VH30	○		○			○
	VH35	○		○			○
	VH45	○		○			○
TS	VH55	○		○			○
	TS15	○		○			
	TS20	○		○			
	TS25	○		○			
	TS30	○		○			
NS	TS35	○		○			
	NS15	○	○	○	○	○	
	NS20	○	○	○	○	○	
	NS25	○	○	○	○	○	
	NS30	○	○	○	○*	○	
LW	NS35	○		○		○	
	LW17	○		○	○*	○	
	LW21	○		○	○*	○	
	LW27	○		○	○	○	
	LW35	○		○		○	
PU	LW50	○		○			
	PU05	○		○			
	PU07	○		○			
	PU09	○		○		○	
	PU12	○		○		○	
LU	PU15	○		○		○	
	LU05	○		○			
	LU07	○		○			
	LU09_L	○	○	○	○	○	
	LU09_R	○		○		○	
	LU12_L	○	○	○	○	○	
	LU12_R	○		○		○	
LU15	○	○	○	○*	○		

*) Dust-proof parts are not applicable to high-temperature environmental use.

Series	Model No.	Special environment which linear guide can tolerate					
		Clean	Vacuum	Corrosion	High temp.	Hygienic	High dust proofing
PE	PE05	○		○			
	PE07	○		○			
	PE09	○		○		○	
	PE12	○		○		○	
	PE15	○		○		○	
LE	LE05	○		○			
	LE07	○	○	○	○*		
	LE09_L	○	○	○	○*	○	
	LE09_R	○		○		○	
	LE12_L	○	○	○	○	○	
	LE12_R	○		○		○	
Miniature LH	LE15_L	○	○	○	○	○	
	LE15AR	○		○		○	
	LH08	○		○			
	LH10	○		○			
	LH12	○	○	○	○*	○	
RA	RA15	○		○			
	RA20	○		○			
	RA25	○		○			
	RA30	○		○			
	RA35	○		○			
	RA45	○		○			
RB	RA55	○		○			
	RA65	○		○			
	RB30	○		○			
	RB35	○		○			
	RB45	○		○			
LA	RB55	○		○			
	RB65	○		○			
	LA25	○		○			
	LA30	○		○			
	LA35	○		○			
	LA45	○		○			
HA	LA55	○		○			
	LA65	○		○			
	HA25	○		○			
	HA30	○		○			
	HA35	○		○			
	HA45	○		○			
HS	HA55	○		○			
	HS15	○		○			
	HS20	○		○			
	HS25	○		○			
	HS30	○		○			
HS35	○		○				

2. Ball screws

Series	Special environment				
	Clean	Vacuum	Rust prevention	High temp.	Foreign matters
KA Series	○	○	○		
For Contaminated environments VSS Type					○
Made-to-order ball screw	○*	○*	○*	○*	○*

*Available in the made-to-order ball screw.
Please consult NSK.

3. Monocarriers

Please consult with NSK for special environmental use.

1.6 Precautions for Handling

Please observe the following precautions to maintain high functions of ball screws and linear motion guide bearings in special environment over a long period.

- > Products are washed to remove oil, and wrapped in a way to protect them from moisture. Use the product as soon as possible after opening the package.
- > After opening, store the ball slide (random-matching type linear guide) and ball nut (R series ball screw) in a clean, air-tight container such as desiccater with desiccating agent (e.g. silica gel). Do not apply rust preventive oil or paper or product that vaporizes rust preventive agent.
- > Wear plastic gloves and handle product in clean place.

2. Lubrication

There are two types of lubricating method -- grease and oil -- for ball screws, linear guides and monocarriers.

Use a lubricant agent and method most suitable to condition requirements and purpose to optimize functions of ball screws, linear guides and monocarriers.

In general, lubricants with low base oil kinematic viscosity are used for high-speed operation, in which thermal expansion has a large impact, and in low temperatures.

Lubrication with high base oil kinematic viscosity is used for oscillating operations, low speeds and high temperatures.

The following are lubrication methods using grease and oil.

2.1 Grease Lubrication

Grease lubrication is widely used because it does not require a special oil supply system or piping. Grease lubricants made by NSK are:

- › Various types of grease in bellows tubes that can be instantly attached to a grease pump;
- › NSK Grease Unit that consists of a hand grease pump and various nozzles. They are compact and easy to use.

1. NSK grease lubricants

Table 1.1 shows the marketed general grease widely used for linear guides, ball screws, and monocarrier for specific uses, conditions and purposes.

Table 1.1 Grease lubricant for linear guides, ball screws and monocarriers

Type	Thickener	Base oil	Base oil kinematic viscosity mm ² /s (40°C)	Range of use temperature (°C)	Purpose
AS2	Lithium type	Mineral oil	130	-10 - 110	For general use at high load
PS2	Lithium type	Synthetic oil + synthetic hydrocarbon oil	15.9	-50 - 110	For low temperature and high frequency operation
LR3	Lithium type	Synthetic oil	30	-30 - 130	For high speed, medium load
LG2	Lithium type	Mineral oil + synthetic hydrocarbon oil	32	-20 - 70	For clean environment
LGU	Diurea	Synthetic hydrocarbon oil	95.8	-30 - 120	For clean environment
NF2	Urea composite type	Synthetic hydrocarbon oil	26	-40 - 100	For fretting resistance

(1) NSK Grease AS2

› Features

It is an environmentally friendly and widely used grease for high load application. It is mineral oil based grease containing lithium thickener and several additives. It is superb in load resistance as well as stability in oxidization. It not only maintains good lubrication over a long period of time, but also demonstrates superb capability in retaining water. Even containing a large amount of water, it does not lose grease when it is softened.

› Application

It is a standard grease for general NSK linear guides, ball screws and monocarriers. It is prevalently used in many applications because of its high base oil viscosity, high load resistance, and stability in oxidization.

(2) NSK Grease LR3

› Features

It contains a special synthetic oil for high temperature and stability, and a carefully selected anti-oxidation agent. This grease dramatically increases lubrication life under high temperature conditions. It is used for high speed, medium load. Lubrication life exceeded 2 000 hours in the endurance test at 150°C. Its rust prevention capacity in severe conditions such as water and moist environments is further strengthened.

› Application

It is a standard grease for ball screws PSS type (shaft dia. 15 mm or over), FSS type, FA type (except shaft dia. 10 mm with lead of 4mm and shaft dia. 12 mm with lead of 5 mm) and VFA type. It is ideal for operation with medium load, at high speed such as positioning in high tact material handling equipment.

(3) NSK Grease PS2

› Features

The major base oil component is synthetic oil with mineral oil. It is an excellent lubrication especially for low temperature operation. It is for high speed and light load.

› Application

It is a standard grease for NSK miniature linear guides and ball screws. It is especially superb for low temperature operation, but also functions well in normal temperatures, making it ideal for small equipment with light load.

› Nature

Thickener	Lithium soap base
Base oil	Mineral oil
Consistency	275
Dropping point	181°C
Volume of evaporation	0.24% (99°C, 22 hr)
Copper plate corrosion test	Satisfactory (Method B, 100°C, 24 hr)
Oil separation	2.8% (100°C, 24 hr)
Base oil kinematic viscosity	130 mm ² /s (40°C)

› Nature

Thickener	Lithium soap base
Base oil	Synthetic oil
Consistency	228
Dropping point	208°C
Volume of evaporation	0.58% (99°C, 22 hr)
Copper plate corrosion test	Satisfactory (Method B, 100°C, 24 hr)
Oil separation	1.9% (100°C, 24 hr)
Base oil kinematic viscosity	30 mm ² /s (40°C)

› Nature

Thickener	Lithium soap base
Base oil	Synthetic oil + Synthetic hydrocarbon oil
Consistency	275
Dropping point	190°C
Volume of evaporation	0.60% (99°C, 22 hr)
Copper plate corrosion test	Satisfactory (Method B, 100°C, 24 hr)
Oil separation	3.6% (100°C, 24 hr)
Base oil kinematic viscosity	15.9 mm ² /s (40°C)

(4) NSK Grease LG2

> Features

This grease was developed by NSK to be exclusively used for linear guides and ball screws in clean room. Compared to the fluorine grease which are commonly used in clean room, LG2 has several advantages such as:

- > Higher in lubrication function
- > Longer lubrication life
- > More stable torque (resistant to wear)
- > Higher rust prevention.

In dust generation, LG2 is more than equal to fluorine grease in keeping dust volume low. Since the base oil is not a special oil but a mineral oil, LG2 can be handled in the same manner as general greases.

> Application

LG2 is a lubrication grease for rolling element products such as linear guides and ball screws for semiconductor and liquid crystal display (LCD) processing equipment which require a highly clean environment. Because LG2 is exclusively for a clean environment at normal temperatures, however, it cannot be used in a vacuum environment.

Refer to "Special environment" in page D8 for detailed data on superb characteristics of NSK Grease LG2.

> Nature

Thickener	Lithium soap base
Base oil	Mineral oil + Synthetic hydrocarbon oil
Consistency	199
Dropping point	201°C
Volume of evaporation	1.40% (99°C, 22 hr)
Copper plate corrosion test	Satisfactory (Method B, 100°C, 24 hr)
Oil separation	0.8% (100°C, 24 hr)
Base oil kinematic viscosity	32 mm ² /s (40°C)

(5) NSK Grease LGU

> Features

This is a proprietary urea base grease of NSK featuring low dust emission exclusively for ball screws and linear guides which are used in clean rooms.

In comparison with fluorine base grease, which has been used commonly in clean rooms, LGU has better lubricating property, longer duration of lubricant, better torque variation, much better anti-rust property, and equivalent or better dust emission. In addition, this grease can be handled in the same way as the other common grease because high-grade synthetic oil is used as the base oil.

LGU grease contains much less metallic elements compared to LG2 grease. It can be used in high temperature environment.

> Application

This is exclusive lubrication grease for ball screws and linear guides that are installed in equipment that requires cleanliness, as same as LG2 grease, and it can be used in high temperature range of -30 to 120°C. This cannot be used in vacuum.

> Nature

Thickener	Diurea
Base oil	Synthetic hydrocarbon oil
Consistency	201
Dropping point	260°C
Volume of evaporation	0.09% (99°C, 22 hr)
Copper plate corrosion test	Satisfactory (Method B, 100°C, 24 hr)
Oil separation	0.6% (100°C, 24 hr)
Base oil kinematic viscosity	95.8 mm ² /s (40°C)

(6) NSK Grease NF2

> Features

It uses high-grade synthetic oil as the base oil and urea base organic compound as the thickener. It has remarkable anti-fretting corrosion property. It can be used in wide temperature range, from low to high, and has superior lubrication life.

> Application

This grease is suitable for ball screws and linear guides of which application include oscillating operations. Allowable temperature range is -40 to 100°C.

› Nature

Thickener	Diurea
Base oil	Synthetic hydrocarbon oil
Consistency	288
Dropping point	260°C
Volume of evaporation	0.22% (99°C, 22 hr)
Copper plate corrosion test	Satisfactory (Method B, 100°C, 24 hr)
Oil separation	0.5% (100°C, 24 hr)
Base oil kinematic viscosity	26 mm ² /s (40°C)

› Precautions for handling

- › Wash the linear guides and ball screws to remove oil prior to applying Clean Grease LG2 or LGU, so the grease functions are fully utilized.
- › Clean grease is exclusively used for clean environments at normal temperatures.

Note) Refer to NSK Grease Unit Catalog (CAT.No.3317) for details of NSK Grease.

2. Before use of NSK Precision Products

Wipe off the rust preventive oil before use for the products that the oil is applied.

If grease is not applied, apply grease, and move a ball slide or ball nut a few strokes so the grease permeates into the ball slide and inside the nut. (Move the ball slide or the ball nut 5 to 10 times with full stroke.)

Then wipe off the excess grease.

3. How to replenish grease and volume of grease to be replenished

Use grease fitting if exclusive grease supply component is not used. Supply required amount through grease fitting by a grease pump. Wipe off old grease and accumulated dust before supplying new grease. If grease fitting is not used or there is no oil filler due to the size limitation, apply grease directly to the rail or to the ball groove of the screw shaft. Remove the seal if possible, move a ball slide or ball nut a few strokes so that the grease permeates into the ball slide, nut and inside the slider.

Once grease is replenished, another supply is not required for a long time. But under some operational conditions, it is necessary to periodically replenish grease. The following are replenishing methods.

* When replenishing using a grease pump:

Use a grease pump and fill the inside of ball slide, ball nut and monocarrier slider with grease. Supply grease until it comes out from the ball slide, ball nut or monocarrier slider area. Move ball slide, ball nut or monocarrier slider by hand while filling them with grease, so the grease permeates all areas. Do not operate the machine immediately after replenishing. Always try the system a few times to spread the grease throughout the system and to remove excess grease. Trial operations are necessary because the resistance to sliding force and screw torque greatly increases immediately after replenishment (full-pack state) and may cause problems. The agitating resistance of grease is accountable for this phenomenon. Wipe off excess grease that accumulates at end of rail and screw shaft after trial runs so the grease does not move to other areas.

* When there is an exclusive grease supply system and the volume from the spout can be controlled, the criterion is:

- › All at once, replenish the amount that fills about 50% of the internal space of the ball slide or the internal space of the ball nut. This method eliminates waste of grease and is efficient.

Tables 1.2, 1.3 and 1.4 show internal spaces of ball slide, ball nut and monocarrier slider for reference.

Table 1.2 Inside space of the slide of linear guide

NH Series

Unit: cm³

Model No.	Series	NH	
		High-load type	Ultra-high-load type
15		3	4
20		6	8
25		9	13
30		13	20
35		22	30
45		47	59
55		80	100
65		139	186

VH Series

Unit: cm³

Model No.	Series	VH	
		High-load type	Super-high-load type
15		3	4
20		6	8
25		9	13
30		13	20
35		22	30
45		47	59
55		80	100

NS Series

Unit: cm³

Model No.	Series	NS	
		Medium-load type	High-load type
15		2	3
20		3	4
25		5	8
30		8	12
35		12	19

LW Series

Unit: cm³

Model No.	Series	LW
17		3
21		3
27		7
35		24
50		52

RA Series

Unit: cm³

Model No.	Series	RA	
		High-load type	Super-high-load type
15		1	1.5
20		2	2.5
25		3	3.5
30		5	6
35		6	8
45		10	13
55		15	20
65		33	42

RB Series

Unit: cm³

Model No.	Series	RA	
		High-load type	Super-high-load type
30		5	6
35		6	8
45		10	13
55		15	20
65		33	42

LA Series

Unit: cm³

Model No.	Series	LA	
		High-load type	Super-high-load type
25		8	12
30		14	18
35		21	29
45		38	48
55		68	86
65		130	177

HA, HS Series

Unit: cm³

Model No.	Series	HA	HS
		15	-
20	-	9	
25	16	16	
30	27	25	
35	42	40	
45	67	-	
55	122	-	

PU, LU Series

Unit: cm³

Model No.	Series	PU		LU	
		Standard type	High-load type	Standard type	High-load type
05		0.1	-	0.1	-
07		0.1	-	0.1	-
09		0.2	0.3	0.2	0.3
12		0.3	0.4	0.3	0.4
15		0.8	1.1	0.8	1.1

PE, LE Series

Unit: cm³

Model No.	Series	PE			LE	
		Standard type	High-load type	Medium-load type	Standard type	High-load type
05		0.1	-	0.1	0.1	-
07		0.2	-	0.1	0.2	0.3
09		0.4	0.5	0.2	0.4	0.5
12		0.5	0.7	0.3	0.5	0.7
15		1.2	1.6	0.8	1.2	1.6

Miniature LH Series

Unit: cm³

Model No.	Series	LH
08		0.2
10		0.4
12		1.2

Table 1.3 Inside space of ball nut
Return tube type (single nut)

Unit: cm ³		Unit: cm ³	
Nut model	Inside space	Nut model	Inside space
1004 - 2.5	0.8	2525 - 1.5	7.5
1205 - 2.5	1.2	2805 - 5	6
1210 - 2.5	1.4	3205 - 5	7
1405 - 2.5	2.2	3206 - 5	9.5
1408 - 2.5	2.1	3210 - 5	22
1510 - 2.5	2.3	3225 - 2.5	17
1605 - 2.5	2.6	3232 - 1.5	15
1616 - 1.5	2.1	3610 - 5	32
2004 - 5	2.7	4005 - 10	14
2005 - 5	4.3	4010 - 5	30
2010 - 2.5	4.7	4012 - 5	34
2020 - 1.5	4.2	4510 - 5	34
2504 - 5	3.2	5010 - 5	37
2505 - 5	5	5010 - 10	59
2506 - 5	7		
2510 - 3	9.5		
2520 - 2.5	12		

Deflector (bridge) type
(single nut)

Unit: cm ³	
Nut model	Inside space
2505 - 6	6.5
2510 - 4	10
3205 - 8	9.5
3210 - 6	28
4010 - 8	42
5010 - 8	52

End cap type

Unit: cm ³	
Nut model	Inside space
1520 - 1.5	1.9
1632 - 1	2
2040 - 1	2.8
2550 - 1	4.2

Note: Nut model: shaft diameter, lead, total number of turns of balls. Please consult NSK for other specifications.
Refer to B110 to B146 for Compact FA Series.

Table 1.4 Inside space of the monocarrier
MCM Series

Unit: cm ³			Unit: cm ³		
Model No.	Lead (mm)	Inside space	Model No.	Lead (mm)	Inside space
MCM02	1	0.3	MCM06	5	8.3
	2	0.3		10	6.5
MCM03	1	1		20	5.5
	2	0.9	MCM08	5	11.6
	10	1.8		10	9.8
	12	1.7		20	8.7
30	4.2	30		4.3	
MCM05	5	4	MCM10	10	19.4
	20	2.1		20	17.4
	30	2.0		30	8.8

MCH Series

Unit: cm ³		
Model No.	Lead (mm)	Inside space
MCH06	5	2.8
	10	2.7
MCH09	10	2.7
	20	2.7
MCH10	5	5.8
	10	5.8
	20	5.6
MCH10	10	10.9
	20	10.1

4. Intervals of checks and replenishments

Although the grease is of high quality, it gradually deteriorates and its lubrication function diminishes. Also, the grease in the ball slide and ball nut is gradually removed by stroke movement.

In some environments, the grease becomes dirty, and foreign objects may enter. Grease should be replenished depending on frequency of use. The following is a guide of grease replenishment intervals for linear guides and ball screws.

Table 1.5 Intervals of checks and replenishments for grease lubrication

Intervals of checks	Items to check	Intervals of replenishments
3-6 months	Dirt, foreign matters such as cutting chips	Usually once per year. Every 3 000 km for material handling system that travels more than 3 000 km per year. Replenish if checking results warrant it necessary.

- Notes:** 1) As a general rule, do not mix greases of different brands.
 2) Grease viscosity varies by temperature. Viscosity is particular high in winter due to low temperatures. Pay attention to increases in linear guide and monocarrier sliding resistance and ball screw and monocarrier torque in such conditions.
 3) When the ambient temperature is low, or in Winter, if it is difficult to pump out the grease from the container, wait until the grease is softened.
 4) In locations where coolant is dispersed or scattered, emulsification of lubricants and rinsing with water may significantly deteriorate the integrity of the lubricant and efficiency of the grease. Protect the grease unit from coolant by shielding it with a cover, etc.

5. NSK Grease Unit

Supply grease to NSK linear guides and ball screws by manual type hand grease pump. Install grease in bellows tube to the pump. Several types of grease (80 g) are available.



Grease in bellows tube



(1) Composition of NSK Grease Unit

Components and grease types are shown below.

	Name	(Tube color)	Reference number
NSK Grease Unit			
NSK Grease (80 g in a bellows tube)	NSK Grease AS2	(Brown)	NSK GRS AS2
	NSK Grease PS2	(Orange)	NSK GRS PS2
	NSK Grease LR3	(Green)	NSK GRS LR3
	NSK Grease LG2	(Blue)	NSK GRS LG2
	NSK Grease LGU	(Yellow)	NSK GRS LGU
	NSK Grease NF2	(Gray)	NSK GRS NF2
NSK Hand Grease Pump Unit			
NSK Hand Grease Pump (Straight nozzle NSK HGP NZ1 -- One nozzle is provided with hand pump.)			NSK HGP
Grease nozzle (used with hand grease pump)			
	NSK straight nozzle		NSK HGP NZ1
	NSK chuck nozzle		NSK HGP NZ2
	NSK drive fitting nozzle		NSK HGP NZ3
	NSK point nozzle		NSK HGP NZ4
	NSK flexible nozzle		NSK HGP NZ5
	NSK flexible extension pipe		NSK HGP NZ6
	NSK straight extension pipe		NSK HGP NZ7
	NSK nozzle for MCH		NSK HGP NZ8

(2) NSK Greases (80 g in bellows tube)

Refer to pages D14 and D15 for their natures and details.

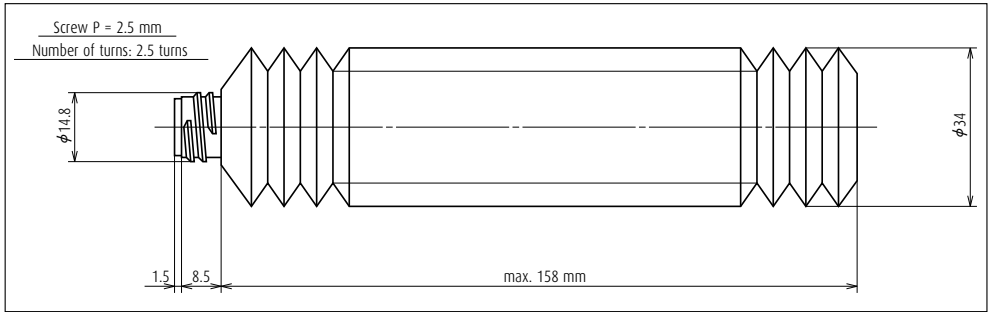


Fig. 1.1 Bellows tube

(3) NSK Manual Grease Pump Unit

a) NSK Hand Grease Pump
(Reference number: NSK HGP)

> Features

- Light-weight
- Inserting by high pressure
- No leaking
- Easy to change grease
- Remaining grease
- Several nozzles

> Specifications

- Discharge pressure: 15 Mpa
- Spout volume: 0.35 cc/shot
- Mass of main body: Without nozzle 240 g, Provided nozzle 90 g
- Grease tube outer diameter: ϕ 38.1
- Accessory: Several nozzles for a unique application can be attached

Can be operated by one hand, yet there is no worry to make a mistake.

Insert at 15 Mpa.
Does not leak when held upside down.

Simply attach grease in bellows tube.

Can be confirmed through slit on tube.
Six types of nozzles to choose from.

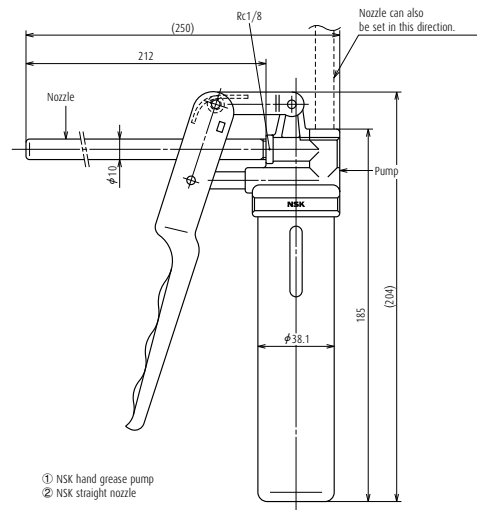


Fig. 1.2 NSK Hand Grease Pump with NSK straight nozzle

*Air is contained in the unopened bellows tube. Try the system tens of times when to use the hand grease pump. The tube will be use after deflated from the tube.

b) Nozzles

Table 1.6 Nozzles that can be attached to NSK Hand Grease Pump

Name	Designation code	Use	Dimensions
NSK straight nozzle	NSK HGP NZ1	Can be used with grease fitting A, B, and C under JIS B1575 standard.	
NSK chuck nozzle	NSK HGP NZ2	Same as above. However, there is no need to press the hand pump because the grease fitting and the nozzle come to contact due to the chucking mechanism at the tip.	
NSK fitting nozzle	NSK HGP NZ3	Dedicated for the - φ 3 drive-in grease fitting.	
NSK point nozzle	NSK HGP NZ4	Used for linear guides and ball screws which do not have grease fitting. Supplies grease directly to the ball grooves, or through the opening of ball slide or ball slide to inside.	
NSK flexible nozzle	NSK HGP NZ5	The tip of the flexible nozzle is chuck nozzle. The straight nozzle is not available for use.	
NSK flexible extension pipe	NSK HGP NZ6	Flexible extension pipe connects the grease pump and the nozzle	
NSK straight extension pipe	NSK HGP NZ7	Straight extension pipe connects the grease pump and the nozzle.	
NSK nozzle for MCH	NSK HGP NZ8	For MCH Series grease replenishment	

Table 1.7 Grease fittings used for NSK linear guide

Series	Model number	Tap hole for grease fitting	Standard grease fitting	Straight nozzle NZ1	Chuck nozzle NZ2	Drive-in nipple nozzle NZ3	Point nozzle NZ4	Flexible nozzle NZ5
NH	NH15	φ 3	Drive-in type			○		
NH	NH20, 25, 30, 35*	M6×0.75	B type	○	○			○
NH	NH45, 55, 65	Rc1/8	B type	○	○			○
VH	VH15	φ 3	Drive-in type			○		
VH	VH20, 25, 30, 35*	M6×0.75	B type	○	○			○
VH	VH45, 55	Rc1/8	B type	○	○			○
TS	TS15	φ 3	Drive-in type			○		
TS	TS20, 25, 30, 35*	M6×0.75	B type	○	○			○
NS	NS15	φ 3	Drive-in type			○		
NS	NS20, 25, 30, 35*	M6×0.75	B type	○	○			○
LW	LW17	φ 3	Drive-in type			○		
LW	LW21, 27, 35*	M6×0.75	B type	○	○			○
LW	LW50	Rc1/8	B type	○	○			○
PU	PU05, 07, 09, 12	-	-				○	
PU	PU15	φ 3	Drive-in type			○		
LU	LU05, 07, 09, 12, 15	-	-				○	
PE	PE05, 07, 09, 12	-	-				○	
PE	PE15	φ 3	Drive-in type			○		
LE	LE05, 07, 09, 12, 15	-	-				○	
Miniature LH	LH08, 10	-	-				○	
Miniature LH	LH12	φ 3	Drive-in type			○		
RA	RA15, 20	φ 3	Drive-in type			○		
RA	RA25, 30, 35*	M6×0.75	B type	○	○			○
RA	RA45, 55, 65	Rc1/8	B type	○	○			○
RB	RB30	φ 3	Drive-in type			○		
RB	RB35, 45	M6×0.75	B type	○	○			○
RB	RB55, 65	Rc1/8	B type	○	○			○
LA	LA25, 30, 35*	M6×0.75	B type	○	○			○
LA	LA45, 55, 65	Rc1/8	B type	○	○			○
HA	HA25, 30, 35*	M6×0.75	B type	○	○			○
HA	HA45, 55	Rc1/8	B type	○	○			○
HS	HS15	φ 3	Drive-in type			○		
HS	HS20, 25, 30, 35*	M6×0.75	B type	○	○			○

*) If using a chuck nozzle, avoid interference with table and rail.

Note: 1) For PU, PE, LU, and LE Series, apply grease directly to ball groove, etc. using point nozzle.

2) A long threaded grease fitting is required for NSK linear guides because of dust-proof parts. Please refer to the sections pertaining to the lubrication and dust-proof parts of each series.

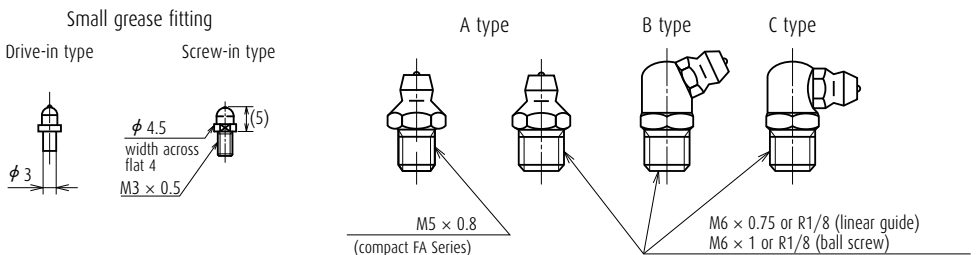


Fig. 1.3 Grease fittings

Table 1.8 Applicable grease nozzle for ball screws

Series Tap hole for grease fitting			Model no.		Standard grease fitting	Straight nozzle NZ1	Chuck nozzles NZ2	Drive-in fitting nozzle NZ3	Point nozzle NZ4	Flexible nozzle NZ5
Finished shaft end	Compact FA	High-accuracy, clean	USS	M5×0.8	A type	○	○		○	○
		General	PSS		A type	○ ^{*1}	○ ^{*1}		○	○ ^{*1}
		Transfer equipment	FSS		A type	○ ^{*1}	○ ^{*1}		○	○ ^{*1}
	Miniature, fine lead	MA	Shaft dia. 12 or less	-	-				○	
			Shaft dia. 16 or over	M6×1	-				○	
	Small equipment	FA		M6×1	-	○ ^{*2}	○ ^{*2}		○	○ ^{*2}
	Machine tools	SA	Shaft dia. 36 or less	M6×1	-	○	○		○	Finished shaft end
			Shaft dia. 40 or over	Rc1/8	-	○	○		○	a
	Stainless steel	KA	Shaft dia. 12 or less and lead 2 or less	M3×0.5	-			○	○	
			except above	M6×1	-	○ ^{*2}	○ ^{*2}		○	○ ^{*2}
	Transfer equipment	VFA	Shaft dia. 12 or less	φ 2.7	-				○	
			Shaft dia. 15 or over	φ 3.5	-				○	
RMA			-	-				○		
Miniature, fine lead	MS	Shaft dia. 12 or less	-	-				○		
		Shaft dia. 16 or over	M6×1	-				○		
Small equipment	FS		M6×1	-	○ ^{*2}	○ ^{*2}		○	○ ^{*2}	
Machine tools	SS	Shaft dia. 36 or less	M6×1	-	○	○		○	○	
		Shaft dia. 40 or over	Rc1/8	-	○	○		○	○	
Blank shaft end	HSS		M6×1	-	○	○		○	○	
		RMS		-				○		
	RNFTL	Shaft dia. 12 or less	M3×0.5	-			○	○		
		Shaft dia. 14 or over	M6×1	-	○	○		○	○	
	RNFBL	Shaft dia. 12 or less	M3×0.5	-			○	○		
		Shaft dia. 14 or over	M6×1	-	○	○		○	○	
	RNCT		-	-				○		
	RNFCL	Shaft dia. 12 or less	M3×0.5	-			○	○		
		Shaft dia. 15 or over	M6×1	-	○	○		○	○	
RNSTL		M6×1	-	○	○		○	○		

^{*1} Unavailable for shaft dia. 25 mm ^{*2} If using A type grease fitting, may not install the nozzle.

Notes 1) Normally, grease fitting is not provided to NSK ball screw except Compact FA Series. Ball nut has a tap hole to install a grease fitting. The user should install a grease fitting if necessary. 2) For M3 × 0.5 tap hole, small fitting (screw-in type) is available. Please contact NSK. 3) VFA type cannot install grease fitting. Apply grease directly to inside the nut through oil hole using point nozzle. 4) MA, RMA, MS, RMS, and RNCT types have no tap hole, apply grease directly to the screw shaft and ball grooves using point nozzle.

Table 1.9 Applicable grease nozzles for Monocarriers

Series	Model no.	Tap hole for grease fitting	Standard grease fitting	Straight nozzle NZ1	Chuck nozzles NZ2	Drive-in fitting nozzle NZ3	Flexible nozzle NZ5	MCH exclusive fitting nozzle NZ8
MCM	MCM02	-	-					
MCM	MCM03, 05, 08, 10	φ 3	Drive-in type			○		○
MCM	MCM06	M6×0.75	A type	○	○			
MCH	MCH06,09,10	φ 3	Drive-in type					○

^{*}) Use of NZ3 is recommended.

2.2 Oil Lubrication

Required amount of new oil is regularly supplied by:

- > Manual or automatic intermittent supply system;
- > Oil mist lubricating system via piping.

Equipment for oil lubrication is more costly than grease lubrication. However, oil mist lubricating system supplies air as well as oil, raising the inner pressure of the ball slide. This prevents foreign matters from entering, and the air cools the system. Use an oil of high atomizing rate such as ISO VG 32 to 68 for the oil mist lubrication system.

ISO VG 68 to 220 are recommended for common intermittent replenishment system. Approximate volume of oil Q for a ball slide of linear guide per hour can be obtained by the following formula.

In case of ball type linear guides except the LA Series

$$Q = n/150 \text{ (cm}^3\text{/hr)}$$

In case of LA Series, RA Series

$$Q \geq n/100 \text{ (cm}^3\text{/hr)}$$

n: Linear guide code

e.g. When NH45 is used,

$$n = 45$$

Therefore,

$$Q = 45/150 = 0.3 \text{ cm}^3\text{/hr}$$

Similarly, approximate oil supply volume Q to ball screw can be obtained by the following formula.

$$Q = d/15 \text{ (cm}^3\text{/hr)}$$

d: Nominal shaft diameter of the ball screw

e.g. When the shaft diameter is 50,

$$d = 50$$

Therefore,

$$Q = 50/15 = 3.3 \text{ cm}^3\text{/hr}$$

For oil lubrication by gravity drip, the oil supply position and installation position of the ball slide or ball nut are crucial. In case of linear guide, unless it is installed to a horizontal position, the oil flows only on the down side, and does not spread to all raceway surface. This may cause insufficient lubrication. For ball screw lubrication as well, oil does not spread if the oil orifice is installed at the bottom, causing insufficient lubrication. Please consult NSK to correct such situations prior to use. NSK has internal design which allows oil lubricant to flow throughout the system. **Table 2.1** shows the criterion of intervals of oil checks and replenishments.

Table 2.1 Intervals of checks and replenishments

Method	Intervals of checks	Items to check	Replenishment or intervals of changes
Automatic intermittent supply	Weekly	Volume of oil, dirt, etc.	Replenish at each check. Suitable volume for tank capacity.
Oil bath	Daily before operation	Oil surface	Make a suitable criterion based on consumption

Notes 1) As with grease lubrication, do not mix oil lubricant with different types.

2) Some components of the linear guide and ball screw are made of plastic. Avoid using an oil that adversely affects synthetic resin.

3) When using oil mist lubricating system, please confirm an oil supply amount at the each outlet part.

3. RoHS Compliant

1. Linear Guides

- > Linear Guides listed in the catalog except the products for special environments, are compliant with RoHS.
- > Please consult NSK for RoHS of special parts and lubricant provided by customer, and customer-supplied product.

2. Ball Screws

- > Ball screws listed in the catalog except the products for special environments, are compliant with RoHS.

3. Monocarriers

- > Monocarriers listed in the catalog are compliant with RoHS.

4. Ball Screw Support Bearings

- > Ball screw support bearings listed in the catalog are compliant with RoHS.

*For details of country-specific RoHS, contact NSK.



APPENDICES: TABLES

E BLOCK

Appendices: Tables

1. Conversion from International Systems of Units (SI) E1
2. Conversion table between N and kgf.....E3
3. Conversion table between kg and lb.....E4
4. Hardness conversion table.....E5
5. Variations of shaft used in common fitsE7
6. Variations of housing holes in common fitsE9

Appendices: Table

1. Conversion from international system of units (SI)

Comparisons of SI, CGS, and engineering systems of units

System of units \ Items	Length	Mass	Time	Temperature	Acceleration	Force	Stress	Pressure	Energy	Power
SI	m	kg	s	K, °C	m/s ²	N	Pa	Pa	J	W
CGS system	cm	g	s	°C	Gal	dyn	dyn/cm ²	dyn/cm ²	erg	erg/s
Engineering system	m	kgf • s ² /m	s	°C	m/s ²	kgf	kgf/m ²	kgf/m ²	kgf • m	kgf • m/s

Conversion rates from SI system of units

Item	SI unit		Units other than SI units		Conversion rate from SI unit
	Name of unit	Abbreviation	Name of unit	Abbreviation	
Angle	Radian	rad	Degree	°	180/π
			Minute	'	10 800/π
			Second	"	648 000/π
Length	Meter	m	Micron	μ	10 ⁶
			Angstrom	Å	10 ¹⁰
Area	Square meter	m ²	Are	a	10 ⁻²
			Hectare	ha	10 ⁻⁴
Volume	Cubic meter	m ³	Liter	l, L	10 ³
			Deciliter	dl, dL	10 ⁴
Time	Second	s	Minute	min	1/60
			Hour	h	1/3 600
			Day	d	1/86 400
Numbers of vibration	Hertz	Hz	Cycle	s ⁻¹	1
Rotational speed	Times per second	s ⁻¹	Times per minute	rpm	60
Velocity	Meter per second	m/s	Kilometer per hour	km/h	3 600/1 000
			Knot	kn	3 600/1 852
Acceleration	Meter per square second	m/s ²	Gal	Gal	10 ²
Acceleration	Meter per square second	m/s ²	G	G	1/9.806 65
Mass	Kilogram	kg	Ton	t	10 ⁻³
Force	Newton	N	Weight kilogram	kgf	1/9.806 65
			Weight ton	tf	1/(9.806 65×10 ³)
			Dyne	dyn	10 ⁵
Torque and moment of force	Newton meter	N • m	Weight kilogram meter	kgf • m	1/9.806 65
Stress	Pascal	Pa	Weight kilogram per square centimeter	kgf/cm ²	1/(9.806 65×10 ⁴)
Stress	(Newtons per square meter)	(N/m ²)	Weight kilogram per square millimeter	kgf/mm ²	1/(9.806 65×10 ⁶)

Prefixes for SI units

Powers of 10	Prefix		Powers of 10	Prefix	
	Name	Code		Name	Code
10^{18}	exa	E	10^{-1}	deci	d
10^{15}	peta	P	10^{-2}	centi	c
10^{12}	tera	T	10^{-3}	milli	m
10^9	giga	G	10^{-6}	micro	μ
10^6	mega	M	10^{-9}	nano	n
10^3	kilo	k	10^{-12}	pico	p
10^2	hecto	h	10^{-15}	femto	f
10^1	deca	da	10^{-18}	atto	a

Conversion rates from SI units (continued from previous page)

Item	SI unit		Units other than SI units		Conversion rate from SI unit
	Name of unit	Abbreviation	Name of unit	Abbreviation	
Pressure	Pascal (newton per square meter)	Pa (N/m ²)	Weight kilogram per square meter	kgf/m ²	1/9.806 65
			Water column meter	mH ₂ O	1/(9.806 65×10 ³)
			Mercurial column millimeter	mmHg	760/(1.013 25×10 ⁵)
			Torr	Torr	760/(1.013 25×10 ⁵)
			Bar Atmosphere	bar atm	10 ⁻⁵ 1/(1.013 25×10 ⁵)
Energy	Joule (newton meter)	J (N · m)	Erg	erg	10 ⁷
			Calorie (international)	cal _{IT}	1/4.186 8
			Weight kilogram meter	kgf · m	1/9.806 65
			Kilowatt hour	kW · h	1/(3.6×10 ⁶)
			Metric horsepower/hour	PS · h	≈3.776 72×10 ⁻⁷
Electric power, power	Watt (joules per second)	W (J/s)	Weight kilogram meter per second	kgf · m/s	1/9.806 65
			Kilo calorie per hour	kcal/h	1/1.163
			Metric horsepower	PS	≈1/735.498 8
Viscosity, Viscosity index	Pascal second	Pa · s	Poise	P	10
Kinematic viscosity, Kinematic viscosity index	Square meter per second	m ² /s	Stokes	St	10 ⁴
			Centistokes	cSt	10 ⁶
Temperature, Difference in temperature	Kelvin, Celsius degrees	K, °C	Degree	°C	[See Note (1)]
Electrical current, magnetomotive force	Ampere	A	Ampere	A	1
Electrical power, electromotive force	Volt	V	(Watt per ampere)	(W/A)	1
Magnetic field intensity	Ampere per meter	A/m	Oersted	Oe	4 π /10 ³
Magnetic flux density	Tesla	T	Gauss	Gs	10 ⁴
			Gamma	γ	10 ⁹
Electrical resistance	Ohm	Ω	(Volt per ampere)	(V/A)	1

Note (1) Conversion from TK to 0°C is : $\theta = T - 273.15$. To indicate temperature difference: $\Delta T = \Delta\theta$. ΔT and $\Delta\theta$ indicate temperature differences measured by Kelvin and Celsius respectively.

Remarks: Names and abbreviations of the unit in parentheses indicate the definition of the unit shown above the parentheses or left to the parentheses.

Conversion example 1 N = 1/9.806 65 kgf

Appendices: (conversion table)

2. Conversion table between N and kgf

[How to read the table]

To convert 10 N to kgf, locate 10 in the center column in the first block. Locate a corresponding kgf figure in the right side column. You will find 10 N is 1.0197 kgf. To convert 10 kgf to N, locate a figure in N column to its left. You will find 10 kgf is 98.006 N.

$$1 \text{ N} = 0.1019716 \text{ kgf}$$

$$1 \text{ kgf} = 9.80665 \text{ N}$$

N		kgf	N		kgf	N		kgf
9.8066	1	0.1020	333.43	34	3.4670	657.05	67	6.8321
19.613	2	0.2039	343.23	35	3.5690	666.85	68	6.9341
29.420	3	0.3059	353.04	36	3.6710	676.66	69	7.0360
39.227	4	0.4079	362.85	37	3.7729	686.47	70	7.1380
49.033	5	0.5099	372.65	38	3.8749	696.27	71	7.2400
58.840	6	0.6118	382.46	39	3.9769	706.08	72	7.3420
68.647	7	0.7138	392.27	40	4.0789	715.89	73	7.4439
78.453	8	0.8158	402.07	41	4.1808	725.69	74	7.5459
88.260	9	0.9177	411.88	42	4.2828	735.50	75	7.6479
98.066	10	1.0197	421.69	43	4.3848	745.31	76	7.7498
107.87	11	1.1217	431.49	44	4.4868	755.11	77	7.8518
117.68	12	1.2237	441.30	45	4.5887	764.92	78	7.9538
127.49	13	1.3256	451.11	46	4.6907	774.73	79	8.0558
137.29	14	1.4279	460.91	47	4.7927	784.53	80	8.1577
147.10	15	1.5296	470.72	48	4.8946	794.34	81	8.2597
156.91	16	1.6315	480.53	49	4.9966	804.15	82	8.3617
166.71	17	1.7335	490.33	50	5.0986	813.95	83	8.4636
176.52	18	1.8355	500.14	51	5.2006	823.76	84	8.5656
186.33	19	1.9375	509.95	52	5.3025	833.57	85	8.6676
196.13	20	2.0394	519.75	53	5.4045	843.37	86	8.7696
205.94	21	2.1414	529.56	54	5.5065	853.18	87	8.8715
215.75	22	2.2434	539.37	55	5.6084	862.99	88	8.9735
225.55	23	2.3453	549.17	56	5.7104	872.79	89	9.0755
235.36	24	2.4473	558.98	57	5.8124	882.60	90	9.1774
245.17	25	2.5493	568.79	58	5.9144	892.41	91	9.2794
254.97	26	2.6513	578.59	59	6.0163	902.21	92	9.3814
264.78	27	2.7532	588.40	60	6.1183	912.02	93	9.4834
274.59	28	2.8552	598.21	61	6.2203	921.83	94	9.5853
284.39	29	2.9572	608.01	62	6.3222	931.63	95	9.6873
294.20	30	3.0591	617.82	63	6.4242	941.44	96	9.7893
304.01	31	3.1611	627.63	64	6.5262	951.25	97	9.8912
313.81	32	3.2631	637.43	65	6.6282	961.05	98	9.9932
323.62	33	3.3651	647.24	66	6.7301	970.86	99	10.095

3. Conversion table between kg and lb

[How to read the table]

To convert 10 kg to lb, locate 10 in the center column in the first block. Locate a corresponding lb figure in right column. You will find 10 kg is 22.046 lb. To convert 10 lb to kg, locate the figure in the kg column to the left. You will find 10 lb is 4.536 kg.

$$1 \text{ kg} = 2.2046226 \text{ lb}$$

$$1 \text{ lb} = 0.45359237 \text{ kg}$$

kg		lb
0.454	1	2.205
0.907	2	4.409
1.361	3	6.614
1.814	4	8.818
2.268	5	11.023
2.722	6	13.228
3.175	7	15.432
3.629	8	17.637
4.082	9	19.842
4.536	10	22.046
4.990	11	24.251
5.443	12	26.455
5.897	13	28.660
6.350	14	30.865
6.804	15	33.069
7.257	16	35.274
7.711	17	37.479
8.165	18	39.683
8.618	19	41.888
9.072	20	44.092
9.525	21	46.297
9.979	22	48.502
10.433	23	50.706
10.886	24	52.911
11.340	25	55.116
11.793	26	57.320
12.247	27	59.525
12.701	28	61.729
13.154	29	63.934
13.608	30	66.139
14.061	31	68.343
14.515	32	70.548
14.969	33	72.753

kg		lb
15.422	34	74.957
15.876	35	77.162
16.329	36	79.366
16.783	37	81.571
17.237	38	83.776
17.690	39	85.980
18.144	40	88.185
18.597	41	90.390
19.051	42	92.594
19.504	43	94.799
19.958	44	97.003
20.412	45	99.208
20.865	46	101.41
21.319	47	103.62
21.772	48	105.82
22.226	49	108.03
22.680	50	110.23
23.133	51	112.44
23.587	52	114.64
24.040	53	116.84
24.494	54	119.05
24.948	55	121.25
25.401	56	123.46
25.855	57	125.66
26.308	58	127.87
26.762	59	130.07
27.216	60	132.28
27.669	61	134.48
28.123	62	136.69
28.576	63	138.89
29.030	64	141.10
29.484	65	143.30
29.937	66	145.51

kg		lb
30.391	67	147.71
30.844	68	149.91
31.298	69	152.12
31.751	70	154.32
32.205	71	156.53
32.659	72	158.73
33.112	73	160.94
33.566	74	163.14
34.019	75	165.35
34.473	76	167.55
34.927	77	169.76
35.380	78	171.96
35.834	79	174.17
36.287	80	176.37
36.741	81	178.57
37.195	82	180.78
37.648	83	182.98
38.102	84	185.19
38.555	85	187.39
39.009	86	189.60
39.463	87	191.80
39.916	88	194.01
40.370	89	196.21
40.823	90	198.42
41.277	91	200.62
41.730	92	202.83
42.184	93	205.03
42.638	94	207.23
43.091	95	209.44
43.545	96	211.64
43.998	97	213.85
44.452	98	216.05
44.906	99	218.26

Appendices: Table

4. Conversion table of hardness

Rockwell C Scale hardness (1 471 N)	Vickers hardness	Brinell hardness		Rockwell hardness		Shore hardness
		Standard ball	Tungsten carbide ball	A Scale Load 588.4 N brale penetrator	B Scale Load 980.7 N Diameter 1.5888 mm {1/16 in} sphere	
68	940	—	—	85.6	—	97
67	900	—	—	85.0	—	95
66	865	—	—	84.5	—	92
65	832	—	739	83.9	—	91
64	800	—	722	83.4	—	88
63	772	—	705	82.8	—	87
62	746	—	688	82.3	—	85
61	720	—	670	81.8	—	83
60	697	—	654	81.2	—	81
59	674	—	634	80.7	—	80
58	653	—	615	80.1	—	78
57	633	—	595	79.6	—	76
56	613	—	577	79.0	—	75
55	595	—	560	78.5	—	74
54	577	—	543	78.0	—	72
53	560	—	525	77.4	—	71
52	544	500	512	76.8	—	69
51	528	487	496	76.3	—	68
50	513	475	481	75.9	—	67
49	498	464	469	75.2	—	66
48	484	451	455	74.7	—	64
47	471	442	443	74.1	—	63
46	458	432	432	73.6	—	62
45	446	421	421	73.1	—	60
44	434	409	409	72.5	—	58
43	423	400	400	72.0	—	57
42	412	390	390	71.5	—	56
41	402	381	381	70.9	—	55
40	392	371	371	70.4	—	54
39	382	362	362	69.9	—	52

Rockwell C Scale hardness (1 471 N)	Vickers hardness	Brinell hardness		Rockwell hardness		Shore hardness
		Standard ball	Tungsten carbide ball	A Scale Load 588.4 N brale penetrator	B Scale Load 980.7 N Diameter 1.5888 mm {1/16 in} sphere	
38	372	353	353	69.4	—	51
37	363	344	344	68.9	—	50
36	354	336	336	68.4	(109.0)	49
35	345	327	327	67.9	(108.5)	48
34	336	319	319	67.4	(108.0)	47
33	327	311	311	66.8	(107.5)	46
32	318	301	301	66.3	(107.0)	44
31	310	294	294	65.8	(106.0)	43
30	302	286	286	65.3	(105.5)	42
29	294	279	279	64.7	(104.5)	41
28	286	271	271	64.3	(104.0)	41
27	279	264	264	63.8	(103.0)	40
26	272	258	258	63.3	(102.5)	38
25	266	253	253	62.8	(101.5)	38
24	260	247	247	62.4	(101.0)	37
23	254	243	243	62.0	100.0	36
22	248	237	237	61.5	99.0	35
21	243	231	231	61.0	98.5	35
20	238	226	226	60.5	97.8	34
(18)	230	219	219	—	96.7	33
(16)	222	212	212	—	95.5	32
(14)	213	203	203	—	93.9	31
(12)	204	194	194	—	92.3	29
(10)	196	187	187	—	90.7	28
(8)	188	179	179	—	89.5	27
(6)	180	171	171	—	87.1	26
(4)	173	165	165	—	85.5	25
(2)	166	158	158	—	83.5	24
(0)	160	152	152	—	81.7	24

Appendices: Table

5. Deviations of shafts used in common fits

Classification of diameter (mm)		d6	e6	f6	g5	g6	h5	h6	h7	h8	h9	h10	js5	js6
Over	or less													
—	3	-20	-14	-6	-2	-2	0	0	0	0	0	0	±2	±3
		-26	-20	-12	-6	-8	-4	-6	-10	-14	-25	-40	±2	±3
3	6	-30	-20	-10	-4	-4	0	0	0	0	0	0	±2.5	±4
		-38	-28	-18	-9	-12	-5	-8	-12	-18	-30	-48	±2.5	±4
6	10	-40	-25	-13	-5	-5	0	0	0	0	0	0	±3	±4.5
		-49	-34	-22	-11	-14	-6	-9	-15	-22	-36	-58	±3	±4.5
10	18	-50	-32	-16	-6	-6	0	0	0	0	0	0	±4	±5.5
		-61	-43	-27	-14	-17	-8	-11	-18	-27	-43	-70	±4	±5.5
18	30	-65	-40	-20	-7	-7	0	0	0	0	0	0	±4.5	±6.5
		-78	-53	-33	-16	-20	-9	-13	-21	-33	-52	-84	±4.5	±6.5
30	50	-80	-50	-25	-9	-9	0	0	0	0	0	0	±5.5	±8
		-96	-66	-41	-20	-25	-11	-16	-25	-39	-62	-100	±5.5	±8
50	80	-100	-60	-30	-10	-10	0	0	0	0	0	0	±6.5	±9.5
		-119	-79	-49	-23	-29	-13	-19	-30	-46	-74	-120	±6.5	±9.5
80	120	-120	-72	-36	-12	-12	0	0	0	0	0	0	±7.5	±11
		-142	-94	-58	-27	-34	-15	-22	-35	-54	-87	-140	±7.5	±11
120	180	-145	-85	-43	-14	-14	0	0	0	0	0	0	±9	±12.5
		-170	-110	-68	-32	-39	-18	-25	-40	-63	-100	-160	±9	±12.5
180	250	-170	-100	-50	-15	-15	0	0	0	0	0	0	±10	±14.5
		-199	-129	-79	-35	-44	-20	-29	-46	-72	-115	-185	±10	±14.5
250	315	-190	-110	-56	-17	-17	0	0	0	0	0	0	±11.5	±16
		-222	-142	-88	-40	-49	-23	-32	-52	-81	-130	-210	±11.5	±16
315	400	-210	-125	-62	-18	-18	0	0	0	0	0	0	±12.5	±18
		-246	-161	-98	-43	-54	-25	-36	-57	-89	-140	-230	±12.5	±18
400	500	-230	-135	-68	-20	-20	0	0	0	0	0	0	±13.5	±20
		-270	-175	-108	-47	-60	-27	-40	-63	-97	-155	-250	±13.5	±20
500	630	-260	-145	-76	—	-22	—	0	0	0	0	0	—	±22
		-304	-189	-120	—	-66	—	-44	-70	-110	-175	-280	—	±22
630	800	-290	-160	-80	—	-24	—	0	0	0	0	0	—	±25
		-340	-210	-130	—	-74	—	-50	-80	-125	-200	-320	—	±25
800	1 000	-320	-170	-86	—	-26	—	0	0	0	0	0	—	±28
		-376	-226	-142	—	-82	—	-56	-90	-140	-230	-360	—	±28
1 000	1 250	-350	-195	-98	—	-28	—	0	0	0	0	0	—	±33
		-416	-261	-164	—	-94	—	-66	-105	-165	-260	-420	—	±33
1 250	1 600	-390	-220	-110	—	-30	—	0	0	0	0	0	—	±39
		-468	-298	-188	—	-108	—	-78	-125	-195	-310	-500	—	±39
1 600	2 000	-430	-240	-120	—	-32	—	0	0	0	0	0	—	±46
		-522	-332	-212	—	-124	—	-92	-150	-230	-370	-600	—	±46

Unit: μm

j5	j6	j7	k5	k6	k7	m5	m6	n6	p6	r6	r7	Classification of diameter (mm)	
												Over	or less
+2	+4	+6	+4	+6	+10	+6	+8	+10	+12	+16	+20	—	3
-2	-2	-4	0	0	0	+2	+2	+4	+6	+10	+10	—	3
+3	+6	+8	+6	+9	+13	+9	+12	+16	+20	+23	+27	3	6
-2	-4	-4	+1	+1	+1	+4	+4	+8	+12	+15	+15	3	6
+4	+7	+10	+7	+10	+16	+12	+15	+19	+24	+28	+34	6	10
-2	-2	-5	+1	+1	+1	+6	+6	+10	+15	+19	+19	6	10
+5	+8	+12	+9	+12	+19	+15	+18	+23	+29	+34	+41	10	18
-3	-3	-6	+1	+1	+1	+7	+7	+12	+18	+23	+23	10	18
+5	+9	+13	+11	+15	+23	+17	+21	+28	+35	+41	+49	18	30
-4	-4	-8	+2	+2	+2	+8	+8	+15	+22	+28	+28	18	30
+6	+11	+15	+13	+18	+27	+20	+25	+33	+42	+50	+59	30	50
-5	-5	-10	+2	+2	+2	+9	+9	+17	+26	+34	+34	30	50
+6	+12	+18	+15	+21	+32	+24	+30	+39	+51	+60	+71	50	65
-7	-7	-12	+2	+2	+2	+11	+11	+20	+32	+41	+41	50	65
+6	+12	+18	+15	+21	+32	+24	+30	+39	+51	+62	+73	65	80
-7	-7	-12	+2	+2	+2	+11	+11	+20	+32	+43	+43	65	80
+6	+13	+20	+18	+25	+38	+28	+35	+45	+59	+73	+86	80	100
-9	-9	-15	+3	+3	+3	+13	+13	+23	+37	+51	+51	80	100
+6	+13	+20	+18	+25	+38	+28	+35	+45	+59	+76	+89	100	120
-9	-9	-15	+3	+3	+3	+13	+13	+23	+37	+54	+54	100	120
+7	+14	+22	+21	+28	+43	+33	+40	+52	+68	+88	+103	120	140
-11	-11	-18	+3	+3	+3	+15	+15	+27	+43	+63	+63	120	140
+7	+14	+22	+21	+28	+43	+33	+40	+52	+68	+90	+105	140	160
-11	-11	-18	+3	+3	+3	+15	+15	+27	+43	+65	+65	140	160
+7	+14	+22	+21	+28	+43	+33	+40	+52	+68	+93	+108	160	180
-11	-11	-18	+3	+3	+3	+15	+15	+27	+43	+68	+68	160	180
+7	+16	+25	+24	+33	+50	+37	+46	+60	+79	+106	+123	180	200
-13	-13	-21	+4	+4	+4	+17	+17	+31	+50	+77	+77	180	200
+7	+16	+25	+24	+33	+50	+37	+46	+60	+79	+109	+126	200	225
-13	-13	-21	+4	+4	+4	+17	+17	+31	+50	+80	+80	200	225
+7	+16	+25	+24	+33	+50	+37	+46	+60	+79	+113	+130	225	250
-13	-13	-21	+4	+4	+4	+17	+17	+31	+50	+84	+84	225	250
+7	+16	+26	+27	+36	+56	+43	+52	+66	+88	+126	+146	250	280
-16	-16	-26	+4	+4	+4	+20	+20	+34	+56	+94	+94	250	280
+7	+16	+26	+27	+36	+56	+43	+52	+66	+88	+130	+150	280	315
-16	-16	-26	+4	+4	+4	+20	+20	+34	+56	+98	+98	280	315
+7	+18	+29	+29	+40	+61	+46	+57	+73	+98	+144	+165	315	355
-18	-18	-28	+4	+4	+4	+21	+21	+37	+62	+108	+108	315	355
+7	+18	+29	+29	+40	+61	+46	+57	+73	+98	+150	+171	355	400
-18	-18	-28	+4	+4	+4	+21	+21	+37	+62	+114	+114	355	400
+7	+20	+31	+32	+45	+68	+50	+63	+80	+108	+166	+189	400	450
-20	-20	-32	+5	+5	+5	+23	+23	+40	+68	+126	+126	400	450
+7	+20	+31	+32	+45	+68	+50	+63	+80	+108	+172	+195	450	500
-20	-20	-32	+5	+5	+5	+23	+23	+40	+68	+132	+132	450	500
—	—	—	—	+44	+70	—	+70	+88	+122	+194	+220	500	560
—	—	—	—	0	0	—	+26	+44	+78	+150	+150	500	560
—	—	—	—	+44	+70	—	+70	+88	+122	+199	+225	560	630
—	—	—	—	0	0	—	+26	+44	+78	+155	+155	560	630
—	—	—	—	+50	+80	—	+80	+100	+138	+225	+255	630	710
—	—	—	—	0	0	—	+30	+50	+88	+175	+175	630	710
—	—	—	—	+50	+80	—	+80	+100	+138	+235	+265	710	800
—	—	—	—	0	0	—	+30	+50	+88	+185	+185	710	800
—	—	—	—	+56	+90	—	+90	+112	+156	+266	+300	800	900
—	—	—	—	0	0	—	+34	+56	+100	+210	+210	800	900
—	—	—	—	+56	+90	—	+90	+112	+156	+276	+310	900	1 000
—	—	—	—	0	0	—	+34	+56	+100	+220	+220	900	1 000
—	—	—	—	+66	+105	—	+106	+132	+186	+316	+355	1 000	1 120
—	—	—	—	0	0	—	+40	+66	+120	+250	+250	1 000	1 120
—	—	—	—	+66	+105	—	+106	+132	+186	+326	+365	1 120	1 250
—	—	—	—	0	0	—	+40	+66	+120	+260	+260	1 120	1 250
—	—	—	—	+78	+125	—	+126	+156	+218	+378	+425	1 250	1 400
—	—	—	—	0	0	—	+48	+78	+140	+300	+300	1 250	1 400
—	—	—	—	+78	+125	—	+126	+156	+218	+408	+455	1 400	1 600
—	—	—	—	0	0	—	+48	+78	+140	+330	+330	1 400	1 600
—	—	—	—	+92	+150	—	+150	+184	+262	+462	+520	1 600	1 800
—	—	—	—	0	0	—	+58	+92	+170	+370	+370	1 600	1 800
—	—	—	—	+92	+150	—	+150	+184	+262	+492	+550	1 800	2 000
—	—	—	—	0	0	—	+58	+92	+170	+400	+400	1 800	2 000

Appendices: Table

6. Deviations of holes used in common fits

Classification of diameter (mm)		E6	F6	F7	G6	G7	H6	H7	H8	J6	J7	JS6	JS7
Over	or less												
—	3	+ 20 + 14	+ 12 + 6	+ 16 + 6	+ 8 + 2	+ 12 + 2	+ 6 0	+ 10 0	+ 14 0	+ 2 - 4	+ 4 - 6	± 3 ± 3	± 5 ± 5
3	6	+ 28 + 20	+ 18 + 10	+ 22 + 10	+ 12 + 4	+ 16 + 4	+ 8 0	+ 12 0	+ 18 0	+ 5 - 3	± 6 ± 6	± 4 ± 4	± 6 ± 6
6	10	+ 34 + 25	+ 22 + 13	+ 28 + 13	+ 14 + 5	+ 20 + 5	+ 9 0	+ 15 0	+ 22 0	+ 5 - 4	+ 8 - 7	± 4.5 ± 4.5	± 7.5 ± 7.5
10	18	+ 43 + 32	+ 27 + 16	+ 34 + 16	+ 17 + 6	+ 24 + 6	+ 11 0	+ 18 0	+ 27 0	+ 6 - 5	+ 10 - 8	± 5.5 ± 5.5	± 9 ± 9
18	30	+ 53 + 40	+ 33 + 20	+ 41 + 20	+ 20 + 7	+ 28 + 7	+ 13 0	+ 21 0	+ 33 0	+ 8 - 5	+ 12 - 9	± 6.5 ± 6.5	± 10.5 ± 10.5
30	50	+ 66 + 50	+ 41 + 25	+ 50 + 25	+ 25 + 9	+ 34 + 9	+ 16 0	+ 25 0	+ 39 0	+ 10 - 6	+ 14 - 11	± 8 ± 8	± 12.5 ± 12.5
50	80	+ 79 + 60	+ 49 + 30	+ 60 + 30	+ 29 + 10	+ 40 + 10	+ 19 0	+ 30 0	+ 46 0	+ 13 - 6	+ 18 - 12	± 9.5 ± 9.5	± 15 ± 15
80	120	+ 94 + 72	+ 58 + 36	+ 71 + 36	+ 34 + 12	+ 47 + 12	+ 22 0	+ 35 0	+ 54 0	+ 16 - 6	+ 22 - 13	± 11 ± 11	± 17.5 ± 17.5
120	180	+ 110 + 85	+ 68 + 43	+ 83 + 43	+ 39 + 14	+ 54 + 14	+ 25 0	+ 40 0	+ 63 0	+ 18 - 7	+ 26 - 14	± 12.5 ± 12.5	± 20 ± 20
180	250	+ 129 + 100	+ 79 + 50	+ 96 + 50	+ 44 + 15	+ 61 + 15	+ 29 0	+ 46 0	+ 72 0	+ 22 - 7	+ 30 - 16	± 14.5 ± 14.5	± 23 ± 23
250	315	+ 142 + 110	+ 88 + 56	+ 108 + 56	+ 49 + 17	+ 69 + 17	+ 32 0	+ 52 0	+ 81 0	+ 25 - 7	+ 36 - 16	± 16 ± 16	± 26 ± 26
315	400	+ 161 + 125	+ 98 + 62	+ 119 + 62	+ 54 + 18	+ 75 + 18	+ 36 0	+ 57 0	+ 89 0	+ 29 - 7	+ 39 - 18	± 18 ± 18	± 28.5 ± 28.5
400	500	+ 175 + 135	+ 108 + 68	+ 131 + 68	+ 60 + 20	+ 83 + 20	+ 40 0	+ 63 0	+ 97 0	+ 33 - 7	+ 43 - 20	± 20 ± 20	± 31.5 ± 31.5
500	630	+ 189 + 145	+ 120 + 76	+ 146 + 76	+ 66 + 22	+ 92 + 22	+ 44 0	+ 70 0	+ 110 0	— —	— —	± 22 ± 22	± 35 ± 35
630	800	+ 210 + 160	+ 130 + 80	+ 160 + 80	+ 74 + 24	+ 104 + 24	+ 50 0	+ 80 0	+ 125 0	— —	— —	± 25 ± 25	± 40 ± 40
800	1 000	+ 226 + 170	+ 142 + 86	+ 176 + 86	+ 82 + 26	+ 116 + 26	+ 56 0	+ 90 0	+ 140 0	— —	— —	± 28 ± 28	± 45 ± 45
1 000	1 250	+ 261 + 195	+ 164 + 98	+ 203 + 98	+ 94 + 28	+ 133 + 28	+ 66 0	+ 105 0	+ 165 0	— —	— —	± 33 ± 33	± 52.5 ± 52.5
1 250	1 600	+ 298 + 220	+ 188 + 110	+ 235 + 110	+ 108 + 30	+ 155 + 30	+ 78 0	+ 125 0	+ 195 0	— —	— —	± 39 ± 39	± 62.5 ± 62.5
1 600	2 000	+ 332 + 240	+ 212 + 120	+ 270 + 120	+ 124 + 32	+ 182 + 32	+ 92 0	+ 150 0	+ 230 0	— —	— —	± 46 ± 46	± 75 ± 75

Unit: µm

K5	K6	K7	M5	M6	M7	N5	N6	N7	P6	P7	Classification of diameter (mm)	
											Over	or less
0 - 4	0 - 6	0 - 10	- 2 - 6	- 2 - 8	- 2 - 12	- 4 - 8	- 4 - 10	- 4 - 14	- 6 - 12	- 6 - 16	—	3
0 - 5	+ 2 - 6	+ 3 - 9	- 3 - 8	- 1 - 9	0 - 12	- 7 - 12	- 5 - 13	- 4 - 16	- 9 - 17	- 8 - 20	3	6
+ 1 - 5	+ 2 - 7	+ 5 - 10	- 4 - 10	- 3 - 12	0 - 15	- 8 - 14	- 7 - 16	- 4 - 19	- 12 - 21	- 9 - 24	6	10
+ 2 - 6	+ 2 - 9	+ 6 - 12	- 4 - 12	- 4 - 15	0 - 18	- 9 - 17	- 9 - 20	- 5 - 23	- 15 - 26	- 11 - 29	10	18
+ 1 - 8	+ 2 - 11	+ 6 - 15	- 5 - 14	- 4 - 17	0 - 21	- 12 - 21	- 11 - 24	- 7 - 28	- 18 - 31	- 14 - 35	18	30
+ 2 - 9	+ 3 - 13	+ 7 - 18	- 5 - 16	- 4 - 20	0 - 25	- 13 - 24	- 12 - 28	- 8 - 33	- 21 - 37	- 17 - 42	30	50
+ 3 - 10	+ 4 - 15	+ 9 - 21	- 6 - 19	- 5 - 24	0 - 30	- 15 - 28	- 14 - 33	- 9 - 39	- 26 - 45	- 21 - 51	50	80
+ 2 - 13	+ 4 - 18	+ 10 - 25	- 8 - 23	- 6 - 28	0 - 35	- 18 - 33	- 16 - 38	- 10 - 45	- 30 - 52	- 24 - 59	80	120
+ 3 - 15	+ 4 - 21	+ 12 - 28	- 9 - 27	- 8 - 33	0 - 40	- 21 - 39	- 20 - 45	- 12 - 52	- 36 - 61	- 28 - 68	120	180
+ 2 - 18	+ 5 - 24	+ 13 - 33	- 11 - 31	- 8 - 37	0 - 46	- 25 - 45	- 22 - 51	- 14 - 60	- 41 - 70	- 33 - 79	180	250
+ 3 - 20	+ 5 - 27	+ 16 - 36	- 13 - 36	- 9 - 41	0 - 52	- 27 - 50	- 25 - 57	- 14 - 66	- 47 - 79	- 36 - 88	250	315
+ 3 - 22	+ 7 - 29	+ 17 - 40	- 14 - 39	- 10 - 46	0 - 57	- 30 - 55	- 26 - 62	- 16 - 73	- 51 - 87	- 41 - 98	315	400
+ 2 - 25	+ 8 - 32	+ 18 - 45	- 16 - 43	- 10 - 50	0 - 63	- 33 - 60	- 27 - 67	- 17 - 80	- 55 - 95	- 45 - 108	400	500
— —	0 - 44	0 - 70	— —	- 26 - 70	- 26 - 96	— —	- 44 - 88	- 44 - 114	- 78 - 122	- 78 - 148	500	630
— —	0 - 50	0 - 80	— —	- 30 - 80	- 30 - 110	— —	- 50 - 100	- 50 - 130	- 88 - 138	- 88 - 168	630	800
— —	0 - 56	0 - 90	— —	- 34 - 90	- 34 - 124	— —	- 56 - 112	- 56 - 146	- 100 - 156	- 100 - 190	800	1 000
— —	0 - 66	0 - 105	— —	- 40 - 106	- 40 - 145	— —	- 66 - 132	- 66 - 171	- 120 - 186	- 120 - 225	1 000	1 250
— —	0 - 78	0 - 125	— —	- 48 - 126	- 48 - 173	— —	- 78 - 156	- 78 - 203	- 140 - 218	- 140 - 265	1 250	1 600
— —	0 - 92	0 - 150	— —	- 58 - 150	- 58 - 208	— —	- 92 - 184	- 92 - 242	- 170 - 262	- 170 - 320	1 600	2 000

NSK Sales Offices – Europe, Middle East and Africa**UK**

NSK UK Ltd.
Northern Road, Newark
Nottinghamshire NG24 2JF
Tel. +44 (0) 1636 605123
Fax +44 (0) 1636 643276
info-uk@nsk.com

France

NSK France S.A.S.
Quartier de l'Europe
2, rue Georges Guynemer
78283 Guyancourt Cedex
Tel. +33 (0) 1 30573939
Fax +33 (0) 1 30570001
info-fr@nsk.com

**Germany, Austria,
Switzerland, Benelux, Nordic**

NSK Deutschland GmbH
Harkortstraße 15
40880 Ratingen
Tel. +49 (0) 2102 4810
Fax +49 (0) 2102 4812290
info-de@nsk.com

Italy

NSK Italia S.p.A.
Via Garibaldi, 215
20024 Garbagnate
Milanese (MI)
Tel. +39 02 995 191
Fax +39 02 990 25 778
info-it@nsk.com

Middle East

NSK Bearings Gulf Trading Co.
JAFZA View 19, Floor 24 Office 2/3
Jebel Ali Downtown,
PO Box 262163
Dubai, UAE
Tel. +971 (0) 4 804 8205
Fax +971 (0) 4 884 7227
info-me@nsk.com

Poland & CEE

NSK Polska Sp. z o.o.
Warsaw Branch
Ul. Migdałowa 4/73
02-796 Warszawa
Tel. +48 22 645 15 25
Fax +48 22 645 15 29
info-pl@nsk.com

Russia

NSK Polska Sp. z o.o.
Russian Branch
Office I 703, Bldg 29,
18th Line of Vasilievskiy Ostrov,
Saint-Petersburg, 199178
Tel. +7 812 3325071
Fax +7 812 3325072
info-ru@nsk.com

South Africa

NSK South Africa (Pty) Ltd.
27 Galaxy Avenue
Linbro Business Park
Sandton 2146
Tel. +27 (011) 458 3600
Fax +27 (011) 458 3608
nsk-sa@nsk.com

Spain

NSK Spain, S.A.
C/ Tarragona, 161 Cuerdo Bajo
2ª Planta, 08014 Barcelona
Tel. +34 93 2892763
Fax +34 93 4335776
info-es@nsk.com

Turkey

NSK Rulmanları Orta Doğu Tic. Ltd. Şti
Cevizli Mah. D-100 Güney Yan Yol
Kuriş Kule İş Merkezi No:2 Kat:4
Kartal - İstanbul
Tel. +90 216 5000 675
Fax +90 216 5000 676
turkey@nsk.com

Please also visit our website: www.nskeurope.com | Global NSK: www.nsk.com

